

The image features three vertical, cylindrical gold tubes of different heights, arranged in a slightly staggered fashion. They are set against a dark, gradient background. The tubes have a polished, reflective surface that catches the light, creating bright highlights and soft shadows. The bottom of each tube is open, revealing a dark interior. The overall composition is minimalist and modern.

NOVELTIES AUTUMN 2022

DOXIS
LIGHTING FACTORY

DOXIS

LIGHTING FACTORY

Founded in 2002, Dosis Lighting Factory is a young and dynamic company. We design, develop, produce and assemble architectural lighting fixtures at our facilities in Genk, Belgium. This offers more flexibility, faster lead times and a better quality control. Quality, customer support and short delays is what we stand for. Long-term partnership is what we are looking for. But more than anything our customers inspire us when building solutions!

Dosis has partnerships with well-known designers, engineers and tool builders. We create very up-to-date designs using first-quality components and the latest technology from well-known European suppliers such as Philips, Bridgelux, TCI, Vossloh Schwabe and Citizen to name a few.

We serve dealers, architects, light planners and installers in numerous countries all over the globe. We manufacture lighting fixtures used in private homes, shops, museums, offices, etc... Some references include Nike sportswear, Tommy Hilfiger, Mc Donalds, Airport Hong Kong, Airport Bremen Germany, City Hall Luxemburg, City Hall Strassbourg France, Ferrari München Germany, Living Tomorrow Brussels Belgium, Kérastase, Postbank Amsterdam, Opera House Sydney Australia, Chiquita Banana HQ Charlotte NC, Ministry of foreign affairs Kabul Afganistan, Airbus Toulouse France and







Quality Guarantee

Modern CNC equipment and machinery guarantee quality parts needed to assemble. Highly qualified workers guarantee short lead times and a constant quality.


Recently, Dosis invested in a brand new coating facility, applying both powdercoating and liquid coatings. Standard we offer 10 different colors, and on request we can coat any existing RAL tone. Our coating facility applies the strongest possible ecological norms.




Product overview

Tektus

Suspended Round

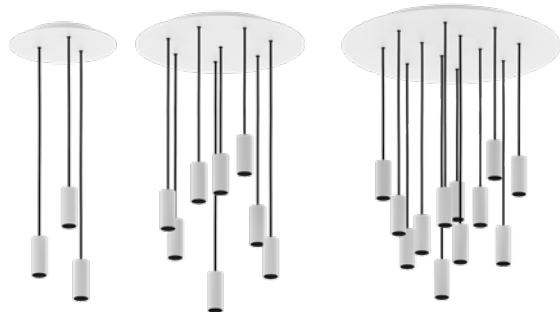

Tektus 45 Suspended Round Ø300 **see page 9**
 Tektus 45 Suspended Round Ø480 **see page 11**
 Tektus 45 Suspended Round Ø640 **see page 13**

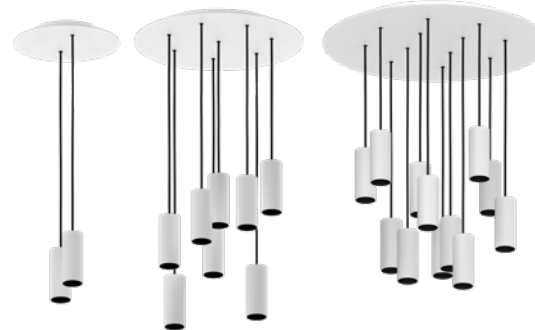

Tektus 60 Suspended Round Ø300 **see page 15**
 Tektus 60 Suspended Round Ø480 **see page 15**
 Tektus 60 Suspended Round Ø640 **see page 15**

Tektus

Suspended Slim



Tektus 45 Suspended Slim 1-way **see page 19**
 Tektus 45 Suspended Slim 2-way **see page 21**
 Tektus 45 Suspended Slim 3-way **see page 23**
 Tektus 45 Suspended Slim 4-way **see page 25**



Tektus 60 Suspended Slim 1-way **see page 19**
 Tektus 60 Suspended Slim 2-way **see page 21**
 Tektus 60 Suspended Slim 3-way **see page 23**
 Tektus 60 Suspended Slim 4-way **see page 25**

Tektus

Suspended 3-Phase



Tektus 45 Suspended 114mm 3-Phase **see page 29**
 Tektus 45 Suspended 200mm 3-Phase **see page 29**
 Tektus 60 Suspended 350mA 3-Phase **see page 31**
 Tektus 60 Suspended 500mA 3-Phase **see page 31**


Tektus

Suspended Compact



Tektus 45 Suspended 114mm 3-Phase **see page 27**
 Tektus 45 Suspended 200mm 3-Phase **see page 27**
 Tektus 60 Suspended 150mm 3-Phase **see page 27**

Lounge Flat Iron

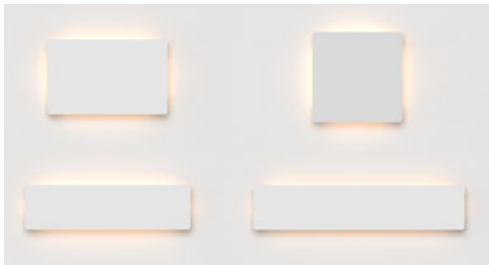

Flat Iron 80.50 **see page 47**
 Flat Iron 60.60 **see page 47**
 Flat Iron 110.30 **see page 47**
 Flat Iron 140.30 **see page 47**

Full Moon Indirect



Full Moon 600 Indirect **see page 49**
 Full Moon 600 Indirect **see page 49**

Tektus Wall




Tektus Wall Down **see page 37**
 Tektus Wall Down **see page 37**
 Tektus Wall Down **see page 37**

Downlights



Tektus 45 Discus 55
see page 33



Tektus 45 Flush
see page 35



Focus Standard & Base
see page 41



Focus Trimless Standard & Base
see page 43




Titan Wallwasher
see page 45



Tektus Zoom
see page 38

LEDliner35 & LEDliner47 Ready-to-go Square/Rectangle

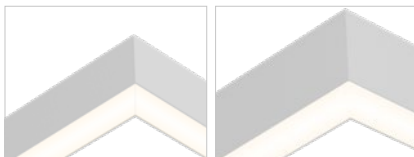


LEDliner35
see page 60-63
 LEDliner47
see page 64-69

LEDliner Full Black



see page 56

LEDliner Modules Tektus Pendel



see page 55

Tektus Slim Profile & Modules



see page 50-53

Tektus 45 Suspended

Round D300



Type	Downlight
Mounting	Suspended
Material	Luminaire:Aluminium
Adjustable	No
El. class / IP	Class I / IP20
Pendels	1-3pcs
Warranty: see p.72	

Tektus 45 Direct: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 45 InDirect: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

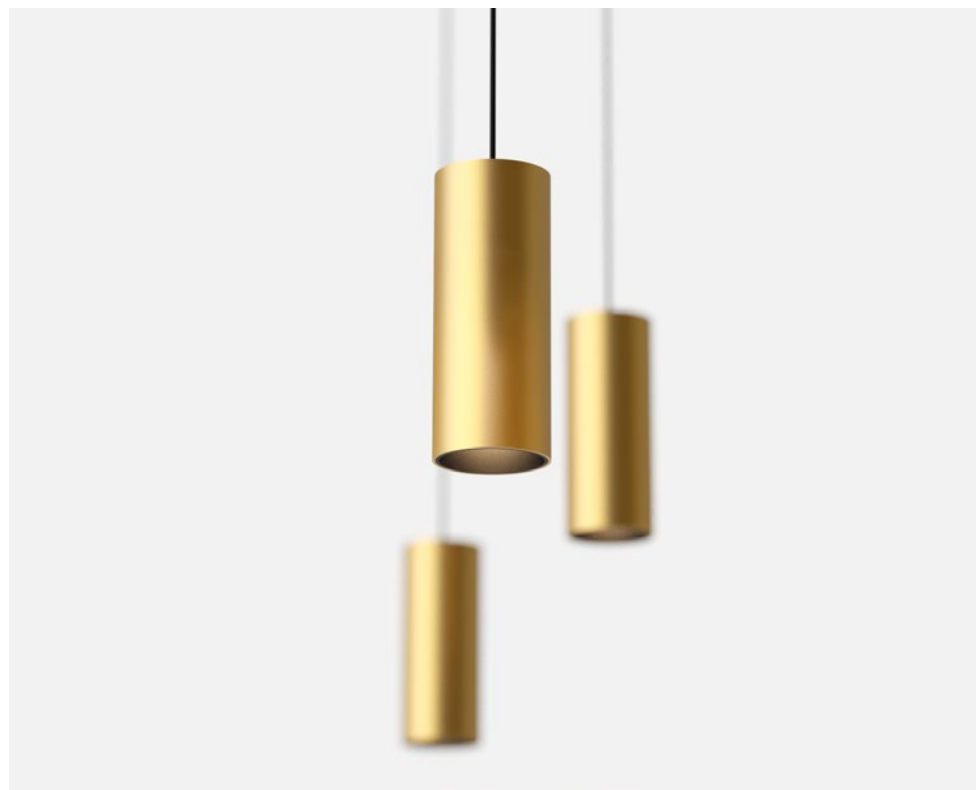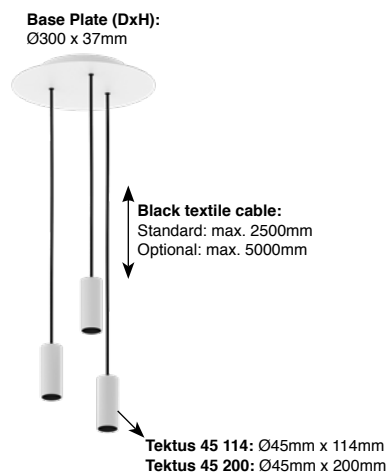

Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5

Honeycomb

Honeycomb Tektus 45 (1pc)	1048.00.07
---------------------------	------------


Marble look Base (suppl. price)


Marble Look Base D300	201.60.01
-----------------------	-----------

Marble Look Base



Honeycomb Tektus 45





Tektus 45 Suspended

Round - Diameter 300 - 114mm module Down

Driver(s) integrated and included in article and pricing

Non dim

1x Module 114mm	3101.AA.24.CCC.XX.10
2x Module 114mm	3102.AA.24.CCC.XX.10
3x Module 114mm	3103.AA.24.CCC.XX.10

1-10V dim

1x Module 114mm	3101.AA.25.CCC.XX.10
2x Module 114mm	3102.AA.25.CCC.XX.10
3x Module 114mm	3103.AA.25.CCC.XX.10

DALI dim

1x Module 114mm	3101.AA.26.CCC.XX.10
2x Module 114mm	3102.AA.26.CCC.XX.10
3x Module 114mm	3103.AA.26.CCC.XX.10

Mains dim

1x Module 114mm	3101.AA.27.CCC.XX.10
2x Module 114mm	3102.AA.27.CCC.XX.10
3x Module 114mm	3103.AA.27.CCC.XX.10

Push dim


1x Module 114mm	3101.AA.29.CCC.XX.10
2x Module 114mm	3102.AA.29.CCC.XX.10
3x Module 114mm	3103.AA.29.CCC.XX.10

0000.AA.00.CCC.XX.00

29: 29° Lens
40: 40° Lens
51: 51° Lens

927: 2700K - Ra90 - 10.2W - 772lm/pc
930: 3000K - Ra90 - 10.2W - 811lm/pc
940: 4000K - Ra90 - 10.2W - 822lm/pc

Available colors (see below)
Other RAL colors on request



Tektus 45 Suspended

Round - Diameter 300 - 200mm module Down

Driver(s) integrated and included in article and pricing

Non dim

1x Module 200mm	3101.AA.24.CCC.XX.20
2x Module 200mm	3102.AA.24.CCC.XX.20
3x Module 200mm	3103.AA.24.CCC.XX.20

1-10V dim

1x Module 200mm	3101.AA.25.CCC.XX.20
2x Module 200mm	3102.AA.25.CCC.XX.20
3x Module 200mm	3103.AA.25.CCC.XX.20

DALI dim


1x Module 200mm	3101.AA.26.CCC.XX.20
2x Module 200mm	3102.AA.26.CCC.XX.20
3x Module 200mm	3103.AA.26.CCC.XX.20

Mains dim

1x Module 200mm	3101.AA.27.CCC.XX.20
2x Module 200mm	3102.AA.27.CCC.XX.20
3x Module 200mm	3103.AA.27.CCC.XX.20

Push dim

1x Module 200mm	3101.AA.29.CCC.XX.20
2x Module 200mm	3102.AA.29.CCC.XX.20
3x Module 200mm	3103.AA.29.CCC.XX.20



Tektus 45 Suspended

Round - Diameter 300 - 200mm module Up & Down

Driver(s) integrated and included in article and pricing

Non dim

1x Module 200mm	3101.AA.24.CCC.XX.21
2x Module 200mm	3102.AA.24.CCC.XX.21

1-10V dim

1x Module 200mm	3101.AA.25.CCC.XX.21
2x Module 200mm	3102.AA.25.CCC.XX.21

DALI dim

1x Module 200mm	3101.AA.26.CCC.XX.21
2x Module 200mm	3102.AA.26.CCC.XX.21

Mains dim

1x Module 200mm	3101.AA.27.CCC.XX.21
-----------------	----------------------

Push dim

1x Module 200mm	3101.AA.29.CCC.XX.21
2x Module 200mm	3102.AA.29.CCC.XX.21

Remark: Layout pattern for the pendels see p.16



White Matt Text.
Standard



Black Matt Text.
Standard



White + Black
Standard




Bronze Matt
Standard



Black + Gold Matt



White + Gold Matt



Black + Champagne



White + Champagne



Gold Matt



Champagne

*Supplementary price

Tektus 45 Suspended

Round D480

Type Downlight
Mounting Suspended
Material Luminaire:Aluminium
Adjustable No
El. class / IP Class I / IP20
Pendels 1-9pcs
Warranty: see p.72


Tektus 45 Direct: Bridgelux Vero 10 LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90 (Ra80 on request)
SDCM 3
Luminous Flux LED
2700K - Ra90: 1100lm (124lm/W)
3000K - Ra90: 1156lm (130lm/W)
4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System
2700K - Ra90: 772lm (76lm/W)
3000K - Ra90: 811lm (80lm/W)
4000K - Ra90: 822lm (81lm/W)
Beam angle 29° / 40° / 51°
LED Power 8.9W (excl. driver)
System Power 10.2W (incl. driver)

Tektus 45 Indirect: Bridgelux Vero 10 LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90 (Ra80 on request)
SDCM 3
Luminous Flux LED
2700K - Ra90: 1100lm (124lm/W)
3000K - Ra90: 1156lm (130lm/W)
4000K - Ra90: 1172lm (132lm/W)
LED Power 8.9W (excl. driver)
System Power 10.2W (incl. driver)

Base Plate (DxH):
Ø480 x 37mm

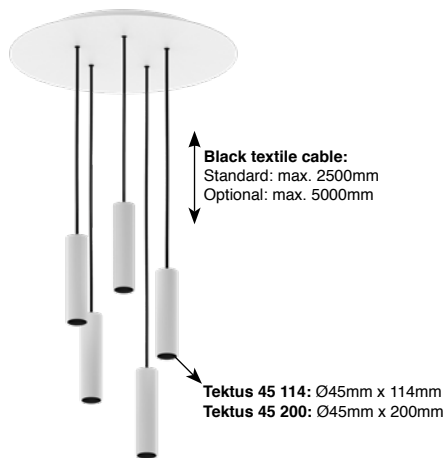

Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5

Honeycomb

Honeycomb Tektus 45 (1pc)	1048.00.07
---------------------------	------------

Marble look Base (suppl. price)

Marble Look Base D480	201.60.02
-----------------------	-----------

Base plate indirect lighting - Tektus D480 - 1100lm

Non dimmable	1084.24.CCC
DALI dimmable*	1084.26.CCC
Mains dimmable	1084.27.CCC

927: 2700K Ra90 (116lm/W)

930: 3000K Ra90 (122lm/W)

940: 4000K Ra90 (131lm/W)

Non dim/Mains dim: separate circuits for spots & indirect lighting

DALI dim: separate DALI address for spots and indirect lighting


Indirect lighting might reduce the number of pendants possible

*Not compatible with touch

Marble Look Base



Honeycomb Tektus 45



Base plate indirect lighting





Tektus 45 Suspended

Round - Diameter 480 - 114mm module Down
Driver(s) integrated and included in article and pricing

Non dim

3x Module 114mm	3203.AA.24.CCC.XX.10
4x Module 114mm	3204.AA.24.CCC.XX.10
5x Module 114mm	3205.AA.24.CCC.XX.10
6x Module 114mm	3206.AA.24.CCC.XX.10
7x Module 114mm	3207.AA.24.CCC.XX.10
8x Module 114mm	3208.AA.24.CCC.XX.10
9x Module 114mm	3209.AA.24.CCC.XX.10

Touch & DALI dim

3x Module 114mm	3203.AA.26.CCC.XX.10
4x Module 114mm	3204.AA.26.CCC.XX.10
5x Module 114mm	3205.AA.26.CCC.XX.10
6x Module 114mm	3206.AA.26.CCC.XX.10
7x Module 114mm	3207.AA.26.CCC.XX.10
8x Module 114mm	3208.AA.26.CCC.XX.10
9x Module 114mm	3209.AA.26.CCC.XX.10

Mains dim

3x Module 114mm	3203.AA.27.CCC.XX.10
4x Module 114mm	3204.AA.27.CCC.XX.10
5x Module 114mm	3205.AA.27.CCC.XX.10

0000.AA.00.CCC.XX.00

29: 29° Lens
40: 40° Lens
51: 51° Lens

927: 2700K - Ra90 - 10.2W - 772lm/pc
930: 3000K - Ra90 - 10.2W - 811lm/pc
940: 4000K - Ra90 - 10.2W - 822lm/pc

Available colors (see below)
Other RAL colors on request



White Matt Text.
Standard



Black Matt Text.
Standard



White + Black
Standard



Bronze Matt
Standard



Black + Gold Matt



White + Gold Matt



Black + Champagne



White + Champagne



Gold Matt



Champagne

*Supplementary price



Tektus 45 Suspended

Round - Diameter 480 - 200mm module Down
Driver(s) integrated and included in article and pricing

Non dim

3x Module 200mm	3203.AA.24.CCC.XX.20
4x Module 200mm	3204.AA.24.CCC.XX.20
5x Module 200mm	3205.AA.24.CCC.XX.20
6x Module 200mm	3206.AA.24.CCC.XX.20
7x Module 200mm	3207.AA.24.CCC.XX.20
8x Module 200mm	3208.AA.24.CCC.XX.20
9x Module 200mm	3209.AA.24.CCC.XX.20

Touch & DALI dim

3x Module 200mm	3203.AA.26.CCC.XX.20
4x Module 200mm	3204.AA.26.CCC.XX.20
5x Module 200mm	3205.AA.26.CCC.XX.20
6x Module 200mm	3206.AA.26.CCC.XX.20
7x Module 200mm	3207.AA.26.CCC.XX.20
8x Module 200mm	3208.AA.24.CCC.XX.20
9x Module 200mm	3209.AA.24.CCC.XX.20

Mains dim

3x Module 200mm	3203.AA.27.CCC.XX.20
4x Module 200mm	3204.AA.27.CCC.XX.20
5x Module 200mm	3205.AA.27.CCC.XX.20



Tektus 45 Suspended

Round - Diameter 480 - 200mm module Up & Down
Driver(s) integrated and included in article and pricing

Non dim

3x Module 200mm	3203.AA.24.CCC.XX.21
4x Module 200mm	3204.AA.24.CCC.XX.21
5x Module 200mm	3205.AA.24.CCC.XX.21
6x Module 200mm	3206.AA.24.CCC.XX.21
7x Module 200mm	3207.AA.24.CCC.XX.21
8x Module 200mm	3208.AA.24.CCC.XX.21
9x Module 200mm	3209.AA.24.CCC.XX.21

Touch & DALI dim

3x Module 200mm	3203.AA.26.CCC.XX.21
4x Module 200mm	3204.AA.26.CCC.XX.21
5x Module 200mm	3205.AA.26.CCC.XX.21
6x Module 200mm	3206.AA.26.CCC.XX.21
7x Module 200mm	3207.AA.26.CCC.XX.21
8x Module 200mm	3208.AA.24.CCC.XX.21

Remark: Layout pattern for the pendels see p.16

Tektus 45 Suspended

Round D640

Type	Downlight
Mounting	Suspended
Material	Luminaire:Aluminium
Adjustable	No
El. class / IP	Class I / IP20
No. of Pendants	6-20pcs
Warranty:	see p.72


Tektus 45 Direct: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 45 Indirect: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Base Plate (DxH):
Ø640 x 37mm

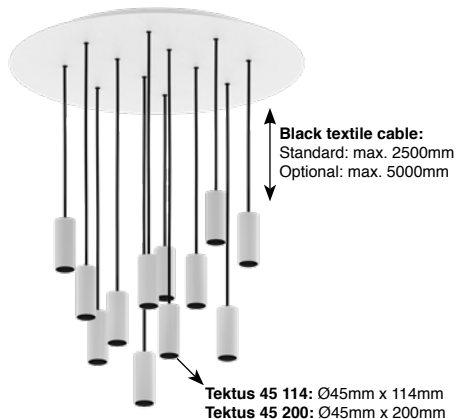

Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5

Honeycomb

Honeycomb Tektus 45 (1pc)	1048.00.07
---------------------------	------------

Marble look Base (suppl. price)

Marble Look Base D640	201.60.03
-----------------------	-----------

Base plate indirect lighting - Tektus D640 - 1600lm

Non dimmable	1089.24.CCC
DALI dimmable*	1089.26.CCC
Mains dimmable	1089.27.CCC

927: 2700K Ra90 (116lm/W)

930: 3000K Ra90 (122lm/W)

940: 4000K Ra90 (131lm/W)

Non dim/Mains dim: separate circuits for spots & indirect lighting

DALI dim: separate DALI address for spots and indirect lighting


Indirect lighting might reduce the number of pendants possible

*Not compatible with touch


Marble Look Base




Honeycomb Tektus 45



Base plate indirect lighting



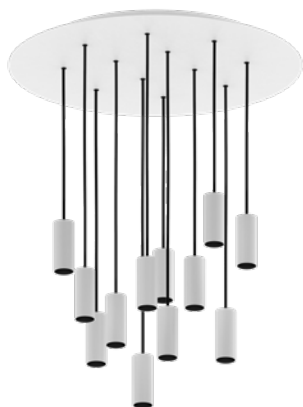

Tektus 45 Suspended

Round - Diameter 640 - 114mm module Down


Driver(s) integrated and included in article and pricing

Non dim

6x Module 114mm	3306.AA.24.CCC.XX.10
8x Module 114mm	3308.AA.24.CCC.XX.10
10x Module 114mm	3310.AA.24.CCC.XX.10
12x Module 114mm	3312.AA.24.CCC.XX.10
14x Module 114mm	3314.AA.24.CCC.XX.10
16x Module 114mm	3316.AA.24.CCC.XX.10
18x Module 114mm	3318.AA.24.CCC.XX.10
20x Module 114mm	3320.AA.24.CCC.XX.10

Touch & DALI dim

6x Module 114mm	3306.AA.26.CCC.XX.10
8x Module 114mm	3308.AA.26.CCC.XX.10
10x Module 114mm	3310.AA.26.CCC.XX.10
12x Module 114mm	3312.AA.26.CCC.XX.10
14x Module 114mm	3314.AA.26.CCC.XX.10
16x Module 114mm	3316.AA.26.CCC.XX.10
18x Module 114mm	3318.AA.26.CCC.XX.10
20x Module 114mm	3320.AA.26.CCC.XX.10

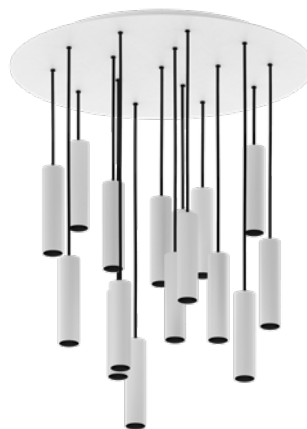

Tektus 45 Suspended

Round - Diameter 640 - 200mm module Down


Driver(s) integrated and included in article and pricing

Non dim

6x Module 200mm	3306.AA.24.CCC.XX.20
8x Module 200mm	3308.AA.24.CCC.XX.20
10x Module 200mm	3310.AA.24.CCC.XX.20
12x Module 200mm	3312.AA.24.CCC.XX.20
14x Module 200mm	3314.AA.24.CCC.XX.20
16x Module 200mm	3316.AA.24.CCC.XX.20
18x Module 200mm	3318.AA.24.CCC.XX.20
20x Module 200mm	3320.AA.24.CCC.XX.20

Touch & DALI dim

6x Module 200mm	3306.AA.26.CCC.XX.20
8x Module 200mm	3308.AA.26.CCC.XX.20
10x Module 200mm	3310.AA.26.CCC.XX.20
12x Module 200mm	3312.AA.26.CCC.XX.20
14x Module 200mm	3314.AA.26.CCC.XX.20
16x Module 200mm	3316.AA.26.CCC.XX.20
18x Module 200mm	3318.AA.26.CCC.XX.20
20x Module 200mm	3320.AA.26.CCC.XX.20

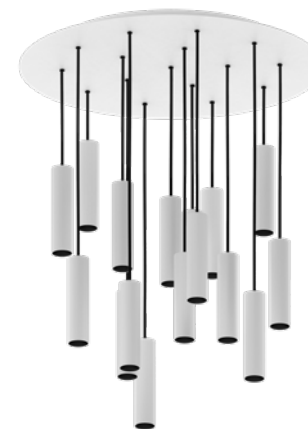

Tektus 45 Suspended

Round - Diameter 640 - 200mm module Up & Down

Driver(s) integrated and included in article and pricing

Non dim

6x Module 200mm	3306.AA.24.CCC.XX.21
8x Module 200mm	3308.AA.24.CCC.XX.21
10x Module 200mm	3310.AA.24.CCC.XX.21
12x Module 200mm	3312.AA.24.CCC.XX.21

Touch & DALI dim

6x Module 200mm	3306.AA.26.CCC.XX.21
8x Module 200mm	3308.AA.26.CCC.XX.21
10x Module 200mm	3310.AA.26.CCC.XX.21
12x Module 200mm	3312.AA.26.CCC.XX.21

Remark: Layout pattern for the pendels see p.16

0000.AA.00.CCC.XX.00

Available colors (see below)
Other RAL colors on request

927: 2700K - Ra90 - 10.2W - 772lm/pc
930: 3000K - Ra90 - 10.2W - 811lm/pc
940: 4000K - Ra90 - 10.2W - 822lm/pc

29: 29° Lens
40: 40° Lens
51: 51° Lens



*Supplementary price

Tektus 60 Suspended Round


Type	Downlight
Mounting	Suspended
Material	Luminaire:Aluminium
Adjustable	No
El. class / IP	Class I / IP20
No. of Pendants	1-20pcs
Warranty: see p.72	

Tektus 60: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (140lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W) 3000K - Ra90: 1035lm (80lm/W) 4000K - Ra90: 1050lm (81lm/W)
Beam angle	23° / 36° / 48° / 57° / Zoom (25° - 46°)
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)

Base Plate (DxH):

Ø300 x 37mm
Ø480 x 37mm
Ø640 x 37mm

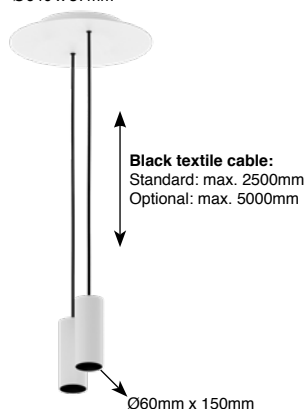

Options

Textile cable 5000mm

Black Textile Cable 5000mm	102.02.03-5
----------------------------	-------------

Honeycomb

Honeycomb Tektus 60 (1pc)	1048.00.08
---------------------------	------------

Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5

Base plate indirect lighting - Tektus D480/640

D480 - Non dimmable	1084.24.CCC
D480 - DALI dimmable*	1084.26.CCC
D480 - Mains dimmable	1084.27.CCC
D640 - Non dimmable	1089.24.CCC
D640 - DALI dimmable*	1089.26.CCC
D640 - Mains dimmable	1089.27.CCC

927: 2700K Ra90 (D480:1100lm, D640:1600lm, 116lm/W)

930: 3000K Ra90 (D480:1100lm, D640:1600lm, 122lm/W)

940: 4000K Ra90 (D480:1100lm, D640:1600lm, 131lm/W)

Non dim/Mains dim: separate circuits for spots & indirect lighting

DALI dim: separate DALI address for spots & indirect lighting

Indirect lighting might reduce the number of pendants possible

*Not compatible with touch


Marble look Base (suppl. price)

Marble Look Base D300	201.60.01
Marble Look Base D480	201.60.02
Marble Look Base D640	201.60.03


Marble Look Base




Honeycomb Tektus 60



Base plate indirect lighting





Tektus 60 Suspended

Round - Diameter 300 Down

Driver(s) integrated and included in article and pricing

Non dim

1x Module 150mm	3101.AA.24.CCC.XX.30
2x Module 150mm	3102.AA.24.CCC.XX.30
3x Module 150mm	3103.AA.24.CCC.XX.30

1-10V dim

1x Module 150mm	3101.AA.25.CCC.XX.30
2x Module 150mm	3102.AA.25.CCC.XX.30
3x Module 150mm	3103.AA.25.CCC.XX.30

DALI dim

1x Module 150mm	3101.AA.26.CCC.XX.30
2x Module 150mm	3102.AA.26.CCC.XX.30
3x Module 150mm	3103.AA.26.CCC.XX.30

Mains dim

1x Module 150mm	3101.AA.27.CCC.XX.30
2x Module 150mm	3102.AA.27.CCC.XX.30
3x Module 150mm	3103.AA.27.CCC.XX.30

Push dim

1x Module 150mm	3101.AA.29.CCC.XX.30
2x Module 150mm	3102.AA.29.CCC.XX.30
3x Module 150mm	3103.AA.29.CCC.XX.30

0000.AA.00.CCC.XX.00

23: 23° Lens
36: 36° Lens
48: 48° Lens
57: 57° Lens

927: 2700K - Ra90 - 12.9W - 995lm/pc
930: 3000K - Ra90 - 12.9W - 1035lm/pc
940: 4000K - Ra90 - 12.9W - 1050lm/pc

Available colors (see below)
Other RAL colors on request



White Matt Text.
Standard



Black Matt Text.
Standard



White + Black
Standard



Bronze Matt
Standard



Black + Gold Matt




White + Gold Matt




Black + Champagne



White + Champagne




Gold Matt



Champagne

*Supplementary price

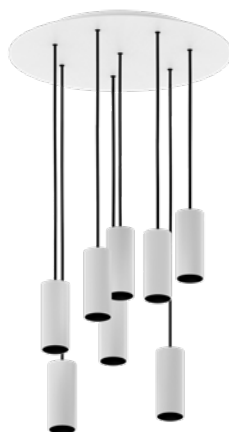

Tektus 60 Suspended

Round - Diameter 480 Down

Driver(s) integrated and included in article and pricing

Non dim


3x Module 150mm	3203.AA.24.CCC.XX.30
4x Module 150mm	3204.AA.24.CCC.XX.30
5x Module 150mm	3205.AA.24.CCC.XX.30
6x Module 150mm	3206.AA.24.CCC.XX.30
7x Module 150mm	3207.AA.24.CCC.XX.30
8x Module 150mm	3208.AA.24.CCC.XX.30
9x Module 150mm	3209.AA.24.CCC.XX.30

Touch & DALI dim

3x Module 150mm	3203.AA.26.CCC.XX.30
4x Module 150mm	3204.AA.26.CCC.XX.30
5x Module 150mm	3205.AA.26.CCC.XX.30
6x Module 150mm	3206.AA.26.CCC.XX.30
7x Module 150mm	3207.AA.26.CCC.XX.30
8x Module 150mm	3208.AA.26.CCC.XX.30
9x Module 150mm	3209.AA.26.CCC.XX.30

Mains dim

3x Module 150mm	3203.AA.27.CCC.XX.30
4x Module 150mm	3204.AA.27.CCC.XX.30
5x Module 150mm	3205.AA.27.CCC.XX.30

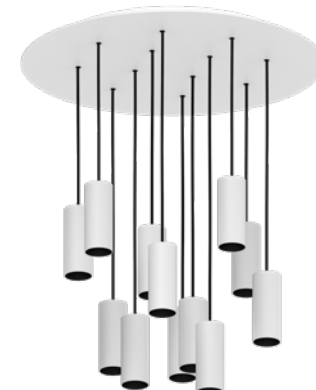

Tektus 60 Suspended

Round - Diameter 640 Down

Driver(s) integrated and included in article and pricing


Non dim

6x Module 150mm	3306.AA.24.CCC.XX.30
8x Module 150mm	3308.AA.24.CCC.XX.30
10x Module 150mm	3310.AA.24.CCC.XX.30
12x Module 150mm	3312.AA.24.CCC.XX.30
14x Module 150mm	3314.AA.24.CCC.XX.30
16x Module 150mm	3316.AA.24.CCC.XX.30
18x Module 150mm	3318.AA.24.CCC.XX.30
20x Module 150mm	3320.AA.24.CCC.XX.30

Touch & DALI dim

6x Module 150mm	3306.AA.26.CCC.XX.30
8x Module 150mm	3308.AA.26.CCC.XX.30
10x Module 150mm	3310.AA.26.CCC.XX.30
12x Module 150mm	3312.AA.26.CCC.XX.30
14x Module 150mm	3314.AA.26.CCC.XX.30
16x Module 150mm	3316.AA.26.CCC.XX.30
18x Module 150mm	3318.AA.26.CCC.XX.30
20x Module 150mm	3320.AA.26.CCC.XX.30

Remark: Layout pattern for the pends see p.16

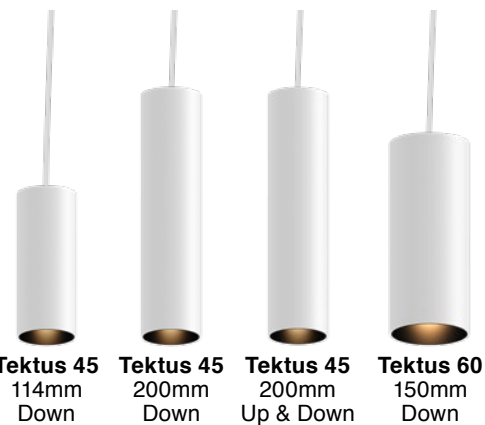

Tektus Suspended Layouts


The Tektus Pendula Range is characterised by its variety of possibilities:

- pattern in which the pendula are hung
- the length of the cable (standard 0-2500mm)
- the color of the light pendel
-

• Please share the lay out for the distribution of the pendula.
There several patterns available.

If no preference is shared at the order, the **pattern A** will be prepared.

Pattern.XXX.YY.Z














Base Ø300mm
art. nr.: Pattern.300.00.0

- 1 
Pattern.300.01.A
- 2 
Pattern.300.02.A
- 3 
Pattern.300.03.A

Base Ø480mm
art. nr.: Pattern.480.00.0

- 3 
Pattern.480.03.A
- 4 
Pattern.480.04.A
- 5 
Pattern.480.05.A
- 6 
Pattern.480.06.A
- 6 
Pattern.480.06.B
- 6 
Pattern.480.06.C
- 7 
Pattern.480.07.A
- 7 
Pattern.480.07.B
- 8 
Pattern.480.08.A
- 8 
Pattern.480.08.B
- 8 
Pattern.480.08.C
- 9 
Pattern.480.09.A
- 9 
Pattern.480.09.B
- 9 
Pattern.480.09.C

Base Ø640mm
art. nr.: Pattern.640.00.0

- 6 
Pattern.640.06.A
- 8 
Pattern.640.08.A
- 10 
Pattern.640.10.A
- 10 
Pattern.640.10.B
- 10 
Pattern.640.10.C
- 12 
Pattern.640.12.A
- 12 
Pattern.640.12.B
- 14 
Pattern.640.14.A
- 14 
Pattern.640.14.B
- 14 
Pattern.640.14.C
- 14 
Pattern.640.14.D
- 16 
Pattern.640.16.A
- 16 
Pattern.640.16.B
- 18 
Pattern.640.18.A
- 20 
Pattern.640.20.A
- 20 
Pattern.640.20.B

More details on the layouts can be found on our website:
www.doxis.be

Tektus Suspended Slim 1-Way

Type	Downlight
Mounting	Suspended
Material	Luminaire: Aluminium
Adjustable	No
El. class / IP	Class I / IP20
No. of Pendants	1pc
Warranty: see p.72	



Tektus 45 Direct: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 60: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (140lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W) 3000K - Ra90: 1035lm (80lm/W) 4000K - Ra90: 1050lm (81lm/W)
Beam angle	23° / 36° / 48° / 57° / Zoom (25° - 46°)
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)

Housing (LxWxH):
210 x 67 x 32mm

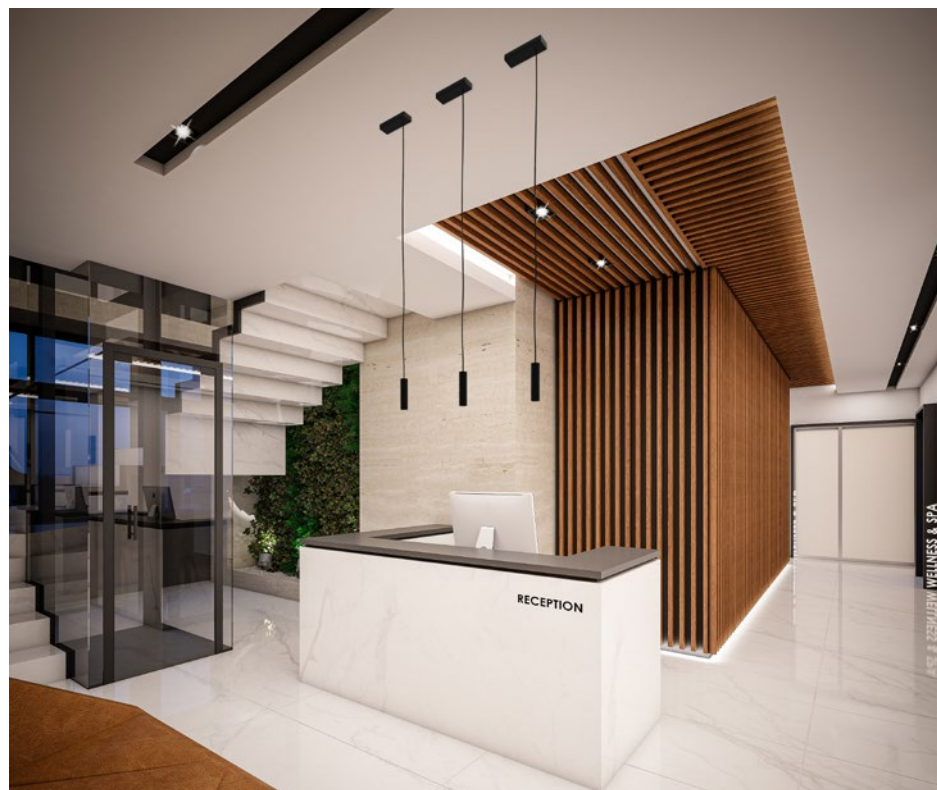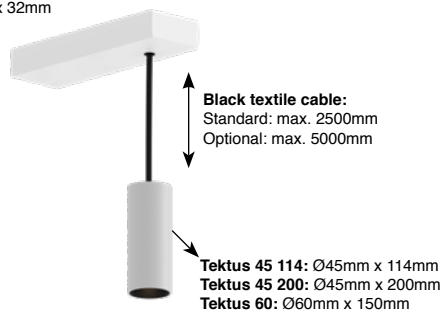

Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A


Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5

Honeycomb

Honeycomb Tektus 45 (1pc)	1048.00.07
Honeycomb Tektus 60 (1pc)	1048.00.08

Honeycomb Tektus 45



Honeycomb Tektus 60





Tektus 45 Slim 1-way

Suspended 114mm Down

Driver(s) integrated and included in article and pricing

Non dim


(1x) 2700K - Ra90 - 10.2W - 772lm	3401.AA.24.927.XX.10
(1x) 3000K - Ra90 - 10.2W - 811lm	3401.AA.24.930.XX.10
(1x) 4000K - Ra90 - 10.2W - 822lm	3401.AA.24.940.XX.10

DALI dim

(1x) 2700K - Ra90 - 10.2W - 772lm	3401.AA.26.927.XX.10
(1x) 3000K - Ra90 - 10.2W - 811lm	3401.AA.26.930.XX.10
(1x) 4000K - Ra90 - 10.2W - 822lm	3401.AA.26.940.XX.10

Mains dim

(1x) 2700K - Ra90 - 10.2W - 772lm	3401.AA.27.927.XX.10
(1x) 3000K - Ra90 - 10.2W - 811lm	3401.AA.27.930.XX.10
(1x) 4000K - Ra90 - 10.2W - 822lm	3401.AA.27.940.XX.10



Tektus 45 Slim 1-way

Suspended 200mm Down

Driver(s) integrated and included in article and pricing

Non dim

(1x) 2700K - Ra90 - 10.2W - 772lm	3401.AA.24.927.XX.20
(1x) 3000K - Ra90 - 10.2W - 811lm	3401.AA.24.930.XX.20
(1x) 4000K - Ra90 - 10.2W - 822lm	3401.AA.24.940.XX.20

DALI dim

(1x) 2700K - Ra90 - 10.2W - 772lm	3401.AA.26.927.XX.20
(1x) 3000K - Ra90 - 10.2W - 811lm	3401.AA.26.930.XX.20
(1x) 4000K - Ra90 - 10.2W - 822lm	3401.AA.26.940.XX.20

Mains dim

(1x) 2700K - Ra90 - 10.2W - 772lm	3401.AA.27.927.XX.20
(1x) 3000K - Ra90 - 10.2W - 811lm	3401.AA.27.930.XX.20
(1x) 4000K - Ra90 - 10.2W - 822lm	3401.AA.27.940.XX.20



Tektus 60 Slim 1-way

Suspended 150mm Down

Driver(s) integrated and included in article and pricing

Non dim

(1x) 2700K - Ra90 - 12.9W - 995lm	3401.AA.24.927.XX.30
(1x) 3000K - Ra90 - 12.9W - 1035lm	3401.AA.24.930.XX.30
(1x) 4000K - Ra90 - 12.9W - 1050lm	3401.AA.24.940.XX.30

Touch & DALI dim

(1x) 2700K - Ra90 - 12.9W - 995lm	3401.AA.26.927.XX.30
(1x) 3000K - Ra90 - 12.9W - 1035lm	3401.AA.26.930.XX.30
(1x) 4000K - Ra90 - 12.9W - 1050lm	3401.AA.26.940.XX.30

Mains dim - length 320mm

(1x) 2700K - Ra90 - 12.9W - 995lm	3401.AA.27.927.XX.30
(1x) 3000K - Ra90 - 12.9W - 1035lm	3401.AA.27.930.XX.30
(1x) 4000K - Ra90 - 12.9W - 1050lm	3401.AA.27.940.XX.30

0000.AA.00.000.XX.00

Available colors (see below)
Other RAL colors on request

Tektus 45
29: 29° Lens
40: 40° Lens
51: 51° Lens

Tektus 60
23: 23° Lens
36: 36° Lens
48: 48° Lens
57: 57° Lens



White Matt Text.
Standard



Black Matt Text.
Standard



White + Black
Standard



Bronze Matt
Standard



Black + Gold Matt



White + Gold Matt



Black + Champagne



White + Champagne



Gold Matt



Champagne

Tektus Suspended

Slim 2-Way

Type	Downlight
Mounting	Suspended
Material	Luminaire:Aluminium
Adjustable	No
El. class / IP	Class I / IP20
No. of Pendants	2pcs
Warranty:	see p.72

Tektus 45 Direct: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)


Tektus 45 Indirect: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 60: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (140lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W) 3000K - Ra90: 1035lm (80lm/W) 4000K - Ra90: 1050lm (81lm/W)
Beam angle	23° / 36° / 48° / 57° / Zoom (25° - 46°)
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)

Housing (LxWxH):
320 x 67 x 32mm

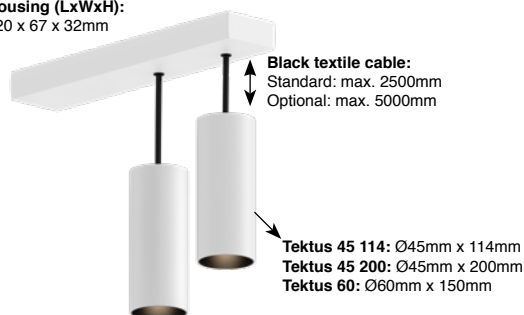

Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A


Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5

Honeycomb


Honeycomb Tektus 45 (1pc)	1048.00.07
Honeycomb Tektus 60 (1pc)	1048.00.08

Honeycomb Tektus 45



Honeycomb Tektus 60





Tektus 45 Slim 2-way

Suspended 114mm Down

Driver(s) integrated and included in article and pricing

Non dim

(2x)2700K - Ra90 - 10.2W - 772lm 3402.AA.24.927.XX.10
(2x)3000K - Ra90 - 10.2W - 811lm 3402.AA.24.930.XX.10
(2x)4000K - Ra90 - 10.2W - 822lm 3402.AA.24.940.XX.10

DALI dim

(2x)2700K - Ra90 - 10.2W - 772lm 3402.AA.26.927.XX.10
(2x)3000K - Ra90 - 10.2W - 811lm 3402.AA.26.930.XX.10
(2x)4000K - Ra90 - 10.2W - 822lm 3402.AA.26.940.XX.10

Mains dim

(2x)2700K - Ra90 - 10.2W - 772lm 3402.AA.27.927.XX.10
(2x)3000K - Ra90 - 10.2W - 811lm 3402.AA.27.930.XX.10
(2x)4000K - Ra90 - 10.2W - 822lm 3402.AA.27.940.XX.10

Tektus 45 Slim 2-way

Suspended 200mm Down / Up & Down

Driver(s) integrated and included in article and pricing

Non dim

(2x)2700K - Ra90 - 10.2W - 772lm 3402.AA.24.927.XX.YY
(2x)3000K - Ra90 - 10.2W - 811lm 3402.AA.24.930.XX.YY
(2x)4000K - Ra90 - 10.2W - 822lm 3402.AA.24.940.XX.YY

Touch & DALI dim

(2x)2700K - Ra90 - 10.2W - 772lm 3402.AA.26.927.XX.YY
(2x)3000K - Ra90 - 10.2W - 811lm 3402.AA.26.930.XX.YY
(2x)4000K - Ra90 - 10.2W - 822lm 3402.AA.26.940.XX.YY

Mains dim

(2x)2700K - Ra90 - 10.2W - 772lm 3402.AA.27.927.XX.YY
(2x)3000K - Ra90 - 10.2W - 811lm 3402.AA.27.930.XX.YY
(2x)4000K - Ra90 - 10.2W - 822lm 3402.AA.27.940.XX.YY

*Indirect module: additional 10.2W/unit

Tektus 60 Slim 2-way

Suspended 150mm Down

Driver(s) integrated and included in article and pricing

Non dim

(2x)2700K - Ra90 - 12.9W - 995lm 3402.AA.24.927.XX.30
(2x)3000K - Ra90 - 12.9W - 1035lm 3402.AA.24.930.XX.30
(2x)4000K - Ra90 - 12.9W - 1050lm 3402.AA.24.940.XX.30

Touch & DALI dim

(2x)2700K - Ra90 - 12.9W - 995lm 3402.AA.26.927.XX.30
(2x)3000K - Ra90 - 12.9W - 1035lm 3402.AA.26.930.XX.30
(2x)4000K - Ra90 - 12.9W - 1050lm 3402.AA.26.940.XX.30

Mains dim

(2x)2700K - Ra90 - 12.9W - 995lm 3402.AA.27.927.XX.30
(2x)3000K - Ra90 - 12.9W - 1035lm 3402.AA.27.930.XX.30
(2x)4000K - Ra90 - 12.9W - 1050lm 3402.AA.27.940.XX.30

0000.AA.00.000.XX.YY

Available colors (see below)
Other RAL colors on request

10: T45 - 114mm module - down
20: T45 - 200mm module - down
30: T60 - 150mm module - down

Tektus 45
29: 29° Lens
40: 40° Lens
51: 51° Lens

Tektus 60
23: 23° Lens
36: 36° Lens
48: 48° Lens
57: 57° Lens



White Matt Text.
Standard



Black Matt Text.
Standard



White + Black
Standard



Bronze Matt
Standard



Black + Gold Matt



White + Gold Matt



Black + Champagne



White + Champagne



Gold Matt



Champagne

Tektus Suspended

Slim 3-Way

Type	Downlight
Mounting	Suspended
Material	Luminaire:Aluminium
Adjustable	No
El. class / IP	Class I / IP20
No. of Pendants	3pcs
Warranty:	see p.72


Tektus 45 Direct: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 60: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (140lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W) 3000K - Ra90: 1035lm (80lm/W) 4000K - Ra90: 1050lm (81lm/W)
Beam angle	23° / 36° / 48° / 57° / Zoom (25° - 46°)
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)

Housing (LxWxH):
440 x 67 x 32mm

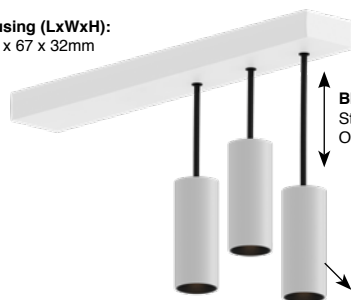

Black textile cable:
Standard: max. 2500mm
Optional: max. 5000mm

Tektus 45 114: Ø45mm x 114mm
Tektus 45 200: Ø45mm x 200mm
Tektus 60: Ø60mm x 150mm



Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A


Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5

Honeycomb

Honeycomb Tektus 45 (1pc)	1048.00.07
Honeycomb Tektus 60 (1pc)	1048.00.08

Honeycomb Tektus 45



Honeycomb Tektus 60





Tektus 45 Slim 3-way

Suspended 114mm Down

Driver(s) integrated and included in article and pricing

Non dim

(3x) 2700K - Ra90 - 10.2W - 772lm 3403.AA.24.927.XX.10
 (3x) 3000K - Ra90 - 10.2W - 811lm 3403.AA.24.930.XX.10
 (3x) 4000K - Ra90 - 10.2W - 822lm 3403.AA.24.940.XX.10

DALI dim

(3x) 2700K - Ra90 - 10.2W - 772lm 3403.AA.26.927.XX.10
 (3x) 3000K - Ra90 - 10.2W - 811lm 3403.AA.26.930.XX.10
 (3x) 4000K - Ra90 - 10.2W - 822lm 3403.AA.26.940.XX.10

Mains dim

(3x) 2700K - Ra90 - 10.2W - 772lm 3403.AA.27.927.XX.10
 (3x) 3000K - Ra90 - 10.2W - 811lm 3403.AA.27.930.XX.10
 (3x) 4000K - Ra90 - 10.2W - 822lm 3403.AA.27.940.XX.10



Tektus 45 Slim 3-way

Suspended 200mm Down

Driver(s) integrated and included in article and pricing

Non dim

(3x) 2700K - Ra90 - 10.2W - 772lm 3403.AA.24.927.XX.20
 (3x) 3000K - Ra90 - 10.2W - 811lm 3403.AA.24.930.XX.20
 (3x) 4000K - Ra90 - 10.2W - 822lm 3403.AA.24.940.XX.20

DALI dim

(3x) 2700K - Ra90 - 10.2W - 772lm 3403.AA.26.927.XX.20
 (3x) 3000K - Ra90 - 10.2W - 811lm 3403.AA.26.930.XX.20
 (3x) 4000K - Ra90 - 10.2W - 822lm 3403.AA.26.940.XX.20

Mains dim

(3x) 2700K - Ra90 - 10.2W - 772lm 3403.AA.27.927.XX.20
 (3x) 3000K - Ra90 - 10.2W - 811lm 3403.AA.27.930.XX.20
 (3x) 4000K - Ra90 - 10.2W - 822lm 3403.AA.27.940.XX.20



Tektus 60 Slim 3-way

Suspended 150mm Down

Driver(s) integrated and included in article and pricing

Non dim - length

(3x) 2700K - Ra90 - 12.9W - 995lm 3403.AA.24.927.XX.30
 (3x) 3000K - Ra90 - 12.9W - 1035lm 3403.AA.24.930.XX.30
 (3x) 4000K - Ra90 - 12.9W - 1050lm 3403.AA.24.940.XX.30

Touch & DALI dim

(3x) 2700K - Ra90 - 12.9W - 995lm 3403.AA.26.927.XX.30
 (3x) 3000K - Ra90 - 12.9W - 1035lm 3403.AA.26.930.XX.30
 (3x) 4000K - Ra90 - 12.9W - 1050lm 3403.AA.26.940.XX.30

Mains dim

(3x) 2700K - Ra90 - 12.9W - 995lm 3403.AA.27.927.XX.30
 (3x) 3000K - Ra90 - 12.9W - 1035lm 3403.AA.27.930.XX.30
 (3x) 4000K - Ra90 - 12.9W - 1050lm 3403.AA.27.940.XX.30

0000.AA.00.000.XX.00

Available colors (see below)
 Other RAL colors on request

Tektus 45
 29: 29° Lens
 40: 40° Lens
 51: 51° Lens

Tektus 60
 23: 23° Lens
 36: 36° Lens
 48: 48° Lens
 57: 57° Lens



White Matt Text.
Standard



Black Matt Text.
Standard



White + Black
Standard



Bronze Matt
Standard



Black + Gold Matt



White + Gold Matt



Black + Champagne



White + Champagne



Gold Matt



Champagne

Tektus Suspended

Slim 4-Way


Type	Downlight
Mounting	Suspended
Material	Luminaire:Aluminium
Adjustable	No
El. class / IP	Class I / IP20
No. of Pendants	4pcs
Warranty:	see p.72

Tektus 45 Direct: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 60: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (140lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W) 3000K - Ra90: 1035lm (80lm/W) 4000K - Ra90: 1050lm (81lm/W)
Beam angle	23° / 36° / 48° / 57° / Zoom (25° - 46°)
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)

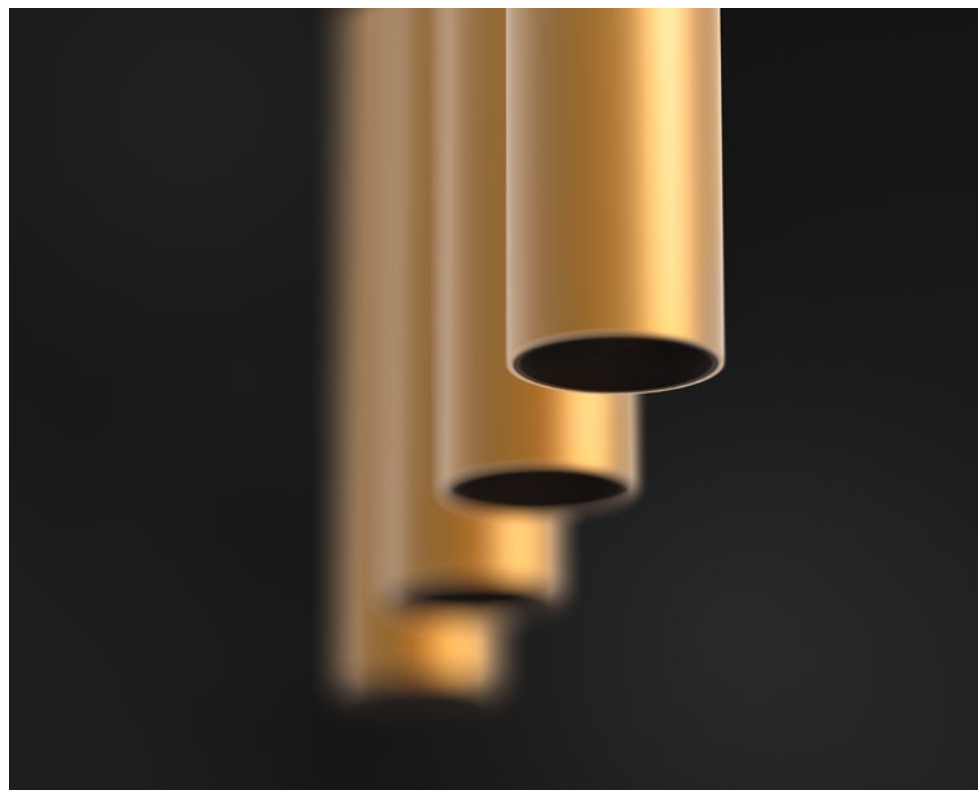

Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A


Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5

Honeycomb

Honeycomb Tektus 45 (1pc)	1048.00.07
Honeycomb Tektus 60 (1pc)	1048.00.08

Honeycomb Tektus 45



Honeycomb Tektus 60




Housing (LxWxH):
570 x 67 x 32mm



Black textile cable:
Standard: max. 2500mm
Optional: max. 5000mm

Tektus 45 114: Ø45mm x 114mm
Tektus 45 200: Ø45mm x 200mm
Tektus 60: Ø60mm x 150mm

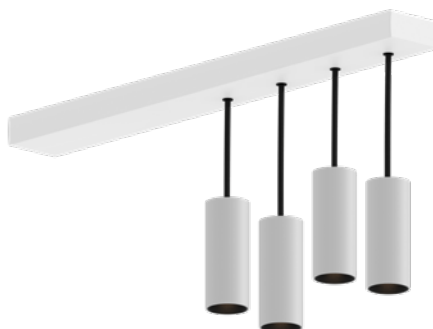

Tektus 45 Slim 4-way

Suspended 114mm Down

Driver(s) integrated and included in article and pricing

Non dim


(4x) 2700K - Ra90 - 10.2W - 772lm 3404.[AA](#).24.927.[XX](#).10
 (4x) 3000K - Ra90 - 10.2W - 811lm 3404.[AA](#).24.930.[XX](#).10
 (4x) 4000K - Ra90 - 10.2W - 822lm 3404.[AA](#).24.940.[XX](#).10

DALI dim

(4x) 2700K - Ra90 - 10.2W - 772lm 3404.[AA](#).26.927.[XX](#).10
 (4x) 3000K - Ra90 - 10.2W - 811lm 3404.[AA](#).26.930.[XX](#).10
 (4x) 4000K - Ra90 - 10.2W - 822lm 3404.[AA](#).26.940.[XX](#).10

Mains dim

(4x) 2700K - Ra90 - 10.2W - 772lm 3404.[AA](#).27.927.[XX](#).10
 (4x) 3000K - Ra90 - 10.2W - 811lm 3404.[AA](#).27.930.[XX](#).10
 (4x) 4000K - Ra90 - 10.2W - 822lm 3404.[AA](#).27.940.[XX](#).10

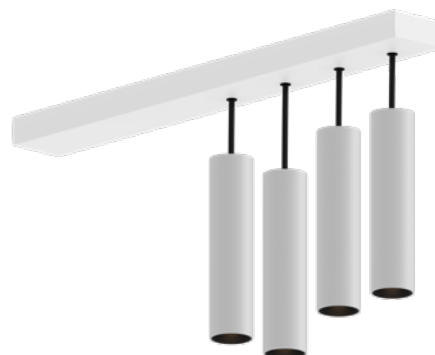

Tektus 45 Slim 4-way

Suspended 200mm Down

Driver(s) integrated and included in article and pricing

Non dim

(4x) 2700K - Ra90 - 10.2W - 772lm 3403.[AA](#).24.927.[XX](#).20
 (4x) 3000K - Ra90 - 10.2W - 811lm 3403.[AA](#).24.930.[XX](#).20
 (4x) 4000K - Ra90 - 10.2W - 822lm 3403.[AA](#).24.940.[XX](#).20

DALI dim

(4x) 2700K - Ra90 - 10.2W - 772lm 3403.[AA](#).26.927.[XX](#).20
 (4x) 3000K - Ra90 - 10.2W - 811lm 3403.[AA](#).26.930.[XX](#).20
 (4x) 4000K - Ra90 - 10.2W - 822lm 3403.[AA](#).26.940.[XX](#).20

Mains dim

(4x) 2700K - Ra90 - 10.2W - 772lm 3403.[AA](#).27.927.[XX](#).20
 (4x) 3000K - Ra90 - 10.2W - 811lm 3403.[AA](#).27.930.[XX](#).20
 (4x) 4000K - Ra90 - 10.2W - 822lm 3403.[AA](#).27.940.[XX](#).20



Tektus 60 Slim 4-way

Suspended 150mm Down

Driver(s) integrated and included in article and pricing

Non dim

(4x) 2700K - Ra90 - 12.9W - 995lm 3404.[AA](#).24.927.[XX](#).30
 (4x) 3000K - Ra90 - 12.9W - 1035lm 3404.[AA](#).24.930.[XX](#).30
 (4x) 4000K - Ra90 - 12.9W - 1050lm 3404.[AA](#).24.940.[XX](#).30


Touch & DALI dim

(4x) 2700K - Ra90 - 12.9W - 995lm 3404.[AA](#).26.927.[XX](#).30
 (4x) 3000K - Ra90 - 12.9W - 1035lm 3404.[AA](#).26.930.[XX](#).30
 (4x) 4000K - Ra90 - 12.9W - 1050lm 3404.[AA](#).26.940.[XX](#).30

Mains dim

(4x) 2700K - Ra90 - 12.9W - 995lm 3404.[AA](#).27.927.[XX](#).30
 (4x) 3000K - Ra90 - 12.9W - 1035lm 3404.[AA](#).27.930.[XX](#).30
 (4x) 4000K - Ra90 - 12.9W - 1050lm 3404.[AA](#).27.940.[XX](#).30

0000.[AA](#).00.000.[XX](#).00



White Matt Text.
Standard



Black Matt Text.
Standard



White + Black
Standard



Bronze Matt
Standard



Black + Gold Matt



White + Gold Matt



Black + Champagne



White + Champagne



Gold Matt



Champagne

Tektus Suspended Compact


Type	Downlight
Mounting	Suspended
Material	Luminaire:Aluminium
Adjustable	No
El. class / IP	Class II / IP20
No. of Pendants	1pc
Warranty: see p.72	

Tektus 45 Direct: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 60: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (140lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W) 3000K - Ra90: 1035lm (80lm/W) 4000K - Ra90: 1050lm (81lm/W)
Beam angle	23° / 36° / 48° / 57° / Zoom (25° - 46°)
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)

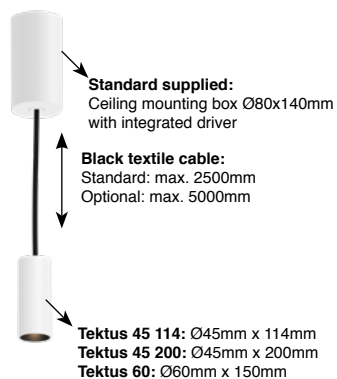

Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5

Honeycomb

Honeycomb Tektus 45 (1pc)	1048.00.07
Honeycomb Tektus 60 (1pc)	1048.00.08

Connection/Mounting accessories

Surface Mounted Box Ø72x40mm***	3001.00.01.XX -
Recessed Box Ø80	3001.00.02.XX -

*Remote placement of driver only

**Not for up/Down

01: Matt White Texture

18: Matt Grey Texture

03: Matt Black Texture


36: Bronze

16: Gold


40: Champagne

Custom colors available on request

Honeycomb Tektus 45



Honeycomb Tektus 60



Optional: Ceiling Mounting Box

Remote placement of driver only



Optional: Recessed Box





Tektus 45 Suspended Compact

Module 114mm Down

Driver(s) integrated and included in article and pricing

Non dim

2700K - Ra90 - 10.2W - 772lm	3001.AA.24.927.XX.10
3000K - Ra90 - 10.2W - 811lm	3001.AA.24.930.XX.10
4000K - Ra90 - 10.2W - 822lm	3001.AA.24.940.XX.10

1-10V dim

2700K - Ra90 - 10.2W - 772lm	3001.AA.25.927.XX.10
3000K - Ra90 - 10.2W - 811lm	3001.AA.25.930.XX.10
4000K - Ra90 - 10.2W - 822lm	3001.AA.25.940.XX.10

DALI dim

2700K - Ra90 - 10.2W - 772lm	3001.AA.26.927.XX.10
3000K - Ra90 - 10.2W - 811lm	3001.AA.26.930.XX.10
4000K - Ra90 - 10.2W - 822lm	3001.AA.26.940.XX.10

Mains dim

2700K - Ra90 - 10.2W - 772lm	3001.AA.27.927.XX.10
3000K - Ra90 - 10.2W - 811lm	3001.AA.27.930.XX.10
4000K - Ra90 - 10.2W - 822lm	3001.AA.27.940.XX.10

Push dim

2700K - Ra90 - 10.2W - 772lm	3001.AA.29.927.XX.10
3000K - Ra90 - 10.2W - 811lm	3001.AA.29.930.XX.10
4000K - Ra90 - 10.2W - 822lm	3001.AA.29.940.XX.10

0000.AA.00.000.XX.00

Tektus 45
 29: 29° Lens
 40: 40° Lens
 51: 51° Lens

Tektus 60
 23: 23° Lens
 36: 36° Lens
 48: 48° Lens
 57: 57° Lens

Available colors (see below)
Other RAL colors on request



Tektus 45 Suspended Compact

Module 200mm Down

Driver(s) integrated and included in article and pricing

Non dim

2700K - Ra90 - 10.2W - 772lm	3001.AA.24.927.XX.20
3000K - Ra90 - 10.2W - 811lm	3001.AA.24.930.XX.20
4000K - Ra90 - 10.2W - 822lm	3001.AA.24.940.XX.20

1-10V dim

2700K - Ra90 - 10.2W - 772lm	3001.AA.25.927.XX.20
3000K - Ra90 - 10.2W - 811lm	3001.AA.25.930.XX.20
4000K - Ra90 - 10.2W - 822lm	3001.AA.25.940.XX.20

DALI dim

2700K - Ra90 - 10.2W - 772lm	3001.AA.26.927.XX.20
3000K - Ra90 - 10.2W - 811lm	3001.AA.26.930.XX.20
4000K - Ra90 - 10.2W - 822lm	3001.AA.26.940.XX.20

Mains dim

2700K - Ra90 - 10.2W - 772lm	3001.AA.27.927.XX.20
3000K - Ra90 - 10.2W - 811lm	3001.AA.27.930.XX.20
4000K - Ra90 - 10.2W - 822lm	3001.AA.27.940.XX.20

Push dim

2700K - Ra90 - 10.2W - 772lm	3001.AA.29.927.XX.20
3000K - Ra90 - 10.2W - 811lm	3001.AA.29.930.XX.20
4000K - Ra90 - 10.2W - 822lm	3001.AA.29.940.XX.20



Tektus 60 Suspended Compact

Module 150mm Down

Driver(s) integrated and included in article and pricing

Non dim

2700K - Ra90 - 12.9W - 995lm	3001.AA.24.927.XX.30
3000K - Ra90 - 12.9W - 1035lm	3001.AA.24.930.XX.30
4000K - Ra90 - 12.9W - 1050lm	3001.AA.24.940.XX.30

1-10V dim

2700K - Ra90 - 12.9W - 995lm	3001.AA.25.927.XX.30
3000K - Ra90 - 12.9W - 1035lm	3001.AA.25.930.XX.30
4000K - Ra90 - 12.9W - 1050lm	3001.AA.25.940.XX.30

DALI dim

2700K - Ra90 - 12.9W - 995lm	3001.AA.26.927.XX.30
3000K - Ra90 - 12.9W - 1035lm	3001.AA.26.930.XX.30
4000K - Ra90 - 12.9W - 1050lm	3001.AA.26.940.XX.30

Mains dim

2700K - Ra90 - 12.9W - 995lm	3001.AA.27.927.XX.30
3000K - Ra90 - 12.9W - 1035lm	3001.AA.27.930.XX.30
4000K - Ra90 - 12.9W - 1050lm	3001.AA.27.940.XX.30

Push dim

2700K - Ra90 - 12.9W - 995lm	3001.AA.29.927.XX.30
3000K - Ra90 - 12.9W - 1035lm	3001.AA.29.930.XX.30
4000K - Ra90 - 12.9W - 1050lm	3001.AA.29.940.XX.30

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

15



Corten

36



Bronze Matt
Standard

16



Gold Matt

40



Champagne

Tektus 45 Suspended

3-Phase

Type	Downlight
Mounting	3-Phase rail
Material	Aluminium
Adjustable	Yes (60°/359°)
El. class / IP	Class I / IP20
No. of Pendants	1pcs
Warranty:	see p.72

Tektus 45: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Standard track adapter
Color: Black



Black textile cable:
Standard: max. 2500mm
Optional: max. 5000mm

Tektus 45 114: Ø45mm x 114mm
Tektus 45 200: Ø45mm x 200mm



Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5


Honeycomb

Honeycomb Tektus 45 (1pc)	1048.00.07
---------------------------	------------

On Request

White track-adapter with integrated driver
Grey track-adapter with integrated driver

Honeycomb Tektus 45





Tektus 45 3-Phase

Suspended 114mm Down

Driver(s) integrated and included in article and pricing

Non dim (universal adapter)

2700K - Ra90 - 10.2W - 772lm 3601.AA.24.927.XX.10

3000K - Ra90 - 10.2W - 811lm 3601.AA.24.930.XX.10

4000K - Ra90 - 10.2W - 822lm 3601.AA.24.940.XX.10

DALI dim (Compatible with Global Trac Pulse & Stucchi One Track)

2700K - Ra90 - 10.2W - 772lm 3601.AA.26.927.XX.10

3000K - Ra90 - 10.2W - 811lm 3601.AA.26.930.XX.10

4000K - Ra90 - 10.2W - 822lm 3601.AA.26.940.XX.10



Tektus 45 3-Phase

Suspended 200mm Down

Driver(s) integrated and included in article and pricing

Non dim (universal adapter)

2700K - Ra90 - 10.2W - 772lm 3601.AA.24.927.XX.20

3000K - Ra90 - 10.2W - 811lm 3601.AA.24.930.XX.20

4000K - Ra90 - 10.2W - 822lm 3601.AA.24.940.XX.20

DALI dim (Compatible with Global Trac Pulse & Stucchi One Track)

2700K - Ra90 - 10.2W - 772lm 3601.AA.26.927.XX.20

3000K - Ra90 - 10.2W - 811lm 3601.AA.26.930.XX.20

4000K - Ra90 - 10.2W - 822lm 3601.AA.26.940.XX.20

0000.AA.00.000.XX.00

29: 29° Lens

40: 40° Lens

51: 51° Lens

Available colors (see below)
Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

15



Corten

36



Bronze Matt
Standard

16



Gold Matt

40



Champagne

Tektus 60 Suspended

3-Phase

Type	Downlight
Mounting	3-Phase rail
Material	Aluminium
Adjustable	Yes (60°/359°)
El. class / IP	Class I / IP20
No. of Pendants	1pcs
Warranty: see p.72	

Tektus 60: Citizen CLU LED (350mA/500mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED (350/500mA)	2700K - Ra90: 1517lm (350mA) / 2118lm (500mA) 3000K - Ra90: 1577lm (350mA) / 2202lm (500mA) 4000K - Ra90: 1601lm (350mA) / 2236lm (500mA)
Luminous Flux System	2700K - Ra90: 995lm (350mA) / 1390lm (500mA) 3000K - Ra90: 1035lm (350mA) / 1445lm (500mA) 4000K - Ra90: 1050lm (350mA) / 1467lm (500mA)
Beam angle	23° / 36° / 48° / 57° / Zoom (25° - 46°)
LED Power	11.3W / 350mA or 16.5W / 500mA (excl. driver)
System Power	12.9W / 350mA or 19.0W / 500mA (incl. driver)

Standard track adapter
Color: Black



Options

Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5


Honeycomb

Honeycomb Tektus 60 (1pc)	1048.00.08
---------------------------	------------

On Request

White track-adapter with integrated driver
Grey track-adapter with integrated driver

Honeycomb Tektus 60





Tektus 60 3-Phase

Suspended 350mA Down

Driver(s) integrated and included in article and pricing

Non dim (universal adapter)

2700K - Ra90 - 12.9W - 995lm	3601.AA.24.927.XX.30
3000K - Ra90 - 12.9W - 1035lm	3601.AA.24.930.XX.30
4000K - Ra90 - 12.9W - 1050lm	3601.AA.24.940.XX.30

DALI dim (Compatible with Global Trac Pulse & Stucchi One Track)

2700K - Ra90 - 12.9W - 995lm	3601.AA.26.927.XX.30
3000K - Ra90 - 12.9W - 1035lm	3601.AA.26.930.XX.30
4000K - Ra90 - 12.9W - 1050lm	3601.AA.26.940.XX.30

Eutrac DALI dim (Compatible with Eutrac BUS only)

2700K - Ra90 - 12.9W - 995lm	3601.AA.30.927.XX.30
3000K - Ra90 - 12.9W - 1035lm	3601.AA.30.930.XX.30
4000K - Ra90 - 12.9W - 1050lm	3601.AA.30.940.XX.30



Tektus 60 3-Phase

Suspended 500mA Down

Driver(s) integrated and included in article and pricing

Non dim (universal adapter)

2700K - Ra90 - 19.0W - 1390lm	3601.AA.24.927.XX.33
3000K - Ra90 - 19.0W - 1445lm	3601.AA.24.930.XX.33
4000K - Ra90 - 19.0W - 1467lm	3601.AA.24.940.XX.33

DALI dim (Compatible with Global Trac Pulse & Stucchi One Track)

2700K - Ra90 - 19.0W - 1390lm	3601.AA.26.927.XX.33
3000K - Ra90 - 19.0W - 1445lm	3601.AA.26.930.XX.33
4000K - Ra90 - 19.0W - 1467lm	3601.AA.26.940.XX.33

Eutrac DALI dim (Compatible with Eutrac BUS only)

2700K - Ra90 - 19.0W - 1390lm	3601.AA.30.927.XX.33
3000K - Ra90 - 19.0W - 1445lm	3601.AA.30.930.XX.33
4000K - Ra90 - 19.0W - 1467lm	3601.AA.30.940.XX.33

0000.AA.00.000.XX.00

23: 23° Lens
36: 36° Lens
48: 48° Lens
57: 57° Lens

Available colors (see below)
Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

15



Corten

36



Bronze Matt
Standard

16



Gold Matt

40



Champagne

Tektus 45

Discus 55


Type	Spot-/Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	Yes (60°/359°)
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty: see p.72	

Tektus 45: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)

Tektus 45: Bridgelux Dim-to-warm LED

CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux	LED: 860lm - System: 603lm
LED Power	8.2W / 250mA (excl. driver)
System Power	9.4W / 250mA (incl. driver)

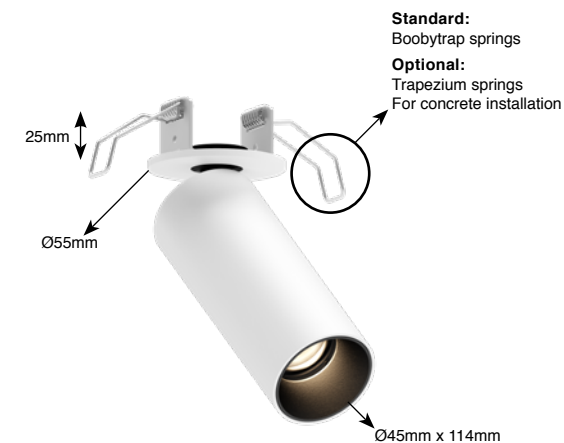

Options


Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Honeycomb

Honeycomb Tektus 45 (1pc) 1048.00.07

Honeycomb Tektus 45





Tektus 45 Disc

Independent driver included in article and pricing

Non dim

2700K - Ra90 - 10.2W - 772lm	1150.AA.24.927.XX
3000K - Ra90 - 10.2W - 811lm	1150.AA.24.930.XX
4000K - Ra90 - 10.2W - 822lm	1150.AA.24.940.XX

1-10V dim*

2700K - Ra90 - 10.2W - 772lm	1150.AA.25.927.XX
3000K - Ra90 - 10.2W - 811lm	1150.AA.25.930.XX
4000K - Ra90 - 10.2W - 822lm	1150.AA.25.940.XX

DALI dim

2700K - Ra90 - 10.2W - 772lm	1150.AA.26.927.XX
3000K - Ra90 - 10.2W - 811lm	1150.AA.26.930.XX
4000K - Ra90 - 10.2W - 822lm	1150.AA.26.940.XX
Dim-to-warm - 9.4W - 603lm	1150.AA.26.DTW.XX

Mains dim

2700K - Ra90 - 10.2W - 772lm	1150.AA.27.927.XX
3000K - Ra90 - 10.2W - 811lm	1150.AA.27.930.XX
4000K - Ra90 - 10.2W - 822lm	1150.AA.27.940.XX
Dim-to-warm - 9.4W - 603lm	1150.AA.27.DTW.XX

0000.AA.00.000.XX-Y

29: 29° Lens
40: 40° Lens
51: 51° Lens

Available colors (see below)
Other RAL colors on request

Standard supplied with Boobytrap springs.
For trapezium springs add "T" to the article no.
(e.g. 1150.29.24.927-T)

*On request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

36



Bronze Matt
Standard

11



Black + Gold Matt

12



White + Gold Matt

41



Black + Champagne

42



White + Champagne

16



Gold Matt

40



Champagne

Tektus 45

Flush

Type	Downlight
Mounting	Trimless
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty: see p.72	

Tektus 45: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)


Tektus 45: Bridgelux Dim-to-warm LED

CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux LED	LED: 860lm - System: 603lm
LED Power	8.2W / 250mA (excl. driver)
System Power	9.4W / 250mA (incl. driver)




Placement inside false ceiling: Ø60mm
Placement on false ceiling or concrete: Ø73mm

Trimless gypkit included
Suitable for false ceilings & concrete ceilings

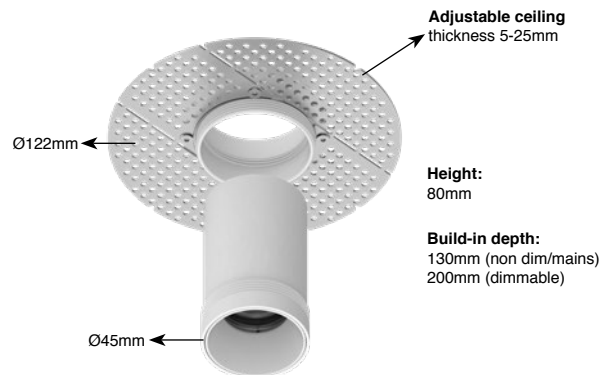

Air circulation notice:
Do not topload with insulation materials

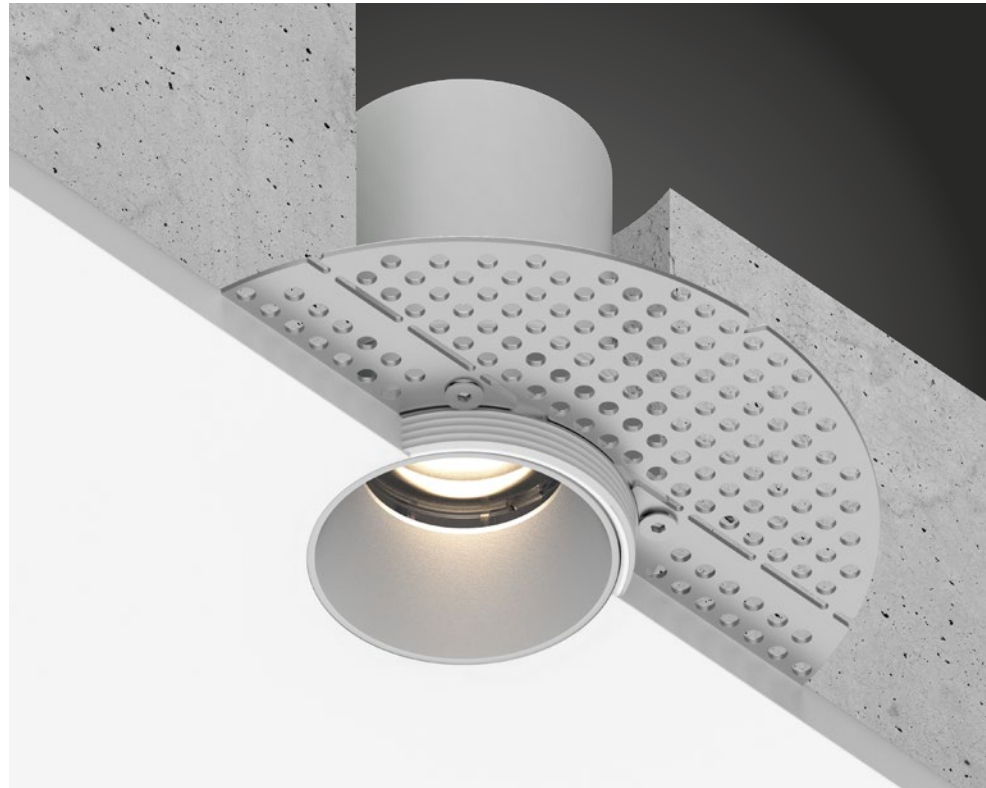

Options


Tektus 45 Additional LED types


LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Honeycomb

Honeycomb Tektus 45 (1pc) 1048.00.07

Honeycomb Tektus 45



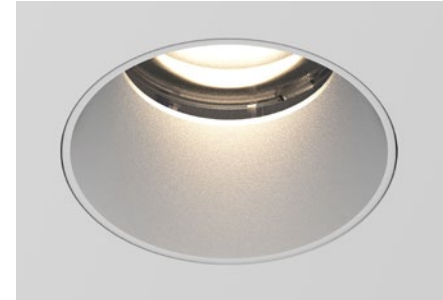

Tektus 45 Flush

Independent driver included in article and pricing

Non dim

2700K - Ra90 - 10.2W - 772lm	1929.AA.24.927.XX
3000K - Ra90 - 10.2W - 811lm	1929.AA.24.930.XX
4000K - Ra90 - 10.2W - 822lm	1929.AA.24.940.XX

1-10V dim*

2700K - Ra90 - 10.2W - 772lm	1150.AA.25.927.XX
3000K - Ra90 - 10.2W - 811lm	1150.AA.25.930.XX
4000K - Ra90 - 10.2W - 822lm	1150.AA.25.940.XX

DALI dim

2700K - Ra90 - 10.2W - 772lm	1929.AA.26.927.XX
3000K - Ra90 - 10.2W - 811lm	1929.AA.26.930.XX
4000K - Ra90 - 10.2W - 822lm	1929.AA.26.940.XX
Dim-to-warm - 9.4W - 603lm	1929.AA.26.DTW.XX

Mains dim

2700K - Ra90 - 10.2W - 772lm	1929.AA.27.927.XX
3000K - Ra90 - 10.2W - 811lm	1929.AA.27.930.XX
4000K - Ra90 - 10.2W - 822lm	1929.AA.27.940.XX
Dim-to-warm - 9.4W - 603lm	1929.AA.27.DTW.XX

0000.AA.00.000.XX

Available colors (see below)
Other RAL colors on request

29: 29° Lens
40: 40° Lens
51: 51° Lens

*On request



White Matt Text.
Standard



Grey Matt Text.
Standard



Black Matt Text.
Standard



Bronze Matt
Standard



Gold Matt



Champagne

Tektus 45

Wall


Type	Downlight
Mounting	Wall mounted
Material	Luminaire:Aluminium+Steel
Adjustable	Yes (60°/359°)
El. class / IP	Class I / IP20
Warranty: see p.72	

Tektus 45: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 45: Bridgelux Dim-to-warm LED

CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux LED	LED: 860lm - System: 603lm
LED Power	8.2W (excl. driver)
System Power	9.4W (incl. driver)

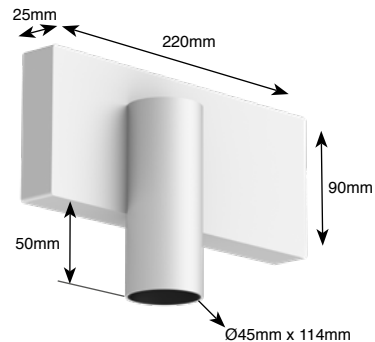

Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Honeycomb

Honeycomb Tektus 45 (1pc) 1048.00.07

On Request


Custom made cutout (Tektus Wall Single Only)

Custom made cutout with backlight (Tektus Wall Single Only)


Cutout



Honeycomb Tektus 45



Suitable as downlight and uplight





Tektus 45 Wall Single

Driver(s) integrated and included in article and pricing

Non dim


(1x) 2700K - Ra90 - 10.2W - 772lm	1170.AA.24.927.XX
(1x) 3000K - Ra90 - 10.2W - 811lm	1170.AA.24.930.XX
(1x) 4000K - Ra90 - 10.2W - 822lm	1170.AA.24.940.XX

Touch & DALI dim

(1x) 2700K - Ra90 - 10.2W - 772lm	1170.AA.26.927.XX
(1x) 3000K - Ra90 - 10.2W - 811lm	1170.AA.26.930.XX
(1x) 4000K - Ra90 - 10.2W - 822lm	1170.AA.26.940.XX

Mains dim

(1x) 2700K - Ra90 - 10.2W - 772lm	1170.AA.27.927.XX
(1x) 3000K - Ra90 - 10.2W - 811lm	1170.AA.27.930.XX
(1x) 4000K - Ra90 - 10.2W - 822lm	1170.AA.27.940.XX



Tektus 45 Wall Cross

Driver(s) integrated and included in article and pricing

Non dim

(2x) 2700K - Ra90 - 10.2W - 772lm	1172.AA.24.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1172.AA.24.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1172.AA.24.940.XX

Touch & DALI dim

(2x) 2700K - Ra90 - 10.2W - 772lm	1172.AA.26.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1172.AA.26.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1172.AA.26.940.XX
(2x) Dim-to-warm - 9.4W - 603lm	1172.AA.26.DTW.XX

Mains dim

(2x) 2700K - Ra90 - 10.2W - 772lm	1172.AA.27.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1172.AA.27.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1172.AA.27.940.XX
(2x) Dim-to-warm - 9.4W - 603lm	1172.AA.27.DTW.XX



Tektus 45 Wall Double

Driver(s) integrated and included in article and pricing

Non dim

(2x) 2700K - Ra90 - 10.2W - 772lm	1171.AA.24.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1171.AA.24.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1171.AA.24.940.XX

Touch & DALI dim

(2x) 2700K - Ra90 - 10.2W - 772lm	1171.AA.26.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1171.AA.26.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1171.AA.26.940.XX
(2x) Dim-to-warm - 9.4W - 603lm	1171.AA.26.DTW.XX

Mains dim

(2x) 2700K - Ra90 - 10.2W - 772lm	1171.AA.27.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1171.AA.27.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1171.AA.27.940.XX
(2x) Dim-to-warm - 9.4W - 603lm	1171.AA.27.DTW.XX

0000.AA.00.000.XX

29: 29° Lens
40: 40° Lens
51: 51° Lens

Available colors (see below)
Suppl. A: Single
Suppl. B: Double/Cross
Other RAL colors on request

01



White Matt Text.
Standard

03



Black Matt Text.
Standard

05



White + Black
Standard

36



Bronze Matt
Standard

11



Black + Gold Matt

12



White + Gold Matt

41



Black + Champagne

42



White + Champagne

16



Gold Matt

40



Champagne

*Remark: Suppl. A: 1 Light module / Suppl. B: 2 light modules

Updated Tektus 60 Zoom



How to order

For ordering Tektus products equipped with zoom lens add "ZM" as identifier for the angle in the article number.

Tektus 60 Zoom is available for all Tektus 60 products.

Please note that Tektus 60 uses the Bridgelux Vero10 LED at 500mA only resulting in a "Tektus zoom" specific luminous flux and power consumption.

**Use the option below additional to any Tektus 60 product:
Tektus Zoom With Bridgelux Vero 10 LED (1pc)**

Tektus 60 product

2700K - Ra90 - 12.9W - 995lm	0000.AA.27.927.XX
3000K - Ra90 - 12.9W - 1035lm	0000.AA.27.930.XX
4000K - Ra90 - 12.9W - 1050lm	0000.AA.27.940.XX

Zoom Lens: 0000.ZM.00.000.00

Tektus 60 zoom: Vero10 LED (500mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux	2700K - Ra90: 1439lm (111lm/W)
LED	3000K - Ra90: 1505lm (116lm/W)
	4000K - Ra90: 1592lm
(123lm/W)	
Luminous Flux	2700K - Ra90: 943lm (64lm/W)
System	3000K - Ra90: 987lm (67lm/W)
	4000K - Ra90: 1044lm (71lm/W)
Beam angle	Zoom (21° - 47°)
LED Power	12.9W (excl. driver)
System Power	14.7W (incl. driver)

Reduced Light Output Series for Tektus 60



Tektus 60 Round 3-Way

Diameter 640 (Large)

Driver(s) integrated and included in article and pricing

Non dim

(3x)Standard: 995-1050lm/12.9W 1089.AA.24.CCC.XX
(3x)Reduced: 722-762lm/9.1W 1089.AA.24.CCC.XX-R




Tektus 60 Rectangle 2-Way

Surface Mounted

Driver(s) integrated and included in article and pricing

Non dim

(2x)Standard: 995-1050lm/12.9W 1081.AA.24.927.XX
(2x)Reduced: 722-762lm/9.1W 1081.AA.24.930.XX-R



Tektus 60 Rectangle 3-Way

Surface Mounted

Driver(s) integrated and included in article and pricing

Non dim

(3x)Standard: 995-1050lm/12.9W 1080.AA.24.CCC.XX
(3x)Reduced: 722-762lm/9.1W 1080.AA.24.CCC.XX-R



Tektus 60 Square 3-Way

Surface Mounted

Driver(s) integrated and included in article and pricing

Non dim

(3x)Standard: 995-1050lm/12.9W 1082.AA.24.CCC.XX
(3x)Reduced: 722-762lm/9.1W 1082.AA.24.CCC.XX-R

23: Lens with 23° beam angle
36: Lens with 36° beam angle
48: Lens with 48° beam angle
57: Lens with 57° beam angle

927: 2700K - Ra90
930: 3000K - Ra90
940: 4000K - Ra90

01: White Matt Texture
05: White + Black Matt Texture
12: White Matt Texture + Gold Matt*
03: Black Matt Texture
11: Black Matt Texture + Gold Matt*



White Matt Text.
Standard



White + Black
Standard




White + Gold Matt



Black Matt Text.
Standard



Black + Gold Matt



Tektus 60 Square 1-Way

Surface Mounted

Driver(s) integrated and included in article and pricing

Non dim

(1x)Standard: 995-1050lm/12.9W 1093.AA.24.CCC.XX
(1x)Reduced: 722-762lm/9.1W 1093.AA.24.CCC.XX-R



Tektus 60 Round 1-Way

Diameter 300

Driver(s) integrated and included in article and pricing

Non dim

(1x)Standard: 995-1050lm/12.9W 1125.AA.24.CCC.XX
(1x)Reduced: 722-762lm/9.1W 1125.AA.24.CCC.XX-R



Tektus 60 Round 2-Way

Diameter 480 (Small)

Driver(s) integrated and included in article and pricing

Non dim

(2x)Standard: 995-1050lm/12.9W 1088.AA.24.CCC.XX
(2x)Reduced: 722-762lm/9.1W 1088.AA.24.CCC.XX-R



Focus Recessed


Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty:	see p.72

Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (139lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 1395lm (108lm/W) 3000K - Ra90: 1450lm (112lm/W) 4000K - Ra90: 1472lm (114lm/W)
Beam angle	24° / 28° / 44°
LED Power	11.3W / 350mA (excl. driver)
System Power	12.9W / 350mA (incl. driver)
Forward voltage	29.3V (min.) - 32.3V (typ.) - 35.1V (max.)

Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 1034lm (101lm/W) 3000K - Ra90: 1086lm (106lm/W) 4000K - Ra90: 1101lm (108lm/W)
Beam angle	16° / 30° / 41°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)

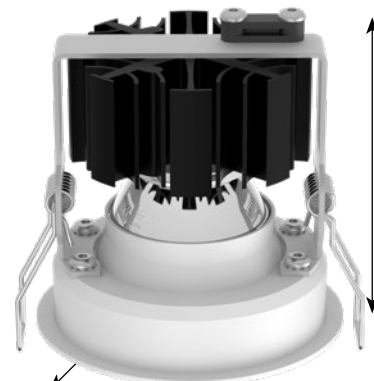

Height:
90mm

Build-in depth:
110mm

Ø88mm



Options

Focus Basic Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Front Glass IP54

Front Glass Focus IP54 (1pc) 1450.00.00.000.00

Updated!

New reflectors and LED holders for Plus version (left)
Basic version with reduced output (right)



Air circulation notice:

Do not topload with insulation materials



Focus Recessed Plus

Independent driver included in article and pricing

Non dim

2700K - Ra90 - 12.9W - 1289lm	1419. AA .24.927. XX
3000K - Ra90 - 12.9W - 1340lm	1419. AA .24.930. XX
4000K - Ra90 - 12.9W - 1361lm	1419. AA .24.940. XX

1-10V dim & Push dim

2700K - Ra90 - 12.9W - 1289lm	1419. AA .25.927. XX
3000K - Ra90 - 12.9W - 1340lm	1419. AA .25.930. XX
4000K - Ra90 - 12.9W - 1361lm	1419. AA .25.940. XX

DALI dim

2700K - Ra90 - 12.9W - 1289lm	1419. AA .26.927. XX
3000K - Ra90 - 12.9W - 1340lm	1419. AA .26.930. XX
4000K - Ra90 - 12.9W - 1361lm	1419. AA .26.940. XX

Mains dim

2700K - Ra90 - 12.9W - 1289lm	1419. AA .27.927. XX
3000K - Ra90 - 12.9W - 1340lm	1419. AA .27.930. XX
4000K - Ra90 - 12.9W - 1361lm	1419. AA .27.940. XX

Focus Recessed Basic

Independent driver included in article and pricing

Non dim

2700K - Ra90 - 10.2W - 937lm	1420. AA .24.927. XX
3000K - Ra90 - 10.2W - 984lm	1420. AA .24.930. XX
4000K - Ra90 - 10.2W - 998lm	1420. AA .24.940. XX

1-10V dim & Push dim

2700K - Ra90 - 10.2W - 937lm	1420. AA .25.927. XX
3000K - Ra90 - 10.2W - 984lm	1420. AA .25.930. XX
4000K - Ra90 - 10.2W - 998lm	1420. AA .25.940. XX

DALI dim

2700K - Ra90 - 10.2W - 937lm	1420. AA .26.927. XX
3000K - Ra90 - 10.2W - 984lm	1420. AA .26.930. XX
4000K - Ra90 - 10.2W - 998lm	1420. AA .26.940. XX

Mains dim

2700K - Ra90 - 10.2W - 937lm	1420. AA .27.927. XX
3000K - Ra90 - 10.2W - 984lm	1420. AA .27.930. XX
4000K - Ra90 - 10.2W - 998lm	1420. AA .27.940. XX

0000.[AA](#).00.000.[XX](#)

Basic
 Plus
 16: 16° Reflector
 24: 24° Reflector
 28: 28° Reflector
 44: 44° Reflector
 30: 30° Reflector
 41: 41° Reflector

Available colors (see below)
 Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

25



Smoked brown Text.
Standard

36



Bronze
Standard

16



Gold Matt

40



Champagne

Focus Trimless

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty: see p.72	

Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (139lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 1395lm (108lm/W) 3000K - Ra90: 1450lm (112lm/W) 4000K - Ra90: 1472lm (114lm/W)
Beam angle	24° / 28° / 44°
LED Power	11.3W / 350mA (excl. driver)
System Power	12.9W / 350mA (incl. driver)
Forward voltage	29.3V (min.) - 32.3V (typ.) - 35.1V (max.)


Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 1034lm (101lm/W) 3000K - Ra90: 1086lm (106lm/W) 4000K - Ra90: 1101lm (108lm/W)
Beam angle	16° / 30° / 41°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)



Trimless gypkit included

Adjustable ceiling thickness:
9-18mm




Height:
90mm

Build-in depth:
115mm (non dim)
130mm (dimmable)

Ø80mm

Air circulation notice:
Do not topload with insulation materials

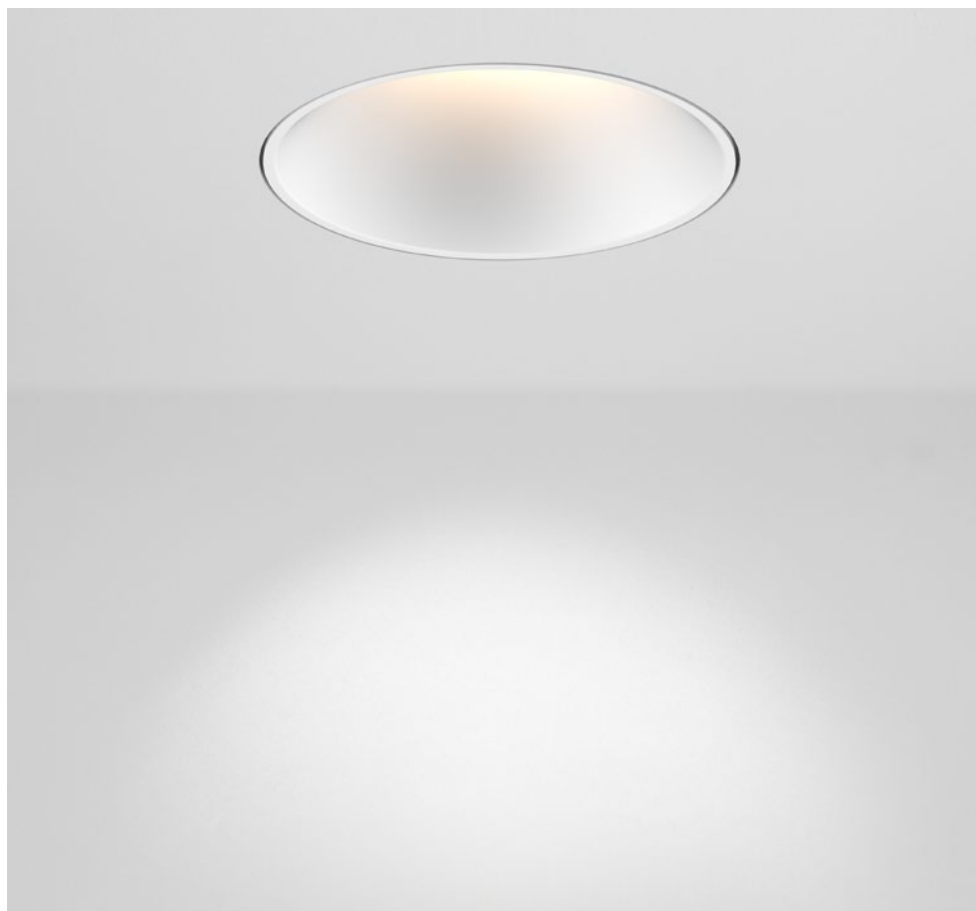

Options

Focus Basic Additional LED types


LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Front Glass IP54

Front Glass Focus IP54 (1pc) 1450.00.00

Updated!

New reflectors and LED holders for Plus version (left)
Basic version with reduced output (right)

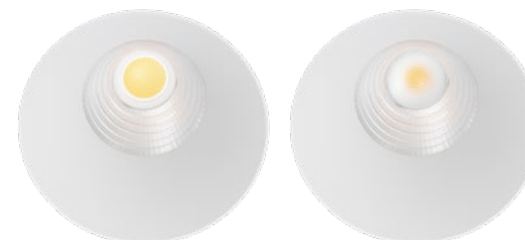



Focus Trimless Plus

Independent driver included in article and pricing

Non dim

2700K - Ra90 - 12.9W - 1289lm	1417. AA.24.927.XX
3000K - Ra90 - 12.9W - 1340lm	1417. AA.24.930.XX
4000K - Ra90 - 12.9W - 1361lm	1417. AA.24.940.XX

1-10V dim & Push dim

2700K - Ra90 - 12.9W - 1289lm	1417. AA.25.927.XX
3000K - Ra90 - 12.9W - 1340lm	1417. AA.25.930.XX
4000K - Ra90 - 12.9W - 1361lm	1417. AA.25.940.XX

DALI dim

2700K - Ra90 - 12.9W - 1289lm	1417. AA.26.927.XX
3000K - Ra90 - 12.9W - 1340lm	1417. AA.26.930.XX
4000K - Ra90 - 12.9W - 1361lm	1417. AA.26.940.XX

Mains dim

2700K - Ra90 - 12.9W - 1289lm	1417. AA.27.927.XX
3000K - Ra90 - 12.9W - 1340lm	1417. AA.27.930.XX
4000K - Ra90 - 12.9W - 1361lm	1417. AA.27.940.XX

Focus Trimless Basic

Independent driver included in article and pricing

Non dim

2700K - Ra90 - 10.2W - 937lm	1421. AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1421. AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1421. AA.24.940.XX

1-10V dim & Push dim

2700K - Ra90 - 10.2W - 937lm	1421. AA.25.927.XX
3000K - Ra90 - 10.2W - 984lm	1421. AA.25.930.XX
4000K - Ra90 - 10.2W - 998lm	1421. AA.25.940.XX


DALI dim

2700K - Ra90 - 10.2W - 937lm	1421. AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1421. AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1421. AA.26.940.XX


Mains dim

2700K - Ra90 - 10.2W - 937lm	1421. AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1421. AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1421. AA.27.940.XX

0000.[AA.00.000.XX](#)



01
White Matt Text.
Standard



18
Grey Matt Text.
Standard



03
Black Matt Text.
Standard



25
Smoked brown Text.
Standard



36
Bronze
Standard



16
Gold Matt



40
Champagne

Titan

Wallwasher


Type	Wallwasher
Mounting	Various
Adjustable	Horizontal only
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty: see p.72	

BridgeLux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 937lm (92lm/W) 3000K - Ra90: 984lm (96lm/W) 4000K - Ra90: 998lm (98lm/W)
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)



- Ø Boobytrap springs: 76-80mm
- Ø Trapezium springs: 79-80mm

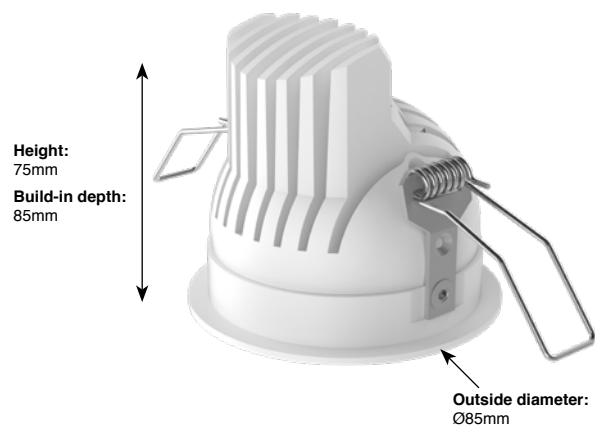


Options

Titan Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Air circulation notice:

Do not topload with insulation materials





Titan Fix

Wallwasher

Independent driver included in article and pricing

Non dim

2700K - Ra90 - 10.2W - 937lm	1029.WW.24.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1029.WW.24.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1029.WW.24.940.XX-Y

1-10V dim & Push dim

2700K - Ra90 - 10.2W - 937lm	1029.WW.25.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1029.WW.25.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1029.WW.25.940.XX-Y

DALI dim

2700K - Ra90 - 10.2W - 937lm	1029.WW.26.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1029.WW.26.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1029.WW.26.940.XX-Y

Mains dim

2700K - Ra90 - 10.2W - 937lm	1029.WW.27.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1029.WW.27.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1029.WW.27.940.XX-Y

0000.00.00.000.XX-Y

T: Trapezium springs

B: Boobytrap springs

Available colors (see below)
Other RAL colors on request



TRAPEZIUM SPRINGS



BOOBYTRAP SPRINGS



Titan walwasher is also available for following products:

Titan 1-Way Cone	1109.WW.00.000.00
Titan 2-Way Cone	1112.WW.00.000.00
Titan Semi-Recessed Cone	1200.WW.00.000.00
Titan Trimless Standard Cone	1016.WW.00.000.00
Titan 140 Cone	1211.WW.00.000.00
Titan 200 Cone	1214.WW.00.000.00
Titan Box Single Cone	1413.WW.00.000.00
Titan Box Double Cone	1406.WW.00.000.00

Add WW to article code for ordering wallwasher version

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

36



Bronze Matt
Standard

16



Gold Matt

40



Champagne

Flat Iron

Type Lounge
 Mounting Wall Mounted
 Material Steel/Aluminium
 El. class / IP Class I / IP20
 Warranty: see p.72

Flat Iron 6060 module

Led module + driver included
 Luminous Flux 1600lm (LED)
 LED power 2700K - Ra90: 13.8W (116lm/W)
 excl. driver 3000K - Ra90: 13.2W (121lm/W)
 4000K - Ra90: 12.2W (131lm/W)

Flat Iron 8050 module


Luminous Flux 1800lm (LED)
 LED power 2700K - Ra90: 15.5W (116lm/W)
 excl. driver 3000K - Ra90: 14.8W (121lm/W)
 4000K - Ra90: 13.7W (131lm/W)

Flat Iron 11030 module

Luminous Flux 2000lm (LED)
 LED power 2700K - Ra90: 17.2W (116lm/W)
 excl. driver 3000K - Ra90: 16.4W (121lm/W)
 4000K - Ra90: 15.2W (131lm/W)

Flat Iron 14030 module


Luminous Flux 2600lm (LED)
 LED power 2700K - Ra90: 22.4W (116lm/W)
 excl. driver 3000K - Ra90: 21.4W (121lm/W)
 4000K - Ra90: 19.8W (131lm/W)

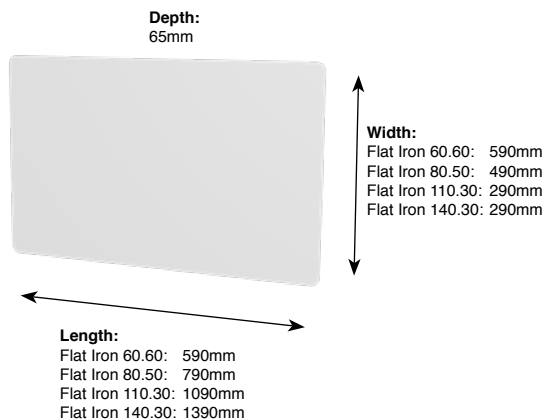

Options

Spacer for increasing distance to wall with 55mm (set)

Set (4pcs) White Matt Texture	1305.00.01
Set (4pcs) Grey Matt Texture	1305.00.18
Set (4pcs) Black Matt Texture	1305.00.03
Set (4pcs) Bronze	1305.00.36
Set (4pcs) Gold	1305.00.16
Set (4pcs) Champagne	1305.00.40

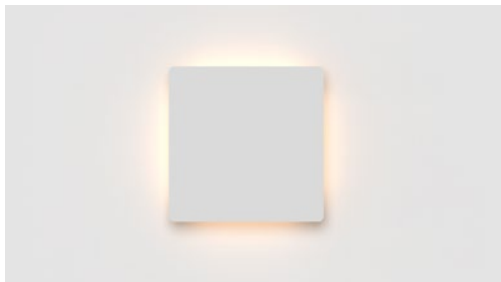

Flat Iron 60.60

Driver(s) integrated and included in article and pricing

Non dim


2700K - Ra90 - 13.8W - 1600lm	3505.00.24.927.XX
3000K - Ra90 - 13.2W - 1600lm	3505.00.24.930.XX
4000K - Ra90 - 12.2W - 1600lm	3505.00.24.940.XX

DALI dim

2700K - Ra90 - 13.8W - 1600lm	3505.00.26.927.XX
3000K - Ra90 - 13.2W - 1600lm	3505.00.26.930.XX
4000K - Ra90 - 12.2W - 1600lm	3505.00.26.940.XX

Mains dim

2700K - Ra90 - 13.8W - 1600lm	3505.00.27.927.XX
3000K - Ra90 - 13.2W - 1600lm	3505.00.27.930.XX
4000K - Ra90 - 12.2W - 1600lm	3505.00.27.940.XX

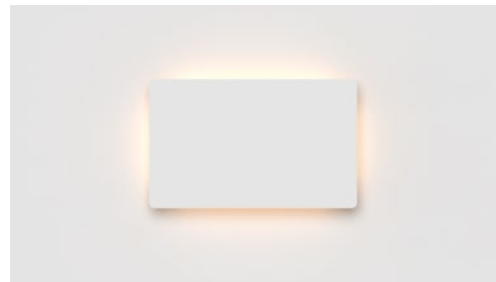

Flat Iron 80.50

Driver(s) integrated and included in article and pricing

Non dim


2700K - Ra90 - 15.5W - 1800lm	3704.00.24.927.XX
3000K - Ra90 - 14.8W - 1800lm	3704.00.24.930.XX
4000K - Ra90 - 13.7W - 1800lm	3704.00.24.940.XX

DALI dim

2700K - Ra90 - 15.5W - 1800lm	3704.00.26.927.XX
3000K - Ra90 - 14.8W - 1800lm	3704.00.26.930.XX
4000K - Ra90 - 13.7W - 1800lm	3704.00.26.940.XX

Mains dim

2700K - Ra90 - 15.5W - 1800lm	3704.00.27.927.XX
3000K - Ra90 - 14.8W - 1800lm	3704.00.27.930.XX
4000K - Ra90 - 13.7W - 1800lm	3704.00.27.940.XX

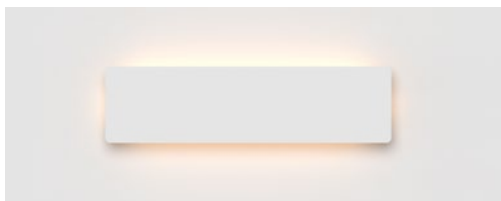

Flat Iron 110.30

Driver(s) integrated and included in article and pricing

Non dim


2700K - Ra90 - 17.2W - 2000lm	3113.00.24.927.XX
3000K - Ra90 - 16.4W - 2000lm	3113.00.24.930.XX
4000K - Ra90 - 15.2W - 2000lm	3113.00.24.940.XX

DALI dim

2700K - Ra90 - 17.2W - 2000lm	3113.00.26.927.XX
3000K - Ra90 - 16.4W - 2000lm	3113.00.26.930.XX
4000K - Ra90 - 15.2W - 2000lm	3113.00.26.940.XX

Mains dim

2700K - Ra90 - 17.2W - 2000lm	3113.00.27.927.XX
3000K - Ra90 - 16.4W - 2000lm	3113.00.27.930.XX
4000K - Ra90 - 15.2W - 2000lm	3113.00.27.940.XX

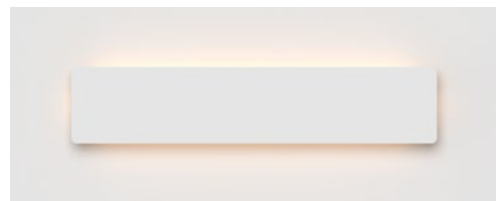

Flat Iron 140.30

Driver(s) integrated and included in article and pricing

Non dim

2700K - Ra90 - 22.4W - 2600lm	3133.00.24.927.XX
3000K - Ra90 - 21.4W - 2600lm	3133.00.24.930.XX
4000K - Ra90 - 19.8W - 2600lm	3133.00.24.940.XX

DALI dim

2700K - Ra90 - 22.4W - 2600lm	3133.00.26.927.XX
3000K - Ra90 - 21.4W - 2600lm	3133.00.26.930.XX
4000K - Ra90 - 19.8W - 2600lm	3133.00.26.940.XX


Mains dim

2700K - Ra90 - 22.4W - 2600lm	3133.00.27.927.XX
3000K - Ra90 - 21.4W - 2600lm	3133.00.27.930.XX
4000K - Ra90 - 19.8W - 2600lm	3133.00.27.940.XX

0000.00.00.000.XX

Available colors (see below)
Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

36



Bronze Matt
Standard

15



Corten

16



Gold Matt

40



Champagne

Full Moon Indirect

600 - 900

Type Lounge
Mounting Ceiling Mounted / Suspended
Material Aluminium
El. class / IP Class I / IP20
Warranty: see p.72

Direct module Full Moon 600

Luminous Flux 3000K - Ra80: 8268lm (145lm/W)
LED 4000K - Ra80: 8718lm (153lm/W)
Luminous Flux 3000K - Ra80: 4936lm (76lm/W)
System 4000K - Ra80: 5230lm (81lm/W)
LED power 57W (excl. driver)
System power 64.8W (incl. driver)

Indirect module Full Moon 600

Luminous Flux 3000K - Ra90: 1100lm
LED 4000K - Ra90: 1100lm
Power 3000K - Ra90: 9W
LED 4000K - Ra90: 8.4W
Power 3000K - Ra90: 10.2W
System 4000K - Ra90: 9.5W

Direct module Full Moon 900

Luminous Flux 3000K - Ra80: 21262lm (145lm/W)
LED 4000K - Ra80: 22416lm (153lm/W)
Luminous Flux 3000K - Ra80: 12757lm (76lm/W)
System 4000K - Ra80: 13450lm (81lm/W)
LED power 146.6W (excl. driver)
System power 166.0W (incl. driver)

Indirect module Full Moon 900

Luminous Flux 3000K - Ra90: 1600lm
LED 4000K - Ra90: 1600lm
Power 3000K - Ra90: 13.1W
LED 4000K - Ra90: 14.9W
Power 3000K - Ra90: 12.2W
System 4000K - Ra90: 13.9W



Options

Integrated Emergency Lighting

Standard - 3 Hours 659.24.LED-3

Extended (DALI) - 3 Hours 659.26.LED-3

Emergency modules are equipped with self-testing.

Extended version with on command testing, status read-out and additional functionality (only compatible with DALI)



Full Moon 600 Indirect

Driver(s) integrated and included in article and pricing

Non dimmable + Indirect Lighting

3000K - Ra80 - 74.0W 1600.01.24.830.[XX](#)
 4000K - Ra80 - 73.3W 1600.01.24.840.[XX](#)

DALI Dimmable + Indirect Lighting

3000K - Ra80 - 74.0W 1600.01.26.830.[XX](#)
 4000K - Ra80 - 73.3W 1600.01.26.840.[XX](#)



Full Moon 900 Indirect

Driver(s) integrated and included in article and pricing

Non dimmable + Indirect Lighting

3000K - Ra80 - 178.3W 1900.01.24.830.[XX](#)
 4000K - Ra80 - 177.3W 1900.01.24.840.[XX](#)

DALI Dimmable + Indirect Lighting

3000K - Ra80 - 178.3W 1900.01.26.830.[XX](#)
 4000K - Ra80 - 177.3W 1900.01.26.840.[XX](#)

0000.00.00.000.[XX](#)

Available colors (see below)
 Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

07



Anthracite
Standard

03



Black Matt Text.
Standard

25



Smoked Brown Text.
Standard

A modern office interior featuring a sleek, minimalist design. The space includes a white desk with two computer monitors, two black office chairs, and a potted plant. The ceiling is white with a black track system holding several gold-colored cylindrical light fixtures. The walls are a mix of dark grey, white, and large panels with a natural stone texture. A long, low white reception desk is in the foreground. The floor is made of large, light-colored stone tiles. In the bottom left corner, there are two black ceramic vases.

Tektus Slim Profile & Modules

The Tektus Slim profile/module is a sleek profile that can be used to complement and enhance any interior and at the same time serve as the backbone for the lighting system as well as for the electricity distribution.

Tektus Slim

Custom Made

Tektus 60: Citizen CLU LED (350mA)



Luminous flux LED	2700K - Ra90: 1517lm (134lm/W)
	3000K - Ra90: 1577lm (140lm/W)
	4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W)
	3000K - Ra90: 1035lm (80lm/W)
	4000K - Ra90: 1050lm (81lm/W)
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)

Tektus 45 (Direct): Bridgelux Vero 10 LED (350mA)

Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W)
	3000K - Ra90: 1156lm (130lm/W)
	4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W)
	3000K - Ra90: 811lm (80lm/W)
	4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)


Tektus 45 Indirect: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W)
	3000K - Ra90: 1156lm (130lm/W)
	4000K - Ra90: 1172lm (132lm/W)
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

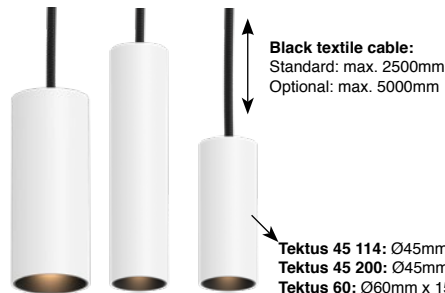

Basic components

Profile housing




Profile /meter (max. length single piece 3400mm)

Matt White Texture	2249.00.01	
Matt Black Texture	2249.00.03	
Matt Anthracite Texture	2249.00.07	
Matt Grey 9006 Texture	2249.00.18	
Smoked Brown Texture	2249.00.25	
Bronze	2249.00.36	
Gold	2249.00.16	
Champagne	2249.00.40	
Other RAL Colors	650.99.00	on request



Connector Tektus Slim

90°	1931.00.00
180°	1933.00.00
Custom made	1933.99.00



Screwless end cap (1 piece)

Matt White Texture	2250.00.01
Matt Black Texture	2250.00.03
Matt Anthracite Texture	2250.00.07
Matt Grey Texture	2250.00.18
Smoked Brown Texture	2250.00.25
Bronze	2250.00.36
Gold	2250.00.16
Champagne	2250.00.40

End caps require 15mm of space for each cap


Modules



Tektus Modules

Tektus 45 Spot	see p.50
Tektus 60 Spot	see p.50
Tektus 45 Pendel Slim Single 114	see p.51
Tektus 45 Pendel Slim Single 200	see p.51
Tektus 60 Pendel Slim Single 150	see p.51

Electrical




Extra circuit

Per meter
Extra circuit /m 650.00.00

When multiple modules are used in one profile, modules can be switched individually using multiple circuits. Length of extra circuit equals the full length of the profile.

Available colors



White Matt Text.



Black Matt Text.



Grey Matt Text.



Anthracite Matt Text.



Bronze



Smoked Brown



Gold (Optional)



Champagne (Optional)

Tektus Slim

Custom Made - Spot Modules

Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A


Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5

Honeycomb

Honeycomb Tektus 45 (1pc)	1048.00.07
Honeycomb Tektus 60 (1pc)	1048.00.08

Honeycomb Tektus 45



Honeycomb Tektus 60



Tektus 45 Standard Single

Tektus Slim Module 114mm

Driver(s) integrated and included in article and pricing

Module only, LEDliner profile not included

Non dim - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm	1248.AA.24.927.XX
(1x) 3000K - Ra90 - 10.2W - 811lm	1248.AA.24.930.XX
(1x) 4000K - Ra90 - 10.2W - 822lm	1248.AA.24.940.XX

Touch & DALI dim Single - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm	1248.AA.26.927.XX
(1x) 3000K - Ra90 - 10.2W - 811lm	1248.AA.26.930.XX
(1x) 4000K - Ra90 - 10.2W - 822lm	1248.AA.26.940.XX

Tektus 45 Standard Double

Tektus Slim Module 114mm

Driver(s) integrated and included in article and pricing


Module only, LEDliner profile not included

Non dim - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm	1300.AA.24.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1300.AA.24.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1300.AA.24.940.XX

Touch & DALI dim Double - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm	1300.AA.26.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1300.AA.26.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1300.AA.26.940.XX

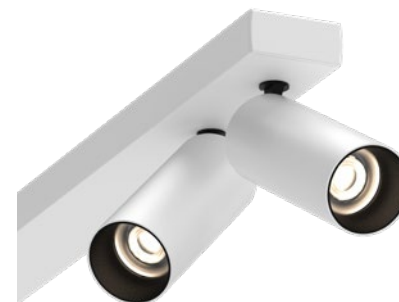

Tektus 60 Standard Single

Tektus Slim Module 150mm

Driver(s) integrated and included in article and pricing

Module only, LEDliner profile not included

Non dim - 1x Tektus 60 on one 350mA driver

(1x) 2700K - Ra90 - 12.9W - 995lm	1250.AA.24.927.XX
(1x) 3000K - Ra90 - 12.9W - 1035lm	1250.AA.24.930.XX
(1x) 4000K - Ra90 - 12.9W - 1050lm	1250.AA.24.940.XX

Touch & DALI dim Single - 1x Tektus 60 on one 350mA driver

(1x) 2700K - Ra90 - 12.9W - 995lm	1250.AA.26.927.XX
(1x) 3000K - Ra90 - 12.9W - 1035lm	1250.AA.26.930.XX
(1x) 4000K - Ra90 - 12.9W - 1050lm	1250.AA.26.940.XX

Tektus 60 Standard Double

Tektus Slim Module 150mm

Driver(s) integrated and included in article and pricing

Module only, LEDliner profile not included


Non dim - 2x Tektus 60 on one 350mA driver

(2x) 2700K - Ra90 - 12.9W - 995lm	1302.AA.24.927.XX
(2x) 3000K - Ra90 - 12.9W - 1035lm	1302.AA.24.930.XX
(2x) 4000K - Ra90 - 12.9W - 1050lm	1302.AA.24.940.XX


Touch & DALI dim Double - 2x Tektus 60 on one 350mA driver

(2x) 2700K - Ra90 - 12.9W - 995lm	1302.AA.26.927.XX
(2x) 3000K - Ra90 - 12.9W - 1035lm	1302.AA.26.930.XX
(2x) 4000K - Ra90 - 12.9W - 1050lm	1302.AA.26.940.XX

0000.AA.00.000.XX




01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

36



Bronze Matt
Standard

16




Gold Matt

40



Champagne

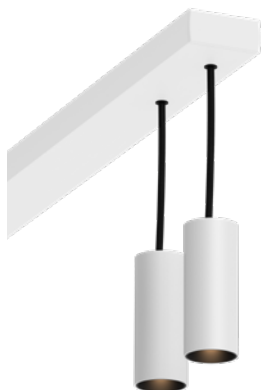

Tektus 45 Pendel Slim Single

Tektus Slim Module 114mm

Driver(s) integrated and included in article and pricing
Module only, LEDliner profile not included

Non dim - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm 3602.**AA**.24.927.**XX**.10
 (1x) 3000K - Ra90 - 10.2W - 811lm 3602.**AA**.24.930.**XX**.10
 (1x) 4000K - Ra90 - 10.2W - 822lm 3602.**AA**.24.940.**XX**.10

DALI dim - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm 3602.**AA**.26.927.**XX**.10
 (1x) 3000K - Ra90 - 10.2W - 811lm 3602.**AA**.26.930.**XX**.10
 (1x) 4000K - Ra90 - 10.2W - 822lm 3602.**AA**.26.940.**XX**.10

Tektus 45 Pendel Slim Double

Tektus Slim Module 114mm


Driver(s) integrated and included in article and pricing
Module only, LEDliner profile not included

Non dim - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm 3603.**AA**.24.927.**XX**.10
 (2x) 3000K - Ra90 - 10.2W - 811lm 3603.**AA**.24.930.**XX**.10
 (2x) 4000K - Ra90 - 10.2W - 822lm 3603.**AA**.24.940.**XX**.10

Touch & DALI dim Double - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm 3603.**AA**.26.927.**XX**.10
 (2x) 3000K - Ra90 - 10.2W - 811lm 3603.**AA**.26.930.**XX**.10
 (2x) 4000K - Ra90 - 10.2W - 822lm 3603.**AA**.26.940.**XX**.10

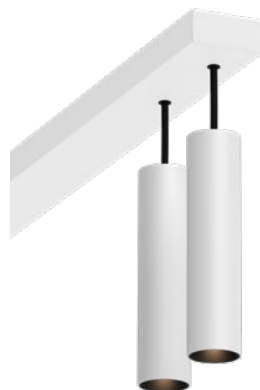

Tektus 45 Pendel Slim Single

Tektus Slim Module 200mm

Driver(s) integrated and included in article and pricing
Module only, LEDliner profile not included

Non dim - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm 3602.**AA**.24.927.**XX**.YY
 (1x) 3000K - Ra90 - 10.2W - 811lm 3602.**AA**.24.930.**XX**.YY
 (1x) 4000K - Ra90 - 10.2W - 822lm 3602.**AA**.24.940.**XX**.YY

Touch & DALI dim - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm 3602.**AA**.26.927.**XX**.YY
 (1x) 3000K - Ra90 - 10.2W - 811lm 3602.**AA**.26.930.**XX**.YY
 (1x) 4000K - Ra90 - 10.2W - 822lm 3602.**AA**.26.940.**XX**.YY

*Indirect module: additional 10.2W/unit

Tektus 45 Pendel Slim Double

Tektus Slim Module 200mm

Driver(s) integrated and included in article and pricing
Module only, LEDliner profile not included


Non dim - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm 3603.**AA**.24.927.**XX**.YY
 (2x) 3000K - Ra90 - 10.2W - 811lm 3603.**AA**.24.930.**XX**.YY
 (2x) 4000K - Ra90 - 10.2W - 822lm 3603.**AA**.24.940.**XX**.YY

Touch & DALI dim Double - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm 3603.**AA**.26.927.**XX**.YY
 (2x) 3000K - Ra90 - 10.2W - 811lm 3603.**AA**.26.930.**XX**.YY
 (2x) 4000K - Ra90 - 10.2W - 822lm 3603.**AA**.26.940.**XX**.YY

*Indirect module: additional 10.2W/unit

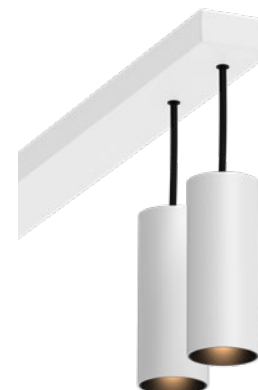

Tektus 60 Pendel Slim Single

Tektus Slim Module 150mm

Driver(s) integrated and included in article and pricing
Module only, LEDliner profile not included

Non dim - 1x Tektus 60 on one 350mA driver

(1x) 2700K - Ra90 - 12.9W - 995lm 3602.**AA**.24.927.**XX**.30
 (1x) 3000K - Ra90 - 12.9W - 1035lm 3602.**AA**.24.930.**XX**.30
 (1x) 4000K - Ra90 - 12.9W - 1050lm 3602.**AA**.24.940.**XX**.30

Touch & DALI dim - 1x Tektus 60 on one 350mA driver

(1x) 2700K - Ra90 - 12.9W - 995lm 3602.**AA**.26.927.**XX**.30
 (1x) 3000K - Ra90 - 12.9W - 1035lm 3602.**AA**.26.930.**XX**.30
 (1x) 4000K - Ra90 - 12.9W - 1050lm 3602.**AA**.26.940.**XX**.30

Tektus 60 Pendel Slim Double

Tektus Slim Module 150mm

Driver(s) integrated and included in article and pricing
Module only, LEDliner profile not included

Non dim - 2x Tektus 60 on one 350mA driver

(2x) 2700K - Ra90 - 12.9W - 995lm 3603.**AA**.24.927.**XX**.30
 (2x) 3000K - Ra90 - 12.9W - 1035lm 3603.**AA**.24.930.**XX**.30
 (2x) 4000K - Ra90 - 12.9W - 1050lm 3603.**AA**.24.940.**XX**.30

Touch & DALI dim Double - 2x Tektus 60 on one 350mA driver

(2x) 2700K - Ra90 - 12.9W - 995lm 3603.**AA**.26.927.**XX**.30
 (2x) 3000K - Ra90 - 12.9W - 1035lm 3603.**AA**.26.930.**XX**.30
 (2x) 4000K - Ra90 - 12.9W - 1050lm 3603.**AA**.26.940.**XX**.30

0000.**AA**.00.000.**XX**.YY

Tektus 45
29: 29° Lens
40: 40° Lens
51: 51° Lens

Tektus 60
23: 23° Lens
36: 36° Lens
48: 48° Lens
57: 57° Lens

Available colors (see below)
 Other RAL colors on request

10: T45 - 114mm module - down
20: T45 - 200mm module - down
21: T45 - 200mm module - up&down
30: T60 - 150mm module - down

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

15



Corten

36



Bronze Matt
Standard

16



Gold Matt

40



Champagne

*Supplementary price

Tektus Suspended

For mounting on LEDliner profiles

Type	Downlight
Mounting	Suspended
Material	Luminaire: Aluminium
Adjustable	No
El. class / IP	Class II / IP20
Warranty:	see p.72

Tektus 45 Direct: Bridgelux Vero 10 LED (350mA)



CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 45 Indirect: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 60: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (140lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W) 3000K - Ra90: 1035lm (80lm/W) 4000K - Ra90: 1050lm (81lm/W)
Beam angle	23° / 36° / 48° / 57° / Zoom (25° - 46°)
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)

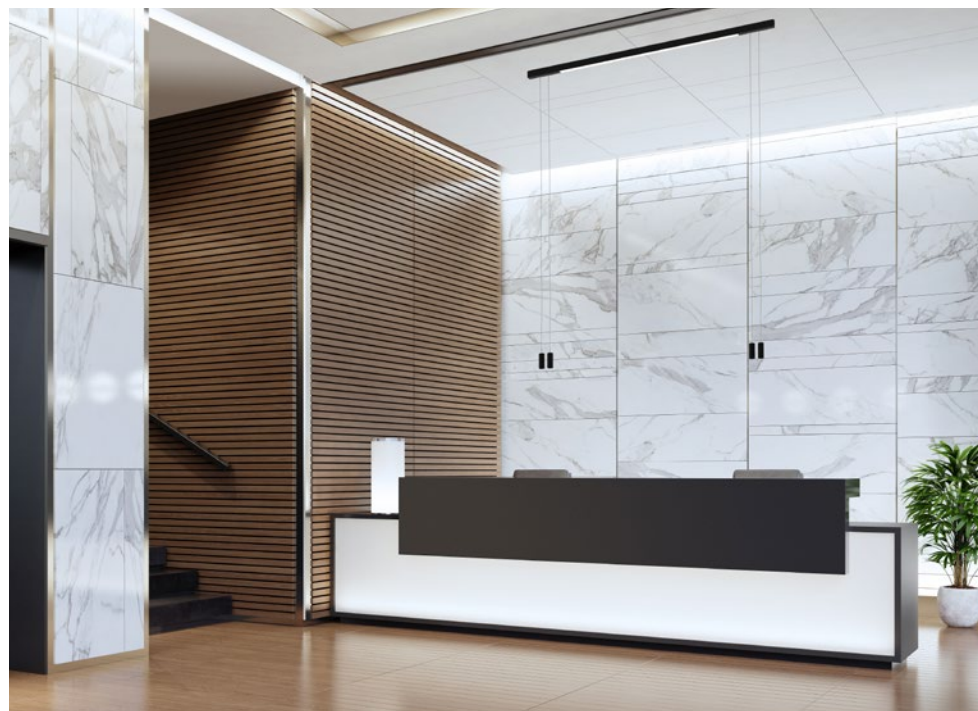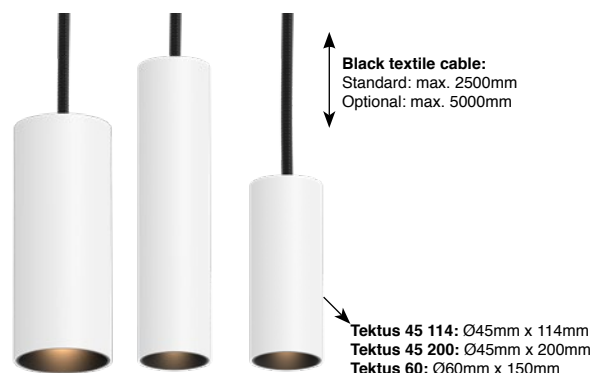

Options

Tektus 45 Additional LED types

LED 2700K CRI 97	LED.VERO10.927.CRI97
LED 3000K CRI 97	LED.VERO10.930.CRI97
LED 3000K Class A	LED.VERO10.930.CL-A
LED 4000K Class A	LED.VERO10.940.CL-A

Textile cable

White Textile Cable 2500mm	102.02.01-2
White Textile Cable 5000mm	102.02.01-5
Black Textile Cable 5000mm	102.02.03-5


Honeycomb

Honeycomb Tektus 45 (1pc)	1048.00.07
Honeycomb Tektus 60 (1pc)	1048.00.08

Module Tektus Single:




Module Tektus Double:



Suitable profiles:

LEDliner35
LEDliner40
LEDliner47
LEDliner65
LEDliner66
LEDliner70
LEDliner80
LEDliner100

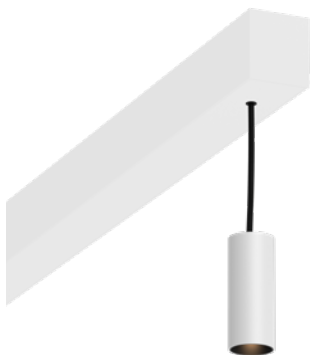

Tektus 45 Pendel LL Single

LEDliner Module 114mm

Driver(s) integrated and included in article and pricing

Module only, LEDliner profile not included

Non dim - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm 3604.**AA**.24.927.**XX**.10
 (1x) 3000K - Ra90 - 10.2W - 811lm 3604.**AA**.24.930.**XX**.10
 (1x) 4000K - Ra90 - 10.2W - 822lm 3604.**AA**.24.940.**XX**.10

DALI dim - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm 3604.**AA**.26.927.**XX**.10
 (1x) 3000K - Ra90 - 10.2W - 811lm 3604.**AA**.26.930.**XX**.10
 (1x) 4000K - Ra90 - 10.2W - 822lm 3604.**AA**.26.940.**XX**.10

Tektus 45 Pendel LL Double

LEDliner Module 114mm

Driver(s) integrated and included in article and pricing


Module only, LEDliner profile not included

Non dim - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm 3605.**AA**.24.927.**XX**.10
 (2x) 3000K - Ra90 - 10.2W - 811lm 3605.**AA**.24.930.**XX**.10
 (2x) 4000K - Ra90 - 10.2W - 822lm 3605.**AA**.24.940.**XX**.10

Touch & DALI dim Double - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm 3605.**AA**.26.927.**XX**.10
 (2x) 3000K - Ra90 - 10.2W - 811lm 3605.**AA**.26.930.**XX**.10
 (2x) 4000K - Ra90 - 10.2W - 822lm 3605.**AA**.26.940.**XX**.10

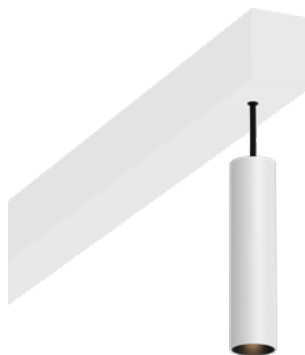

Tektus 45 Pendel LL Single

LEDliner Module 200mm

Driver(s) integrated and included in article and pricing

Module only, LEDliner profile not included

Non dim - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm 3604.**AA**.24.927.**XX**.YY
 (1x) 3000K - Ra90 - 10.2W - 811lm 3604.**AA**.24.930.**XX**.YY
 (1x) 4000K - Ra90 - 10.2W - 822lm 3604.**AA**.24.940.**XX**.YY

Touch & DALI dim - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm 3604.**AA**.26.927.**XX**.YY
 (1x) 3000K - Ra90 - 10.2W - 811lm 3604.**AA**.26.930.**XX**.YY
 (1x) 4000K - Ra90 - 10.2W - 822lm 3604.**AA**.26.940.**XX**.YY

*Indirect module: additional 10.2W/unit

Tektus 45 Pendel LL Double

LEDliner Module 200mm

Driver(s) integrated and included in article and pricing

Module only, LEDliner profile not included


Non dim - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm 3605.**AA**.24.927.**XX**.YY
 (2x) 3000K - Ra90 - 10.2W - 811lm 3605.**AA**.24.930.**XX**.YY
 (2x) 4000K - Ra90 - 10.2W - 822lm 3605.**AA**.24.940.**XX**.YY

Touch & DALI dim Double - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm 3605.**AA**.26.927.**XX**.YY
 (2x) 3000K - Ra90 - 10.2W - 811lm 3605.**AA**.26.930.**XX**.YY
 (2x) 4000K - Ra90 - 10.2W - 822lm 3605.**AA**.26.940.**XX**.YY

*Indirect module: additional 10.2W/unit

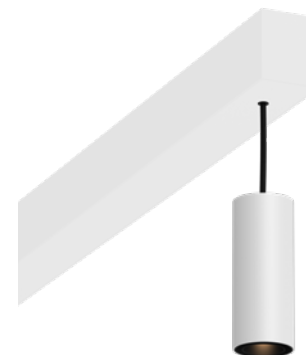

Tektus 60 Pendel LL Single

LEDliner Module 150mm

Driver(s) integrated and included in article and pricing

Module only, LEDliner profile not included

Non dim - 1x Tektus 60 on one 350mA driver

(1x) 2700K - Ra90 - 12.9W - 995lm 3604.**AA**.24.927.**XX**.30
 (1x) 3000K - Ra90 - 12.9W - 1035lm 3604.**AA**.24.930.**XX**.30
 (1x) 4000K - Ra90 - 12.9W - 1050lm 3604.**AA**.24.940.**XX**.30

Touch & DALI dim - 1x Tektus 60 on one 350mA driver

(1x) 2700K - Ra90 - 12.9W - 995lm 3604.**AA**.26.927.**XX**.30
 (1x) 3000K - Ra90 - 12.9W - 1035lm 3604.**AA**.26.930.**XX**.30
 (1x) 4000K - Ra90 - 12.9W - 1050lm 3604.**AA**.26.940.**XX**.30

Tektus 60 Pendel LL Double

LEDliner Module 150mm

Driver(s) integrated and included in article and pricing

Module only, LEDliner profile not included

Non dim - 2x Tektus 60 on one 350mA driver

(2x) 2700K - Ra90 - 12.9W - 995lm 3605.**AA**.24.927.**XX**.30
 (2x) 3000K - Ra90 - 12.9W - 1035lm 3605.**AA**.24.930.**XX**.30
 (2x) 4000K - Ra90 - 12.9W - 1050lm 3605.**AA**.24.940.**XX**.30

Touch & DALI dim Double - 2x Tektus 60 on one 350mA driver

(2x) 2700K - Ra90 - 12.9W - 995lm 3605.**AA**.26.927.**XX**.30
 (2x) 3000K - Ra90 - 12.9W - 1035lm 3605.**AA**.26.930.**XX**.30
 (2x) 4000K - Ra90 - 12.9W - 1050lm 3605.**AA**.26.940.**XX**.30

0000.**AA**.00.000.**XX**.YY

Tektus 45
23: 23° Lens
29: 29° Lens
40: 40° Lens
51: 51° Lens

Tektus 60
23: 23° Lens
36: 36° Lens
48: 48° Lens
57: 57° Lens

Available colors (see below)
 Other RAL colors on request

10: T45 - 114mm module - down
20: T45 - 200mm module - down
21: T45 - 200mm module - up&down
30: T60 - 150mm module - down

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

15



Corten

36



Bronze Matt
Standard

16



Gold Matt

40



Champagne

*Supplementary price

LEDliner **Full Black**


New Black Anodised Suspension set
2500.01.03

Black Diffuser for LEDliner 35, LEDliner40, Ledliner80 /m
2100.00.03

Black Diffuser for LEDLiner47 /m
2101.00.03

Ready To Go profiles LEDliner 35, LEDliner40, Ledliner80 & LEDLiner47
Equipped with black diffuser and black suspension
R35MM.00.000.00 **B**


—— Add “.B” to RTG article number for black diffuser and suspension set

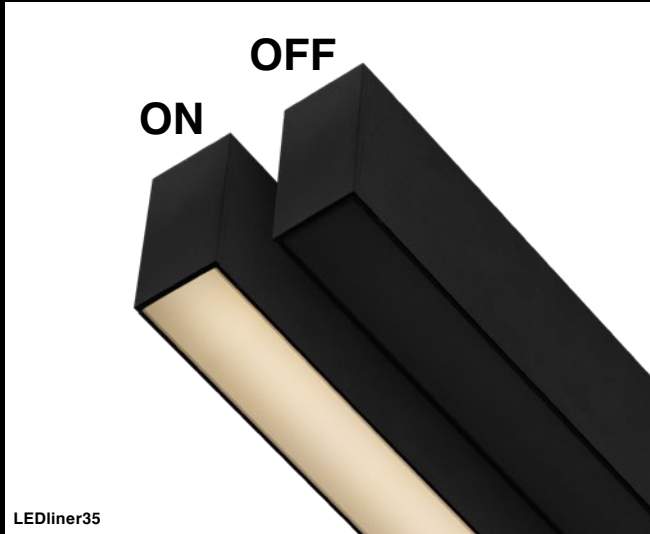

Ready To Go **Rectangle & Square**


With our profiles we make frames that can basically have any shape.

In this catalog you can find all-in pre-designed frames for our LEDliner35 an LEDliner47 series. If you do not find what you are looking for, please contact us.

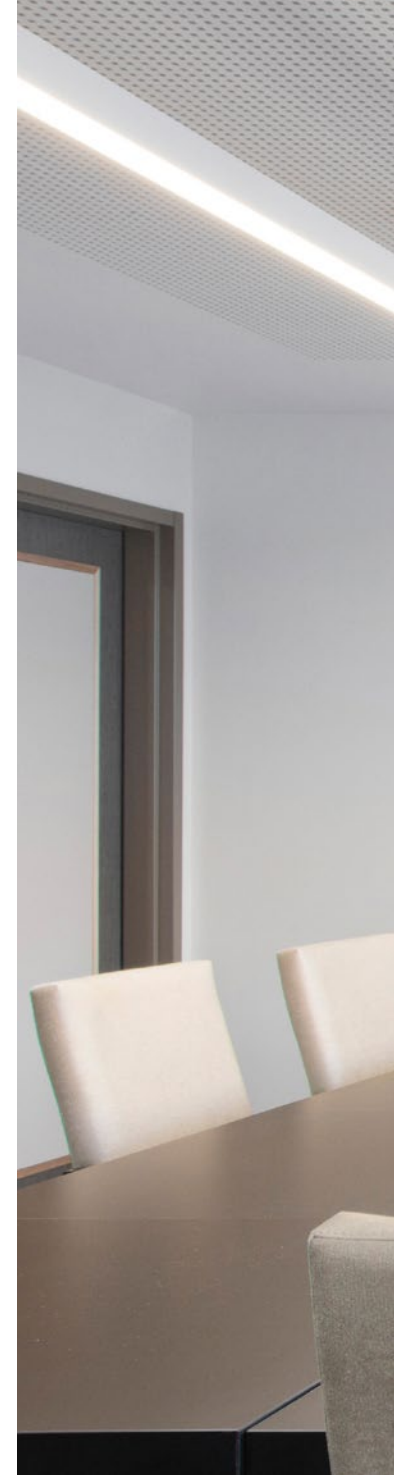



Ready To Go Square LEDliner35 Ceiling Mounted



Included

Profile
Top cover
Connectors
LED Modules
Drivers
PC Cover Down
Mounting profile

Article number	Ratio	L	W	Length	Width	LED Flux* 927	LED Flux* 930	LED Flux* 940	Power** 927, 930 & 940
Q3504040.DM.CCC.xx	1:1	4	4	628 mm	628 mm	8040lm	8320lm	8800lm	49,6W
Q3505050.DM.CCC.xx	1:1	5	5	768 mm	768 mm	n/a***	10400lm	11000lm	62,0W
Q3506060.DM.CCC.xx	1:1	6	6	907 mm	907 mm	12060lm	12480lm	13200lm	74,4W
Q3507070.DM.CCC.xx	1:1	7	7	1049 mm	1049 mm	n/a***	14560lm	15400lm	86,8W
Q3508080.DM.CCC.xx	1:1	8	8	1187 mm	1187 mm	16080lm	16640lm	17600lm	99,2W
Q3509090.DM.CCC.xx	1:1	9	9	1329 mm	1329 mm	n/a***	18720lm	19800lm	111,6W
Q3510100.DM.CCC.xx	1:1	10	10	1469 mm	1469 mm	20100lm	20800lm	22000lm	124,0W
Q3511110.DM.CCC.xx	1:1	11	11	1611 mm	1611 mm	n/a***	22880lm	24200lm	136,4W
Q3512120.DM.CCC.xx	1:1	12	12	1749 mm	1749 mm	24120lm	24960lm	26400lm	148,8W
Q3513130.DM.CCC.xx	1:1	13	13	1891 mm	1891 mm	n/a***	27040lm	28600lm	161,2W
Q3514140.DM.CCC.xx	1:1	14	14	2030 mm	2030 mm	28140lm	29120lm	30800lm	173,6W
Q3515150.DM.CCC.xx	1:1	15	15	2172 mm	2172 mm	n/a***	31200lm	33000lm	186,0W
Q3516160.DM.CCC.xx	1:1	16	16	2310 mm	2310 mm	32160lm	33280lm	35200lm	198,4W
Q3517170.DM.CCC.xx	1:1	17	17	2452 mm	2452 mm	n/a***	35360lm	37400lm	210,8W
Q3518180.DM.CCC.xx	1:1	18	18	2592 mm	2592 mm	36180lm	37440lm	39600lm	223,2W
Q3519190.DM.CCC.xx	1:1	19	19	2734 mm	2734 mm	n/a***	39520lm	41800lm	235,6W
Q3520200.DM.CCC.xx	1:1	20	20	2872 mm	2872 mm	40200lm	41600lm	44000lm	248,0W
Q3521210.DM.CCC.xx	1:1	21	21	3014 mm	3014 mm	n/a***	43680lm	46200lm	260,4W
Q3522220.DM.CCC.xx	1:1	22	22	3153 mm	3153 mm	44220lm	45760lm	48400lm	272,8W
Q3523230.DM.CCC.xx	1:1	23	23	3295 mm	3295 mm	n/a***	47840lm	50600lm	285,2W
Q3524240.DM.CCC.xx	1:1	24	24	3433 mm	3433 mm	48240lm	49920lm	52800lm	297,6W
Q3525250.DM.CCC.xx	1:1	25	25	3576 mm	3576 mm	n/a***	52000lm	55000lm	310,0W
Q3526260.DM.CCC.xx	1:1	26	26	3715 mm	3715 mm	52260lm	54080lm	57200lm	322,4W
Q3527270.DM.CCC.xx	1:1	27	27	3857 mm	3857 mm	n/a***	56160lm	59400lm	334,8W
Q3528280.DM.CCC.xx	1:1	28	28	3996 mm	3996 mm	56280lm	58240lm	61600lm	347,2W
Q3529290.DM.CCC.xx	1:1	29	29	4138 mm	4138 mm	n/a***	60320lm	63800lm	359,6W
Q3530300.DM.CCC.xx	1:1	30	30	4276 mm	4276 mm	60300lm	62400lm	66000lm	372,0W
Q3531310.DM.CCC.xx	1:1	31	31	4418 mm	4418 mm	n/a***	64480lm	68200lm	384,4W
Q3532320.DM.CCC.xx	1:1	32	32	4556 mm	4556 mm	64320lm	66560lm	70400lm	396,8W
Q3533330.DM.CCC.xx	1:1	33	33	4698 mm	4698 mm	n/a***	68640lm	72600lm	409,2W
Q3534340.DM.CCC.xx	1:1	34	34	4838 mm	4838 mm	68340lm	70720lm	74800lm	421,6W
Q3535350.DM.CCC.xx	1:1	35	35	4980 mm	4980 mm	n/a***	72800lm	77000lm	434,0W
Q3536360.DM.CCC.xx	1:1	36	36	5119 mm	5119 mm	72360lm	74880lm	79200lm	446,4W
Q3537370.DM.CCC.xx	1:1	37	37	5261 mm	5261 mm	n/a***	76960lm	81400lm	458,8W
Q3538380.DM.CCC.xx	1:1	38	38	5399 mm	5399 mm	76380lm	79040lm	83600lm	471,2W
Q3539390.DM.CCC.xx	1:1	39	39	5541 mm	5541 mm	n/a***	81120lm	85800lm	483,6W
Q3540400.DM.CCC.xx	1:1	40	40	5681 mm	5681 mm	80400lm	83200lm	88000lm	496,0W
Q3541410.DM.CCC.xx	1:1	41	41	5823 mm	5823 mm	n/a***	85280lm	90200lm	508,4W
Q3542420.DM.CCC.xx	1:1	42	42	5961 mm	5961 mm	84420lm	87360lm	92400lm	520,8W
Q3543430.DM.CCC.xx	1:1	43	43	6103 mm	6103 mm	n/a***	89440lm	94600lm	533,2W
Q3544440.DM.CCC.xx	1:1	44	44	6242 mm	6242 mm	88440lm	91520lm	96800lm	545,6W
Q3545450.DM.CCC.xx	1:1	45	45	6384 mm	6384 mm	n/a***	93600lm	99000lm	558,0W
Q3546460.DM.CCC.xx	1:1	46	46	6522 mm	6522 mm	92460lm	95680lm	101200lm	570,4W
Q3547470.DM.CCC.xx	1:1	47	47	6664 mm	6664 mm	n/a***	97760lm	103400lm	582,8W
Q3548480.DM.CCC.xx	1:1	48	48	6802 mm	6802 mm	96480lm	99840lm	105600lm	595,2W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios which can be found on www.doxis.be.

** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K.



Article number structure: **Q3500000.DM.CCC.xx**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim

927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K

01: White Matt Texture
18: Grey 9006 Matt Texture
03: Black Matt Texture
36: Bronze
16: Gold
40: Champagne
Other colors on request

Ready To Go Rectangle LEDliner35 Ceiling Mounted



Included

Profile
Top cover
Connectors
LED Modules
Drivers
PC Cover Down
Mounting profile

Article number	Ratio	L	W	Length	Width	LED Flux* 927	LED Flux* 930	LED Flux* 940	Power** 927, 930 & 940
Q3504060.DM.CCC.xx	2:3	4	6	628 mm	907 mm	10050lm	10400lm	11000lm	62,0W
Q3505080.DM.CCC.xx	2:3	5	8	768 mm	1187 mm	n/a***	13520lm	14300lm	80,6W
Q3506100.DM.CCC.xx	2:3	6	10	907 mm	1469 mm	16080lm	16640lm	17600lm	99,2W
Q3507110.DM.CCC.xx	2:3	7	11	1049 mm	1611 mm	n/a***	18720lm	19800lm	111,6W
Q3508120.DM.CCC.xx	2:3	8	12	1187 mm	1749 mm	20100lm	20800lm	22000lm	124,0W
Q3509140.DM.CCC.xx	2:3	9	14	1329 mm	2030 mm	n/a***	23920lm	25300lm	142,6W
Q3510160.DM.CCC.xx	2:3	10	16	1469 mm	2310 mm	26130lm	27040lm	28600lm	161,2W
Q3511170.DM.CCC.xx	2:3	11	17	1611 mm	2452 mm	n/a***	29120lm	30800lm	173,6W
Q3512180.DM.CCC.xx	2:3	12	18	1749 mm	2592 mm	30150lm	31200lm	33000lm	186,0W
Q3513200.DM.CCC.xx	2:3	13	20	1891 mm	2872 mm	n/a***	34320lm	36300lm	204,6W
Q3514220.DM.CCC.xx	2:3	14	22	2030 mm	3153 mm	36180lm	37440lm	39600lm	223,2W
Q3515230.DM.CCC.xx	2:3	15	23	2172 mm	3295 mm	n/a***	39520lm	41800lm	235,6W
Q3516240.DM.CCC.xx	2:3	16	24	2310 mm	3433 mm	40200lm	41600lm	44000lm	248,0W
Q3517260.DM.CCC.xx	2:3	17	26	2452 mm	3715 mm	n/a***	44720lm	47300lm	266,6W
Q3518280.DM.CCC.xx	2:3	18	28	2592 mm	3996 mm	46230lm	47840lm	50600lm	285,2W
Q3504080.DM.CCC.xx	1:2	4	8	628 mm	1187 mm	12060lm	12480lm	13200lm	74,4W
Q3505100.DM.CCC.xx	1:2	5	10	768 mm	1469 mm	n/a***	15600lm	16500lm	93,0W
Q3506120.DM.CCC.xx	1:2	6	12	907 mm	1749 mm	18090lm	18720lm	19800lm	111,6W
Q3507140.DM.CCC.xx	1:2	7	14	1049 mm	2030 mm	n/a***	21840lm	23100lm	130,2W
Q3508160.DM.CCC.xx	1:2	8	16	1187 mm	2310 mm	24120lm	24960lm	26400lm	148,8W
Q3509180.DM.CCC.xx	1:2	9	18	1329 mm	2592 mm	n/a***	28080lm	29700lm	167,4W
Q3510200.DM.CCC.xx	1:2	10	20	1469 mm	2872 mm	30150lm	31200lm	33000lm	186,0W
Q3511220.DM.CCC.xx	1:2	11	22	1611 mm	3153 mm	n/a***	34320lm	36300lm	204,6W
Q3512240.DM.CCC.xx	1:2	12	24	1749 mm	3433 mm	36180lm	37440lm	39600lm	223,2W
Q3513260.DM.CCC.xx	1:2	13	26	1891 mm	3715 mm	n/a***	40560lm	42900lm	241,8W
Q3514280.DM.CCC.xx	1:2	14	28	2030 mm	3996 mm	42210lm	43680lm	46200lm	260,4W
Q3515300.DM.CCC.xx	1:2	15	30	2172 mm	4276 mm	n/a***	46800lm	49500lm	279,0W
Q3516320.DM.CCC.xx	1:2	16	32	2310 mm	4556 mm	48240lm	49920lm	52800lm	297,6W
Q3517340.DM.CCC.xx	1:2	17	34	2452 mm	4838 mm	n/a***	53040lm	56100lm	316,2W
Q3518360.DM.CCC.xx	1:2	18	36	2592 mm	5119 mm	54270lm	56160lm	59400lm	334,8W
Q3504160.DM.CCC.xx	1:4	4	16	628 mm	2310 mm	20100lm	20800lm	22000lm	124,0W
Q3505200.DM.CCC.xx	1:4	5	20	768 mm	2872 mm	n/a***	26000lm	27500lm	155,0W
Q3506240.DM.CCC.xx	1:4	6	24	907 mm	3433 mm	30150lm	31200lm	33000lm	186,0W
Q3507280.DM.CCC.xx	1:4	7	28	1049 mm	3996 mm	n/a***	36400lm	38500lm	217,0W
Q3508320.DM.CCC.xx	1:4	8	32	1187 mm	4556 mm	40200lm	41600lm	44000lm	248,0W
Q3509360.DM.CCC.xx	1:4	9	36	1329 mm	5119 mm	n/a***	46800lm	49500lm	279,0W
Q3510400.DM.CCC.xx	1:4	10	40	1469 mm	5681 mm	50250lm	52000lm	55000lm	310,0W
Q3511440.DM.CCC.xx	1:4	11	44	1611 mm	6242 mm	n/a***	57200lm	60500lm	341,0W
Q3512480.DM.CCC.xx	1:4	12	48	1749 mm	6802 mm	60300lm	62400lm	66000lm	372,0W
Q3504240.DM.CCC.xx	1:6	4	24	628 mm	3433 mm	28140lm	29120lm	30800lm	173,6W
Q3505300.DM.CCC.xx	1:6	5	30	768 mm	4276 mm	n/a***	36400lm	38500lm	217,0W
Q3506360.DM.CCC.xx	1:6	6	36	907 mm	5119 mm	42210lm	43680lm	46200lm	260,4W
Q3504320.DM.CCC.xx	1:8	4	32	628 mm	4556 mm	36180lm	37440lm	39600lm	223,2W
Q3505400.DM.CCC.xx	1:8	5	40	768 mm	5681 mm	n/a***	46800lm	49500lm	279,0W
Q3506480.DM.CCC.xx	1:8	6	48	907 mm	6802 mm	54270lm	56160lm	59400lm	334,8W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios which can be found on www.doxis.be.

** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K.


Article number structure: **Q3500000.DM.CCC.xx**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim


927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K

01: White Matt Texture
18: Grey 9006 Matt Texture
03: Black Matt Texture
36: Bronze
16: Gold
40: Champagne
Other colors on request

Ready To Go Square LEDliner35 Suspended Down



Average weight of equipped profile: 1.60 kg/m



Opal cover is standard.
Prismatic cover is not available
Black cover optional (add ".B" to art. nr.)

Included

Profile
Top cover
Connectors
LED Modules
Drivers
PC Cover Down
Suspension cables (2000mm)
Connecting box
Textile power cable (2000mm)



Article number	Ratio	L	W	Length	Width	LED Flux* 927	LED Flux* 930	LED Flux* 940	Power** 927, 930 & 940
P3504040.DM.CCC.xx	1:1	4	4	628 mm	628 mm	8040lm	8320lm	8800lm	49,6W
P3505050.DM.CCC.xx	1:1	5	5	768 mm	768 mm	n/a***	10400lm	11000lm	62,0W
P3506060.DM.CCC.xx	1:1	6	6	907 mm	907 mm	12060lm	12480lm	13200lm	74,4W
P3507070.DM.CCC.xx	1:1	7	7	1049 mm	1049 mm	n/a***	14560lm	15400lm	86,8W
P3508080.DM.CCC.xx	1:1	8	8	1187 mm	1187 mm	16080lm	16640lm	17600lm	99,2W
P3509090.DM.CCC.xx	1:1	9	9	1329 mm	1329 mm	n/a***	18720lm	19800lm	111,6W
P3510100.DM.CCC.xx	1:1	10	10	1469 mm	1469 mm	20100lm	20800lm	22000lm	124,0W
P3511110.DM.CCC.xx	1:1	11	11	1611 mm	1611 mm	n/a***	22880lm	24200lm	136,4W
P3512120.DM.CCC.xx	1:1	12	12	1749 mm	1749 mm	24120lm	24960lm	26400lm	148,8W
P3513130.DM.CCC.xx	1:1	13	13	1891 mm	1891 mm	n/a***	27040lm	28600lm	161,2W
P3514140.DM.CCC.xx	1:1	14	14	2030 mm	2030 mm	28140lm	29120lm	30800lm	173,6W
P3515150.DM.CCC.xx	1:1	15	15	2172 mm	2172 mm	n/a***	31200lm	33000lm	186,0W
P3516160.DM.CCC.xx	1:1	16	16	2310 mm	2310 mm	32160lm	33280lm	35200lm	198,4W
P3517170.DM.CCC.xx	1:1	17	17	2452 mm	2452 mm	n/a***	35360lm	37400lm	210,8W
P3518180.DM.CCC.xx	1:1	18	18	2592 mm	2592 mm	36180lm	37440lm	39600lm	223,2W
P3519190.DM.CCC.xx	1:1	19	19	2734 mm	2734 mm	n/a***	39520lm	41800lm	235,6W
P3520200.DM.CCC.xx	1:1	20	20	2872 mm	2872 mm	40200lm	41600lm	44000lm	248,0W
P3521210.DM.CCC.xx	1:1	21	21	3014 mm	3014 mm	n/a***	43680lm	46200lm	260,4W
P3522220.DM.CCC.xx	1:1	22	22	3153 mm	3153 mm	44220lm	45760lm	48400lm	272,8W
P3523230.DM.CCC.xx	1:1	23	23	3295 mm	3295 mm	n/a***	47840lm	50600lm	285,2W
P3524240.DM.CCC.xx	1:1	24	24	3433 mm	3433 mm	48240lm	49920lm	52800lm	297,6W
P3525250.DM.CCC.xx	1:1	25	25	3576 mm	3576 mm	n/a***	52000lm	55000lm	310,0W
P3526260.DM.CCC.xx	1:1	26	26	3715 mm	3715 mm	52260lm	54080lm	57200lm	322,4W
P3527270.DM.CCC.xx	1:1	27	27	3857 mm	3857 mm	n/a***	56160lm	59400lm	334,8W
P3528280.DM.CCC.xx	1:1	28	28	3996 mm	3996 mm	56280lm	58240lm	61600lm	347,2W
P3529290.DM.CCC.xx	1:1	29	29	4138 mm	4138 mm	n/a***	60320lm	63800lm	359,6W
P3530300.DM.CCC.xx	1:1	30	30	4276 mm	4276 mm	60300lm	62400lm	66000lm	372,0W
P3531310.DM.CCC.xx	1:1	31	31	4418 mm	4418 mm	n/a***	64480lm	68200lm	384,4W
P3532320.DM.CCC.xx	1:1	32	32	4556 mm	4556 mm	64320lm	66560lm	70400lm	396,8W
P3533330.DM.CCC.xx	1:1	33	33	4698 mm	4698 mm	n/a***	68640lm	72600lm	409,2W
P3534340.DM.CCC.xx	1:1	34	34	4838 mm	4838 mm	68340lm	70720lm	74800lm	421,6W
P3535350.DM.CCC.xx	1:1	35	35	4980 mm	4980 mm	n/a***	72800lm	77000lm	434,0W
P3536360.DM.CCC.xx	1:1	36	36	5119 mm	5119 mm	72360lm	74880lm	79200lm	446,4W
P3537370.DM.CCC.xx	1:1	37	37	5261 mm	5261 mm	n/a***	76960lm	81400lm	458,8W
P3538380.DM.CCC.xx	1:1	38	38	5399 mm	5399 mm	76380lm	79040lm	83600lm	471,2W
P3539390.DM.CCC.xx	1:1	39	39	5541 mm	5541 mm	n/a***	81120lm	85800lm	483,6W
P3540400.DM.CCC.xx	1:1	40	40	5681 mm	5681 mm	80400lm	83200lm	88000lm	496,0W
P3541410.DM.CCC.xx	1:1	41	41	5823 mm	5823 mm	n/a***	85280lm	90200lm	508,4W
P3542420.DM.CCC.xx	1:1	42	42	5961 mm	5961 mm	84420lm	87360lm	92400lm	520,8W
P3543430.DM.CCC.xx	1:1	43	43	6103 mm	6103 mm	n/a***	89440lm	94600lm	533,2W
P3544440.DM.CCC.xx	1:1	44	44	6242 mm	6242 mm	88440lm	91520lm	96800lm	545,6W
P3545450.DM.CCC.xx	1:1	45	45	6384 mm	6384 mm	n/a***	93600lm	99000lm	558,0W
P3546460.DM.CCC.xx	1:1	46	46	6522 mm	6522 mm	92460lm	95680lm	101200lm	570,4W
P3547470.DM.CCC.xx	1:1	47	47	6664 mm	6664 mm	n/a***	97760lm	103400lm	582,8W
P3506480.DM.CCC.xx	1:1	48	48	6802 mm	6802 mm	96480lm	99840lm	105600lm	595,2W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios which can be found on www.doxis.be.

** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K.


Article number structure: **P3500000.DM.CCC.xx**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim


927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K

01: White Matt Texture
18: Grey 9006 Matt Texture
03: Black Matt Texture
36: Bronze
16: Gold
40: Champagne
Other colors on request

Ready To Go Rectangle LEDliner35 Suspended Down



Average weight of equipped profile: 1.60 kg/m



Opal cover is standard.
Prismatic cover is not available
Black cover optional (add ".B" to art. nr.)

Included

Profile
Top cover
Connectors
LED Modules
Drivers
PC Cover Down
Suspension cables (2000mm)
Connecting box
Textile power cable (2000mm)



Article number	Ratio	L	W	Length	Width	LED Flux* 927	LED Flux* 930	LED Flux* 940	Power** 927, 930 & 940
P3504060.DM.CCC.xx	2:3	4	6	628 mm	907 mm	10050lm	10400lm	11000lm	62,0W
P3505080.DM.CCC.xx	2:3	5	8	768 mm	1187 mm	n/a***	13520lm	14300lm	80,6W
P3506100.DM.CCC.xx	2:3	6	10	907 mm	1469 mm	16080lm	16640lm	17600lm	99,2W
P3507110.DM.CCC.xx	2:3	7	11	1049 mm	1611 mm	n/a***	18720lm	19800lm	111,6W
P3508120.DM.CCC.xx	2:3	8	12	1187 mm	1749 mm	20100lm	20800lm	22000lm	124,0W
P3509140.DM.CCC.xx	2:3	9	14	1329 mm	2030 mm	n/a***	23920lm	25300lm	142,6W
P3510160.DM.CCC.xx	2:3	10	16	1469 mm	2310 mm	26130lm	27040lm	28600lm	161,2W
P3511170.DM.CCC.xx	2:3	11	17	1611 mm	2452 mm	n/a***	29120lm	30800lm	173,6W
P3512180.DM.CCC.xx	2:3	12	18	1749 mm	2592 mm	30150lm	31200lm	33000lm	186,0W
P3513200.DM.CCC.xx	2:3	13	20	1891 mm	2872 mm	n/a***	34320lm	36300lm	204,6W
P3514220.DM.CCC.xx	2:3	14	22	2030 mm	3153 mm	36180lm	37440lm	39600lm	223,2W
P3515230.DM.CCC.xx	2:3	15	23	2172 mm	3295 mm	n/a***	39520lm	41800lm	235,6W
P3516240.DM.CCC.xx	2:3	16	24	2310 mm	3433 mm	40200lm	41600lm	44000lm	248,0W
P3517260.DM.CCC.xx	2:3	17	26	2452 mm	3715 mm	n/a***	44720lm	47300lm	266,6W
P3518280.DM.CCC.xx	2:3	18	28	2592 mm	3996 mm	46230lm	47840lm	50600lm	285,2W
P3504080.DM.CCC.xx	1:2	4	8	628 mm	1187 mm	12060lm	12480lm	13200lm	74,4W
P3505100.DM.CCC.xx	1:2	5	10	768 mm	1469 mm	n/a***	15600lm	16500lm	93,0W
P3506120.DM.CCC.xx	1:2	6	12	907 mm	1749 mm	18090lm	18720lm	19800lm	111,6W
P3507140.DM.CCC.xx	1:2	7	14	1049 mm	2030 mm	n/a***	21840lm	23100lm	130,2W
P3508160.DM.CCC.xx	1:2	8	16	1187 mm	2310 mm	24120lm	24960lm	26400lm	148,8W
P3509180.DM.CCC.xx	1:2	9	18	1329 mm	2592 mm	n/a***	28080lm	29700lm	167,4W
P3510200.DM.CCC.xx	1:2	10	20	1469 mm	2872 mm	30150lm	31200lm	33000lm	186,0W
P3511220.DM.CCC.xx	1:2	11	22	1611 mm	3153 mm	n/a***	34320lm	36300lm	204,6W
P3512240.DM.CCC.xx	1:2	12	24	1749 mm	3433 mm	36180lm	37440lm	39600lm	223,2W
P3513260.DM.CCC.xx	1:2	13	26	1891 mm	3715 mm	n/a***	40560lm	42900lm	241,8W
P3514280.DM.CCC.xx	1:2	14	28	2030 mm	3996 mm	42210lm	43680lm	46200lm	260,4W
P3515300.DM.CCC.xx	1:2	15	30	2172 mm	4276 mm	n/a***	46800lm	49500lm	279,0W
P3516320.DM.CCC.xx	1:2	16	32	2310 mm	4556 mm	48240lm	49920lm	52800lm	297,6W
P3517340.DM.CCC.xx	1:2	17	34	2452 mm	4838 mm	n/a***	53040lm	56100lm	316,2W
P3518360.DM.CCC.xx	1:2	18	36	2592 mm	5119 mm	54270lm	56160lm	59400lm	334,8W
P3504160.DM.CCC.xx	1:4	4	16	628 mm	2310 mm	20100lm	20800lm	22000lm	124,0W
P3505200.DM.CCC.xx	1:4	5	20	768 mm	2872 mm	n/a***	26000lm	27500lm	155,0W
P3506240.DM.CCC.xx	1:4	6	24	907 mm	3433 mm	30150lm	31200lm	33000lm	186,0W
P3507280.DM.CCC.xx	1:4	7	28	1049 mm	3996 mm	n/a***	36400lm	38500lm	217,0W
P3508320.DM.CCC.xx	1:4	8	32	1187 mm	4556 mm	40200lm	41600lm	44000lm	248,0W
P3509360.DM.CCC.xx	1:4	9	36	1329 mm	5119 mm	n/a***	46800lm	49500lm	279,0W
P3510400.DM.CCC.xx	1:4	10	40	1469 mm	5681 mm	50250lm	52000lm	55000lm	310,0W
P3511440.DM.CCC.xx	1:4	11	44	1611 mm	6242 mm	n/a***	57200lm	60500lm	341,0W
P3512480.DM.CCC.xx	1:4	12	48	1749 mm	6802 mm	60300lm	62400lm	66000lm	372,0W
P3504240.DM.CCC.xx	1:6	4	24	628 mm	3433 mm	28140lm	29120lm	30800lm	173,6W
P3505300.DM.CCC.xx	1:6	5	30	768 mm	4276 mm	n/a***	36400lm	38500lm	217,0W
P3506360.DM.CCC.xx	1:6	6	36	907 mm	5119 mm	42210lm	43680lm	46200lm	260,4W
P3504320.DM.CCC.xx	1:8	4	32	628 mm	4556 mm	36180lm	37440lm	39600lm	223,2W
P3505400.DM.CCC.xx	1:8	5	40	768 mm	5681 mm	n/a***	46800lm	49500lm	279,0W
P3506480.DM.CCC.xx	1:8	6	48	907 mm	6802 mm	54270lm	56160lm	59400lm	334,8W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios which can be found on www.doxis.be.

** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K.


Article number structure: **P3500000.DM.CCC.xx**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim


927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K

01: White Matt Texture
18: Grey 9006 Matt Texture
03: Black Matt Texture
36: Bronze
16: Gold
40: Champagne
Other colors on request

Ready To Go Square LEDliner47 Ceiling Mounted



Average weight of equipped profile: 2.70 kg/m



Opal cover is standard.
Prismatic cover is not available
Black cover optional (add ".B" to art. nr.)

Included

Profile
Connectors
LED Modules
Drivers
PC Cover Down

Article number	Ratio	L	W	Length	Width	LED Flux* 927	LED Flux* 930	LED Flux* 940	Power** 927, 930 & 940
Q4705050.DM.CCC.xx	1:1	5	5	780 mm	780 mm	n/a***	10400lm	11000lm	62,0W
Q4706060.DM.CCC.xx	1:1	6	6	919 mm	919 mm	12060lm	12480lm	13200lm	74,4W
Q4707070.DM.CCC.xx	1:1	7	7	1061 mm	1061 mm	n/a***	14560lm	15400lm	86,8W
Q4708080.DM.CCC.xx	1:1	8	8	1199 mm	1199 mm	16080lm	16640lm	17600lm	99,2W
Q4709090.DM.CCC.xx	1:1	9	9	1341 mm	1341 mm	n/a***	18720lm	19800lm	111,6W
Q4710100.DM.CCC.xx	1:1	10	10	1481 mm	1481 mm	20100lm	20800lm	22000lm	124,0W
Q4711110.DM.CCC.xx	1:1	11	11	1623 mm	1623 mm	n/a***	22880lm	24200lm	136,4W
Q4712120.DM.CCC.xx	1:1	12	12	1761 mm	1761 mm	24120lm	24960lm	26400lm	148,8W
Q4713130.DM.CCC.xx	1:1	13	13	1903 mm	1903 mm	n/a***	27040lm	28600lm	161,2W
Q4714140.DM.CCC.xx	1:1	14	14	2042 mm	2042 mm	28140lm	29120lm	30800lm	173,6W
Q4715150.DM.CCC.xx	1:1	15	15	2184 mm	2184 mm	n/a***	31200lm	33000lm	186,0W
Q4716160.DM.CCC.xx	1:1	16	16	2322 mm	2322 mm	32160lm	33280lm	35200lm	198,4W
Q4717170.DM.CCC.xx	1:1	17	17	2464 mm	2464 mm	n/a***	35360lm	37400lm	210,8W
Q4718180.DM.CCC.xx	1:1	18	18	2604 mm	2604 mm	36180lm	37440lm	39600lm	223,2W
Q4719190.DM.CCC.xx	1:1	19	19	2746 mm	2746 mm	n/a***	39520lm	41800lm	235,6W
Q4720200.DM.CCC.xx	1:1	20	20	2884 mm	2884 mm	40200lm	41600lm	44000lm	248,0W
Q4721210.DM.CCC.xx	1:1	21	21	3026 mm	3026 mm	n/a***	43680lm	46200lm	260,4W
Q4722220.DM.CCC.xx	1:1	22	22	3165 mm	3165 mm	44220lm	45760lm	48400lm	272,8W
Q4723230.DM.CCC.xx	1:1	23	23	3307 mm	3307 mm	n/a***	47840lm	50600lm	285,2W
Q4724240.DM.CCC.xx	1:1	24	24	3445 mm	3445 mm	48240lm	49920lm	52800lm	297,6W
Q4725250.DM.CCC.xx	1:1	25	25	3588 mm	3588 mm	n/a***	52000lm	55000lm	310,0W
Q4726260.DM.CCC.xx	1:1	26	26	3727 mm	3727 mm	52260lm	54080lm	57200lm	322,4W
Q4727270.DM.CCC.xx	1:1	27	27	3869 mm	3869 mm	n/a***	56160lm	59400lm	334,8W
Q4728280.DM.CCC.xx	1:1	28	28	4008 mm	4008 mm	56280lm	58240lm	61600lm	347,2W
Q4729290.DM.CCC.xx	1:1	29	29	4150 mm	4150 mm	n/a***	60320lm	63800lm	359,6W
Q4730300.DM.CCC.xx	1:1	30	30	4288 mm	4288 mm	60300lm	62400lm	66000lm	372,0W
Q4731310.DM.CCC.xx	1:1	31	31	4430 mm	4430 mm	n/a***	64480lm	68200lm	384,4W
Q4732320.DM.CCC.xx	1:1	32	32	4568 mm	4568 mm	64320lm	66560lm	70400lm	396,8W
Q4733330.DM.CCC.xx	1:1	33	33	4710 mm	4710 mm	n/a***	68640lm	72600lm	409,2W
Q4734340.DM.CCC.xx	1:1	34	34	4850 mm	4850 mm	68340lm	70720lm	74800lm	421,6W
Q4735350.DM.CCC.xx	1:1	35	35	4992 mm	4992 mm	n/a***	72800lm	77000lm	434,0W
Q4736360.DM.CCC.xx	1:1	36	36	5131 mm	5131 mm	72360lm	74880lm	79200lm	446,4W
Q4737370.DM.CCC.xx	1:1	37	37	5273 mm	5273 mm	n/a***	76960lm	81400lm	458,8W
Q4738380.DM.CCC.xx	1:1	38	38	5411 mm	5411 mm	76380lm	79040lm	83600lm	471,2W
Q4739390.DM.CCC.xx	1:1	39	39	5553 mm	5553 mm	n/a***	81120lm	85800lm	483,6W
Q4740400.DM.CCC.xx	1:1	40	40	5693 mm	5693 mm	80400lm	83200lm	88000lm	496,0W
Q4741410.DM.CCC.xx	1:1	41	41	5835 mm	5835 mm	n/a***	85280lm	90200lm	508,4W
Q4742420.DM.CCC.xx	1:1	42	42	5973 mm	5973 mm	84420lm	87360lm	92400lm	520,8W
Q4743430.DM.CCC.xx	1:1	43	43	6115 mm	6115 mm	n/a***	89440lm	94600lm	533,2W
Q4744440.DM.CCC.xx	1:1	44	44	6254 mm	6254 mm	88440lm	91520lm	96800lm	545,6W
Q4745450.DM.CCC.xx	1:1	45	45	6396 mm	6396 mm	n/a***	93600lm	99000lm	558,0W
Q4746460.DM.CCC.xx	1:1	46	46	6534 mm	6534 mm	92460lm	95680lm	101200lm	570,4W
Q4747470.DM.CCC.xx	1:1	47	47	6676 mm	6676 mm	n/a***	97760lm	103400lm	582,8W
Q4748480.DM.CCC.xx	1:1	48	48	6814 mm	6814 mm	96480lm	99840lm	105600lm	595,2W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios which can be found on www.doxis.be.

** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K.


Article number structure: **Q4700000.DM.CCC.xx**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim


927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K

01: White Matt Texture
18: Grey 9006 Matt Texture
03: Black Matt Texture
36: Bronze
16: Gold
40: Champagne
Other colors on request

Ready To Go Rectangle LEDliner47 Ceiling Mounted



Average weight of equipped profile: 2.70 kg/m



Opal cover is standard.
Prismatic cover is not available
Black cover optional (add "B" to art. nr.)

Included

Profile
Connectors
LED Modules
Drivers
PC Cover Down

Article number	Ratio	L	W	Length	Width	LED Flux* 927	LED Flux* 930	LED Flux* 940	Power** 927, 930 & 940
Q4705080.DM.CCC.xx	2:3	5	8	780 mm	1199 mm	n/a***	13520lm	14300lm	80,6W
Q4706100.DM.CCC.xx	2:3	6	10	919 mm	1481 mm	16080lm	16640lm	17600lm	99,2W
Q4707110.DM.CCC.xx	2:3	7	11	1061 mm	1623 mm	n/a***	18720lm	19800lm	111,6W
Q4708120.DM.CCC.xx	2:3	8	12	1199 mm	1761 mm	20100lm	20800lm	22000lm	124,0W
Q4709140.DM.CCC.xx	2:3	9	14	1341 mm	2042 mm	n/a***	23920lm	25300lm	142,6W
Q4710160.DM.CCC.xx	2:3	10	16	1481 mm	2322 mm	26130lm	27040lm	28600lm	161,2W
Q4711170.DM.CCC.xx	2:3	11	17	1623 mm	2464 mm	n/a***	29120lm	30800lm	173,6W
Q4712180.DM.CCC.xx	2:3	12	18	1761 mm	2604 mm	30150lm	31200lm	33000lm	186,0W
Q4713200.DM.CCC.xx	2:3	13	20	1903 mm	2884 mm	n/a***	34320lm	36300lm	204,6W
Q4714220.DM.CCC.xx	2:3	14	22	2042 mm	3165 mm	36180lm	37440lm	39600lm	223,2W
Q4715230.DM.CCC.xx	2:3	15	23	2184 mm	3307 mm	n/a***	39520lm	41800lm	235,6W
Q4716240.DM.CCC.xx	2:3	16	24	2322 mm	3445 mm	40200lm	41600lm	44000lm	248,0W
Q4717260.DM.CCC.xx	2:3	17	26	2464 mm	3727 mm	n/a***	44720lm	47300lm	266,6W
Q4718280.DM.CCC.xx	2:3	18	28	2604 mm	4008 mm	46230lm	47840lm	50600lm	285,2W
Q4719290.DM.CCC.xx	2:3	19	29	2746 mm	4150 mm	n/a***	49920lm	52800lm	297,6W
Q4705100.DM.CCC.xx	1:2	5	10	780 mm	1481 mm	n/a***	15600lm	16500lm	93,0W
Q4706120.DM.CCC.xx	1:2	6	12	919 mm	1761 mm	18090lm	18720lm	19800lm	111,6W
Q4707140.DM.CCC.xx	1:2	7	14	1061 mm	2042 mm	n/a***	21840lm	23100lm	130,2W
Q4708160.DM.CCC.xx	1:2	8	16	1199 mm	2322 mm	24120lm	24960lm	26400lm	148,8W
Q4709180.DM.CCC.xx	1:2	9	18	1341 mm	2604 mm	n/a***	28080lm	29700lm	167,4W
Q4710200.DM.CCC.xx	1:2	10	20	1481 mm	2884 mm	30150lm	31200lm	33000lm	186,0W
Q4711220.DM.CCC.xx	1:2	11	22	1623 mm	3165 mm	n/a***	34320lm	36300lm	204,6W
Q4712240.DM.CCC.xx	1:2	12	24	1761 mm	3445 mm	36180lm	37440lm	39600lm	223,2W
Q4713260.DM.CCC.xx	1:2	13	26	1903 mm	3727 mm	n/a***	40560lm	42900lm	241,8W
Q4714280.DM.CCC.xx	1:2	14	28	2042 mm	4008 mm	42210lm	43680lm	46200lm	260,4W
Q4715300.DM.CCC.xx	1:2	15	30	2184 mm	4288 mm	n/a***	46800lm	49500lm	279,0W
Q4716320.DM.CCC.xx	1:2	16	32	2322 mm	4568 mm	48240lm	49920lm	52800lm	297,6W
Q4717340.DM.CCC.xx	1:2	17	34	2464 mm	4850 mm	n/a***	53040lm	56100lm	316,2W
Q4718360.DM.CCC.xx	1:2	18	36	2604 mm	5131 mm	54270lm	56160lm	59400lm	334,8W
Q4719380.DM.CCC.xx	1:2	19	38	2746 mm	5411 mm	n/a***	59280lm	62700lm	353,4W
Q4705200.DM.CCC.xx	1:4	5	20	780 mm	2884 mm	n/a***	26000lm	27500lm	155,0W
Q4706240.DM.CCC.xx	1:4	6	24	919 mm	3445 mm	30150lm	31200lm	33000lm	186,0W
Q4707280.DM.CCC.xx	1:4	7	28	1061 mm	4008 mm	n/a***	36400lm	38500lm	217,0W
Q4708320.DM.CCC.xx	1:4	8	32	1199 mm	4568 mm	40200lm	41600lm	44000lm	248,0W
Q4709360.DM.CCC.xx	1:4	9	36	1341 mm	5131 mm	n/a***	46800lm	49500lm	279,0W
Q4710400.DM.CCC.xx	1:4	10	40	1481 mm	5693 mm	50250lm	52000lm	55000lm	310,0W
Q4711440.DM.CCC.xx	1:4	11	44	1623 mm	6254 mm	n/a***	57200lm	60500lm	341,0W
Q4712480.DM.CCC.xx	1:4	12	48	1761 mm	6814 mm	60300lm	62400lm	66000lm	372,0W
Q4705300.DM.CCC.xx	1:6	5	30	780 mm	4288 mm	n/a***	36400lm	38500lm	217,0W
Q4706360.DM.CCC.xx	1:6	6	36	919 mm	5131 mm	42210lm	43680lm	46200lm	260,4W
Q4707420.DM.CCC.xx	1:6	7	42	1061 mm	5973 mm	n/a***	50960lm	53900lm	303,8W
Q4708480.DM.CCC.xx	1:6	8	48	1199 mm	6814 mm	56280lm	58240lm	61600lm	347,2W
Q4705400.DM.CCC.xx	1:8	5	40	640 mm	4568 mm	n/a***	46800lm	49500lm	279,0W
Q4706480.DM.CCC.xx	1:8	6	48	780 mm	5693 mm	54270lm	56160lm	59400lm	334,8W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios which can be found on www.doxis.be.

** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K.


Article number structure: **Q4700000.DM.CCC.xx**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim


927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K

01: White Matt Texture
18: Grey 9006 Matt Texture
03: Black Matt Texture
36: Bronze
16: Gold
40: Champagne
Other colors on request

Ready To Go Square LEDliner47 Suspended Down



Average weight of equipped profile: 2.70 kg/m



Opal cover is standard.
Prismatic cover is not available
Black cover optional (add ".B" to art. nr.)

Included

Profile
Top cover
Connectors
LED Modules
Drivers
PC Cover Down
Suspension cables (2000mm)
Connecting box
Textile power cable (2000mm)



Article number	Ratio	L	W	Length	Width	LED Flux* 927	LED Flux* 930	LED Flux* 940	Power** 927, 930 & 940
P4705050.DM.CCC.xx	1:1	5	5	780 mm	780 mm	n/a***	10400lm	11000lm	62,0W
P4706060.DM.CCC.xx	1:1	6	6	959 mm	959 mm	12060lm	12480lm	13200lm	74,4W
P4707070.DM.CCC.xx	1:1	7	7	1101 mm	1101 mm	n/a***	14560lm	15400lm	86,8W
P4708080.DM.CCC.xx	1:1	8	8	1239 mm	1239 mm	16080lm	16640lm	17600lm	99,2W
P4709090.DM.CCC.xx	1:1	9	9	1381 mm	1381 mm	n/a***	18720lm	19800lm	111,6W
P4710100.DM.CCC.xx	1:1	10	10	1521 mm	1521 mm	20100lm	20800lm	22000lm	124,0W
P4711110.DM.CCC.xx	1:1	11	11	1663 mm	1663 mm	n/a***	22880lm	24200lm	136,4W
P4712120.DM.CCC.xx	1:1	12	12	1801 mm	1801 mm	24120lm	24960lm	26400lm	148,8W
P4713130.DM.CCC.xx	1:1	13	13	1943 mm	1943 mm	n/a***	27040lm	28600lm	161,2W
P4714140.DM.CCC.xx	1:1	14	14	2082 mm	2082 mm	28140lm	29120lm	30800lm	173,6W
P4715150.DM.CCC.xx	1:1	15	15	2224 mm	2224 mm	n/a***	31200lm	33000lm	186,0W
P4716160.DM.CCC.xx	1:1	16	16	2362 mm	2362 mm	32160lm	33280lm	35200lm	198,4W
P4717170.DM.CCC.xx	1:1	17	17	2504 mm	2504 mm	n/a***	35360lm	37400lm	210,8W
P4718180.DM.CCC.xx	1:1	18	18	2644 mm	2644 mm	36180lm	37440lm	39600lm	223,2W
P4719190.DM.CCC.xx	1:1	19	19	2786 mm	2786 mm	n/a***	39520lm	41800lm	235,6W
P4720200.DM.CCC.xx	1:1	20	20	2924 mm	2924 mm	40200lm	41600lm	44000lm	248,0W
P4721210.DM.CCC.xx	1:1	21	21	3066 mm	3066 mm	n/a***	43680lm	46200lm	260,4W
P4722220.DM.CCC.xx	1:1	22	22	3205 mm	3205 mm	44220lm	45760lm	48400lm	272,8W
P4723230.DM.CCC.xx	1:1	23	23	3347 mm	3347 mm	n/a***	47840lm	50600lm	285,2W
P4724240.DM.CCC.xx	1:1	24	24	3485 mm	3485 mm	48240lm	49920lm	52800lm	297,6W
P4725250.DM.CCC.xx	1:1	25	25	3628 mm	3628 mm	n/a***	52000lm	55000lm	310,0W
P4726260.DM.CCC.xx	1:1	26	26	3767 mm	3767 mm	52260lm	54080lm	57200lm	322,4W
P4727270.DM.CCC.xx	1:1	27	27	3909 mm	3909 mm	n/a***	56160lm	59400lm	334,8W
P4728280.DM.CCC.xx	1:1	28	28	4048 mm	4048 mm	56280lm	58240lm	61600lm	347,2W
P4729290.DM.CCC.xx	1:1	29	29	4190 mm	4190 mm	n/a***	60320lm	63800lm	359,6W
P4730300.DM.CCC.xx	1:1	30	30	4328 mm	4328 mm	60300lm	62400lm	66000lm	372,0W
P4731310.DM.CCC.xx	1:1	31	31	4470 mm	4470 mm	n/a***	64480lm	68200lm	384,4W
P4732320.DM.CCC.xx	1:1	32	32	4608 mm	4608 mm	64320lm	66560lm	70400lm	396,8W
P4733330.DM.CCC.xx	1:1	33	33	4750 mm	4750 mm	n/a***	68640lm	72600lm	409,2W
P4734340.DM.CCC.xx	1:1	34	34	4890 mm	4890 mm	68340lm	70720lm	74800lm	421,6W
P4735350.DM.CCC.xx	1:1	35	35	5032 mm	5032 mm	n/a***	72800lm	77000lm	434,0W
P4736360.DM.CCC.xx	1:1	36	36	5171 mm	5171 mm	72360lm	74880lm	79200lm	446,4W
P4737370.DM.CCC.xx	1:1	37	37	5313 mm	5313 mm	n/a***	76960lm	81400lm	458,8W
P4738380.DM.CCC.xx	1:1	38	38	5451 mm	5451 mm	76380lm	79040lm	83600lm	471,2W
P4739390.DM.CCC.xx	1:1	39	39	5593 mm	5593 mm	n/a***	81120lm	85800lm	483,6W
P4740400.DM.CCC.xx	1:1	40	40	5733 mm	5733 mm	80400lm	83200lm	88000lm	496,0W
P4741410.DM.CCC.xx	1:1	41	41	5875 mm	5875 mm	n/a***	85280lm	90200lm	508,4W
P4742420.DM.CCC.xx	1:1	42	42	6013 mm	6013 mm	84420lm	87360lm	92400lm	520,8W
P4743430.DM.CCC.xx	1:1	43	43	6155 mm	6155 mm	n/a***	89440lm	94600lm	533,2W
P4744440.DM.CCC.xx	1:1	44	44	6294 mm	6294 mm	88440lm	91520lm	96800lm	545,6W
P4745450.DM.CCC.xx	1:1	45	45	6436 mm	6436 mm	n/a***	93600lm	99000lm	558,0W
P4746460.DM.CCC.xx	1:1	46	46	6574 mm	6574 mm	92460lm	95680lm	101200lm	570,4W
P4747470.DM.CCC.xx	1:1	47	47	6716 mm	6716 mm	n/a***	97760lm	103400lm	582,8W
P4748480.DM.CCC.xx	1:1	48	48	6854 mm	6854 mm	96480lm	99840lm	105600lm	595,2W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios which can be found on www.doxis.be.

** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K.


Article number structure: **P4700000.DM.CCC.xx**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim


927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K

01: White Matt Texture
18: Grey 9006 Matt Texture
03: Black Matt Texture
36: Bronze
16: Gold
40: Champagne
Other colors on request

Ready To Go Rectangle LEDliner47 Suspended Down



Average weight of equipped profile: 2.70 kg/m



Opal cover is standard.
Prismatic cover is not available
Black cover optional (add ".B" to art. nr.)

Included

Profile
Top cover
Connectors
LED Modules
Drivers
PC Cover Down
Suspension cables (2000mm)
Connecting box
Textile power cable (2000mm)



Article number	Ratio	L	W	Length	Width	LED Flux* 927	LED Flux* 930	LED Flux* 940	Power** 927, 930 & 940
P4705080.DM.CCC.xx	2:3	5	8	780 mm	1199 mm	n/a***	13520lm	14300lm	80,6W
P4706100.DM.CCC.xx	2:3	6	10	919 mm	1481 mm	16080lm	16640lm	17600lm	99,2W
P4707110.DM.CCC.xx	2:3	7	11	1061 mm	1623 mm	n/a***	18720lm	19800lm	111,6W
P4708120.DM.CCC.xx	2:3	8	12	1199 mm	1761 mm	20100lm	20800lm	22000lm	124,0W
P4709140.DM.CCC.xx	2:3	9	14	1341 mm	2042 mm	n/a***	23920lm	25300lm	142,6W
P4710160.DM.CCC.xx	2:3	10	16	1481 mm	2322 mm	26130lm	27040lm	28600lm	161,2W
P4711170.DM.CCC.xx	2:3	11	17	1623 mm	2464 mm	n/a***	29120lm	30800lm	173,6W
P4712180.DM.CCC.xx	2:3	12	18	1761 mm	2604 mm	30150lm	31200lm	33000lm	186,0W
P4713200.DM.CCC.xx	2:3	13	20	1903 mm	2884 mm	n/a***	34320lm	36300lm	204,6W
P4714220.DM.CCC.xx	2:3	14	22	2042 mm	3165 mm	36180lm	37440lm	39600lm	223,2W
P4715230.DM.CCC.xx	2:3	15	23	2184 mm	3307 mm	n/a***	39520lm	41800lm	235,6W
P4716240.DM.CCC.xx	2:3	16	24	2322 mm	3445 mm	40200lm	41600lm	44000lm	248,0W
P4717260.DM.CCC.xx	2:3	17	26	2464 mm	3727 mm	n/a***	44720lm	47300lm	266,6W
P4718280.DM.CCC.xx	2:3	18	28	2604 mm	4008 mm	46230lm	47840lm	50600lm	285,2W
P4719290.DM.CCC.xx	2:3	19	29	2746 mm	4150 mm	n/a***	49920lm	52800lm	297,6W
P4705100.DM.CCC.xx	1:2	5	10	780 mm	1481 mm	n/a***	15600lm	16500lm	93,0W
P4706120.DM.CCC.xx	1:2	6	12	919 mm	1761 mm	18090lm	18720lm	19800lm	111,6W
P4707140.DM.CCC.xx	1:2	7	14	1061 mm	2042 mm	n/a***	21840lm	23100lm	130,2W
P4708160.DM.CCC.xx	1:2	8	16	1199 mm	2322 mm	24120lm	24960lm	26400lm	148,8W
P4709180.DM.CCC.xx	1:2	9	18	1341 mm	2604 mm	n/a***	28080lm	29700lm	167,4W
P4710200.DM.CCC.xx	1:2	10	20	1481 mm	2884 mm	30150lm	31200lm	33000lm	186,0W
P4711220.DM.CCC.xx	1:2	11	22	1623 mm	3165 mm	n/a***	34320lm	36300lm	204,6W
P4712240.DM.CCC.xx	1:2	12	24	1761 mm	3445 mm	36180lm	37440lm	39600lm	223,2W
P4713260.DM.CCC.xx	1:2	13	26	1903 mm	3727 mm	n/a***	40560lm	42900lm	241,8W
P4714280.DM.CCC.xx	1:2	14	28	2042 mm	4008 mm	42210lm	43680lm	46200lm	260,4W
P4715300.DM.CCC.xx	1:2	15	30	2184 mm	4288 mm	n/a***	46800lm	49500lm	279,0W
P4716320.DM.CCC.xx	1:2	16	32	2322 mm	4568 mm	48240lm	49920lm	52800lm	297,6W
P4717340.DM.CCC.xx	1:2	17	34	2464 mm	4850 mm	n/a***	53040lm	56100lm	316,2W
P4718360.DM.CCC.xx	1:2	18	36	2604 mm	5131 mm	54270lm	56160lm	59400lm	334,8W
P4719380.DM.CCC.xx	1:2	19	38	2746 mm	5411 mm	n/a***	59280lm	62700lm	353,4W
P4705200.DM.CCC.xx	1:4	5	20	780 mm	2884 mm	n/a***	26000lm	27500lm	155,0W
P4706240.DM.CCC.xx	1:4	6	24	919 mm	3445 mm	30150lm	31200lm	33000lm	186,0W
P4707280.DM.CCC.xx	1:4	7	28	1061 mm	4008 mm	n/a***	36400lm	38500lm	217,0W
P4708320.DM.CCC.xx	1:4	8	32	1199 mm	4568 mm	40200lm	41600lm	44000lm	248,0W
P4709360.DM.CCC.xx	1:4	9	36	1341 mm	5131 mm	n/a***	46800lm	49500lm	279,0W
P4710400.DM.CCC.xx	1:4	10	40	1481 mm	5693 mm	50250lm	52000lm	55000lm	310,0W
P4711440.DM.CCC.xx	1:4	11	44	1623 mm	6254 mm	n/a***	57200lm	60500lm	341,0W
P4712480.DM.CCC.xx	1:4	12	48	1761 mm	6814 mm	60300lm	62400lm	66000lm	372,0W
P4705300.DM.CCC.xx	1:6	5	30	780 mm	4288 mm	n/a***	36400lm	38500lm	217,0W
P4706360.DM.CCC.xx	1:6	6	36	919 mm	5131 mm	42210lm	43680lm	46200lm	260,4W
P4707420.DM.CCC.xx	1:6	7	42	1061 mm	5973 mm	n/a***	50960lm	53900lm	303,8W
P4708480.DM.CCC.xx	1:6	8	48	1199 mm	6814 mm	56280lm	58240lm	61600lm	347,2W
P4705400.DM.CCC.xx	1:8	5	40	780 mm	5693 mm	n/a***	46800lm	49500lm	279,0W
P4706480.DM.CCC.xx	1:8	6	48	919 mm	6814 mm	54270lm	56160lm	59400lm	334,8W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios which can be found on www.doxis.be.

** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K.


Article number structure: **P4700000.DM.CCC.xx**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim


927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K

01: White Matt Texture
18: Grey 9006 Matt Texture
03: Black Matt Texture
36: Bronze
16: Gold
40: Champagne
Other colors on request

Ready To Go Square LEDliner47 Suspended Up & Down 1C



Average weight of equipped profile: 2.70 kg/m



Opal cover is standard.
Prismatic cover is not available
Black cover optional (add ".B" to art. nr.)

Included

Profile
Connectors
LED Modules
Drivers
PC Covers Up+Down
Suspension cables (2000mm)
Connecting box
Textile power cable (2000mm)



Article number	Ratio	L	W	Length	Width	LED Flux* 927	LED Flux* 930	LED Flux* 940	Power** 927, 930 & 940
P4704041.DM.CCC.xx	1:1	4	4	640 mm	640 mm	n/a***	16640lm	17600lm	99,2W
P4705051.DM.CCC.xx	1:1	5	5	780 mm	780 mm	n/a***	20800lm	22000lm	124,0W
P4706061.DM.CCC.xx	1:1	6	6	919 mm	919 mm	24120lm	24960lm	26400lm	148,8W
P4707071.DM.CCC.xx	1:1	7	7	1061 mm	1061 mm	n/a***	29120lm	30800lm	173,6W
P4708081.DM.CCC.xx	1:1	8	8	1199 mm	1199 mm	32160lm	33280lm	35200lm	198,4W
P4709091.DM.CCC.xx	1:1	9	9	1341 mm	1341 mm	n/a***	37440lm	39600lm	223,2W
P4710101.DM.CCC.xx	1:1	10	10	1481 mm	1481 mm	40200lm	41600lm	44000lm	248,0W
P4711111.DM.CCC.xx	1:1	11	11	1623 mm	1623 mm	n/a***	45760lm	48400lm	272,8W
P4712121.DM.CCC.xx	1:1	12	12	1761 mm	1761 mm	48240lm	49920lm	52800lm	297,6W
P4713131.DM.CCC.xx	1:1	13	13	1903 mm	1903 mm	n/a***	54080lm	57200lm	322,4W
P4714141.DM.CCC.xx	1:1	14	14	2042 mm	2042 mm	56280lm	58240lm	61600lm	347,2W
P4715151.DM.CCC.xx	1:1	15	15	2184 mm	2184 mm	n/a***	62400lm	66000lm	372,0W
P4716161.DM.CCC.xx	1:1	16	16	2322 mm	2322 mm	64320lm	66560lm	70400lm	396,8W
P4717171.DM.CCC.xx	1:1	17	17	2464 mm	2464 mm	n/a***	70720lm	74800lm	421,6W
P4718181.DM.CCC.xx	1:1	18	18	2604 mm	2604 mm	72360lm	74880lm	79200lm	446,4W
P4719191.DM.CCC.xx	1:1	19	19	2746 mm	2746 mm	n/a***	79040lm	83600lm	471,2W
P4720201.DM.CCC.xx	1:1	20	20	2884 mm	2884 mm	80400lm	83200lm	88000lm	496,0W
P4721211.DM.CCC.xx	1:1	21	21	3026 mm	3026 mm	n/a***	87360lm	92400lm	520,8W
P4722221.DM.CCC.xx	1:1	22	22	3165 mm	3165 mm	88440lm	91520lm	96800lm	545,6W
P4723231.DM.CCC.xx	1:1	23	23	3307 mm	3307 mm	n/a***	95680lm	101200lm	570,4W
P4724241.DM.CCC.xx	1:1	24	24	3445 mm	3445 mm	96480lm	99840lm	105600lm	595,2W
P4725251.DM.CCC.xx	1:1	25	25	3588 mm	3588 mm	n/a***	104000lm	110000lm	620,0W
P4726261.DM.CCC.xx	1:1	26	26	3727 mm	3727 mm	104520lm	108160lm	114400lm	644,8W
P4727271.DM.CCC.xx	1:1	27	27	3869 mm	3869 mm	n/a***	112320lm	118800lm	669,6W
P4728281.DM.CCC.xx	1:1	28	28	4008 mm	4008 mm	112560lm	116480lm	123200lm	694,4W
P4729291.DM.CCC.xx	1:1	29	29	4150 mm	4150 mm	n/a***	120640lm	127600lm	719,2W
P4730301.DM.CCC.xx	1:1	30	30	4288 mm	4288 mm	120600lm	124800lm	132000lm	744,0W
P4731311.DM.CCC.xx	1:1	31	31	4430 mm	4430 mm	n/a***	128960lm	136400lm	768,8W
P4732321.DM.CCC.xx	1:1	32	32	4568 mm	4568 mm	128640lm	133120lm	140800lm	793,6W
P4733331.DM.CCC.xx	1:1	33	33	4710 mm	4710 mm	n/a***	137280lm	145200lm	818,4W
P4734341.DM.CCC.xx	1:1	34	34	4850 mm	4850 mm	136680lm	141440lm	149600lm	843,2W
P4735351.DM.CCC.xx	1:1	35	35	4992 mm	4992 mm	n/a***	145600lm	154000lm	868,0W
P4736361.DM.CCC.xx	1:1	36	36	5131 mm	5131 mm	144720lm	149760lm	158400lm	892,8W
P4737371.DM.CCC.xx	1:1	37	37	5273 mm	5273 mm	n/a***	153920lm	162800lm	917,6W
P4738381.DM.CCC.xx	1:1	38	38	5411 mm	5411 mm	152760lm	158080lm	167200lm	942,4W
P4739391.DM.CCC.xx	1:1	39	39	5553 mm	5553 mm	n/a***	162240lm	171600lm	967,2W
P4740401.DM.CCC.xx	1:1	40	40	5693 mm	5693 mm	160800lm	166400lm	176000lm	992,0W
P4741411.DM.CCC.xx	1:1	41	41	5835 mm	5835 mm	n/a***	170560lm	180400lm	1016,8W
P4742421.DM.CCC.xx	1:1	42	42	5973 mm	5973 mm	168840lm	174720lm	184800lm	1041,6W
P4743431.DM.CCC.xx	1:1	43	43	6115 mm	6115 mm	n/a***	178880lm	189200lm	1066,4W
P4744441.DM.CCC.xx	1:1	44	44	6254 mm	6254 mm	176880lm	183040lm	193600lm	1091,2W
P4745451.DM.CCC.xx	1:1	45	45	6396 mm	6396 mm	n/a***	187200lm	198000lm	1116,0W
P4746461.DM.CCC.xx	1:1	46	46	6534 mm	6534 mm	184920lm	191360lm	202400lm	1140,8W
P4747471.DM.CCC.xx	1:1	47	47	6676 mm	6676 mm	n/a***	195520lm	206800lm	1165,6W
P4748481.DM.CCC.xx	1:1	48	48	6814 mm	6814 mm	192960lm	199680lm	211200lm	1190,4W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios which can be found on www.doxis.be.

** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K.


Article number structure: **P4700001.DM.CCC.xx**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim


927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K

01: White Matt Texture
18: Grey 9006 Matt Texture
03: Black Matt Texture
36: Bronze
16: Gold
40: Champagne
Other colors on request

Ready To Go Rectangle LEDliner47 Suspended Up & Down 1C



Average weight of equipped profile: 2.70 kg/m



Opal cover is standard.
Prismatic cover is not available
Black cover optional (add ".B" to art. nr.)

Included

Profile
Connectors
LED Modules
Drivers
PC Covers Up+Down
Suspension cables (2000mm)
Connecting box
Textile power cable (2000mm)



Article number	Ratio	L	W	Length	Width	LED Flux* 927	LED Flux* 930	LED Flux* 940	Power** 927, 930 & 940
P4705081.DM.CCC.xx	2:3	5	8	780 mm	1199 mm	n/a***	27040lm	28600lm	161,2W
P4706101.DM.CCC.xx	2:3	6	10	919 mm	1481 mm	32160lm	33280lm	35200lm	198,4W
P4707111.DM.CCC.xx	2:3	7	11	1061 mm	1623 mm	n/a***	37440lm	39600lm	223,2W
P4708121.DM.CCC.xx	2:3	8	12	1199 mm	1761 mm	40200lm	41600lm	44000lm	248,0W
P4709141.DM.CCC.xx	2:3	9	14	1341 mm	2042 mm	n/a***	47840lm	50600lm	285,2W
P4710161.DM.CCC.xx	2:3	10	16	1481 mm	2322 mm	52260lm	54080lm	57200lm	322,4W
P4711171.DM.CCC.xx	2:3	11	17	1623 mm	2464 mm	n/a***	58240lm	61600lm	347,2W
P4712181.DM.CCC.xx	2:3	12	18	1761 mm	2604 mm	60300lm	62400lm	66000lm	372,0W
P4713201.DM.CCC.xx	2:3	13	20	1903 mm	2884 mm	n/a***	68640lm	72600lm	409,2W
P4714221.DM.CCC.xx	2:3	14	22	2042 mm	3165 mm	72360lm	74880lm	79200lm	446,4W
P4715231.DM.CCC.xx	2:3	15	23	2184 mm	3307 mm	n/a***	79040lm	83600lm	471,2W
P4716241.DM.CCC.xx	2:3	16	24	2322 mm	3445 mm	80400lm	83200lm	88000lm	496,0W
P4717261.DM.CCC.xx	2:3	17	26	2464 mm	3727 mm	n/a***	89440lm	94600lm	533,2W
P4718281.DM.CCC.xx	2:3	18	28	2604 mm	4008 mm	92460lm	95680lm	101200lm	570,4W
P4719291.DM.CCC.xx	2:3	19	29	2746 mm	4150 mm	n/a***	99840lm	105600lm	595,2W
P4705101.DM.CCC.xx	1:2	5	10	780 mm	1481 mm	n/a***	31200lm	33000lm	186,0W
P4706121.DM.CCC.xx	1:2	6	12	919 mm	1761 mm	36180lm	37440lm	39600lm	223,2W
P4707141.DM.CCC.xx	1:2	7	14	1061 mm	2042 mm	n/a***	43680lm	46200lm	260,4W
P4708161.DM.CCC.xx	1:2	8	16	1199 mm	2322 mm	48240lm	49920lm	52800lm	297,6W
P4709181.DM.CCC.xx	1:2	9	18	1341 mm	2604 mm	n/a***	56160lm	59400lm	334,8W
P4710201.DM.CCC.xx	1:2	10	20	1481 mm	2884 mm	60300lm	62400lm	66000lm	372,0W
P4711221.DM.CCC.xx	1:2	11	22	1623 mm	3165 mm	n/a***	68640lm	72600lm	409,2W
P4712241.DM.CCC.xx	1:2	12	24	1761 mm	3445 mm	72360lm	74880lm	79200lm	446,4W
P4713261.DM.CCC.xx	1:2	13	26	1903 mm	3727 mm	n/a***	81120lm	85800lm	483,6W
P4714281.DM.CCC.xx	1:2	14	28	2042 mm	4008 mm	84420lm	87360lm	92400lm	520,8W
P4715301.DM.CCC.xx	1:2	15	30	2184 mm	4288 mm	n/a***	93600lm	99000lm	558,0W
P4716321.DM.CCC.xx	1:2	16	32	2322 mm	4568 mm	96480lm	99840lm	105600lm	595,2W
P4717341.DM.CCC.xx	1:2	17	34	2464 mm	4850 mm	n/a***	106080lm	112200lm	632,4W
P4718361.DM.CCC.xx	1:2	18	36	2604 mm	5131 mm	108540lm	112320lm	118800lm	669,6W
P4719381.DM.CCC.xx	1:2	19	38	2746 mm	5411 mm	n/a***	118560lm	125400lm	706,8W
P4705201.DM.CCC.xx	1:4	5	20	780 mm	2884 mm	n/a***	52000lm	55000lm	310,0W
P4706241.DM.CCC.xx	1:4	6	24	919 mm	3445 mm	60300lm	62400lm	66000lm	372,0W
P4707281.DM.CCC.xx	1:4	7	28	1061 mm	4008 mm	n/a***	72800lm	77000lm	434,0W
P4708321.DM.CCC.xx	1:4	8	32	1199 mm	4568 mm	80400lm	83200lm	88000lm	496,0W
P4709361.DM.CCC.xx	1:4	9	36	1341 mm	5131 mm	n/a***	93600lm	99000lm	558,0W
P4710401.DM.CCC.xx	1:4	10	40	1481 mm	5693 mm	100500lm	104000lm	110000lm	620,0W
P4711441.DM.CCC.xx	1:4	11	44	1623 mm	6254 mm	n/a***	114400lm	121000lm	682,0W
P4712481.DM.CCC.xx	1:4	12	48	1761 mm	6814 mm	120600lm	124800lm	132000lm	744,0W
P4705301.DM.CCC.xx	1:6	5	30	780 mm	4288 mm	n/a***	72800lm	77000lm	434,0W
P4706361.DM.CCC.xx	1:6	6	36	919 mm	5131 mm	84420lm	87360lm	92400lm	520,8W
P4707421.DM.CCC.xx	1:6	7	42	1061 mm	5973 mm	n/a***	101920lm	107800lm	607,6W
P4708481.DM.CCC.xx	1:6	8	48	1199 mm	6814 mm	112560lm	116480lm	123200lm	694,4W
P4704321.DM.CCC.xx	1:8	4	32	640 mm	4568 mm	72360lm	74880lm	79200lm	446,4W
P4705401.DM.CCC.xx	1:8	5	40	780 mm	5693 mm	n/a***	93600lm	99000lm	558,0W
P4706481.DM.CCC.xx	1:8	6	48	919 mm	6814 mm	108540lm	112320lm	118800lm	669,6W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios which can be found on www.doxis.be.

** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K.

Article number structure: **P4700001.DM.CCC.xx**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim

927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K

01: White Matt Texture
18: Grey 9006 Matt Texture
03: Black Matt Texture
36: Bronze
16: Gold
40: Champagne
Other colors on request

Index

Index by article

Article no. structure	Product Name	Page
1029.XX.XX.XXX.XX	Titan Fix Wallwasher	44
1080.XX.XX.XXX.XX	Tektus 60 Rectangle 3-Way	39
1080.XX.XX.XXX.XX-R	Tektus 60 Rectangle 3-Way Reduced	39
1081.XX.XX.XXX.XX	Tektus 60 Rectangle 2-Way	39
1081.XX.XX.XXX.XX-R	Tektus 60 Rectangle 2-Way Reduced	39
1082.XX.XX.XXX.XX	Tektus 60 Square 3-Way	39
1082.XX.XX.XXX.XX-R	Tektus 60 Square 3-Way Reduced	39
1088.XX.XX.XXX.XX	Tektus 60 Round 2-Way	39
1088.XX.XX.XXX.XX-R	Tektus 60 Round 2-Way Reduced	39
1089.XX.XX.XXX.XX	Tektus 60 Round 3-Way	39
1089.XX.XX.XXX.XX-R	Tektus 60 Round 3-Way Reduced	39
1093.XX.XX.XXX.XX	Tektus 60 Square 1-Way	39
1093.XX.XX.XXX.XX-R	Tektus 60 Square 1-Way Reduced	39
1125.XX.XX.XXX.XX	Tektus 60 Round 1-Way	39
1125.XX.XX.XXX.XX-R	Tektus 60 Round 1-Way Reduced	39
1150.XX.XX.XXX.XX	Tektus 45 Discus 55	32
1170.XX.XX.XXX.XX	Tektus 45 Wall Single	36
1171.XX.XX.XXX.XX	Tektus 45 Wall Cross	36
1172.XX.XX.XXX.XX	Tektus 45 Wall Double	36
1248.XX.XX.XXX.XX	Tektus 45 Standard Single	52
1250.XX.XX.XXX.XX	Tektus 60 Standard Single	52
1300.XX.XX.XXX.XX	Tektus 45 Standard Double	52
1302.XX.XX.XXX.XX	Tektus 60 Standard Double	52
1419.XX.XX.XXX.XX	Focus Recessed Up	40
1420.XX.XX.XXX.XX	Focus Recessed Basic	42
1421.XX.XX.XXX.XX	Focus Trimless	42
1421.XX.XX.XXX.XX	Focus Trimless Basic	42
1600.01.XX.XXX.XX	Full Moon 900 Indirect	48
1900.01.XX.XXX.XX	Full Moon 600 Indirect	48
1929.XX.XX.XXX.XX	Tektus 45 Flush	34
1931.XX.XX	Tektus Slim Profile 90° connector	51
1933.XX.XX	Tektus Slim Profile 180° connector	51
2249.XX.XX	Tektus Slim Profile	51
2250.XX.XX	Tektus Slim Screwless End Cap	51
3001.XX.XX.XXX.XX.10	Tektus 45 Suspended Compact 114mm	26
3001.XX.XX.XXX.XX.20	Tektus 45 Suspended Compact 200mm	26
3001.XX.XX.XXX.XX.30	Tektus 60 Suspended Compact 150mm	26
310X.XX.XX.XXX.XX.XX	Tektus Suspended Round D300	8-14
3113.XX.XX.XXX.XX	Flat Iron 110.30	46
3133.XX.XX.XXX.XX	Flat Iron 140.30	46
320X.XX.XX.XXX.XX.XX	Tektus Suspended Round D480	10-14
330X.XX.XX.XXX.XX.XX	Tektus Suspended Round D640	12-14
3401.XX.XX.XXX.XX.10	Tektus 45 Slim 1-Way 114mm	18
3401.XX.XX.XXX.XX.20	Tektus 45 Slim 1-Way 200mm	18
3401.XX.XX.XXX.XX.30	Tektus 60 Slim 1-Way 150mm	18
3402.XX.XX.XXX.XX.10	Tektus 45 Slim 2-Way 114mm	20
3402.XX.XX.XXX.XX.2X	Tektus 45 Slim 2-Way 200mm	20
3402.XX.XX.XXX.XX.30	Tektus 60 Slim 2-Way 150mm	20
3403.XX.XX.XXX.XX.10	Tektus 45 Slim 3-Way 114mm	22
3403.XX.XX.XXX.XX.20	Tektus 45 Slim 3-Way 200mm	22
3403.XX.XX.XXX.XX.30	Tektus 60 Slim 3-Way 150mm	22
3404.XX.XX.XXX.XX.10	Tektus 45 Slim 4-Way 114mm	24
3404.XX.XX.XXX.XX.20	Tektus 45 Slim 4-Way 200mm	24
3404.XX.XX.XXX.XX.30	Tektus 60 Slim 4-Way 150mm	24
3505.XX.XX.XXX.XX	Flat Iron 60.50	46
3601.XX.XX.XXX.XX.10	Tektus 45 Suspended 3-Phase 114mm	28
3601.XX.XX.XXX.XX.20	Tektus 45 Suspended 3-Phase 200mm	28
3601.XX.XX.XXX.XX.30	Tektus 60 Suspended 3-Phase 500mA	30
3601.XX.XX.XXX.XX.33	Tektus 60 Suspended 3-Phase 350mA	30
3602.XX.XX.XXX.XX.10	Tektus 45 Pendel Slim Single 114mm	53
3602.XX.XX.XXX.XX.20	Tektus 45 Pendel Slim Single 200mm	53
3602.XX.XX.XXX.XX.21	Tektus 45 Pendel Slim Single 200mm UD	53
3602.XX.XX.XXX.XX.30	Tektus 60 Pendel Slim Single 150mm	53
3603.XX.XX.XXX.XX.10	Tektus 45 Pendel Slim Double 114mm	53
3603.XX.XX.XXX.XX.20	Tektus 45 Pendel Slim Double 200mm	53
3603.XX.XX.XXX.XX.21	Tektus 45 Pendel Slim Double 200mm UD	53
3603.XX.XX.XXX.XX.30	Tektus 60 Pendel Slim Double 150mm	53
3604.XX.XX.XXX.XX.10	Tektus 45 Pendel LL Single 114mm	53
3604.XX.XX.XXX.XX.20	Tektus 45 Pendel LL Single 200mm	53
3604.XX.XX.XXX.XX.21	Tektus 45 Pendel LL Single 200mm UD	53
3604.XX.XX.XXX.XX.30	Tektus 60 Pendel LL Single 150mm	53
3605.XX.XX.XXX.XX.10	Tektus 45 Pendel LL Double 114mm	53
3605.XX.XX.XXX.XX.20	Tektus 45 Pendel LL Double 200mm	53
3605.XX.XX.XXX.XX.21	Tektus 45 Pendel LL Double 200mm UD	53
3605.XX.XX.XXX.XX.30	Tektus 60 Pendel LL Double 150mm	53
3704.XX.XX.XXX.XX	Flat Iron 80.50	46
P35XXXX0.XX.XXX.XX	Frame LEDliner35 Ceiling Suspended	66
P47XXX0.XX.XXX.XX	Frame LEDliner47 Ceiling Suspended Down	66
P47XXX1.XX.XXX.XX	Frame LEDliner47 Ceiling Suspended Up / Down (1c)	68
Q35XXXX0.XX.XXX.XX	Frame LEDliner35 Ceiling Mounted	62
Q47XXX0.XX.XXX.XX	Frame LEDliner47 Ceiling Mounted	64

Index by name

Product Name	Article no. structure	Page
Flat Iron 110.30	3113.XX.XX.XXX.XX	46
Flat Iron 140.30	3133.XX.XX.XXX.XX	46
Flat Iron 60.50	3505.XX.XX.XXX.XX	46
Flat Iron 80.50	3704.XX.XX.XXX.XX	46
Focus Recessed Basic	1420.XX.XX.XXX.XX	40
Focus Recessed Up	1419.XX.XX.XXX.XX	40
Focus Trimless	1421.XX.XX.XXX.XX	42
Focus Trimless Basic	1421.XX.XX.XXX.XX	42
Frame LEDliner35 Ceiling Mounted	Q35XXXX0.XX.XXX.XX	66
Frame LEDliner35 Ceiling Suspended	P35XXXX0.XX.XXX.XX	62
Frame LEDliner47 Ceiling Mounted	Q47XXX0.XX.XXX.XX	64
Frame LEDliner47 Ceiling Suspended Down	P47XXX0.XX.XXX.XX	66
Frame LEDliner47 Ceiling Suspended Up / Down (1c)	P47XXX1.XX.XXX.XX	68
Full Moon 600 Indirect	1900.01.XX.XXX.XX	48
Full Moon 900 Indirect	1600.01.XX.XXX.XX	48
Tektus 45 Discus 55	1150.XX.XX.XXX.XX	32
Tektus 45 Flush	1929.XX.XX.XXX.XX	34
Tektus 45 Pendel LL Double 114mm	3605.XX.XX.XXX.XX.10	53
Tektus 45 Pendel LL Double 200mm	3605.XX.XX.XXX.XX.20	53
Tektus 45 Pendel LL Double 200mm UD	3605.XX.XX.XXX.XX.21	53
Tektus 45 Pendel LL Single 114mm	3604.XX.XX.XXX.XX.10	53
Tektus 45 Pendel LL Single 200mm	3604.XX.XX.XXX.XX.20	53
Tektus 45 Pendel LL Single 200mm UD	3604.XX.XX.XXX.XX.21	53
Tektus 45 Pendel Slim Double 114mm	3603.XX.XX.XXX.XX.10	53
Tektus 45 Pendel Slim Double 200mm	3603.XX.XX.XXX.XX.20	53
Tektus 45 Pendel Slim Double 200mm UD	3603.XX.XX.XXX.XX.21	53
Tektus 45 Pendel Slim Single 114mm	3602.XX.XX.XXX.XX.10	53
Tektus 45 Pendel Slim Single 200mm	3602.XX.XX.XXX.XX.20	53
Tektus 45 Slim 1-Way 114mm	3401.XX.XX.XXX.XX.10	18
Tektus 45 Slim 1-Way 200mm	3401.XX.XX.XXX.XX.20	18
Tektus 45 Slim 2-Way 114mm	3402.XX.XX.XXX.XX.10	20
Tektus 45 Slim 2-Way 200mm	3402.XX.XX.XXX.XX.20	20
Tektus 45 Slim 3-Way 114mm	3403.XX.XX.XXX.XX.10	22
Tektus 45 Slim 3-Way 200mm	3403.XX.XX.XXX.XX.20	22
Tektus 45 Slim 4-Way 114mm	3404.XX.XX.XXX.XX.10	24
Tektus 45 Slim 4-Way 200mm	3404.XX.XX.XXX.XX.20	24
Tektus Slim Profile	1933.XX.XX	51
Tektus Slim Profile 90° connector	1931.XX.XX	51
Tektus Slim Profile 180° connector	1933.XX.XX	51
Tektus Slim Screwless End Cap	2250.XX.XX	51
Tektus 45 Standard Double	1300.XX.XX.XXX.XX	52
Tektus 45 Standard Single	1248.XX.XX.XXX.XX	52
Tektus 45 Suspended 3-Phase 114mm	3601.XX.XX.XXX.XX.10	28
Tektus 45 Suspended 3-Phase 200mm	3601.XX.XX.XXX.XX.20	28
Tektus 45 Suspended Compact 114mm	3001.XX.XX.XXX.XX.10	26
Tektus 45 Suspended Compact 200mm	3001.XX.XX.XXX.XX.20	26
Tektus 45 Wall Cross	1171.XX.XX.XXX.XX	36
Tektus 45 Wall Double	1172.XX.XX.XXX.XX	36
Tektus 45 Wall Single	1170.XX.XX.XXX.XX	36
Tektus 60 Pendel LL Double 150mm	3605.XX.XX.XXX.XX.30	53
Tektus 60 Pendel LL Single 150mm	3604.XX.XX.XXX.XX.30	53
Tektus 60 Pendel Slim Double 150mm	3603.XX.XX.XXX.XX.30	53
Tektus 60 Pendel Slim Single 150mm	3602.XX.XX.XXX.XX.30	53
Tektus 60 Rectangle 2-Way	1081.XX.XX.XXX.XX	39
Tektus 60 Rectangle 2-Way Reduced	1081.XX.XX.XXX.XX-R	39
Tektus 60 Rectangle 3-Way	1080.XX.XX.XXX.XX	39
Tektus 60 Rectangle 3-Way Reduced	1080.XX.XX.XXX.XX-R	39
Tektus 60 Round 1-Way	1125.XX.XX.XXX.XX	39
Tektus 60 Round 1-Way Reduced	1125.XX.XX.XXX.XX-R	39
Tektus 60 Round 2-Way	1088.XX.XX.XXX.XX	39
Tektus 60 Round 2-Way Reduced	1088.XX.XX.XXX.XX-R	39
Tektus 60 Round 3-Way	1089.XX.XX.XXX.XX	39
Tektus 60 Round 3-Way Reduced	1089.XX.XX.XXX.XX-R	39
Tektus 60 Slim 1-Way 150mm	3401.XX.XX.XXX.XX.30	18
Tektus 60 Slim 2-Way 150mm	3402.XX.XX.XXX.XX.30	20
Tektus 60 Slim 3-Way 150mm	3403.XX.XX.XXX.XX.30	22
Tektus 60 Square 1-Way	1081.XX.XX.XXX.XX	39
Tektus 60 Square 1-Way Reduced	1081.XX.XX.XXX.XX-R	39
Tektus 60 Square 3-Way Reduced	1082.XX.XX.XXX.XX-R	39
Tektus 60 Standard Double	1302.XX.XX.XXX.XX	52
Tektus 60 Standard Single	1250.XX.XX.XXX.XX	52
Tektus 60 Suspended 3-Phase 350mA	3601.XX.XX.XXX.XX.33	30
Tektus 60 Suspended 3-Phase 500mA	3601.XX.XX.XXX.XX.30	30
Tektus 60 Suspended Compact 150mm	3001.XX.XX.XXX.XX.30	26
Tektus Suspended Round D300	310X.XX.XX.XXX.XX.XX	8-14
Tektus Suspended Round D480	320X.XX.XX.XXX.XX.XX	10-14
Tektus Suspended Round D640	330X.XX.XX.XXX.XX.XX	12-14
Titan Fix Wallwasher	1029.XX.XX.XXX.XX	44

Catalogus en prijslijst

Prijzen excl. BTW in Euro, excl. recupel, af fabriek Genk, België. Goederen reizen op risico van de koper. Enkel de algemene verkoopvoorwaarden van Dosis zijn van toepassing. Het toepassen en verwijzen naar algemene voorwaarden van de koper, hoe dan ook genoemd, wordt door ons nadrukkelijk van de hand gewezen. Prijswijzigingen en technische wijzigingen zonder voorafgaandelijke aankondigingen voorbehouden. Bijdrage Recupel: 0.01€ excl. BTW per verlichtingstoestel (enkel voor België)

Kleuren: Kleuren in de catalogoog gedrukt zijn indicatief. Kleuren op papier kunnen afwijken van kleuren in de realiteit.

Reparatiekosten: worden niet door Dosis geaccepteerd tenzij deze vooraf bevestigd en goedgekeurd zijn door Dosis, ook wanneer de verantwoordelijkheid voor deze reparatie bij Dosis ligt.

Het in ontvangst nemen van zendingen: collis grondig controleren op aantallen en op uiterlijk vertoon van schade en desgevallend de schade op het ontvangstbordersel vermelden. In geval van manco's of van uiterlijk vertoon van schade van de verpakking, Dosis onmiddellijk verwittigen. Bij het niet kunnen voorleggen van een ontvangstbordersel met vermelding van de schade kan Dosis haar aanspraak op verzekering bij de transportfirma niet laten gelden en kan Dosis bijgevolg ook geen schade uitkeren aan de klant.

Garantiebepalingen: 5 Jaar op alle Dosis toestellen*.

*In geval van schade moeten de armaturen schadevrij verpakt geleverd worden bij Dosis Lighting Factory. Garantie voor elektronische componenten is gelimiteerd tot de garantievoorwaarden van de leverancier van de elektronische componenten. Dwz, gelimiteerd tot het leveren van de componenten zelf, zonder vergoeding voor installatiekosten, verpakking of verzending. Om voor garantie in aanmerking te komen, moet bewijs van installatie door een gecertificeerde installateur voorgelegd worden en moeten de elektronische componenten in een optimale omgeving gemonteerd zijn voor de werking van deze.

Prijswijzigingen en prijscorrecties alsook technische wijzigingen en technische correcties zijn zonder voorafgaandelijke aankondigingen en zonder verbindelijke garantie voorbehouden.

Retours

Omwille van de veelzijdigheid in kleuren, reflectoren, maten, Ra-waarde, kleurtemperatuur, etc. is elk Dosis armatuur uniek en kan annulering, teruggave of omruiling van bestelde Dosis goederen niet geaccepteerd worden (ook niet voor RTG-profielen of Lounge-toestellen).

Katalog und Preisliste

Preise brutto, ohne MwSt, in Euro, ab Werk Genk. Der Gefahrenübergang für den Transport der Waren erfolgt automatisch beim Verlassen unseres Werks und geht auf den Käufer über. Preisänderungen und technische Änderungen ohne vorhergehender Ankündigungen behalten wir uns vor. Es gelten ausschließlich nur die Dosis Liefer- und Zahlungsbedingungen. Anderslautende Liefer- und Zahlungsbedingungen, auch die unserer Kunden, werden nicht anerkannt. Beiträge Recupel: 0.01 € excl. MwSt.pro Beleuchtungsatrikel. (nur für Belgien).

Farben: Die im Katalog gezeigten Farben sind beispielhaft und können wegen der Druckqualität von der Realität abweichen, sie sind somit nicht verbindlich.

Reparaturkosten werden nicht durch Dosis akzeptiert falls diese nicht vorab bestätigt und genehmigt wurde durch Dosis, sogar wenn die Verantwortlichkeit für dieser Reparatur bei Dosis liegt.

Bei Sendungsempfang: Die Pakete sollten gründlich kontrolliert werden auf Anzahl und auf äussere Zeichen von Beschädigung. Im Fall einer Beschädigung soll dieses auf dem Lieferschein des Speditors vermerkt werden. Falls Pakete fehlen oder falls Pakete beschädigt sind, soll dieses sofort an die Firma Dosis gemeldet werden. Die Firma Dosis muss den Lieferschein mit dem Vermerk der Beschädigung vom Spediteur erhalten, damit die Firma Dosis die Versicherung des Speditors ansprechen kann. Wenn dieses nicht der Fall ist, bekommt die Firma Dosis keinen Schadenersatz, und kann somit auch keinem Schadenersatz an den Kunden zahlen.

Garantie: 5 Jahre auf Dosis Leuchten*.

*Im Fall der Beschädigung einer Philips SLM LED muss diese sorgfältig und sicher verpackt an Dosis zurückgeschickt werden. Die Garantie für elektronische Komponenten ist begrenzt durch die Garantiebedingungen des Herstellers, meistens lediglich auf den Austausch der Komponenten. Eine Übernahme von Transport-, Verpackungs- und Montage-/Demontagekosten ist ausgeschlossen. Ein kostenloser Austausch defekter Komponenten kann nur nach Zusendung einer Probe und bei Nachweis der Montage und Demontage durch einen zertifizierten Elektroinstallateur akzeptiert werden. Des weiteren sind optimale Installationsbedingungen zwingend.

Preisänderungen und Preiskorrekturen sowie technische Änderungen und technische Korrekturen bleiben ohne vorherige Ankündigung und ohne verbindliche Garantie vorbehalten.

Retouren

Wegen die Vielfältigkeit an Sonderfarben, Ausstrahlungswinkel der Reflektoren, Abmessungen, Ra-Werten, Farbentemperaturen, usw. ist jede Dosis Leuchte eine individuelle Anfertigung. Deswegen können Dosis Produkten weder storniert, zurückgegeben oder umgetauscht werden. Dies gilt auch für RTG-Profilleuchten und Lounge-Artikel.

Catalogue et liste de prix

Prix brut en Euro, TVA excl., départ usine Genk. Marchandises voyagent aux risques de l'acheteur. Uniquement les conditions générales de Dosis sont applicables. Application et se reporter aux conditions générales de l'acheteur, en tout cas, est expressément rejetée par Dosis. Contribution Recupel: 0.01€ excl. TVA par appareil d'éclairage (seulement pour la Belgique) Dosis se réserve le droit de modifier sans préavis les prix et les spécifications techniques de tous les produits.

Couleurs: Les couleurs dans le catalogue sont à titre indicatifs. Il se peut que la couleur sur papier diffère de la couleur dans la réalité. **Les frais de réparation** ne sont pas acceptés par Dosis à moins qu'ils sont approuvés et confirmés d'avance par Dosis. Ceci même si la responsabilité de ces frais est de la part de Dosis.

En acceptant des envois: veuillez avoir la gentillesse de contrôler dûment les envois sur nombre, dégâts visibles et si nécessaire en faire mention sur la note d'envoi.

En cas de manquements ou dommage visible de l'emballage, il faut directement informer Dosis.

Si on ne peut pas présenter la note avec la mention de dommage, Dosis perd sa prétention à l'assurance du transporteur et par conséquent ne peut pas payer les frais de dégâts au client.

Contribution Recupel: 0.01€ excl. TVA par appareil d'éclairage (seulement pour la Belgique)

Garantie: 5 Ans sur tous les appareils Dosis*.

*En cas de dommage, les appareils doivent être livrés proprement emballés chez Dosis Lighting Factory. Garantie des composants électroniques est limitée à la garantie du fournisseur de composants électroniques. C'est à dire, limitée à l'approvisionnement des composants eux-mêmes, sans aucune indemnité pour frais d'installation, l'emballage ou l'expédition. Une preuve d'installation par un installateur certifié est nécessaire pour récupérer la garantie et le matériel doit être correctement installé dans un environnement garantissant un fonctionnement optimal des composants électroniques.

Les modifications de prix et les corrections de prix, ainsi que les modifications techniques et les corrections techniques sont réservées sans préavis et sans garantie contraignante.

Des retours

A cause du polyvalence des couleurs, réflecteurs, mesures, valeurs de RA, température de couleurs, etc. chaque armature Dosis est unique; la raison pour laquelle une annulation, retour / échange du produit Dosis ne peut pas être accepté (idem pour les profilés RTG ou les articles de la collection Lounge).

Catalog and Pricelist

Prices end-user, ex. VAT, in Euros, ex-works.

Prices and technical product-details are subject to changes.

All goods are dispatched without insurance at the risk of the purchaser.

Only Dosis general terms of sale are applicable to all business transactions. Applying and refer to terms and conditions of the buyer, anyway, is expressly rejected by Dosis.

Colors in the printed catalogue are indicative. Colors on paper may differ from colors in reality.

Cost on repairs will not be accepted by Dosis unless previously confirmed and approved by Dosis, even if the responsibility is to be taken by Dosis.

Receiving packages: When receiving goods, please check package on visual damage as well as on quantity of boxes. In case a box is damaged or missing, please mark this on the shipping documents and inform Dosis ASAP.

Warranty procedures: 5 years on all Dosis fixtures*.

*In case of warranty claims, all fixtures must be properly packed, and returned at sender's risk to Dosis Lighting Factory. Warranty for electronic failure is limited to the electronic supplier's warranty policy, usually limited to the replacement of the electronic components, without installation cost, packing cost, or shipping cost. In order to claim warranty, proof of installation by a certified electrician must be provided. The environment in which electronic components are installed must be ideal and perfect in order to claim warranty.

Price changes and price corrections, as well as technical changes and technical corrections are reserved without prior notice and without a binding guarantee.

Returning goods

Due to the versatility of colors, reflectors, dimensions, Ra-values, color temperatures, etc. all Dosis products are unique. Reason why cancellations, returns and/or exchanges of Dosis products cannot be accepted (equally for RTG-profiles or Lounge luminaires).

Algemene Verkoopsvoorwaarden.

1. Behoudens anders overeengekomen, is Dosis lighting factory NV (hierna Dosis) enkel gebonden door haar offerte en/of orderbevestiging en onderhevig voorwaarden met inbegrip van de bijlage "prijslijst, catalogus, garantie en retours", met uitdrukkelijke uitsluiting van de eigen contractuele voorwaarden van de koper.
2. De Koper garandeert steeds te voldoen aan alle toepasselijke regelgeving en richtlijnen m.b.t. de productie en verdeling van de Goederen. Dosis garandeert uitsluitend dat de goederen in overeenstemming zijn met de bindende en toepasselijke Belgische en/of Europese regelgeving, tenzij tussen Partijen uitdrukkelijk anders wordt overeengekomen.
3. Onze offertes hebben een geldigheidsduur zoals vermeld op de offerte of indien niet vermeld van 3 maanden. Alle overeenkomsten worden afgesloten op basis van de op dat ogenblik geldende prijzen. Indien na de offerte of de overeenkomst kostprijsbepalende factoren, zoals (niet initiatief) valutascommelingen, verhoging van materiaalprijzen, prijzen van hulpmaterialen en grondstoffen, lonen, salarissen, sociale lasten, van overheidswege opgelegde kosten, (milieu)heffingen en belastingen, transportkosten, in- en uitvoerrechten of verzekeringspremies, stijgen naar aanleiding van al dan niet voorzienbare omstandigheden, kan een prijsverhoging worden doorgerekend door Dosis aan de koper, zonder dat dit recht geeft op ontbinding van de overeenkomst. Indien dwingende voorschriften zijn tegen een dergelijke aanpassing van eenzijdige verhoging verzetten, heeft Dosis het recht om de overeenkomst met onmiddellijke ingang en zonder enige schadevergoeding te beëindigen door middel van een eenvoudige schrijven per aangetekende post of e-mail.
4. Elke vermelde leveringstermijn geldt ter informatieve titel. De levering van goederen vindt plaats ex works, dit is de Dosis-uitbatingvestiging te Genk (België), tenzij uitdrukkelijk anders overeengekomen. Een laattijdige levering zal geen aanleiding geven tot schadevergoeding door Dosis, tenzij in geval van een toerekenbare zware, opzettelijke of bedrieglijke fout van Dosis. De vertraging in de levering kan evenmin aanleiding geven tot annulatie van de bestelling door de koper.
5. Bij annulatie van een bestelling, zelfs zo deze annulatie slechts gedeeltelijk is, door de koper, is deze gehouden tot betaling van een schadevergoeding van minimum 30% van de prijs van de geannuleerde bestelling. Dosis behoudt zich het recht voor deze schadevergoeding te verhogen ingeval haar werkelijk geleden schade hoger ligt.
6. Iedere klacht, om geldig te zijn, dient schriftelijk en ten laatste binnen de 5 dagen volgend op de ontvangst der goederen, bij onze firma ingediend te worden. Zichtbare gebreken waarover door de koper op het ogenblik van de levering geen opmerkingen werden geformuleerd, worden geacht te zijn aanvaard. Elke klacht betreffende verborgen gebreken moet binnen de 7 dagen na de ontdekking ervan en ten laatste 6 maanden na levering door de koper schriftelijk ter kennis van Dosis worden gebracht.
7. Prijzen zijn excl. BTW in Euro, excl. Recupel (WEEE), excl. transportkosten. Alle facturen zijn betaalbaar op onze uitbatingssite te Genk. Behoudens tegenstrijdige bepaling, mogen onze agenten of vertegenwoordigers het bedrag van de factuur niet inkasseren. Het wisselkoersrisico is ten laste van de koper. Behoudens andersluidende en schriftelijke bepaling, zijn onze facturen betaalbaar op 30 dagen factuurdatum. Elk bedrag dat onbetaald blijft op zijn vervaldag, zal van rechtswege en zonder ingebrekestelling rente geven berekend op basis van de Belgische wettelijke intrestvoet vermeerderd met 2%, met een minimum intrestvoet van 12%. In geval van niet-betaling op de vervaldag, behouden wij ons het recht voor het bedrag van de factuur met 10% te verhogen, met een minimum van 250 €. De niet-betaling op de vervaldag van één enkele factuur, maakt het verschuldigd saldo van al de andere, zelfs niet vervallen facturen, van rechtswege onmiddellijk opeisbaar.
8. Onverminderd haar recht op schadevergoeding is Dosis in geval van niet-betaling op één enkele vervaldag of niet-naleving van elke andere contractuele verplichting door de koper gerechtigd de uitvoering van

- de overeenkomst automatisch op te schorten. Indien en voor zover de koper niet binnen een termijn van 14 dagen na ingebrekestelling door Dosis hiernaas tegemoet gekomen, is Dosis ongeacht haar andere rechten eveneens gerechtigd om de overeenkomst van rechtswege te ontbinden door de loutere verzending van een aangetekende brief.
9. Indien ons vertrouwen in de kredietwaardigheid van de koper geschokt wordt door daden van gerechtelijke uitvoering tegen de koper en/of aanwijsbare andere gebeurtenissen, die het vertrouwen in de goede uitvoering van de door de koper aangegane verbintenissen in vraag stellen en/of onmogelijk maken, behouden wij ons het recht voor, zelfs indien de goederen reeds geheel of gedeeltelijk werden verzonden, de gehele bestelling of een gedeelte ervan op te schorten en van de koper geschikte waarborgen te eisen. Indien de koper weigert hierop in te gaan, behouden wij ons het recht voor de gehele bestelling of een gedeelte ervan te annuleren. Dit alles onverminderd onze rechten op alle schadevergoedingen en interesten.
 10. EIGENDOMSVOORBEHOUD: De goederen blijven onze eigendom tot volledige betaling van de prijs. Alle risico's zijn ten laste van de koper. De betaalde voorschotten blijven ons verworven ter vergoeding van de mogelijke verliezen bij wederverkoop. Ingeval de koper de aan ons toebehorende goederen, zelfs verwerkt, herverkoopt, draagt hij vanaf heden aan ons alle schuldvorderingen over die voortkomen uit deze herverkoop.
 11. Het trekken en/of aanvaarden van wissels of andere verhandelbare documenten, houdt geen schuldvernieuwing in en vormt geen afwijking van de verkoopvoorwaarden.
 12. De aansprakelijkheid van Dosis is te allen tijde beperkt tot de aansprakelijkheid die in de gegeven feitelijke omstandigheden verplicht is opgelegd door de wet en is voor het overige beperkt tot haar zware of opzettelijke/bedrieglijke fout en is in ieder geval gelimiteerd tot het laagste van volgende bedragen: (1) het kwestieuze factuurbedrag, dan wel (2) het bedrag betaald door de verzekering van Dosis, en zal in geen geval indirecte of gevolg schade impliceren. Reparatiekosten worden niet door Dosis geaccepteerd tenzij vooraf bevestigd en goedgekeurd zijn door Dosis, ook wanneer de verantwoordelijkheid voor deze reparatie bij Dosis ligt. Er wordt geen aansprakelijkheid en/of gehoudeheid aanvaard voor schade ontstaan als rechtstreeks of onrechtstreeks gevolg van overmacht en/of hardship (imprevisie). Onder overmacht en hardship wordt onder meer verstaan (louter exemplatieve opsomming): productieonderbrekingen, bevoorradingsproblemen, tekorten aan grondstoffen, arbeidskracht, energie en transport, of vertragingen in transport, valutascommelingen, verhoging van materiaalprijzen, prijzen van hulpmaterialen en grondstoffen, lonen, salarissen, sociale lasten, van overheidswege opgelegde kosten, heffingen en belastingen, transportkosten, in- en uitvoerrechten of verzekeringspremies, optredende tussen de orderbevestiging en de levering, ijsgang, bijzondere weersomstandigheden, stakingen, lock-outs, werkonderbrekingen of andere collectieve arbeidsgeschillen, mobilisatie, oorlog, ziekte, epidemie, pandemie, ongevallen, communicatie- en informaticastoringen, overheidsmaatregelen, uitvoerverbod, welke Dosis zelf of haar leveranciers treffen.
 13. Indien één of meerdere van deze algemene voorwaarden definitief onafdwingbaar of nietig zouden verklaard worden, doet dit geen afbreuk aan de toepasselijkheid van de overige bepalingen. In geval van nietigheid of onafdwingbaarheid van één van de bepalingen, zullen Dosis en de koper in de mate van het mogelijke en volgens hun loyaliteit en overtuiging onderhandelen om de nietige bepaling te vervangen door een equivalente bepaling die beantwoordt aan de algemene geest van deze algemene voorwaarden.
 14. In geval van vertaling van deze tekst primeert de nederlandsstalige versie.
 15. Behoudens schriftelijke overeengekomen afwijking is op de overeenkomst steeds het Belgisch Recht van toepassing. Ingeval van betwisting is enkel de rechtbank van Tongeren, België bevoegd.

Conditions Générales de Vente.

1. Sauf accord dérogatoire, Dosis Lighting Factory NV (ci-après dénommée Dosis) n'est liée que par son devis et/ou sa confirmation de commande et les présentes conditions, y compris l'annexe "liste de prix, catalogue, garantie et retours", à l'exclusion expresse des propres conditions contractuelles de l'acheteur.
2. L'acheteur garantit toujours le respect de tous les règlements et directives applicables concernant la production et la distribution des Biens. Dosis garantit uniquement que les Biens sont conformes à la réglementation belge et/ou européenne contraignante et applicable, sauf convention contraire expresse entre les Parties.
3. Nos propositions de prix sont valables pour la période indiquée sur la proposition ou, à défaut, pour trois mois. Tous les engagements sont conclus sur la base des prix en vigueur à ce moment-là. Si, après l'offre ou le contrat, des facteurs déterminant le prix de revient, tels que (sans que cette liste soit exhaustive) les fluctuations monétaires, l'augmentation des prix des matériaux, des prix des matières auxiliaires et des matières premières, des salaires, des charges sociales, des coûts imposés par les pouvoirs publics, des taxes et impôts (environnementaux), des coûts de transport, des droits d'importation et d'exportation ou des primes d'assurance, augmentent en raison de circonstances prévisibles ou non, une augmentation de prix peut être perçue par Dosis sur l'acheteur, sans que cela n'autorise l'acheteur à résilier le contrat. Si des réglementations obligatoires s'opposent à une telle augmentation unilatérale, Dosis est en droit de résilier le contrat avec effet immédiat et sans aucune indemnité, par simple lettre recommandée ou par e-mail.
4. Tout délai de livraison indiqué l'est à titre indicatif. La livraison des marchandises se fait EX WORKS, c'est-à-dire du bureau de Dosis à Genk (Belgique), sauf accord contraire formel. Un retard de livraison ne donnera lieu à aucune indemnisation de la part de Dosis, sauf en cas d'erreur grave, délibérée ou frauduleuse imputable à Dosis. Le retard de livraison ne peut pas non plus donner lieu à l'annulation de la commande par l'acheteur.
5. Si une commande est annulée, même partiellement, par l'acheteur, le vendeur est tenu de payer une compensation d'au moins 30% du prix de la commande annulée. Dosis se réserve le droit d'augmenter cette compensation si le montant réel subi est plus élevé.
6. Pour être valable, toute réclamation doit être soumise à notre société par écrit et au plus tard dans les 5 jours suivant la réception des marchandises. Les défauts visibles sur lesquels aucune remarque n'a été formulée par l'acheteur au moment de la livraison sont considérés comme acceptés. Toute réclamation concernant les défauts cachés doit être notifiée par écrit à Dosis par l'acheteur dans les 7 jours après leur découverte et au plus tard 6 mois après la livraison.
7. Les prix sont hors TVA en euros, hors Recupel (WEEE), hors frais de transport. Toutes les factures sont payables à notre siège social à Genk. Sauf stipulation contraire, nos agents ou représentants ne peuvent pas collecter le montant de la facture. Le risque de change est à la charge de l'acheteur, ainsi que les frais bancaires. Sauf stipulation contraire écrite, nos factures sont payables à 30 jours de la date de facturation. Tout montant non payé à l'échéance portera, de plein droit et sans mise en demeure, un intérêt sur la base du taux d'intérêt légal belge augmenté de 2%, avec un taux d'intérêt minimum de 12%. En cas de non-paiement à l'échéance, nous nous réservons le droit d'augmenter le montant de la facture de 10%, avec un minimum de 250 €. Le non-paiement à l'échéance d'une seule facture rend immédiatement payable le plein droit le solde dû de toutes les autres factures, même celles non encore échues.
8. Sans préjudice de son droit à l'indemnisation, Dosis est en droit, en cas de non-paiement d'une seule échéance ou de non-respect de toute autre obligation contractuelle par l'acheteur, de suspendre automatiquement l'exécution du contrat. Si et dans la mesure où l'acheteur ne s'y est pas conformé dans un délai de 14 jours après que Dosis lui ait signifié une mise en demeure, Dosis a également le droit, indépendamment de ses autres droits, de dissoudre de plein droit le contrat par le simple envoi d'une lettre recommandée.

9. Si notre confiance dans la solvabilité de l'acheteur est ébranlée par des actes d'exécution judiciaire à l'encontre de l'acheteur et/ou d'autres événements démontrables, qui remettent en cause la confiance dans la bonne exécution des engagements pris par l'acheteur et/ou la rendent impossible, nous nous réservons le droit, même si les marchandises ont déjà été expédiées en tout ou partie, de suspendre tout ou partie de la commande et d'exiger de l'acheteur des garanties appropriées. Si l'acheteur refuse de le faire, nous nous réservons le droit d'annuler tout ou partie de la commande. Tout ceci sans préjudice de nos droits à tous les dommages et intérêts.
10. PROPRIÉTÉ : Les marchandises restent notre propriété jusqu'au paiement intégral du prix. Tous les risques sont à la charge de l'acheteur. Les avances versées nous restent acquises à titre de compensation pour les pertes éventuelles en cas de revente. Si l'acheteur revend les marchandises nous appartenant, même si elles ont été transformées, il nous cède dès à présent toutes les créances résultant de cette revente.
11. Le tirage et/ou l'acceptation de lettres de change ou d'autres documents négociables n'implique pas de novation et ne constitue pas une dérogation aux conditions de vente.
12. La responsabilité de Dosis sera à tout moment limitée à la responsabilité imposée par la loi dans les circonstances factuelles données et sera autrement limitée à sa faute lourde ou intentionnelle/trompeuse et sera en tout cas limitée au plus bas (1) du montant de la facture contestable ou (2) du montant payé par l'assurance de Dosis et n'impliquera en aucun cas des dommages indirects. Les frais de réparation ne seront pas acceptés par Dosis, sauf s'ils sont confirmés et approuvés au préalable par Dosis, même si la responsabilité de cette réparation incombe à Dosis. Aucune responsabilité et/ou obligation n'est acceptée pour les dommages résultant directement ou indirectement d'un cas de force majeure et/ou de difficultés. Par force majeure et difficultés, on entend notamment (liste purement illustrative) des interruptions de production, des problèmes d'approvisionnement, des pénuries de matières premières, de main-d'œuvre, d'énergie et de transport, ou des retards dans le transport, des fluctuations monétaires, des augmentations des prix des matériaux, des prix des matières auxiliaires et des matières premières, des salaires, des charges sociales, des coûts, des prélèvements et des taxes imposés par les pouvoirs publics, des frais de transport, des droits d'importation et d'exportation ou des primes d'assurance, survenant entre la confirmation de la commande et la livraison, le gel, les conditions météorologiques particulières, les grèves, les lock-out, les interruptions de travail ou autres conflits collectifs de travail, la mobilisation, la guerre, les maladies, les épidémies, les pandémies, les accidents, les pannes de communication et d'informatique, les mesures gouvernementales, les interdictions d'exportation qui affectent Dosis elle-même ou ses fournisseurs.
13. Si une ou plusieurs des présentes conditions générales devaient être déclarées définitivement inapplicables ou nulles, cela n'affecterait pas l'applicabilité des autres dispositions. En cas de nullité ou d'inapplicabilité de l'une des dispositions, Dosis et l'acheteur négocieront, dans la mesure du possible et en fonction de leur loyauté et de leur conviction, pour remplacer la disposition nulle par une disposition équivalente conforme à l'esprit général des présentes conditions générales.
14. Ce texte est une traduction des conditions générales néerlandaises. En cas de divergence, le texte néerlandais prévaut sur la traduction.
15. Sauf accord écrit contraire, le contrat est toujours régi par le droit belge. En cas de litiges, seul le tribunal de Tongeren, Belgique, est compétent.

Dosis Lighting Factory NV - Horizonlaan 30 – 3600 Genk - Belgium

Allgemeine Verkaufsbedingungen

1. Sofern nicht anders vereinbart, ist Dosis Lighting Factory NV (im Folgenden Dosis genannt) nur an ihr Angebot und/oder ihre Auftragsbestätigung und diese Bedingungen, einschließlich des Anhangs "Preisliste, Katalog, Garantie und Rückgabe", gebunden, unter ausdrücklicher Ausschluss der eigenen Vertragsbedingungen des Käufers.

2. Der Käufer garantiert jederzeit die Einhaltung aller geltenden Vorschriften und Richtlinien in Bezug auf die Herstellung und den Vertrieb der Waren. Dosis garantiert nur, dass die Waren den verbindlichen und anwendbaren belgischen und/oder europäischen Vorschriften entsprechen, es sei denn, die Parteien haben ausdrücklich etwas anderes vereinbart.

3. Unsere Angebote sind für den auf dem Angebot angegebenen Zeitraum oder, falls nicht angegeben, für drei Monate gültig. Alle Verträge werden auf der Grundlage der zu diesem Zeitpunkt geltenden Preise geschlossen. Wenn nach dem Angebot oder der Vereinbarung kostenpreisbestimmende Faktoren, wie (nicht abschließend) Währungsschwankungen, Preiserhöhungen von Materialien, Preisen von Hilfs- und Rohstoffen, Löhnen, Gehältern, Sozialabgaben, staatlich auferlegten Kosten (Umwelt-, Abgaben und Steuern, Transportkosten, Import- und Exportzöllen oder Versicherungsprämien infolge von zu erwartenden oder nicht zu erwartenden Umständen steigen, kann eine Preiserhöhung von Dosis an den Käufer weitergegeben werden, ohne dass dies den Käufer berechtigt, die Vereinbarung aufzulösen. Solange zwingende Vorschriften einer solchen einseitigen Erhöhung entgegenstehen, ist Dosis berechtigt, den Vertrag mit sofortiger Wirkung und ohne jegliche Entschädigung durch ein einfaches Schreiben per Einschreiben oder E-Mail zu kündigen.

4. Die angegebenen Lieferfristen dienen nur zu Informationszwecken, die Lieferung der Waren erfolgt ab Werk, d.h. ab dem Dosis-Büro in Genk (Belgien), sofern nicht ausdrücklich etwas anderes vereinbart ist. Eine verspätete Lieferung gibt keinen Anlass zu einer Entschädigung durch Dosis, es sei denn, es handelt sich um einen zurechenbaren schweren, vorsätzlichen oder betrügerischen Fehler von Dosis. Die Lieferverzögerung darf auch nicht zu einer Stornierung der Bestellung durch den Käufer führen.

5. Wird ein Auftrag vom Käufer auch nur teilweise storniert, ist der Käufer verpflichtet, eine Entschädigung von mindestens 30 % des Preises des stornierten Auftrags zu zahlen. Dosis behält sich das Recht vor, diese Entschädigung zu erhöhen, wenn der tatsächlich erlittene Schaden höher ist.

6. Jede Reklamation muss, um gültig zu sein, schriftlich und spätestens innerhalb von 5 Tagen nach Erhalt der Ware bei unserem Unternehmen eingereicht werden. Sichtbare Mängel, zu denen der Käufer zum Zeitpunkt der Lieferung keine Bemerkungen gemacht hat, gelten als akzeptiert. Beanstandungen wegen versteckter Mängel sind vom Käufer innerhalb von 7 Tagen nach Entdeckung, spätestens jedoch 6 Monate nach Lieferung, schriftlich bei Dosis zu melden.

7. Die Preise sind ohne Mehrwertsteuer in Euro, ohne Recupel (WEEE), ohne Transportkosten. Alle Rechnungen sind an unseren Hauptsitz in Genk zu zahlen. Sofern nicht anders vereinbart, sind unsere Agenten oder Vertreter nicht berechtigt, den Rechnungsbetrag einzuziehen. Das Wechselkursrisiko geht zu Lasten des Käufers, ebenso wie die Bankgebühren. Sofern nicht schriftlich anders vereinbart, sind unsere Rechnungen 30 Tage nach Rechnungsdatum zahlbar. Jeder am Fälligkeitstag nicht bezahlte Betrag wird automatisch und ohne Vorankündigung auf der Grundlage des belgischen gesetzlichen Zinssatzes zusätzlich 2 % verzinst, mit einem Mindestzinssatz von 12 %. Bei Nichtzahlung am Fälligkeitstag behalten wir uns das Recht vor, den Rechnungsbetrag um 10 % zu erhöhen, mindestens jedoch um 250 €. Die Nichtzahlung einer einzigen Rechnung am Fälligkeitstag führt dazu, dass alle anderen Rechnungen, auch die noch nicht fälligen, von Rechts wegen sofort fällig werden.

8. Unbeschadet ihres Rechts auf Schadensersatz ist Dosis im Falle der Nichtzahlung zu einem einzigen Fälligkeitstermin oder der Nichteinhaltung einer anderen vertraglichen Verpflichtung durch den Käufer berechtigt, die Ausführung des Vertrags automatisch auszusetzen. Wenn und soweit der Käufer dem nicht innerhalb einer Frist von 14 Tagen, nachdem Dosis ihn in Verzug gesetzt hat, nachgekommen ist, ist Dosis unbeschadet ihrer sonstigen Rechte auch berechtigt, den Vertrag von Rechts wegen durch einfachen Versand eines Einschreibens aufzulösen.

9. Wenn unser Vertrauen in die Kreditwürdigkeit des Käufers durch gerichtliche Vollstreckungsmaßnahmen gegen den Käufer und/oder nachweisbare andere Ereignisse, die das Vertrauen in die ordnungsgemäße Erfüllung der vom Käufer eingegangenen Verpflichtungen in Frage stellen und/oder unmöglich machen, erschüttert wird, behalten wir uns das Recht vor, auch wenn die

Waren bereits ganz oder teilweise versandt wurden, die gesamte Bestellung oder einen Teil davon auszusetzen und vom Käufer geeignete Garantien zu verlangen. Weigert sich der Käufer, dies zu tun, behalten wir uns das Recht vor, die Bestellung ganz oder teilweise zu stornieren. All dies gilt unbeschadet unserer Rechte auf Schadensersatz und Zinsen.

10. EIGENTUM: Die Ware bleibt bis zur vollständigen Bezahlung des Preises unser Eigentum. Alle Risiken gehen zu Lasten des Käufers. Die gezahlten Vorschüsse verbleiben bei uns als Entschädigung für die möglichen Verluste im Falle des Weiterverkaufs. Für den Fall, dass der Käufer die uns gehörende Ware weiterverkauft, auch wenn diese verarbeitet wurde, überträgt er uns bereits jetzt alle aus diesem Weiterverkauf resultierenden Forderungen.

11. Die Ausstellung und/oder Annahme von Wechseln oder anderen handelbaren Dokumenten bedeutet keine Novation und stellt keine Abweichung von den Verkaufsbedingungen dar.

12. Die Haftung von Dosis ist zu jeder Zeit auf die gesetzlich vorgeschriebene Haftung unter den gegebenen Umständen beschränkt und im Übrigen auf großes oder vorsätzliches bzw. arglistiges Verschulden und in jedem Fall auf den niedrigeren Betrag von (1) dem fraglichen Rechnungsbetrag oder (2) dem von der Versicherung von Dosis gezahlten Betrag begrenzt und schließt in keiner Weise indirekte oder Folgeschäden ein. Reparaturkosten werden von Dosis nicht akzeptiert, es sei denn, sie wurden im Voraus von Dosis bestätigt und genehmigt, auch wenn die Verantwortung für eine solche Reparatur bei Dosis liegt. Für Schäden, die als direkte oder indirekte Folge von höherer Gewalt und/oder Härte auftreten, wird keine Haftung und/oder Verpflichtung übernommen. Unter höherer Gewalt und Härte versteht man (rein illustrative Aufzählung) Produktionsunterbrechungen, Versorgungsschwierigkeiten, Rohstoff-, Arbeits-, Energie- und Transportmangel oder Transportverzögerungen, Währungsschwankungen, Preiserhöhungen bei Materialien, Hilfs- und Rohstoffen, Löhnen, Gehältern, Sozialabgaben, staatlich auferlegten Kosten, Abgaben und Steuern, Transportkosten, Ein- und Ausfuhrzöllen oder Versicherungsprämien, die zwischen der Auftragsbestätigung und der Lieferung eintreten, Eis, besondere Witterungsverhältnisse, Streiks, Aussperrungen, Arbeitsunterbrechungen oder sonstige kollektive Arbeitskämpfe, Mobilmachung, Krieg, Krankheit, Epidemien, Pandemien, Unfälle, Kommunikations- und IT-Ausfälle, behördliche Maßnahmen, Exportverbote, die Dosis selbst oder deren Lieferanten betreffen.

13. Sollten eine oder mehrere dieser allgemeinen Bedingungen für endgültig nicht durchsetzbar oder nichtig erklärt werden, so berührt dies nicht die Anwendbarkeit der übrigen Bestimmungen. Im Falle der Nichtigkeit oder Undurchsetzbarkeit einer der Bestimmungen werden Dosis und der Käufer, soweit möglich und nach ihrer Loyalität und Überzeugung, verhandeln, um die nichtige Bestimmung durch eine gleichwertige Bestimmung zu ersetzen, die dem allgemeinen Geist dieser allgemeinen Bedingungen entspricht.

14. Der Text ist eine Übersetzung der niederländischen Allgemeinen Geschäftsbedingungen. Bei Unstimmigkeiten geht der niederländische Text der Übersetzung vor.

15. Sofern nicht schriftlich anders vereinbart, unterliegt der Vertrag immer belgischem Recht. Im Falle von Streitigkeiten ist ausschließlich das Gericht von Tongeren, Belgien, zuständig.

Dosis Lighting Factory NV - Horizonlaan 30 – 3600 Genk - Belgien

General Terms of Sale.

1. Unless otherwise agreed, Dosis Lighting Factory NV (hereinafter referred to as Dosis) is only bound by its offer and/or confirmation of order and these conditions, including the appendix "price list, catalogue, guarantee and returns", with the explicit exclusion of the purchaser's own contractual conditions.

2. The Buyer always guarantees to comply with all applicable regulations and directives concerning the production and distribution of the Goods. Dosis only guarantees that the Goods comply with the binding and applicable Belgian and/or European regulations, unless otherwise expressly agreed between Parties.

3. Our quotations are valid for the period stated on the quotation or, if not stated, for three months. All agreements are concluded on the basis of the prices applicable at that time. If after the quotation or the agreement cost price determining factors, such as (non-exhaustive) currency fluctuations, increase in prices of materials, prices of auxiliary materials and raw materials, wages, salaries, social security charges, government imposed costs, (environmental) levies and taxes, transport costs, import and export duties or insurance premiums increase as a result of circumstances to be expected or not, a price increase can be passed on by Dosis to the buyer, without this entitling the buyer to dissolve the agreement. If mandatory regulations oppose such a unilateral increase, Dosis is entitled to terminate the contract with immediate effect and without any compensation by means of a simple letter sent by registered post or e-mail.

4. Any delivery period stated is for information purposes only. Delivery of goods takes place ex works, i.e. the Dosis office in Genk (Belgium), unless explicitly agreed otherwise. A late delivery shall not give rise to compensation by Dosis, except in the case of an imputable serious, deliberate or fraudulent deed by Dosis. The delay in delivery does not give rise to cancellation of the order by the Buyer.

5. If an order is cancelled, even partially, by the buyer, the buyer is obliged to pay compensation of at least 30% of the price of the cancelled order. Dosis reserves the right to increase this compensation if the actual damage suffered is higher.

6. In order to be valid, any complaint must be submitted to our company in writing and at the latest within 5 days following the receipt of the goods. Visible defects on which no comments were formulated by the buyer at the time of delivery are deemed to be accepted. Any complaint concerning hidden defects must be notified in writing to Dosis by the buyer within 7 days after discovery and at the latest 6 months after delivery.

7. Prices are excluding VAT in Euro, excluding Recupel (WEEE), excluding transport costs. All invoices are payable to our head office in Genk. Unless stipulated otherwise, our agents or representatives may not collect the amount of the invoice. The exchange rate risk is borne by the buyer as are bank charges. In the absence of any written provision to the contrary, our invoices are payable on the 30th day of the invoice date. Any amount unpaid on the due date shall, automatically and without notice, attract interest calculated on the basis of the Belgian legal interest rate plus 2%, with a minimum interest rate of 12%. In the event of non-payment on the due date, we reserve the right to increase the amount of the invoice by 10%, with a minimum of €250. The non-payment on the due date of a single invoice renders all other invoices due, even those not yet due, immediately payable ipso jure.

8. Without prejudice to its right to compensation, Dosis is entitled in the case of non-payment on a single due date or non-compliance with any other contractual obligation by the Buyer to automatically suspend the execution of the agreement. If and in so far as the Buyer has not complied with this within a period of 14 days after Dosis has served him with a notice of default, Dosis is also entitled, irrespective of its other rights, to dissolve the agreement ipso jure by the mere sending of a registered letter.

9. If our confidence in the creditworthiness of the buyer is shaken by acts of judicial execution against the buyer and/or demonstrable other events, which question the confidence in the proper execution of the commitments entered into by the buyer and/or make it impossible, we

reserve the right, even if the goods have already been shipped in whole or in part, to suspend the entire order or part thereof and to demand suitable guarantees from the buyer. If the buyer refuses to do so, we reserve the right to cancel all or part of the order. All this without prejudice to our rights to all damages and interest.

10. OWNERSHIP: The goods remain our property until full payment of the price. All risks are borne by the buyer. The paid advances remain acquired by us as compensation for the possible losses in case of resale. In the event that the purchaser resells the goods belonging to us, even if these have been processed, he shall from now on assign to us all revenues arising from this resale.

11. The drawing and/or accepting of financial instruments or other negotiable documents does not imply novation and does not constitute a deviation from the terms and conditions of sale.

12. Dosis liability shall at all times be limited to the liability imposed by law in the given factual circumstances and shall otherwise be restricted to its gross or intentional/deceitful fault and shall in any case be limited to the lower of (1) the questionable invoice amount or (2) the amount paid by Dosis' insurance and shall in no way imply indirect or consequential damages. Repair costs will not be accepted by Dosis unless confirmed and approved in advance by Dosis, even when the responsibility for such repair lies with Dosis. No liability and/or obligation is accepted for damages arising as a direct or indirect consequence of force majeure and/or hardship. Force majeure and hardship are understood to include (purely illustrative list) production interruptions, supply problems, shortages of raw materials, labour, energy and transport, or delays in transport, currency fluctuations, increases in prices of materials, prices of auxiliary materials and raw materials, wages, salaries, social security charges, government-imposed costs, levies and taxes, transport costs, import and export duties or insurance premiums, occurring between the order confirmation and the delivery, ice, special weather conditions, strikes, lock-outs, work interruptions or other collective labour disputes, mobilisation, war, illness, epidemics, pandemics, accidents, communication and IT failures, government measures, export bans which affect Dosis itself or its suppliers.

13. If one or more of these general conditions should be declared definitively unenforceable or null and void, this shall not affect the applicability of the remaining provisions. In the event of nullity or unenforceability of one of the provisions, Dosis and the Buyer shall, to the extent possible and in accordance with their loyalty and conviction, negotiate to replace the invalid provision by an equivalent provision which complies with the general spirit of these general conditions.

14. This text is a translation of the Dutch general terms and conditions. The Dutch text prevails over the translation in case of discrepancy.

15. Unless otherwise agreed in writing, the agreement shall always be governed by Belgian law. In case of disputes, only the court of Tongeren, Belgium, is competent.

Dosis Lighting Factory NV - Horizonlaan 30 – 3600 Genk - Belgium

