Welcome to our product catalogue

Be inspired by our great collection of products from our six strong brands: Showtec, DAP, DMT, Infinity, Artecta and Showgear. Brands that will help you to boost creativity and reach your ever-expanding potential. Potential to perform, act, present, live, and work to today's high standards and expectations. In this catalogue we have included hundreds of new and thousands of popular products to serve as a source of inspiration and to provide an overview of our complete portfolio, including products from brands we are distributing such as Antari, Novastar, Neutrik, Wireless Solutions and Lodestar.

We aim to inspire you in many aspects of life. Not only for the power of entertainment, but also to bring comfort and design into homes, businesses, and public places.

In recent years we have been creating new opportunities for AV installers, entrepreneurs, and resellers. This helped many of our customers to quickly adapt to a rapidly changing environment. Look at Artecta and DAP for example. Artecta now offers a wide range of mood and track lighting, and DAP is now able to provide complete solutions for fixed and mobile audio installations in any architectural infrastructure.

By diversifying our target audience, our customers are now better able to adapt, enter new markets and create new business opportunities. This turned out to be important at a time when uncertainty and limitations are the order of the day.

In this catalogue we are highlighting our six strong 'brands that inspire'. These brands offer solutions in audio, show light, professional light, stage effects, video display, and stage essentials. Each brand focuses on a specific market.

To improve and clarify our brand positioning, we have recently shifted a fair number of products between brands.
We have also introduced a brand-new brand called 'Showgear'. Showgear is primarily focussed on stage essentials and will be recognisable by its green brand colour that is used on packaging and marketing communications. Indeed, we are now using colour coding for our brands!

We have compiled this catalogue in such a way that you can easily navigate through all our products by product category. We've added QR codes in case you would like to see more detailed information about specific products. Scan the QR code with your tablet or phone using a QR scanning app, and it will open the appropriate product page on our newly designed website with all the productspecifications.

Take your time to check our products and enjoy the many ideas that will make your imagination run wild.

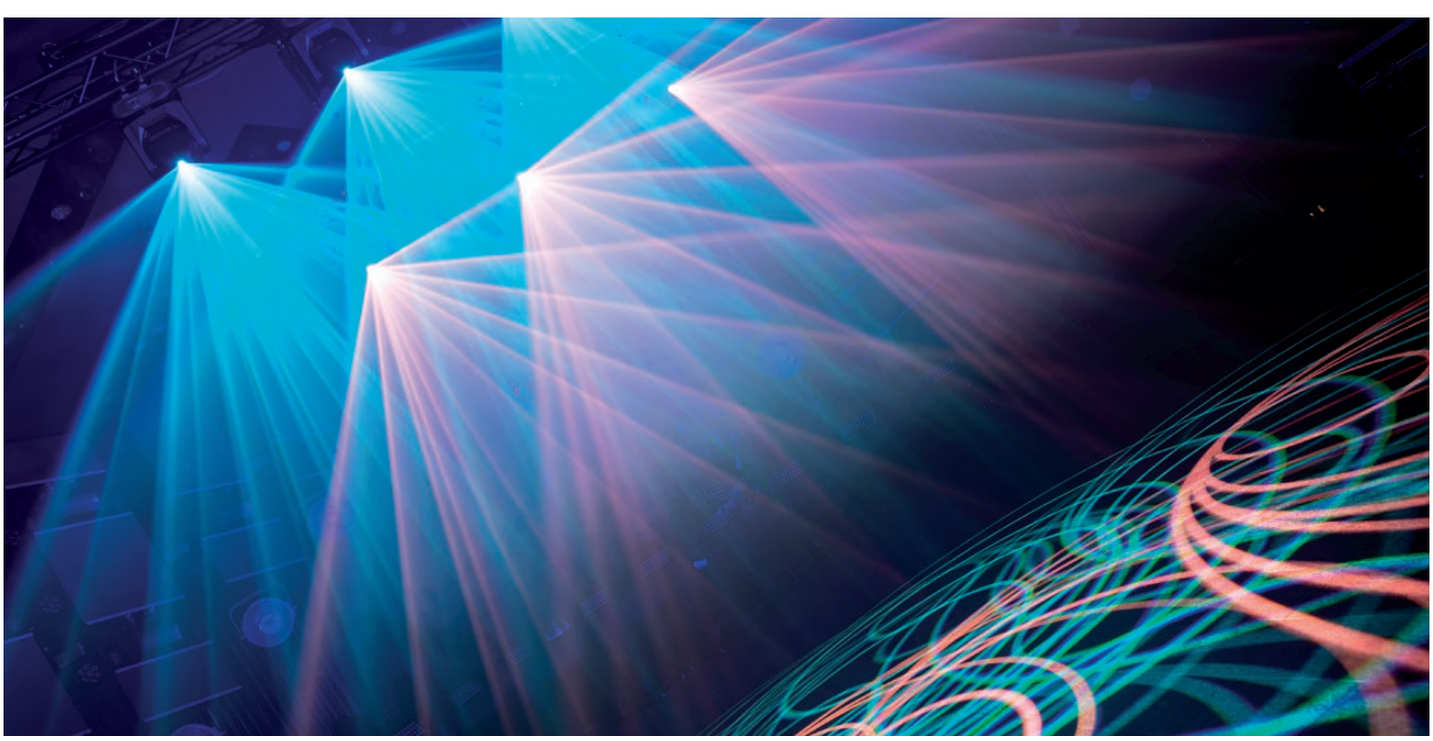

Table of Contents

Brands that inspire

Audiovisual

Led Screens
Pixel Screens 10
Installation Screens 20
LED Screen Rigging & Mounting 26
LED Screen Accessories 27

AV Controllers
Video Processors 28
Video Mixers & Switches 40
AV Software 44
AV Servers 46
AV Interfaces 48
AV Gear 50
Fiber Optic Cables & Converters 52

Projection Screens
Electric Screens 53
Manual Screens 53
Mobile Screens 54
Screen Accessories 55

AV Stands & Brackets
Wall Brackets 56
Ceiling Brackets 59
Flatscreen Trolleys 63
AV Stand Accessories 63



Audio

Speakers
Passive Series 66
Active Series 70
Plug & Play Sets 87
Portable Sound Systems 88
Installation Series 89
Speaker Covers 98
Speaker Accessories 99

Amplifiers
Analogue Amplifiers 102
Digital Amplifiers 104

Audio Mixers
Live Mixers 107
19 Inch Mixers 110
DJ Mixers 113
Mixer Accessories 115

Audio Processing
Analogue Processing 116
Digital Processing 119
Audio Tools 120
DI Boxes 121

Audio Players
CD & Mediaplayers 122

Public Addressing
Amplifiers 124
Wall Mount Speakers 129
Ceiling Speakers 135
Horn Speakers 146
Outdoor Speakers 149
Megaphones 149
PA Accessories 150

Microphones
Wireless Systems 152
Vocal Microphones 156
Studio Microphones 158
Instrument Microphones 159
Wireless Microphone Accessories 164
Microphone Accessories 168

Headphones
Studio Headphones 169

Audio Stands
Speaker Stands 170
Microphone Stands 173
Miscallaneous Stands 177
Accessories for Speaker Stands 181
Accessories for Microphone Stands 182

Foams
Acoustic Foams 184
Speaker Foams 184

Entertainment Lighting

Light Controllers
Consoles 188
DMX Controllers 194
LED Controllers 196
Software Controllers 198
DMX Gear 200
Wireless DMX 210
Dimmer Packs 214
LED Dimmers 219
Powered Chasers 220
Switch & Relay Packs 221
Switches 222
Controller Accessories 223

Moving Lights
Moving Lights Spot 224
Moving Lights Wash 254
Moving Lights Beam 274
Moving Lights Effects 228

Theatre Lights
Fresnels 296
Profiles 306
Optics 311
Flood & Cyclorama Lights 312
Follow Spots 314
House Lights 315
Theatre Lights Accessories 316

Wall Washers
Washers Outdoor 318
Washer Accessories 322

Spots
Spots Indoor 324
Spots Outdoor 332
Spots Accessories 338

Light Bars
Light Bars Indoor 339
Light Bars Outdoor 341

Battery Lights
Battery Spots 345
Battery Shapes 348
Battery Spots Accessories 349

Parcans
Parcan 16 350
Parcan 20 351
Parcan 30 352
Parcan 36 353
Parcan 46 355
Parcan 56 356
Parcan 64 359
Studio Beams 361
Parcan Accessories 362

Blinders
Blinders Analogue 369
Blinders DMX 370

Flood Lights
Flood Lights White 374
Flood Lights Accessories 376

Light Effects
Scanners 378
Effect Lights 382
Lasers 394
Strobes 398
Black Lights 400

Deco Lights
LED Shapes 404
Retro Lights 414
LED Flexilights 416

Mirror Balls
Mirror Balls 418
Mirror Ball Motors 419

Light Bulbs
Halogen Bulbs 420
Discharge Bulbs 428
Light Bulbs 431

Light Stands
Lifter Stands 436
Stands 440
Wind Up Stands 442
Stand Sets 444
Stand Accessories 445



Table of Contents

Brands that inspire

Architectural Light

Track Lighting
1-Phase Spots 448
1-Phase Tracks 449
3-Phase Spots 450
3-Phase Tracks 455
Track Light Accessories 456

LED Strips
Strip Light Flex IP20 458
Strip Light Flex IP62 470
Strip Light Flex IP68 473
Neon Flex Light 475
Strip Light Regid 477
Strip Light Strings 477
Profiles 478
LED Strip Accessories 494

Down Lights
Recessed 496
Surface 498
LED Panels 500

Inground Spots
High Voltage 504

Garden & Street lights
240 V 506

Artecta Accessories
Controllers 510
LED Drivers 523
Power Supplies 532
Cables & Splitters 539
Mounting Devices 539

Special Effects

FX Hardware
Foggers 542
Fazers 556
Low Foggers 559
Hazers 560
Snow Machines 564
Bubble Machines 567
Fans 568
CO2 Hardware 571
Confetti Machines 572
Drop FX 573

FX Accessories
FX Hardware Accessories 574
Remotes 575
CO2 Accessories 576

FX Consumables
Fog Liquids 578
Bubble Liquids 580
Snow Liquids 580
Confetti 581
Electric Confetti Cannons 583
Handheld Confetti Cannons 584

Cables & Connectors

Prefab Cables
Microphone Cables 588
Instrument Cables 589
Line Cables 591
Y-Cables 592
Speaker Cables 593
Patch Cables 594
Studio Snakes 595
Stage Wheels 597
DMX Cables 598
PC Midi & Data Cables 599
Combined Power & Audio Signal Cables 600
Combined Power & Light Signal Cables 601
Combined Power & Data Signal Cables 601
AV Cables 602
Cable Accessories 604

Cables on Spool
Microphone Cables 605
Line & Instrument Cables 606
Speaker Cables 607
Data Cables 608
Combined Power & Signal Cables 612
Multicore Cables 613
AV Cables 617

Connectors
XLR Chassis & Connectors 620
Jack Chassis & Connectors 625
Speaker Chassis & Connectors 627
RCA Chassis & Connectors 628
Data Chassis & Connectors 629
Multicore Assembly 630
Connector Accessories 634

Adapters
Balanced Adapters 635
Unbalanced Adapters 638
Speaker Adapters 642
DMX Adapters 643
Network Adapters 644
Media Adapters 645
BNC Adapters 645

Power Distribution
110 V Connectors 546
240 V Connectors 647
400 V Connectors 652
240 V Extension Cords 655
400 V Extension Cords 659
240 V Socket Boxes 660
Breakout Boxes 661
Breakout Bars 661
Power Splitters 661
Power Distributors 663
Power Multi-Cables 665
Power Multi-Connectors 666

Stage & Rigging

Stage Accessories
Stages 670
Cable Bridges 674
Crowd Control 675
Stage Tapes 676
Roady Tools & Accessories 678

Truss
Single Tube 682
Deco Triangle 683
Deco Square 685
Pro-30 Step 686
Pro-30 Triangle 687
Pro-30 Square 690
Pro-30 Circles 693
Pro-35 Rectangular 693
Pro-40 Square 694
Truss Accessories 700
Truss Furniture 703
Tower 696

Rigging
Chain Hoists 704
Clamps 710
Safety Cables 716
Slings 718
Rigging Accessories 719

Textiles
Backdrops 721
Deco Textiles 722
LED Drapes 723
Pipe & Drape 724
Eurotrack 728
Textile Accessories 729

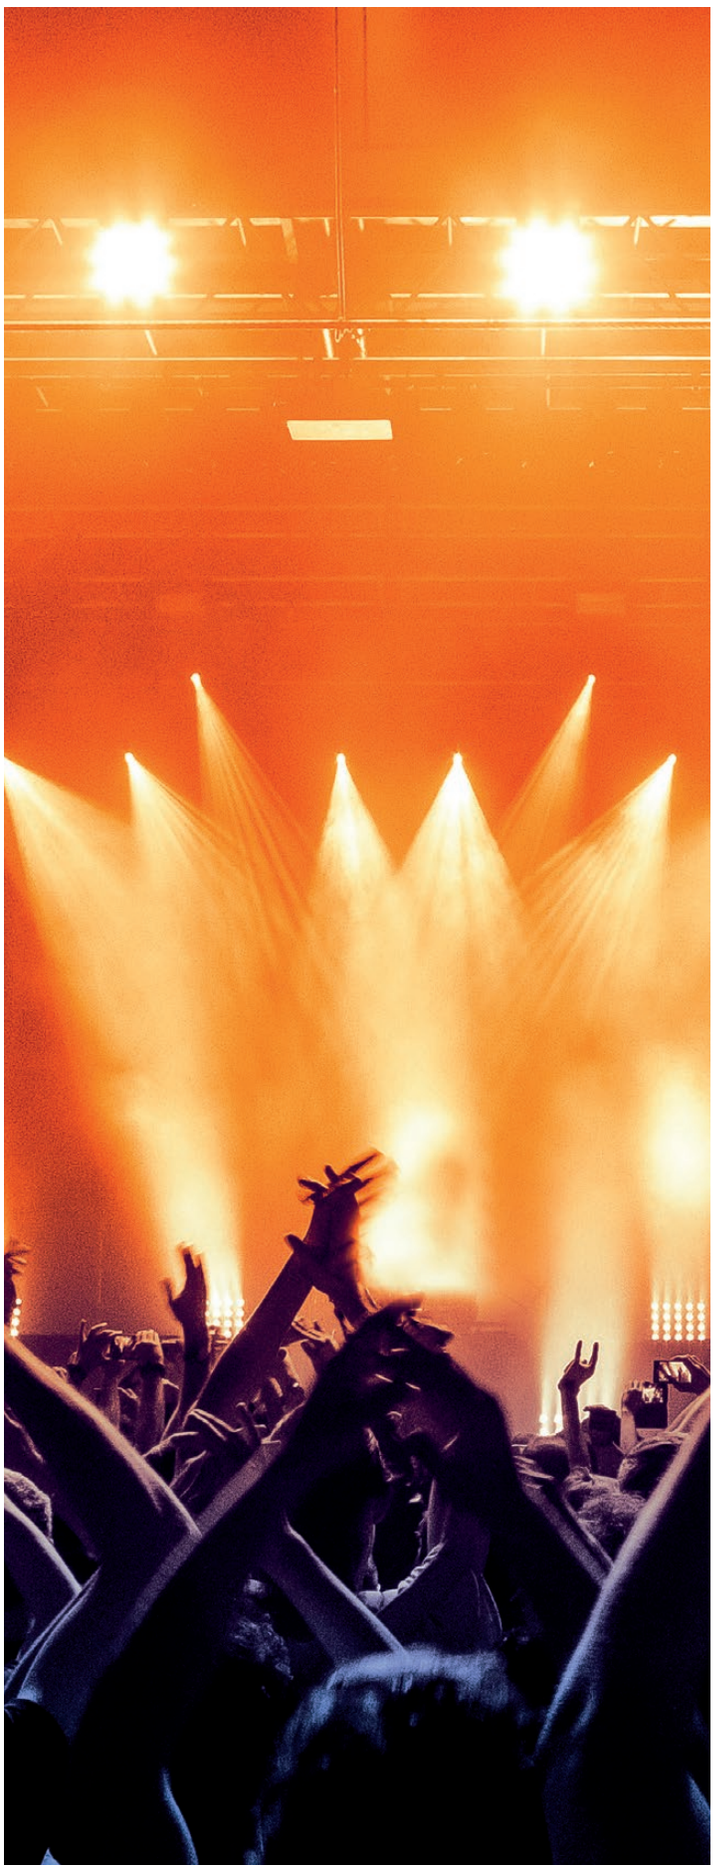

Bags & Cases

Cases
Light Cases LCA 732
Audio Cases 752
DJ Cases DCA 758
Media Cases 762
Utility Cases UCA 763
Daily Cases 772
Rack Cases RCA 775
Flight Case Hardware 784
Flight Case Foams 784

Bags
Gear Bags 785
Tool Bags 786

19 inch Accessories
19 inch Gear 786
19 inch Hardware 787
Gooseneck & Rack Lights 790

Showtec accommodates over a thousand products, ranging from static, moving, and special effect lighting to theatre spots and DMX controllers.

Rental companies, DJs, and professionals in the entertainment industry turn to Showtec for reliable products with a high quality-price ratio. Wherever you are in the entertainment industry, you'll find a solution that fits your experience, your budget, and the visual experience you want to create. Whether you are at a festival, in a club, a theatre, or even in a video production, you can rely on Showtec in any situation.

Our latest Showtec showpieces are our Lampy DMX lighting controllers. They offer strong features and a very user-friendly and intuitive interface that makes shows easy, fast, and fun to design and control.

We have also introduced several new Showtec fixtures, for instance the Phantom 250 Spot and Phantom Hybrid 12R. They are a great addition to our Phantom series and will most definitely fit well in your inventory."



Infinity offers precisely crafted products, ranging from moving and static theatre and studio lighting to complete smart control solutions.

Professionals in the entertainment industry use Infinity for excellent and exclusive lighting solutions. Infinity offers innovative tools to translate creativity and passion in situations where only no-compromise lighting devices are accepted.

New to the Infinity collection is the iFX-640. This is a unique effect moving head with 6 individually controllable RGBW LEDs and diffraction blades for steplessly changing a tight beam into a wide wash effect.

For the Chimp family, new opportunities have risen this year. The controllers have improved and expanded in surprising ways. You are now able to prepare your shows from anywhere with the lightweight and USB-powered SideKick OnPC Wing. Also, we have introduced the Peanut Box with which you add 4 additional universes to your Chimp product and add timecode control to your shows. For enabling 2 additional DMX universes, Art-Net, and sACN on your Chimp OnPC software, a USB dongle is now available. “



DMT provides display and control solutions for fixed and touring installations, based upon the acquired knowledge and skills we have gathered over the years. These solutions include LED panels, projection screens, AV-controllers, and AV brackets.

With DMT’s high-end LED display solutions, complemented by our extensive knowledge and support, we help event organisers and commercial advertisers to make a visual impact in any location.

Recently, we have introduced our second-generation Premiere Pro series with front & back service and higher quality screens. Also, we have introduced Fixed Install indoor models, offering high quality at an incredible price level. New to DMT are HDMI/USB extender sets for creating private networks of up to 253 devices with virtually no distance limit.”



DAP

DAP accommodates over a thousand products, ranging from microphones and speakers to cables and audio mixers.

Performing artists, sound professionals and installers choose DAP to have affordable and solid audio solutions at their disposal. DAP provides versatile remote and fixed solutions for both large and small events, public addressing, and background music.

Especially for medium to large shows and events, Odin Audio Systems by DAP is a truly versatile line-array audio system that perfectly replicates the punchy sound of a kick, the finest details of a guitar, and true vocal expressions. Next to powerful and detailed sound, Odin offers loads of character, great features, and scalability at an unprecedented price level."



ARTECTA

Artecta is mainly focussing on providing complete solutions for controllable mood and track lighting. Also, it accommodates various other architectural lights, such as down lights, office lights, and LED strips.

AV-installers use Artecta for providing high-quality and modern architectural solutions and accessories for design lighting in projects of any size. You can think of retail environments and the hospitality industry.

With the arrival of the Display Series, track lighting is becoming more versatile with 3-phase profiles and fresnels for professional indoor display applications. We have also expanded our LED strip assortment significantly. You can think of LED strips and dedicated profiles for the full Havana series (Ribbon, Dropper and Neon), for example. We have also introduced our new bright and highly bendable Pensacola LED strip, suitable for outdoor applications."



SHOW GEAR

Our brand positioning has bween rearranged. Essentials from DAP, Showtec and DMT are now united under the Showgear brand. This results in a better segmentation and brand-targeting. Also, completely new products have been added to the Showgear range, such as various network cabinets and ceiling/wall mounts.

From rigging equipment and power distribution to flight cases and backdrops, Showgear can support you in so many ways. Therefore, we have started using different pastels, so you can quickly recognise the target group of each Showgear product. From essentials for stages (green) to lighting (orange), to audiovisual (purple), and audio (blue), the pastels are matching the colours of Showtec, DAP, and DMT. Still, they are recognisable as being a Showgear product, since a noticeably lighter shading is used."



Impressive visual experience

Visuals make a big impact when it comes to empowering messages, feelings and beliefs in the mind of your audience. They tell a story, enhance the atmosphere, or notify/convince your target group.

Are you looking for audiovisual equipment to support live, online or hybrid events such as corporate/themed events, trade fairs, or presentations? We can help you supply the right audiovisual set-up including good support and training. We do this for AV rental/installation service providers as well as other customers.

Our audiovisual products range from LED screens and AV controllers to projection screens and AV stands/mounts. These products can serve multiple purposes, such as LED-walls at live events, projection screens in schools, LED billboards in crowded places and virtual presentation screens at virtual productions or virtual event studios. The main features of our audiovisual products are quick and easy installation, high quality, and strong construction. They are built to last and outperform.





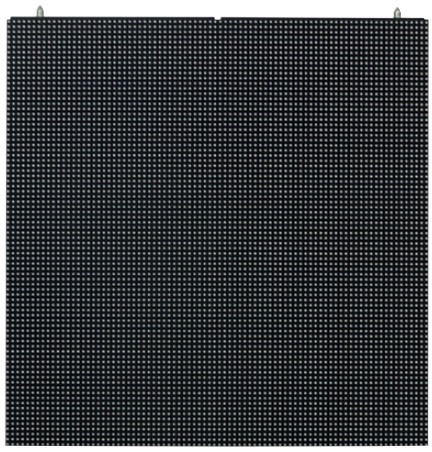

Premiere Series PS2.9N

101736 **50 x 50 cm**

DMT

Specifications:

Pitch Horz.:	2.97 mm
Pitch Vert.:	2.97 mm
Cab. Res. Width:	168 px
Cab. Res. Height:	168 px
Horz. View °:	160 °
Vert. View °:	160 °
Transparency:	0 %
LED Type:	Full Black
Brightness:	1200 nits
Ctrl System:	Novastar
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	200 W
Pwr. Cons. Average:	100 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Data Conn. In:	etherCON
Data Conn. Out:	etherCON
Cab. Width:	500 mm
Cab. Height:	500 mm
Cab. Depth:	65 mm
Weight:	9 kg
IP Rate:	IP20(indoor use only)
Maintenance:	Rear Service
Max. Horz. Rigging:	16 Panels
Max. Vert. Rigging:	15 Panels
Lock. Sys.:	Fast Lock System

FEATURES:

- 2.9 mm Pixel Pitch
- Lightweight
- >1200 Nits
- NovaStar A5s Control system
- Hot-swappable LED Modules and control modules

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT



Premiere Series PS2.9N

101735 **50 x 100 cm**

DMT

Specifications:

Pitch Horz.:	2.97 mm
Pitch Vert.:	2.97 mm
Cab. Res. Width:	168 px
Cab. Res. Height:	336 px
Horz. View °:	160 °
Vert. View °:	160 °
Transparency:	0 %
LED Type:	Full Black
Brightness:	1200 nits
Ctrl System:	Novastar
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	230 W
Pwr. Cons. Average:	100 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Data Conn. In:	etherCON
Data Conn. Out:	etherCON
Cab. Width:	500 mm
Cab. Height:	1000 mm
Cab. Depth:	65 mm
Weight:	14 kg
IP Rate:	IP20(indoor use only)
Maintenance:	Rear Service
Max. Horz. Rigging:	14 Panels
Max. Vert. Rigging:	10 Panels
Lock. Sys.:	Fast Lock System

FEATURES:

- 2.9 mm Pixel Pitch
- Lightweight
- >1200 Nits
- NovaStar A5s Control system
- Hot-swappable LED Modules and control modules

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

Premiere Series PS3.9N

101731 **50 x 50 cm**

DMT

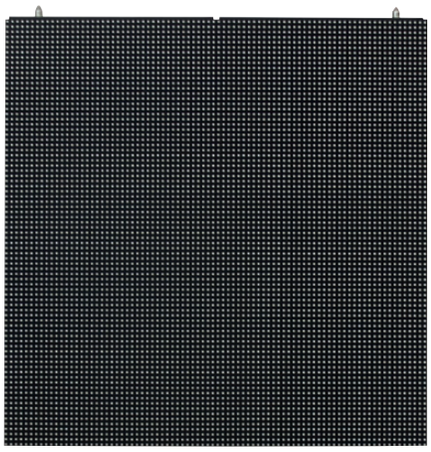

Specifications:

Pitch Horz.:	3.91 mm	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pitch Vert.:	3.91 mm	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Cab. Res. Width:	128 px	Data Conn. In:	etherCON
Cab. Res. Height:	128 px	Data Conn. Out:	etherCON
Horz. View °:	160 °	Cab. Width:	500 mm
Vert. View °:	160 °	Cab. Height:	500 mm
Transparency:	0 %	Cab. Depth:	65 mm
LED Type:	Black Frame	Weight:	8.5 kg
Brightness:	5000 nits	IP Rate:	IP54 Rear / IP65 Front
Ctrl System:	Novastar	Maintenance:	Rear Service
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Horz. Rigging:	16 Panels
Pwr. Cons.:	300 W	Max. Vert. Rigging:	15 Panels
Pwr. Cons. Average:	100 W	Lock. Sys.:	Fast Lock System

FEATURES:

- 3.9 mm Pixel pitch
- IP65
- Lightweight
- >5000 Nits
- NovaStar A5s Control system
- Hot-swappable LED Modules and control modules

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

Premiere Series PS3.9N

101730 **50 x 100 cm**

DMT



Specifications:

Pitch Horz.:	3.91 mm	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pitch Vert.:	3.91 mm	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Cab. Res. Width:	128 px	Data Conn. In:	etherCON
Cab. Res. Height:	256 px	Data Conn. Out:	etherCON
Horz. View °:	160 °	Cab. Width:	500 mm
Vert. View °:	160 °	Cab. Height:	1000 mm
Transparency:	0 %	Cab. Depth:	65 mm
LED Type:	Black Frame	Weight:	13 kg
Brightness:	5000 nits	Curved Angles:	0 °
Ctrl System:	Novastar	IP Rate:	IP54 Rear / IP65 Front
Pwr. Supp.:	100-240 VAC 50-60 Hz	Maintenance:	Rear Service
Pwr. Cons.:	300 W	Max. Horz. Rigging:	15 Panels
Pwr. Cons. Average:	140 W	Max. Vert. Rigging:	10 Panels
		Lock. Sys.:	Fast Lock System

FEATURES:

- 3.9 mm Pixel pitch
- IP65
- Lightweight
- >5000 Nits
- NovaStar A5s Control system
- Hot-swappable LED Modules and control modules

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

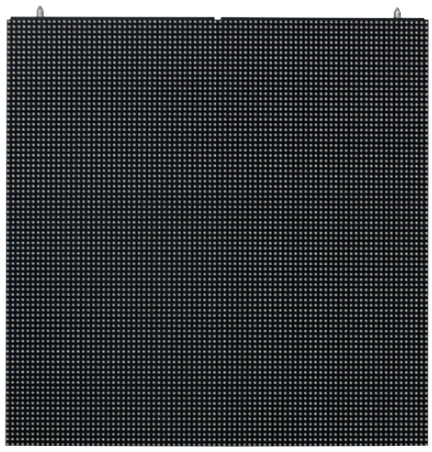

Premiere Series PS4.6N

101726 **50 x 50 cm**

DMT

Specifications:

Pitch Horz.:	4.63 mm
Pitch Vert.:	4.63 mm
Cab. Res. Width:	108 px
Cab. Res. Height:	108 px
Horz. View °:	160 °
Vert. View °:	140 °
Transparency:	0 %
LED Type:	Black Frame
Brightness:	5000 nits
Ctrl System:	Novastar
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Cons. Average:	100 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Data Conn. In:	etherCON
Data Conn. Out:	etherCON
Cab. Width:	500 mm
Cab. Height:	500 mm
Cab. Depth:	65 mm
Weight:	8.5 kg
IP Rate:	IP54 Rear / IP65 Front
Maintenance:	Rear Service
Max. Horz. Rigging:	16 Panels
Max. Vert. Rigging:	15 Panels
Lock. Sys.:	Fast Lock System

FEATURES:

- 4.6 mm Pixel Pitch
- IP65
- Lightweight
- >5000 Nits
- NovaStar A5s Control system
- Hot-swappable LED Modules and control modules

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT



Premiere Series PS4.6N

101725 **50 x 100 cm**

DMT

Specifications:

Pitch Horz.:	4.63 mm
Pitch Vert.:	4.63 mm
Cab. Res. Width:	108 px
Cab. Res. Height:	216 px
Horz. View °:	160 °
Vert. View °:	140 °
Transparency:	0 %
LED Type:	Black Frame
Brightness:	5000 nits
Ctrl System:	Novastar
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Cons. Average:	100 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Data Conn. In:	etherCON
Data Conn. Out:	etherCON
Cab. Width:	500 mm
Cab. Height:	1000 mm
Cab. Depth:	65 mm
Weight:	13 kg
IP Rate:	IP54 Rear / IP65 Front
Maintenance:	Rear Service
Max. Horz. Rigging:	15 Panels
Max. Vert. Rigging:	10 Panels
Lock. Sys.:	Fast Lock System

FEATURES:

- 4.6 mm Pixel Pitch
- IP65
- Lightweight
- >5000 Nits
- NovaStar A5s Control system
- Hot-swappable LED Modules and control modules

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

Premiere Series PS5.9N

101721 **50 x 50 cm**

DMT

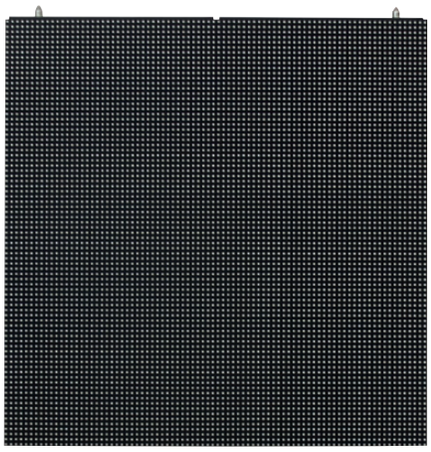

Specifications:

Pitch Horz.:	5.95 mm	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pitch Vert.:	5.95 mm	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Cab. Res. Width:	84 px	Data Conn. In:	etherCON
Cab. Res. Height:	84 px	Data Conn. Out:	etherCON
Horz. View °:	140 °	Cab. Width:	500 mm
Vert. View °:	140 °	Cab. Height:	500 mm
Transparency:	0 %	Cab. Depth:	65 mm
LED Type:	Black Frame	Weight:	8 kg
Brightness:	5000 nits	IP Rate:	IP54 Rear / IP65 Front
Ctrl System:	Novastar	Maintenance:	Rear Service
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Horz. Rigging:	16 Panels
Pwr. Cons.:	300 W	Max. Vert. Rigging:	15 Panels
Pwr. Cons. Average:	135 W	Lock. Sys.:	Fast Lock System

FEATURES:

- 5.9 mm Pixel Pitch
- IP65
- Lightweight
- >5000 Nits
- NovaStar A5s Control system
- Hot-swappable LED Modules and control modules

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

Premiere Series PS5.9N

101720 **50 x 100 cm**

DMT



Specifications:

Pitch Horz.:	5.95 mm	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pitch Vert.:	5.95 mm	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Cab. Res. Width:	84 px	Data Conn. In:	etherCON
Cab. Res. Height:	168 px	Data Conn. Out:	etherCON
Horz. View °:	140 °	Cab. Width:	500 mm
Vert. View °:	140 °	Cab. Height:	1000 mm
Transparency:	0 %	Cab. Depth:	65 mm
LED Type:	Black Frame	Weight:	13 kg
Brightness:	5000 nits	IP Rate:	IP54 Rear / IP65 Front
Ctrl System:	Novastar	Maintenance:	Rear Service
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Horz. Rigging:	30 Panels
Pwr. Cons.:	300 W	Max. Vert. Rigging:	10 Panels
Pwr. Cons. Average:	135 W	Lock. Sys.:	Fast Lock System

FEATURES:

- 5.9 mm Pixel Pitch
- IP65
- Lightweight
- >5000 Nits
- NovaStar A5s Control system
- Hot-swappable LED Modules and control modules

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

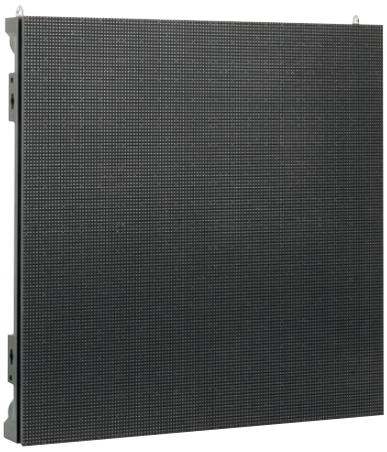

PS 2.9-G2 Indoor

101761 **50 x 50 cm mobile LED Screen**

DMT

Specifications:

Pitch Horz.:	2.97 mm	Pwr. Conn. In.:	powerCON TRUE1 TOP In (Male)
Pitch Vert.:	2.97 mm	Pwr. Conn. Out.:	powerCON TRUE1 TOP Out (Female)
Cab. Res. Width:	168 px	Data Conn. In:	etherCON
Cab. Res. Height:	168 px	Data Conn. Out:	etherCON
Horz. View °:	160 °	Cab. Width:	500 mm
Vert. View °:	160 °	Cab. Height:	500 mm
Transparency:	0 %	Cab. Depth:	66 mm
LED Type:	Full Black	Weight:	9 kg
Brightness:	1200 nits	IP Rate:	IP20(indoor use only)
Ctrl System:	Novastar	Maintenance:	Front / Rear Service
Refresh Rate:	2880 Hz	Max. Horz. Rigging:	18 Panels
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Vert. Rigging:	18 Panels
Pwr. Cons.:	130 W	Lock. Sys.:	Fast Lock System
Pwr. Cons. Average:	50 W		

FEATURES:

- 2.9 mm Pixel Pitch
- Full Black LEDs
- Suitable for mobile and fixed indoor applications
- Front & Rear service
- Wide 160° view angle
- 50 x 50 cm
- Lightweight and small 66 mm design

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

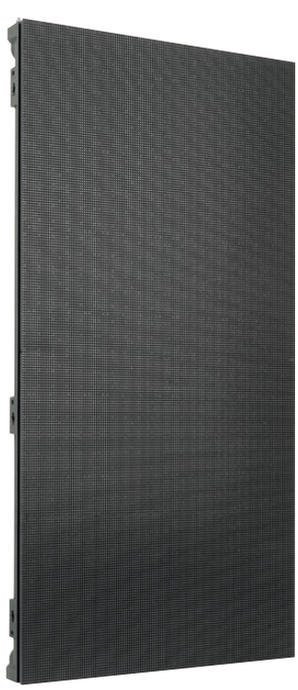

PS 2.9-G2 Indoor

101760 **50 x 100 cm mobile LED Screen**

DMT

Specifications:

Pitch Horz.:	2.97 mm	Pwr. Conn. In.:	powerCON TRUE1 TOP In (Male)
Pitch Vert.:	2.97 mm	Pwr. Conn. Out.:	powerCON TRUE1 TOP Out (Female)
Cab. Res. Width:	168 px	Data Conn. In:	etherCON
Cab. Res. Height:	336 px	Data Conn. Out:	etherCON
Horz. View °:	160 °	Cab. Width:	500 mm
Vert. View °:	160 °	Cab. Height:	1000 mm
Transparency:	0 %	Cab. Depth:	66 mm
LED Type:	Full Black	Weight:	14.2 kg
Brightness:	1200 nits	IP Rate:	IP20(indoor use only)
Ctrl System:	Novastar	Maintenance:	Front / Rear Service
Refresh Rate:	2880 Hz	Max. Horz. Rigging:	18 Panels
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Vert. Rigging:	18 Panels
Pwr. Cons.:	270 W	Lock. Sys.:	Fast Lock System
Pwr. Cons. Average:	90 W		

FEATURES:

- 2.9 mm Pixel Pitch
- Full Black LEDs
- Suitable for mobile and fixed indoor applications
- Front & Rear service
- Wide 160° view angle
- 50 x 100 cm
- Lightweight and small 66 mm design

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

PS 3.9-G2 Outdoor

101758 **50 x 50 cm mobile LED Screen**

DMT

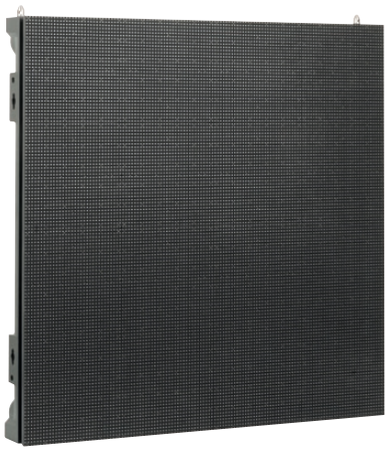

Specifications:

Pitch Horz.:	3.91 mm	Pwr. Conn. In.:	powerCON TRUE1 TOP In (Male)
Pitch Vert.:	3.91 mm	Pwr. Conn. Out.:	powerCON TRUE1 TOP Out (Female)
Cab. Res. Width:	128 px	Data Conn. In:	etherCON
Cab. Res. Height:	128 px	Data Conn. Out:	etherCON
Horz. View °:	160 °	Cab. Width:	500 mm
Vert. View °:	155 °	Cab. Height:	500 mm
Transparency:	0 %	Cab. Depth:	67 mm
LED Type:	Full Black	Weight:	7.93 kg
Brightness:	4000 nits	IP Rate:	IP65
Ctrl System:	Novastar	Maintenance:	Front / Rear Service
Refresh Rate:	3840 Hz	Max. Horz. Rigging:	18 Panels
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Vert. Rigging:	18 Panels
Pwr. Cons.:	130 W	Lock. Sys.:	Fast Lock System
Pwr. Cons. Average:	50 W		

FEATURES:

- 3.9 mm Pixel Pitch
- Bright 4000 Nits output and Full-Black LEDs
- Suitable for mobile and fixed outdoor applications
- Front & Rear service
- Wide 160° view angle
- 50 x 50 cm
- Small 67 mm design and lightweight

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

PS 3.9-G2 Outdoor

101757 **50 x 100 cm mobile LED Screen**

DMT

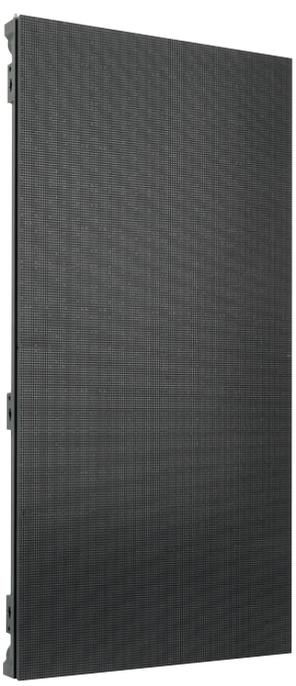

Specifications:

Pitch Horz.:	3.91 mm	Pwr. Conn. In.:	powerCON TRUE1 TOP In (Male)
Pitch Vert.:	3.91 mm	Pwr. Conn. Out.:	powerCON TRUE1 TOP Out (Female)
Cab. Res. Width:	128 px	Data Conn. In:	etherCON
Cab. Res. Height:	256 px	Data Conn. Out:	etherCON
Horz. View °:	160 °	Cab. Width:	500 mm
Vert. View °:	155 °	Cab. Height:	1000 mm
Transparency:	0 %	Cab. Depth:	67 mm
LED Type:	Full Black	Weight:	12.46 kg
Brightness:	4000 nits	IP Rate:	IP65
Ctrl System:	Novastar	Maintenance:	Front / Rear Service
Refresh Rate:	3840 Hz	Max. Horz. Rigging:	18 Panels
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Vert. Rigging:	18 Panels
Pwr. Cons.:	300 W	Lock. Sys.:	Fast Lock System
Pwr. Cons. Average:	100 W		

FEATURES:

- 3.9 mm Pixel Pitch
- Bright 4000 Nits output and Full-Black LEDs
- Suitable for mobile and fixed outdoor applications
- Front & Rear service
- Wide 160° view angle
- 50 x 100 cm
- Small 67 mm design and lightweight

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

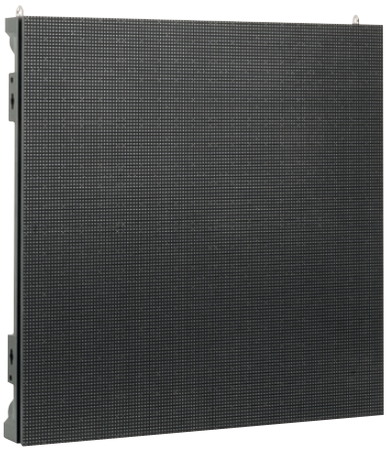

PS 4.6-G2 Outdoor

101753 **50 x 50 cm mobile LED Screen**

DMT

Specifications:

Pitch Horz.:	4.63 mm	Pwr. Conn. In.:	powerCON TRUE1 TOP In (Male)
Pitch Vert.:	4.63 mm	Pwr. Conn. Out.:	powerCON TRUE1 TOP Out (Female)
Cab. Res. Width:	108 px	Data Conn. In:	etherCON
Cab. Res. Height:	108 px	Data Conn. Out:	etherCON
Horz. View °:	160 °	Cab. Width:	500 mm
Vert. View °:	135 °	Cab. Height:	500 mm
Transparency:	0 %	Cab. Depth:	68 mm
LED Type:	Black Frame	Weight:	8.05 kg
Brightness:	5000 nits	IP Rate:	IP65
Ctrl System:	Novastar	Maintenance:	Front / Rear Service
Refresh Rate:	3840 Hz	Max. Horz. Rigging:	18 Panels
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Vert. Rigging:	18 Panels
Pwr. Cons.:	130 W	Lock. Sys.:	Fast Lock System
Pwr. Cons. Average:	50 W		

FEATURES:

- 4.6 mm Pixel Pitch
- Bright 5000 Nits output and Black frame LEDs
- Suitable for mobile and fixed outdoor applications
- Front & Rear service
- Wide 160° view angle
- 50 x 50 cm
- Small 68 mm design and lightweight

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

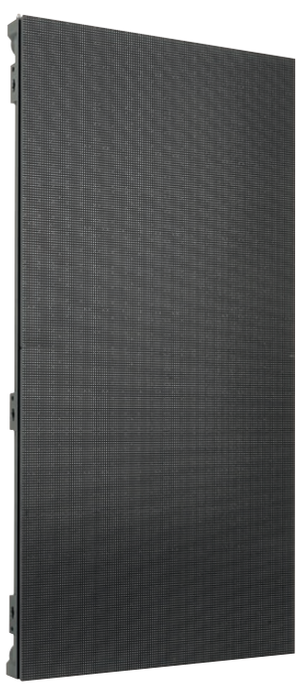

PS 4.6-G2 Outdoor

101752 **50 x 100 cm mobile LED Screen**

DMT

Specifications:

Pitch Horz.:	4.63 mm	Pwr. Conn. In.:	powerCON TRUE1 TOP In (Male)
Pitch Vert.:	4.63 mm	Pwr. Conn. Out.:	powerCON TRUE1 TOP Out (Female)
Cab. Res. Width:	108 px	Data Conn. In:	etherCON
Cab. Res. Height:	216 px	Data Conn. Out:	etherCON
Horz. View °:	160 °	Cab. Width:	500 mm
Vert. View °:	135 °	Cab. Height:	1000 mm
Transparency:	0 %	Cab. Depth:	68 mm
LED Type:	Black Frame	Weight:	12.7 kg
Brightness:	5000 nits	IP Rate:	IP65
Ctrl System:	Novastar	Maintenance:	Front / Rear Service
Refresh Rate:	3840 Hz	Max. Horz. Rigging:	18 Panels
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Vert. Rigging:	18 Panels
Pwr. Cons.:	270 W	Lock. Sys.:	Fast Lock System
Pwr. Cons. Average:	90 W		

FEATURES:

- 4.6 mm Pixel Pitch
- Bright 5000 Nits output and Black frame LEDs
- Suitable for mobile and fixed outdoor applications
- Front & Rear service
- Wide 160° view angle
- 50 x 100 cm
- Small 68 mm design and lightweight

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

PS 5.9-G2 Outdoor

101746 **50 x 50 cm mobile LED Screen**

DMT

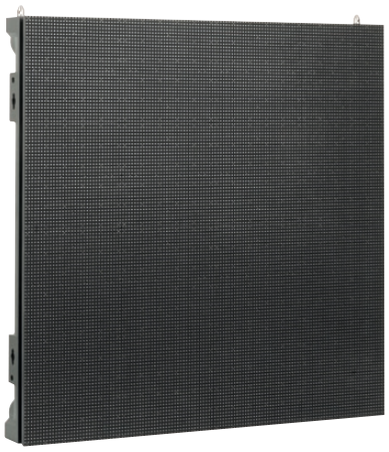

Specifications:

Pitch Horz.:	5.95 mm	Pwr. Conn. In.:	powerCON TRUE1 TOP In (Male)
Pitch Vert.:	5.95 mm	Pwr. Conn. Out.:	powerCON TRUE1 TOP Out (Female)
Cab. Res. Width:	84 px	Data Conn. In:	etherCON
Cab. Res. Height:	84 px	Data Conn. Out:	etherCON
Horz. View °:	160 °	Cab. Width:	500 mm
Vert. View °:	130 °	Cab. Height:	500 mm
Transparency:	0 %	Cab. Depth:	69 mm
LED Type:	Black Frame	Weight:	8 kg
Brightness:	5000 nits	IP Rate:	IP65
Ctrl System:	Novastar	Maintenance:	Front / Rear Service
Refresh Rate:	3840 Hz	Max. Horz. Rigging:	18 Panels
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Vert. Rigging:	18 Panels
Pwr. Cons.:	130 W	Lock. Sys.:	Fast Lock System
Pwr. Cons. Average:	50 W		

FEATURES:

- 5.9 mm Pixel Pitch
- Bright 5000 Nits output and Black Frame LEDs
- Suitable for mobile and fixed outdoor applications
- Front & Rear service
- Wide 160° view angle
- 50 x 50 cm
- Small 69 mm design and lightweight

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

PS 5.9-G2 Outdoor

101745 **50 x 100 cm mobile LED Screen**

DMT

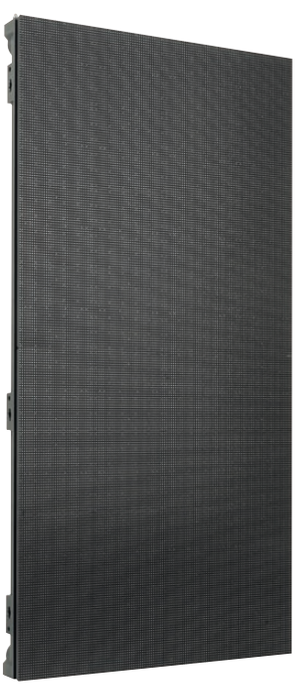

Specifications:

Pitch Horz.:	5.95 mm	Pwr. Conn. In.:	powerCON TRUE1 TOP In (Male)
Pitch Vert.:	5.95 mm	Pwr. Conn. Out.:	powerCON TRUE1 TOP Out (Female)
Cab. Res. Width:	84 px	Data Conn. In:	etherCON
Cab. Res. Height:	168 px	Data Conn. Out:	etherCON
Horz. View °:	160 °	Cab. Width:	500 mm
Vert. View °:	130 °	Cab. Height:	1000 mm
Transparency:	0 %	Cab. Depth:	69 mm
LED Type:	Black Frame	Weight:	12.62 kg
Brightness:	5000 nits	IP Rate:	IP65
Ctrl System:	Novastar	Maintenance:	Front / Rear Service
Refresh Rate:	3840 Hz	Max. Horz. Rigging:	18 Panels
Pwr. Supp.:	100-240 VAC 50-60 Hz	Max. Vert. Rigging:	18 Panels
Pwr. Cons.:	270 W	Lock. Sys.:	Fast Lock System
Pwr. Cons. Average:	90 W		

FEATURES:

- 5.9 mm Pixel Pitch
- Bright 5000 Nits output and Black Frame LEDs
- Suitable for mobile and fixed outdoor applications
- Front & Rear service
- Wide 160° view angle
- 50 x 100 cm
- Small 69 mm design and lightweight

Case for 8x DMT Premiere Series

D7290 **Premium Line**

DMT

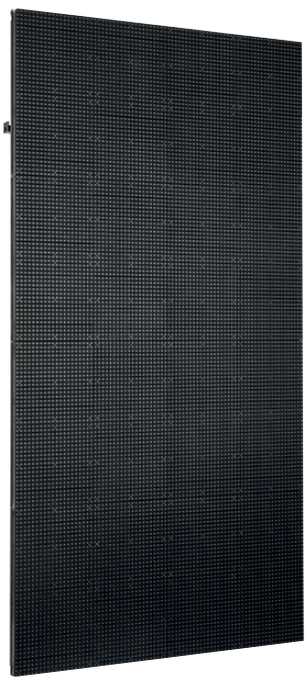

E6-N

101367 **50 x 100 cm**

DMT

Specifications:

Pitch Horz.:	6.25 mm
Pitch Vert.:	6.25 mm
Cab. Res. Width:	80 px
Cab. Res. Height:	160 px
Horz. View °:	140 °
Vert. View °:	140 °
Transparency:	0 %
LED Type:	Black Face
Brightness:	1200 nits
Ctrl System:	Novastar
Refresh Rate:	1600 Hz
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Cons. Average:	100 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
Data Conn. In:	ProCat
Data Conn. Out:	ProCat
Cab. Width:	500 mm
Cab. Height:	1000 mm
Cab. Depth:	63 mm
Weight:	11.2 kg
Curved Angles:	-15 / -7.5 / 0 / 7.5 / 15 °
IP Rate:	IP20(indoor use only)
Maintenance:	Rear Service
Max. Horz. Rigging:	0 Panels
Max. Vert. Rigging:	10 Panels
Lock. Sys.:	Fast Lock System

FEATURES:

- 6.25 mm Pixel Pitch
- NovaStar Control system
- Curving in 5 different angle positions
- Easy Rigging
- Lightweight (only 11 kg)

Case for 6x E-series LED Screen 100 x 50 cm

D7292 **Premium Line**

DMT



FI-3.9 Indoor

101860 **50 x 75 cm Installation LED Screen**

DMT

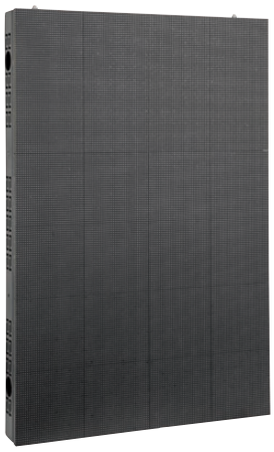

Specifications:

Pitch Horz.:	3.9 mm	Pwr. Cons.:	156 W
Pitch Vert.:	3.9 mm	Pwr. Cons. Average:	63 W
Cab. Res. Width:	128 px	Pwr. Conn. In.:	Pro Power Blue
Cab. Res. Height:	192 px	Pwr. Conn. Out.:	ProPower Grey
Horz. View °:	140 °	Data Conn. In:	ProCat
Vert. View °:	140 °	Data Conn. Out:	ProCat
Transparency:	0 %	Cab. Width:	500 mm
LED Type:	Full Black	Cab. Height:	750 mm
Brightness:	1000 nits	Cab. Depth:	71 mm
Ctrl System:	Novastar	Weight:	11.1 kg
Refresh Rate:	1920 Hz	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	100-240 VAC 50-60 Hz	Maintenance:	Front / Rear Service
		Fix. Mount. Opt.:	M6

FEATURES:

- 3.9 mm Pixel Pitch
- Suitable for fixed indoor applications
- Full Black LED
- Front & Rear service
- Wide 140° view angle
- 50 x 75 cm
- Small 71 mm design

FI-3.9 Indoor

101861 **50 x 100 cm Installation LED Screen**

DMT

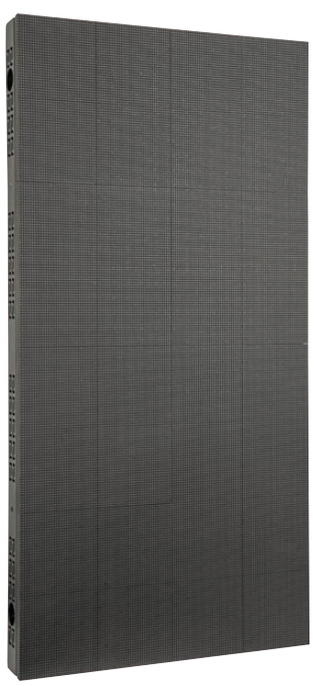

Specifications:

Pitch Horz.:	3.9 mm	Pwr. Cons.:	211 W
Pitch Vert.:	3.9 mm	Pwr. Cons. Average:	85 W
Cab. Res. Width:	128 px	Pwr. Conn. In.:	Pro Power Blue
Cab. Res. Height:	256 px	Pwr. Conn. Out.:	ProPower Grey
Horz. View °:	140 °	Data Conn. In:	ProCat
Vert. View °:	140 °	Data Conn. Out:	ProCat
Transparency:	0 %	Cab. Width:	500 mm
LED Type:	Full Black	Cab. Height:	1000 mm
Brightness:	1000 nits	Cab. Depth:	71 mm
Ctrl System:	Novastar	Weight:	14.3 kg
Refresh Rate:	1920 Hz	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	100-240 VAC 50-60 Hz	Maintenance:	Front / Rear Service
		Fix. Mount. Opt.:	M6

FEATURES:

- 3.9 mm Pixel Pitch
- Suitable for fixed indoor applications
- Full Black LED
- Front & Rear service
- Wide 140° view angle
- 50 x 100 cm
- Small 71 mm design

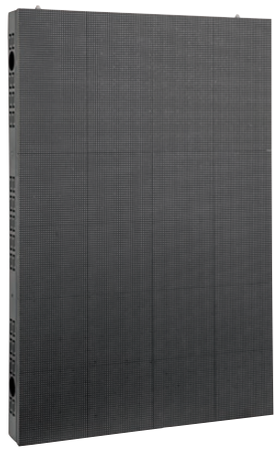

FI-4.8 Indoor

101865 **50 x 75 cm Installation LED Screen**

DMT

Specifications:

Pitch Horz.:	4.8 mm
Pitch Vert.:	4.8 mm
Cab. Res. Width:	104 px
Cab. Res. Height:	156 px
Horz. View °:	140 °
Vert. View °:	140 °
Transparency:	0 %
LED Type:	Black Frame
Brightness:	1000 nits
Ctrl System:	Novastar
Refresh Rate:	1920 Hz
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	144 W
Pwr. Cons. Average:	58 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
Data Conn. In:	ProCat
Data Conn. Out:	ProCat
Cab. Width:	500 mm
Cab. Height:	750 mm
Cab. Depth:	71 mm
Weight:	11.1 kg
IP Rate:	IP20(indoor use only)
Maintenance:	Front / Rear Service
Fix. Mount. Opt.:	M6

FEATURES:

- 4.8 mm Pixel Pitch
- Suitable for fixed indoor applications
- Black Frame LED
- Front & Rear service
- Wide 140° view angle
- 50 x 75 cm
- Small 71 mm design

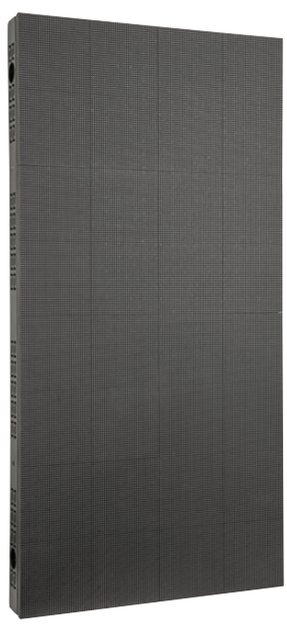

FI-4.8 Indoor

101866 **50 x 100 cm Installation LED Screen**

DMT

Specifications:

Pitch Horz.:	4.8 mm
Pitch Vert.:	4.8 mm
Cab. Res. Width:	104 px
Cab. Res. Height:	208 px
Horz. View °:	140 °
Vert. View °:	140 °
Transparency:	0 %
LED Type:	Black Frame
Brightness:	1000 nits
Ctrl System:	Novastar
Refresh Rate:	1920 Hz
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	195 W
Pwr. Cons. Average:	78 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
Data Conn. In:	ProCat
Data Conn. Out:	ProCat
Cab. Width:	500 mm
Cab. Height:	1000 mm
Cab. Depth:	71 mm
Weight:	14.3 kg
IP Rate:	IP20(indoor use only)
Maintenance:	Front / Rear Service
Fix. Mount. Opt.:	M6

FEATURES:

- 4.8 mm Pixel Pitch
- Suitable for fixed indoor applications
- Black Frame LED
- Front & Rear service
- Wide 140° view angle
- 50 x 100 cm
- Small 71 mm design

FI-3.9 Outdoor

101870 **50 x 75 cm Installation LED Screen**

DMT

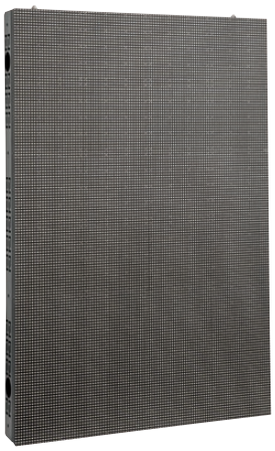

Specifications:

Pitch Horz.:	3.9 mm	Pwr. Cons.:	272 W
Pitch Vert.:	3.9 mm	Pwr. Cons. Average:	109 W
Cab. Res. Width:	128 px	Pwr. Conn. In.:	Pro Power TRUE1 In (Male)
Cab. Res. Height:	192 px	Pwr. Conn. Out.:	ProPower TRUE1 Out (Female)
Horz. View °:	140 °	Data Conn. In:	ProCat
Vert. View °:	140 °	Data Conn. Out:	ProCat
Transparency:	0 %	Cab. Width:	500 mm
LED Type:	Full Black	Cab. Height:	750 mm
Brightness:	5000 nits	Cab. Depth:	71 mm
Ctrl System:	Novastar	Weight:	11.4 kg
Refresh Rate:	1920 Hz	IP Rate:	IP54 Rear / IP65 Front
Pwr. Supp.:	100-240 VAC 50-60 Hz	Maintenance:	Rear Service
		Fix. Mount. Opt.:	M6

FEATURES:

- 3.9 mm Pixel Pitch
- Bright 5000 Nits output and IP65 front
- Suitable for fixed outdoor applications
- Full Black LED
- Wide 140° view angle
- Small 71 mm design
- Rear Service

FI-3.9 Outdoor

101871 **50 x 100 cm Installation LED Screen**

DMT

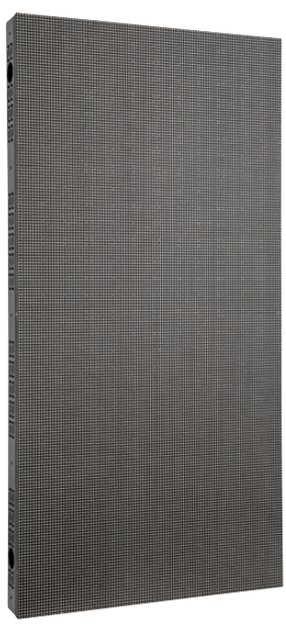

Specifications:

Pitch Horz.:	3.9 mm	Pwr. Cons.:	355 W
Pitch Vert.:	3.9 mm	Pwr. Cons. Average:	142 W
Cab. Res. Width:	128 px	Pwr. Conn. In.:	Pro Power TRUE1 In (Male)
Cab. Res. Height:	256 px	Pwr. Conn. Out.:	ProPower TRUE1 Out (Female)
Horz. View °:	140 °	Data Conn. In:	ProCat
Vert. View °:	140 °	Data Conn. Out:	ProCat
Transparency:	0 %	Cab. Width:	500 mm
LED Type:	Full Black	Cab. Height:	1000 mm
Brightness:	5000 nits	Cab. Depth:	71 mm
Ctrl System:	Novastar	Weight:	14.9 kg
Refresh Rate:	1920 Hz	IP Rate:	IP54 Rear / IP65 Front
Pwr. Supp.:	100-240 VAC 50-60 Hz	Maintenance:	Rear Service
		Fix. Mount. Opt.:	M6

FEATURES:

- 3.9 mm Pixel Pitch
- Bright 5000 Nits output and IP65 front
- Suitable for fixed outdoor applications
- Full Black LED
- Wide 140° view angle
- Small 71 mm design
- Rear Service

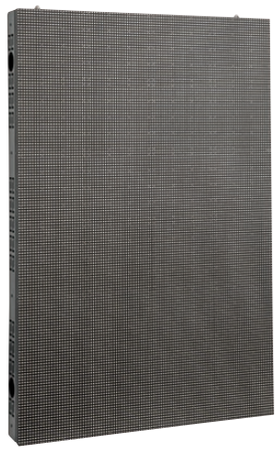

FI-4.8 Outdoor

101875 **50 x 75 cm Installation LED Screen**

DMT

Specifications:

Pitch Horz.:	4.8 mm	Pwr. Cons.:	203 W
Pitch Vert.:	4.8 mm	Pwr. Cons. Average:	82 W
Cab. Res. Width:	104 px	Pwr. Conn. In.:	Pro Power TRUE1 In (Male)
Cab. Res. Height:	156 px	Pwr. Conn. Out.:	ProPower TRUE1 Out (Female)
Horz. View °:	140 °	Data Conn. In:	ProCat
Vert. View °:	140 °	Data Conn. Out:	ProCat
Transparency:	0 %	Cab. Width:	500 mm
LED Type:	Black Frame	Cab. Height:	750 mm
Brightness:	5500 nits	Cab. Depth:	71 mm
Ctrl System:	Novastar	Weight:	11.4 kg
Refresh Rate:	1920 Hz	IP Rate:	IP54 Rear / IP65 Front
Pwr. Supp.:	100-240 VAC 50-60 Hz	Maintenance:	Rear Service
		Fix. Mount. Opt.:	M6

FEATURES:

- 4.8 mm Pixel Pitch
- Bright 5500 Nits output and IP65 front
- Suitable for fixed outdoor applications
- Black Frame LED
- Wide 140° view angle
- Small 71 mm design
- Rear Service

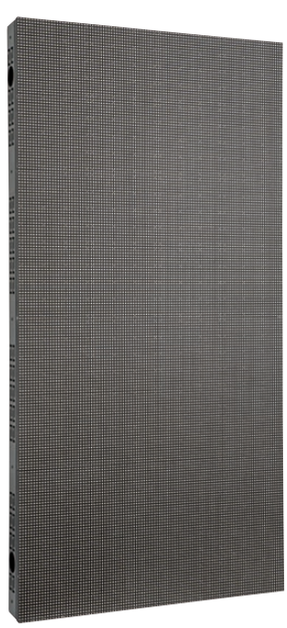

FI-4.8 Outdoor

101876 **50 x 100 cm Installation LED Screen**

DMT

Specifications:

Pitch Horz.:	4.8 mm	Pwr. Cons.:	278 W
Pitch Vert.:	4.8 mm	Pwr. Cons. Average:	111 W
Cab. Res. Width:	104 px	Pwr. Conn. In.:	Pro Power TRUE1 In (Male)
Cab. Res. Height:	208 px	Pwr. Conn. Out.:	ProPower TRUE1 Out (Female)
Horz. View °:	140 °	Data Conn. In:	ProCat
Vert. View °:	140 °	Data Conn. Out:	ProCat
Transparency:	0 %	Cab. Width:	500 mm
LED Type:	Black Frame	Cab. Height:	1000 mm
Brightness:	5500 nits	Cab. Depth:	71 mm
Ctrl System:	Novastar	Weight:	14.9 kg
Refresh Rate:	1920 Hz	IP Rate:	IP54 Rear / IP65 Front
Pwr. Supp.:	100-240 VAC 50-60 Hz	Maintenance:	Rear Service
		Fix. Mount. Opt.:	M6

FEATURES:

- 4.8 mm Pixel Pitch
- Bright 5500 Nits output and IP65 front
- Suitable for fixed outdoor applications
- Black Frame LED
- Wide 140° view angle
- Small 71 mm design
- Rear service

FI Install Series

101850 **FI 1.2 mm**

DMT

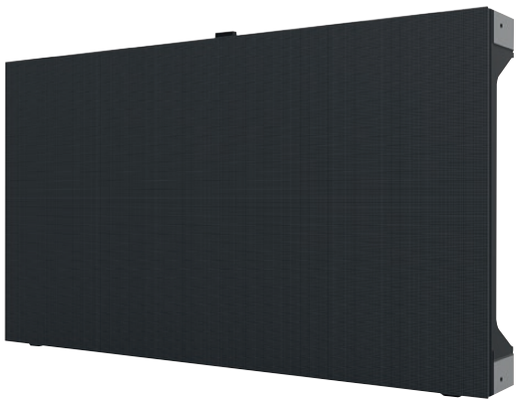

Specifications:

Pitch Horz.:	1.25 mm	Pwr. Cons. Average:	27 W
Pitch Vert.:	1.25 mm	Pwr. Conn. In.:	Internal Powerlink with custom power connector
Cab. Res. Width:	480 px	Pwr. Conn. Out.:	Internal Powerlink with custom power connector
Cab. Res. Height:	270 px	Data Conn. In:	RJ45
Horz. View °:	160 °	Data Conn. Out:	RJ45
Vert. View °:	160 °	Cab. Width:	600 mm
Transparency:	0 %	Cab. Height:	337.5 mm
LED Type:	Full Black	Cab. Depth:	76 mm
Brightness:	800 nits	Weight:	8 kg
Ctrl System:	Novastar	IP Rate:	IP20(indoor use only)
Refresh Rate:	3840 Hz	Maintenance:	Front / Rear Service
Pwr. Supp.:	100-240 VAC 50-60 Hz	Fix. Mount. Opt.:	M8
Pwr. Cons.:	110 W		

FEATURES:

- Pixel Pitch 1.25 mm
- High refresh rate
- Front & Rear Service
- 160° viewing angle
- Lightweight

FI Install Series

101851 **FI 1.5 mm**

DMT

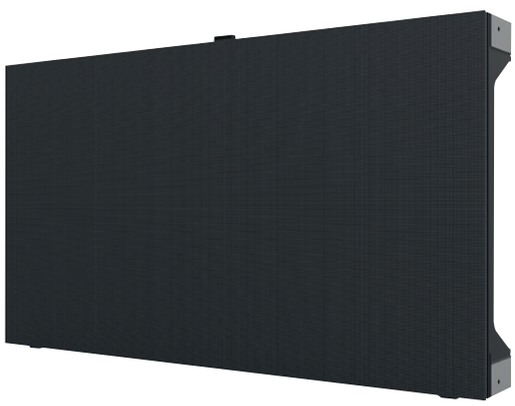

Specifications:

Pitch Horz.:	1.56 mm	Pwr. Cons. Average:	25 W
Pitch Vert.:	1.56 mm	Pwr. Conn. In.:	Internal Powerlink with custom power connector
Cab. Res. Width:	384 px	Pwr. Conn. Out.:	Internal Powerlink with custom power connector
Cab. Res. Height:	216 px	Data Conn. In:	RJ45
Horz. View °:	160 °	Data Conn. Out:	RJ45
Vert. View °:	160 °	Cab. Width:	600 mm
Transparency:	0 %	Cab. Height:	337.5 mm
LED Type:	Full Black	Cab. Depth:	76 mm
Brightness:	800 nits	Weight:	8 kg
Ctrl System:	Novastar	IP Rate:	IP20(indoor use only)
Refresh Rate:	3840 Hz	Maintenance:	Front / Rear Service
Pwr. Supp.:	100-240 VAC 50-60 Hz	Fix. Mount. Opt.:	M8
Pwr. Cons.:	96 W		

FEATURES:

- Pixel Pitch 1.56 mm
- High refresh rate
- Front & Rear service
- 160° viewing angle
- Lightweight

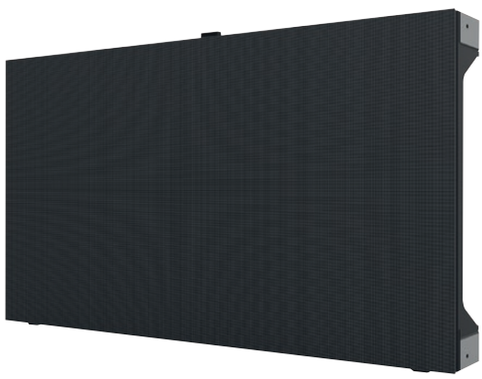

FI Install Series

101852 **FI 1.8 mm**

DMT

Specifications:

Pitch Horz.:	1.87 mm
Pitch Vert.:	1.87 mm
Cab. Res. Width:	320 px
Cab. Res. Height:	180 px
Horz. View °:	160 °
Vert. View °:	160 °
Transparency:	0 %
LED Type:	Full Black
Brightness:	800 nits
Ctrl System:	Novastar
Refresh Rate:	3840 Hz
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	92 W
Pwr. Cons. Average:	24 W
Pwr. Conn. In.:	Internal Powerlink with custom power connector
Pwr. Conn. Out.:	Internal Powerlink with custom power connector
Data Conn. In:	RJ45
Data Conn. Out:	RJ45
Cab. Width:	600 mm
Cab. Height:	337.5 mm
Cab. Depth:	76 mm
Weight:	8 kg
IP Rate:	IP20(indoor use only)
Maintenance:	Front / Rear Service
Fix. Mount. Opt.:	M8

FEATURES:

- Pixel Pitch 1.87 mm
- High refresh rate
- Front & Rear service
- 160° viewing angle
- Lightweight



FI Install Series

101541 6 mm Permanent Outdoor

DMT

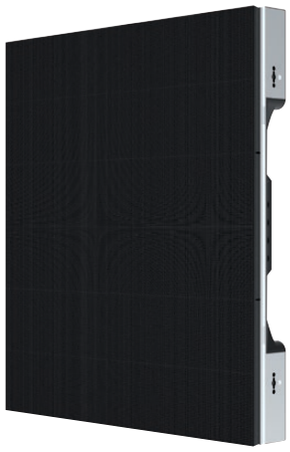

Specifications:

Pitch Horz.:	6.67 mm
Pitch Vert.:	6.67 mm
Cab. Res. Width:	96 px
Cab. Res. Height:	108 px
Horz. View °:	110 °
Vert. View °:	110 °
Transparency:	0 %
LED Type:	Black Frame
Brightness:	5500 nits
Ctrl System:	Novastar
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	260 W
Pwr. Cons. Average:	85 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Data Conn. In:	etherCON
Data Conn. Out:	etherCON
Cab. Width:	640 mm
Cab. Height:	720 mm
Cab. Depth:	113 mm
Weight:	19 kg
IP Rate:	IP65
Maintenance:	Rear Service
Max. Vert. Rigging:	10 Panels
Lock. Sys.:	Fast Lock System

FEATURES:

- 6.67 mm outdoor LED screen
- IP65
- Permanent outdoor use
- Ideal for stadiums, outdoor advertisement, or signage solutions

FI Install Series

101531 10 mm Permanent Outdoor

DMT



Specifications:

Pitch Horz.:	10 mm
Pitch Vert.:	10 mm
Cab. Res. Width:	64 px
Cab. Res. Height:	72 px
Horz. View °:	110 °
Vert. View °:	110 °
Transparency:	0 %
LED Type:	Black Frame
Brightness:	5000 nits
Ctrl System:	Novastar
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Cons. Average:	100 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Data Conn. In:	etherCON
Data Conn. Out:	etherCON
Cab. Width:	640 mm
Cab. Height:	720 mm
Cab. Depth:	119 mm
Weight:	19 kg
Curved Angles:	-7.5 °
IP Rate:	IP65
Maintenance:	Rear Service
Max. Vert. Rigging:	25 Panels
Lock. Sys.:	Fast Lock System

FEATURES:

- 10 mm outdoor LED screen
- IP65
- Permanent outdoor use
- Ideal for stadiums, outdoor advertisement, or signage solutions



Rigging Bar for Premiere Series

101740 Single

DMT

Specifications:

Length (mm):	500 mm
Width (mm):	70 mm
Height (mm):	60 mm
Weight:	4.2 kg
SF:	10:1
Max. Horz. Rigging:	10 Panels
Max. Vert. Rigging:	10 Panels



Rigging Bar for Premiere Series

101741 Double

DMT

Specifications:

Length (mm):	1000 mm
Width (mm):	70 mm
Height (mm):	60 mm
Weight:	8.3 kg
SF:	10:1
Max. Horz. Rigging:	10 Panels
Max. Vert. Rigging:	10 Panels



Rigging Bar for Premiere Series

101742 Triple

DMT

Specifications:

Length (mm):	1500 mm
Width (mm):	70 mm
Height (mm):	60 mm
Weight:	11.9 kg
SF:	10:1
Max. Horz. Rigging:	10 Panels
Max. Vert. Rigging:	10 Panels



Stacking Bracket

101743 Premiere Series

DMT

Specifications:

Length (mm):	272 mm
Width (mm):	133 mm
Height (mm):	50 mm
Weight:	1.42 kg



Perimeter Bracket for Premiere Series

101744 For all all Premiere Serie LED screens

DMT

Specifications:

Length (mm):	647 mm
Base Length:	647 mm
Width (mm):	998 mm
Base Width:	998 mm
Height (mm):	1000 mm
Weight:	9.81 kg
Max. Stack Height:	1 m
Lock. Sys.:	Fast Lock System

Mounting Bracket for FI-3.9 and FI-4.8 Series

101881 **Mounting Bracket**

DMT

Specifications:

Length (mm):	100 mm
Width (mm):	125 mm
Height (mm):	60 mm
Weight:	0.34 kg



Alignment Plate for FI-3.9 and FI-4.8 Series

101882 **Alignment Plate**

DMT

Specifications:

Length (mm):	100 mm
Width (mm):	100 mm
Height (mm):	9 mm
Weight:	0.19 kg



Rigging Bar for E6

101378 **Single**

DMT

Specifications:

Length (mm):	65 mm
Width (mm):	474 mm
Height (mm):	70 mm
Weight:	4.1 kg
SF:	10:1
Max. Vert. Rigging:	10 Panels



Rigging Bar for E6

101379 **Double**

DMT

Specifications:

Length (mm):	65 mm
Width (mm):	974 mm
Height (mm):	70 mm
Weight:	8.2 kg
SF:	10:1
Max. Vert. Rigging:	10 Panels



Front Service Tool for PS-G2

101765 **Front Service tool**

DMT

Specifications:

Material:	Aluminium



Front Service Tool for FI3.9/4.8 Indoor

101880 **Front Service tool**

DMT

Specifications:

Height (mm):	103 mm
Length (mm):	165 mm
Width (mm):	115 mm
Material:	Metal
Housing:	Metal
Weight:	1.92 kg



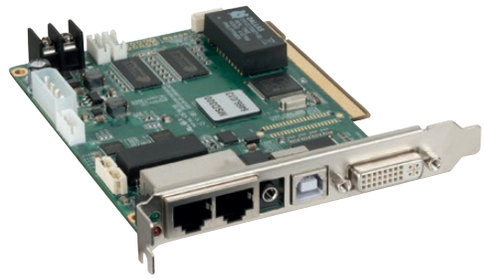

MSD-300

101610 **Sender Box**

NOVASTAR

Specifications:

DVI Single Link:	1	Max. Load. Cap.:	1300000 px
Light Sens. Prt.:	1	Max. In. Res.:	Width and Height can be defined by users
Scale funct.:	No	Pwr. Supp.:	5 VDC
Ctrl System:	Novastar	Pwr. Cons.:	0.1 W
		Data Conn. Out:	RJ45

FEATURES:

- Cabinet config files saving and sending
- 2x ethernet output port
- DVI video Input port
- Lightsensor interface port
- Audio Input



MCTRL-300

101629 **Sender Box**

NOVASTAR

Specifications:

DVI Single Link:	1	Max. In. Res.:	Width and Height can be defined by users
Scale funct.:	No	Pwr. Supp.:	100-240 VAC 50-60 Hz
Ctrl System:	Novastar	Pwr. Cons.:	16 W
Max. Load. Cap.:	1300000 px	Pwr. Conn. In.:	IEC C13 female
		Data Conn. Out:	RJ45

FEATURES:

- Cabinet config files saving and sending
- 2x ethernet output port
- DVI Video Input port
- Light sensor interface port
- Audio Input



MCTRL600

101622 **Sender Box**

NOVASTAR

Specifications:

		defined by users	
		Controlling Mode:	USB
HDMI 1.3:	1	Pwr. Supp.:	100-240 VAC 50-60 Hz
DVI Single Link:	1	Pwr. Cons.:	16 W
Ctrl System:	Novastar	Pwr. Conn. In.:	IEC C13 female
Max. Load. Cap.:	2300000 px	Data Conn. Out:	RJ45
Max. In. Res.:	Width and Height can be		

FEATURES:

- Cabinet config files saving and sending
- Full HD Pixels capacity
- HDCP & 12-bit HDMI/DVI input
- 8/10/12-bit Colour Depth
- 4x gigabit ethernet output port
- Audio input
- Lightsensor input

MCTRL-660

101620 Sender Box

NOVASTAR

Specifications:

HDMI 1.3:	1
DVI Single Link:	1
HDMI 1.3 (loop):	1
DVI Single Link (loop):	1
Scale funct.:	No
Ctrl System:	Novastar
Max. Load. Cap.:	2300000 px
Max. In. Res.:	Width and Height can be defined by users
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	16 W
Data Conn. In:	RJ45 / USB
Data Conn. Out:	RJ45



FEATURES:

- Cabinet config files saving and sending
- Brightness, colour and Test Pattern adjustable by knob
- Full HD Pixels capacity
- HDCP & 12-bit HDMI

MCTRL-660 Pro

101621 Sender Box

NOVASTAR

Specifications:

HDMI 1.4a:	1
DVI Single Link:	1
3G-SDI:	1
HDMI 1.4a (loop):	1
DVI Single Link (loop):	1
3G-SDI (loop):	1
SFP Slot Type:	10G
SFP Slots:	2
Scale funct.:	No
GenLock:	In & Out
Max. Load. Cap.:	2300000 px
Max. In. Res.:	Width and Height can be defined by users
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	20 W
Data Conn. In:	RJ45 / USB
Data Conn. Out:	RJ45



FEATURES:

- Low latency of less than 1 frame
- Cabinet config files saving and sending
- Brightness, colour and test pattern adjustable by knob
- Full HD capacity
- 8/10/12-bit colour Depth
- 3G-SDI Input/loop
- 6 x gigabit ethernet output port
- 2 x 10G optical output port
- Genlock In / Loop

Novastar MCTRL-700

101619 Sender Box

NOVASTAR

Specifications:

Stereo In.:	1
Stereo In. Conn.:	TRS bal. 3.5 mm
HDMI 1.3:	1
DVI Single Link:	1
Main Out.:	6
HDMI 1.3 (loop):	1
DVI Single Link (loop):	1
Scale funct.:	No
GenLock:	No
Max. Load. Cap.:	2300000 px
Max. In. Res.:	1920 x 1200
Controlling Mode:	USB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	12 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. Out:	RJ45

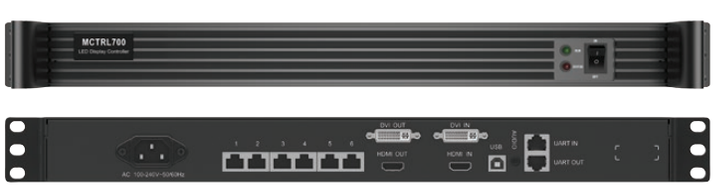

FEATURES:

- 6x Gigabit Ethernet output sender box
- HDMI, DVI and audio input
- 8/10/12-bit Colour Depth
- Full HD pixel capacity
- Control up to 2.3 million pixels
- Multiple units cascadable for uniform control
- Cabinet config files saving and sending



VX4S-N

101628 Video Processor

NOVASTAR

Specifications:

Stereo In.:	1
Stereo In. Conn.:	TRS bal. 3.5 mm
DP1.1:	1
HDMI 1.3:	1
DVI Single Link:	1
3G-SDI:	1
VGA (in):	1
CVBS (in):	1
Main Out.:	4
DVI Single Link (loop):	1
DVI Single Link (Mon. Out.):	1
3G-SDI (loop):	1
Scale funct.:	Yes
Image Mosaic:	Yes
PIP:	Yes
Ctrl System:	Novastar
Max. Load. Cap.:	2300000 px
Max. In. Res.:	1920 x 1200 / Width and Height can be defined by users
Controlling Mode:	Ethernet / USB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	25 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. In:	RJ45 / USB A
Data Conn. Out:	RJ45 / USB B

FEATURES:

- Internal scaling function
- Supports 3G-SDI, DVI, HDMI 1.3, DisplayPort, VGA, CVBS
- High bit depth video input (8/10 bit)
- Supports Image Mosaic
- 4 output ports control up to 2,300,000 pixels
- Supports PIP



VX6S

101632 Video Processor

NOVASTAR

Specifications:

HDMI 1.3:	2
DVI Single Link:	2
3G-SDI:	2
Main Out.:	6
DVI Single Link (loop):	1
Scale funct.:	Yes
Ctrl System:	Novastar
Max. Load. Cap.:	3900000 px
Max. In. Res.:	1920 x 1200 / Width and Height can be defined by users
Controlling Mode:	Ethernet / USB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	16 W
DMX Conn. out:	RJ45
Data Conn. In:	RJ45
Data Conn. Out:	RJ45

FEATURES:

- Input: 2x 3G-SDI, 2x HDMI 1.3, 2x DVI, 1x USB (for content playback)
- Outputs: 6x ethernet output port
- Maximum video output width is 4096P
- Internal scaling function
- Switching effects, quick seamless switching and fade
- Supports 3x layers and 1x OSD
- Supports PGM preview in switcher mode
- Supports adjustment of input resolutions and backup of input source



VX1000

101627 Video Processor

NOVASTAR

Specifications:

HDMI 1.4a:	2
DVI Dual Link:	2
3G-SDI:	1
Main Out.:	10
HDMI 1.3 (MVR):	1
HDMI 1.4a (loop):	1
DVI Dual Link (loop):	1
3G-SDI (loop):	1
SFP Slot Type:	10G
SFP Slots:	2
Scale funct.:	Yes
Image Mosaic:	Yes
PIP:	Yes
Layers:	3
GenLock:	In & Out
Max. Load. Cap.:	6500000 px
Max. In. Res.:	3840 x 1080 / Width and Height can be defined by users
Controlling Mode:	Ethernet / USB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	28 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. In:	RJ45 / USB
Data Conn. Out:	RJ45

FEATURES:

- Internal scaling function
- Inputs: 1x 3G-SDI, 2x DVI, 2x HDMI 1.4
- Outputs: 1x HDMI 1.3, 10x Ethernet, 2x optical (optional)
- Supports Image Mosaic
- Supports 2x PIP
- 10 output ports control up to 6,500,000 pixels
- Up to 4 units can be combined for higher resolutions

Pro HD

101631 Video Processor

NOVASTAR



Specifications:

DP1.1:	1
HDMI 1.3:	1
DVI Single Link:	1
3G-SDI:	1
VGA (in):	1
CVBS (in):	1
HDMI 1.3 (loop):	1
DVI Single Link (loop):	2
GenLock:	In & Out
Ctrl System:	Novastar
Max. Load. Cap.:	2300000 px
Controlling Mode:	Ethernet / USB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	30 W
Data Conn. Out:	etherCON

FEATURES:

- All-in-One controller with scaler and PIP
- Input: DP/ HDMI / DVI / VGA / CVBS / SDI
- 8/10/12-bit colour depth
- 4x gigabit ethernet output port
- 4x fibre optical output port
- Monitor output 1x HDMI/1x DVI
- Audio input
- DMX512 In/Output
- Genlock

Phobos R5

101650 Sender Box

NOVASTAR



Specifications:

HDMI 1.4a:	1
DVI Dual Link:	1
6G-SDI:	1
Main Out.:	8
GenLock:	In & Out
Ctrl System:	Novastar
Max. Load. Cap.:	5200000 px
Controlling Mode:	Ethernet / USB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	25 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. Out:	etherCON / RJ45

FEATURES:

- Free rotation
- Neutrik etherCON outputs
- Easy operation
- 4 K capacity

Phobos MCTRL4K

101652 Sender Box

NOVASTAR



Specifications:

DP1.2:	1
HDMI 2.0:	1
DVI Dual Link:	2
Main Out.:	16
SFP Slot Type:	10G
SFP Slots:	4
Scale funct.:	No
GenLock:	In & Out
Ctrl System:	Novastar
Max. Load. Cap.:	10400000 px
Max. In. Res.:	Width and Height can be defined by users
Controlling Mode:	Ethernet / USB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	30 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. Out:	etherCON / RJ45

FEATURES:

- Real 4 K Controller
- HDR10 supported
- DP 1.2 / Dual-link DVI / HDMI 2.0
- 8/10/12-bit Colour Depth
- 16 x gigabit ethernet output port
- 4 x optical fibre output port
- Genlock





NovaPro UHD Jr

101633 **All in one Controller**

NOVASTAR

Specifications:

DP1.1:	1
HDMI 2.0:	1
DVI Single Link:	4
12G-SDI:	2
HDMI 2.0 (loop):	1
12G-SDI (loop):	2
GenLock:	In & Out
Max. Load. Cap.:	10400000 px
Max. In. Res.:	2048 x 1152 / 3840 x 1080 / 3840 x 2160 / 4096 x 2160
Controlling Mode:	Ethernet / USB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	70 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. Out:	etherCON

FEATURES:

- All-in-One 4K controller with scaler and PIP
- HDR10 supported
- DVI / DP 1.2 / HDMI 2.0 / 12G-SDI
- 8/10/12-bit colour depth
- 16 x gigabit ethernet output port
- 4 x fibre optical output port
- Genlock





NovaPro UHD

101634 **All in one Controller**

NOVASTAR

Specifications:

DP1.2:	1
HDMI 1.3:	4
HDMI 2.0:	1
12G-SDI:	4
Main Out.:	16
HDMI 1.3 (MVR):	1
HDMI 2.0 (loop):	1
HDMI (for ctrl):	1
GenLock:	In & Out
Ctrl System:	Novastar
Max. Load. Cap.:	10400000 px
Max. In. Res.:	1920 x 1080 / 4K x 2K / Width and Height can be defined by users
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	180 W

FEATURES:

- All-in-One 4K controller with scaler and Video Switching functions
- Master VI smart platform for direct control
- DP 1.2 / HDMI 2.0 / HDMI 1.3 / 12G-SDI
- 8/10/12-bit colour depth
- 16 x gigabit ethernet output port
- 4 x 10G SFP fibre port
- Genlock

Taurus T3

101689 **Multimedia Player & Sender Box for LED screen**

NOVASTAR

Specifications:

Light Sens. Prt.:	1
Temp. Sens. Prt.:	1
Int. Media player:	Yes
Processor:	1.5 GHz - Eight-core
Memory:	2 GB
Int. Storage:	8 GB
Local Content Upload:	Ethernet / USB
Scale funct.:	Yes
Ctrl System:	Novastar
Max. Load. Cap.:	650000 px
Controlling Mode:	Ethernet / Wi-Fi
Pwr. Supp.:	5 VDC
Pwr. Cons.:	15 W
Pwr. Conn. In.:	Terminal
Data Conn. In:	RJ45 / USB
Data Conn. Out:	RJ45



FEATURES:

- All-in-one solution: mediaplayer and sendingcard with scaling function
- Control up to 650,000 pixels
- Connect via Ethernet, Wi-Fi or 4G
- Upload new media and change screen settings remotely via Mobile/PC
- 2 ethernet output ports (1 for fixed backup)
- USB port and 8 GB internal memory
- Temperature and light sensor port

Taurus T6

101690 **Multimedia Player & Sender Box for LED screen**

NOVASTAR

Specifications:

HDMI 1.3:	1
Light Sens. Prt.:	1
Temp. Sens. Prt.:	1
HDMI 1.3 (loop):	1
Int. Media player:	Yes
Processor:	1.5 GHz - Eight-core
Memory:	2 GB
Int. Storage:	8 GB
Local Content Upload:	Ethernet / USB
Scale funct.:	Yes
Ctrl System:	Novastar
Max. Load. Cap.:	1300000 px
Controlling Mode:	Ethernet / Wi-Fi
Pwr. Supp.:	5 VDC
Pwr. Cons.:	18 W
Pwr. Conn. In.:	Terminal
Data Conn. In:	RJ45 / USB
Data Conn. Out:	RJ45



FEATURES:

- All-in-one solution: mediaplayer and sendingcard with scaling function
- Control up to 1,300,000 pixels
- Connect via HDMI, Ethernet, Wi-Fi or 4G
- Upload new media and change screen settings remotely via Mobile/PC
- 4 ethernet output ports (2 for fixed backup)
- USB port and 8 GB internal memory
- Temperature and light sensor port



Taurus TB3

101691 **Multimedia Player & Sender Box for LED screen**

NOVASTAR

Specifications:

Light Sens. Prt.:	1
Temp. Sens. Prt.:	1
Int. Media player:	Yes
Processor:	1.5 GHz - Eight-core
Memory:	2 GB
Int. Storage:	8 GB
Local Content Upload:	Ethernet / USB
Scale funct.:	Yes
Ctrl System:	Novastar
Max. Load. Cap.:	650000 px
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	15 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. In:	RJ45 / USB
Data Conn. Out:	RJ45

FEATURES:

- All-in-one solution: mediaplayer and sendingcard with scaling function
- Control up to 650,000 pixels
- Connect via Ethernet, Wi-Fi or 4G
- Upload new media and change screen settings remotely via Mobile/PC
- 2 ethernet output ports (1 for fixed backup)
- USB port and 8 GB internal memory
- Temperature and light sensor port



Taurus TB6

101692 **Multimedia Player & Sender Box for LED screen**

Specifications:

HDMI 1.3:	1
Light Sens. Prt.:	1
Temp. Sens. Prt.:	1
HDMI 1.3 (loop):	1
Int. Media player:	Yes
Processor:	1.5 GHz - Eight-core
Memory:	2 GB
Int. Storage:	8 GB
Local Content Upload:	Ethernet / USB
Scale funct.:	Yes
Ctrl System:	Novastar
Max. Load. Cap.:	1300000 px
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	18 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. In:	RJ45 / USB
Data Conn. Out:	RJ45

FEATURES:

- All-in-one solution: mediaplayer and sendingcard with scaling function
- Control up to 1,300,000 pixels
- Connect via HDMI, Ethernet, Wi-Fi or 4G
- Upload new media and change screen settings remotely via Mobile/PC
- 4 ethernet output ports (2 for fixed backup)
- USB port and 8 GB internal memory
- Temperature and light sensor port





Taurus TB8

101693 **Multimedia Player & Sender Box for LED screen**

Specifications:

HDMI 1.3:	1
Light Sens. Prt.:	1
Temp. Sens. Prt.:	1
HDMI 1.3 (loop):	1
Int. Media player:	Yes
Processor:	1.5 GHz - Eight-core
Memory:	2 GB
Int. Storage:	8 GB
Local Content Upload:	Ethernet / USB
Scale funct.:	Yes
Ctrl System:	Novastar
Max. Load. Cap.:	2300000 px
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	20 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. In:	RJ45 / USB
Data Conn. Out:	RJ45

FEATURES:

- All-in-one solution: mediaplayer and sendingcard with scaling function
- Control up to 2,300,000 pixels
- Connect via HDMI, ethernet, Wi-Fi or 4G
- Upload new media and change screen settings remotely via Mobile/PC
- 4 ethernet output ports (main or backup port)
- USB port and 8 GB internal memory
- Temperature and light sensor port



TCB-300

101696 **Multimedia Player**

Specifications:

Main Out.:	1
HDMI 1.3 (loop):	1
Processor:	1.2 GHz
Memory:	1 GB
Int. Storage:	32 GB
Local Content Upload:	Ethernet / USB
Scale funct.:	Yes
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	15 W
Data Conn. In:	RJ45 / USB
Data Conn. Out:	HDMI

FEATURES:

- Media player with HDMI & Audio output
- Built-in Wi-Fi Access point for easy content upload by smart phone or tablet
- VNNOX cloud platform
- 4G module optionally available



H Series 4x DVI Input Card

NOVASTAR

101660 **Single and Dual Link**

DVI Single Link:	4
DVI Dual Link:	2
Input Slots:	1
Max. In. Res.:	2048 x 1152 / 3840 x 1080



H Series 4x HDMI Input Card

NOVASTAR

101661 **4x HDMI 1.3 or 2x HDMI 1.4**

HDMI 1.3:	2
HDMI 1.4a:	2
Input Slots:	1
Max. In. Res.:	2048 x 1152 / 3840 x 1080



H Series 1x HDMI 2.0 / 1x DP 1.2 Input Card

NOVASTAR

101662 **1x HDMI 2.0 or 1x DP 1.2**

DP1.2:	1
HDMI 2.0:	1
Input Slots:	1
Max. In. Res.:	8192 x 1080 / 4096 x 2160



H Series 2x RJ45 IP Input Card

NOVASTAR

101663 **For Streaming Video Sources**

Ip Decoding:	2
Input Slots:	1
Max. In. Res.:	1920 x 1080 / 3840 x 2160
Data Conn. In:	RJ45



H Series 4x 3G-SDI Input Card

NOVASTAR

101664 **4x Full HD @ 60 Hz**

3G-SDI:	4
Input Slots:	1
Max. In. Res.:	1920 x 1080



H Series 2x CVBS / 2x VGA Input Card

NOVASTAR

101665 **Supports VGA, PAL, and NTSC**

VGA (in):	2
CVBS (in):	2
Input Slots:	1
Max. In. Res.:	1920 x 1080



H Series 4x VGA Input Card

NOVASTAR

101666 **4x 1920x1200 @60 Hz**

VGA (in):	4
Input Slots:	1
Max. In. Res.:	1920 x 1080



H Series 2x DP 1.1 Input Card

NOVASTAR

101667 **2x DP 1.1 – 2x 4K @30 Hz**

DP1.1:	2
Input Slots:	1
Max. In. Res.:	3840 x 1080



H Series 1x 12G-SDI Input Card

NOVASTAR

101668 **Up to 4096x2160 @ 60 Hz**

12G-SDI:	1
Input Slots:	1
12G-SDI (loop):	1
Max. In. Res.:	4096 x 2160



H Series 16x RJ45 plus 2x Fibre 4K Sending Card

NOVASTAR

101670 **Drives up to 10,400,000 pixels**

Main Out.:	16
Output Slots:	2
SFP Slot Type:	10G
SFP Slots:	2
Scale funct.:	Yes
Max. Load. Cap.:	10400000 px
Greyscale Processing:	10 bit
Data Conn. Out:	RJ45



H Series 20x RJ45 4K Sending Card

NOVASTAR

101671 **Drives up to 13,000,000 pixels**

Main Out.:	20
Output Slots:	2
Scale funct.:	Yes
Max. Load. Cap.:	13000000 px
Greyscale Processing:	10 bit
Data Conn. Out:	RJ45



H Series 2x RJ45 plus 1x HDMI 1.3 Preview Card

NOVASTAR

101672 **Connect to network or monitor**

Main Out.:	2
HDMI 1.3 (MVR):	1
Output Slots:	1
Data Conn. Out:	RJ45

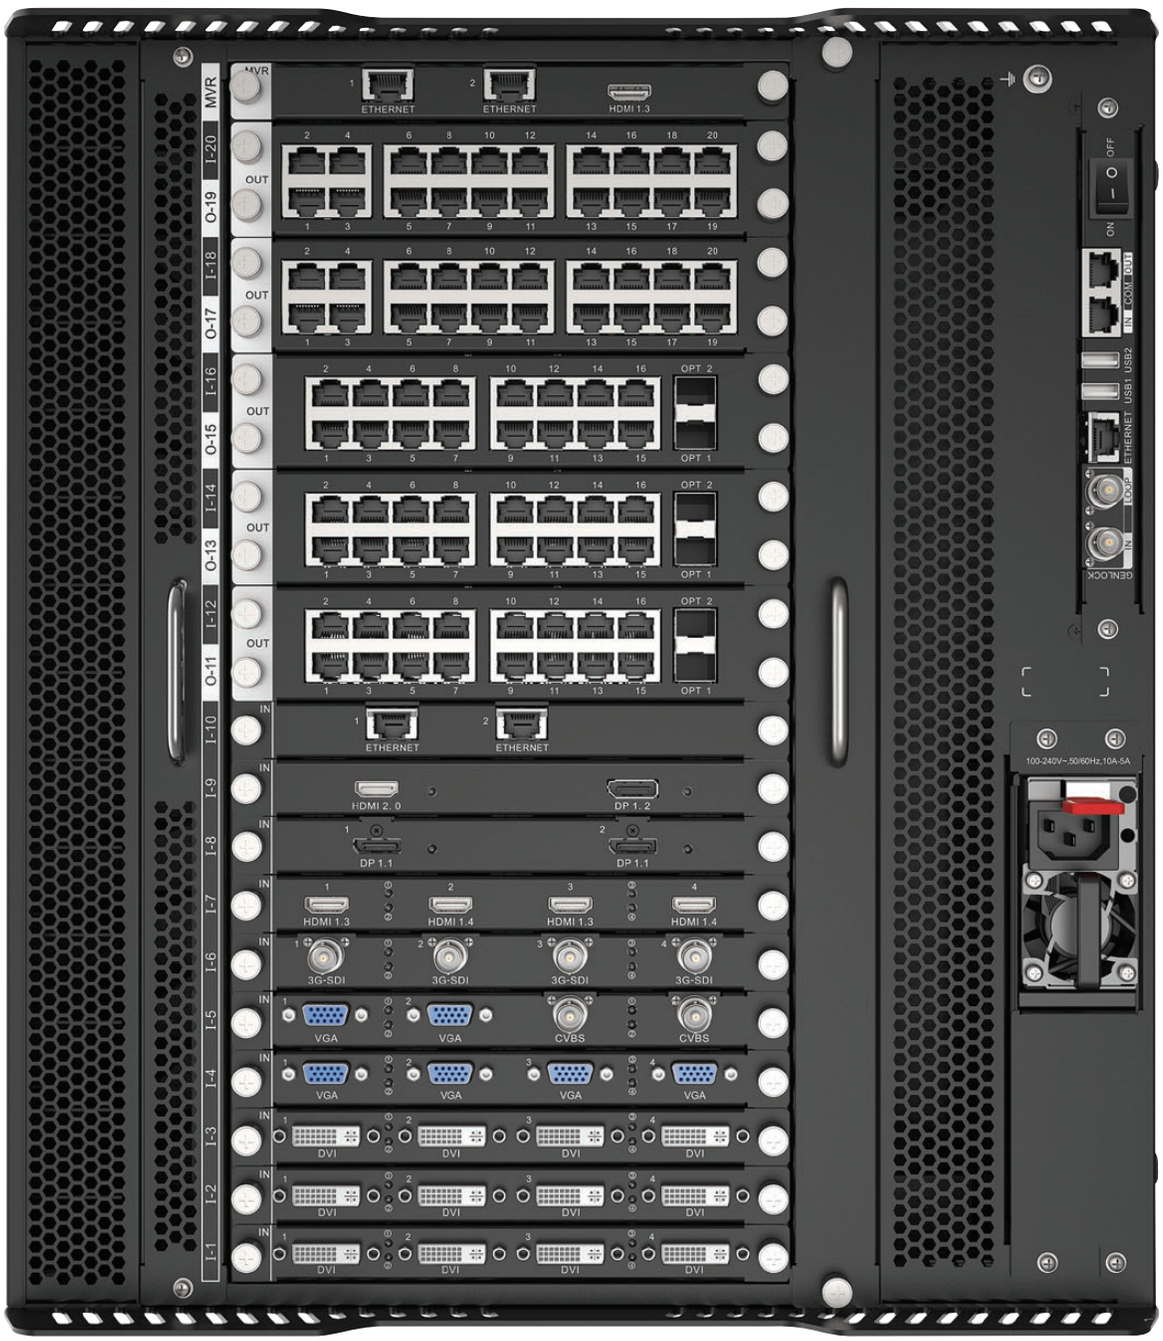
MVR
ETHERNET
ETHERNET
HDMI 1.3
O-19 I-20
O-17 I-18
O-15 I-16
O-13 I-14
O-11 I-12
OUT
OPT 1
OPT 2
I-10
I-9
I-8
I-7
I-6
I-5
I-4
I-3
I-2
I-1
IN
HDMI 2. 0
DP 1. 2
DP 1.1
HDMI 1.3
HDMI 1.4
3G-SDI
VGA
CVBS
DVI
OFF
ON
COM
USB2
USB1
ETHERNET
GENLOCK
100-240V~,50/60Hz,10A-5A



H-Series H2 Main Frame

101675 **Video Wall Splicer for 26 Megapixels**

NOVASTAR

Specifications:

RS-232:	1	GenLock:	In & Out
Input Slots:	4	Max. Load. Cap.:	26000000 px
Output Slots:	2	Controlling Mode:	Ethernet / RS232
Scale funct.:	Yes	Pwr. Supp.:	100-240 VAC 50-60 Hz
Crop Set.:	Yes	Pwr. Cons.:	210 W
Layers:	32	Pwr. Conn. In.:	IEC C13 female
		Data Conn. In:	RJ45
		Data Conn. Out:	RJ45

FEATURES:

- Supports up to 26,000,000 pixels, 4 input cards, and 2 output cards
- HDR10, HLG, and 10-bit processing
- Web Control



H-Series H5 Main Frame

101676 **Video Wall Splicer for 39 Megapixels**

NOVASTAR

Specifications:

RS-232:	1	GenLock:	In & Out
Input Slots:	10	Max. Load. Cap.:	39000000 px
Output Slots:	3	Controlling Mode:	Ethernet / RS232
Scale funct.:	Yes	Pwr. Supp.:	100-240 VAC 50-60 Hz
Crop Set.:	Yes	Pwr. Cons.:	400 W
Layers:	48	Pwr. Conn. In.:	IEC C13 female
		Data Conn. In:	RJ45
		Data Conn. Out:	RJ45

FEATURES:

- Supports up to 39,000,000 pixels, 10 input cards, and 3 output cards
- Supports redundant power supply
- HDR10, HLG, and 10-bit processing
- Web Control



H-Series H9 Main Frame

101677 **Video Wall Splicer for 65 Megapixels**

NOVASTAR

Specifications:

RS-232:	1	GenLock:	In & Out
Input Slots:	15	Max. Load. Cap.:	65000000 px
Output Slots:	5	Controlling Mode:	Ethernet / RS232
Scale funct.:	Yes	Pwr. Supp.:	100-240 VAC 50-60 Hz
Crop Set.:	Yes	Pwr. Cons.:	450 W
Layers:	80	Pwr. Conn. In.:	IEC C13 female
		Data Conn. In:	RJ45
		Data Conn. Out:	RJ45

FEATURES:

- Supports up to 65,000,000 pixels, 15 input cards, and 5 output cards
- Supports redundant power supply
- HDR10, HLG, and 10-bit processing
- Web Control

H-Series H15 Main Frame

101678 **Video Wall Splicer for 130 Megapixels**

NOVASTAR

Specifications:

RS-232:	1	GenLock:	In & Out
Input Slots:	30	Max. Load. Cap.:	130000000 px
Output Slots:	10	Controlling Mode:	Ethernet / RS232
Scale funct.:	Yes	Pwr. Supp.:	100-240 VAC 50-60 Hz
Crop Set.:	Yes	Pwr. Cons.:	900 W
Layers:	160	Pwr. Conn. In.:	IEC C13 female
		Data Conn. In:	RJ45
		Data Conn. Out:	RJ45

FEATURES:

- Supports up to 130,000,000 pixels, 30 input cards, and 10 output cards
- Supports redundant power supply
- HDR10, HLG, and 10-bit processing
- Web Control



Backup Power Supply for H Series H5/H9/H15

101679 **Ensures non-stop operation**

NOVASTAR

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Conn. In.:	IEC C13 female

FEATURES:

- Backup Power Supply
- Provides power if primary power supply fails
- Perfect fit for H Series H5, H9 and H15

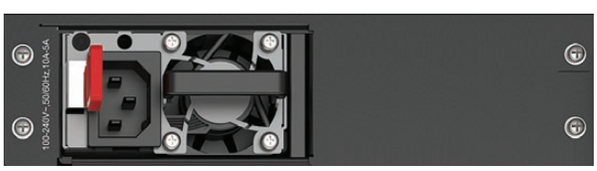



D1 Mini Video Switcher

101285 **4-input video switcher**

DMT

Specifications:

Stereo In.:	1	PIP:	Yes
Stereo In. Conn.:	TRS balanced 3.5 mm	Trans. FX:	Yes
HDMI 1.3:	4	Max. In. Res.:	1920 x 1080
Main Out.:	1	Max. Out. Res.:	1920 x 1080
Main Out. Conn.:	TRS balanced 3.5 mm	Ethernet Ports:	1
USB 3.0 (out):	1	Pwr. Supp.:	12 VDC
HDMI 1.4 (out):	1	Pwr. Cons.:	15 W
		Pwr. Conn. In.:	Low Voltage DC plug

FEATURES:

- Easy and compact video mixer
- Control up to 4 HDMI devices
- HDMI and USB-C output suitable for live streaming
- 2 inch preview screen
- Various split screen & 15 cross-fade switching effects
- Automatic input resolution up/down scaling



D1 Video Mixer with Scaler

101281 **Onboard LCD Touch Screen**

DMT

Specifications:

Stereo In.:	1	DSK/Chroma:	Yes
Stereo In. Conn.:	RCA	Blend:	Yes
HDMI 2.0:	4	Mask:	Yes
Main Out.:	1	Trans. FX:	Yes
Main Out. Conn.:	RCA	GenLock:	In
HDMI (PVW / MVR):	1	Max. In. Res.:	1920 x 1080
HDMI (PGM):	1	Greyscale Processing:	12 bit
Scale funct.:	Yes	Processing Engine:	10 bit
PIP:	Yes	Pwr. Supp.:	100-240 VAC 50-60 Hz
Layers:	2	Pwr. Cons.:	65 W
		Pwr. Conn. In.:	IEC C13 female

FEATURES:

- Fully integrated mixer and scaler
- Dedicated Preview output
- Onboard LCD Touch Screen
- Integrated audio
- Transition effects
- PIP, OSD, DSK, BLEND, MASK, LOGO and STILL
- Sync to Genlock
- Individual Pixel-to-Pixel scaling per input



HDR Master 4K

101635 **4K video processor for improving image quality (SDR - HDR)**

NOVASTAR

Specifications:

DP1.2:	1	Image Mosaic:	Yes
HDMI 2.0:	1	Layers:	1
12G-SDI:	4	GenLock:	In & Out
USB 2.0 (in):	3	BKG:	Yes
HDMI 2.0 (out):	2	Logo:	Yes
HDMI (for ctrl):	1	Max. In. Res.:	4K x 2K
12G-SDI (out):	4	Max. Out. Res.:	4K x 2K
SFP Slot Type:	10G	Ethernet Ports:	1
SFP Slots:	4	Pwr. Supp.:	100-240 VAC 50-60 Hz
Scale funct.:	Yes	Pwr. Cons.:	120 W
		Pwr. Conn. In.:	IEC C13 female
		Data Conn. In:	RJ45

FEATURES:

- 4K video processor from SDR to HDR
- Switchable inputs (HDMI, DP1.2 & 4x 12G-SDI)
- Multiple outputs (2x HDMI & 4x 12G-SDI)
- Synchronise devices with genlock function
- Scalable resolution up to 4K
- Logo and background layering function
- Bridging large distances with fiber connection

C1

101682 Desktop Console

NOVASTAR

Specifications:

HDMI 1.3:	1
RS-232:	1
HDMI 1.3 (loop):	1
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	50 W



FEATURES:

- Two onboard LCDs
- Easy remote setup of video processor J6 and N9
- Remote control of video processor by RJ45
- Supports up to 8 layers, 1 OSD, 1 x BKG and 1 LOGO
- Remote configurations of shape layers and layer masks

J6 Switcher

101680 Multi-Screen Splicing Video Processor

NOVASTAR

Specifications:

DP1.1:	1
HDMI 1.3:	1
DVI Single Link:	4
3G-SDI:	2
HDMI 1.3 (loop):	1
DVI Single Link (loop):	8
DVI Dual Link (loop):	4
3G-SDI (loop):	2
Ctrl SW:	Vcan
GenLock:	In & Out
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	50 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. Out:	etherCON / RJ45



FEATURES:

- Wide range of inputs: HDMI / DP 1.1 / DVI / SDI
- 4 output groups with each 2 x DVI (main output & splicing preview)
- Output resolution can be customised by user
- Preview HDMI monitor output
- Genlock input & loop
- Control by ethernet or USB
- Control by V-can software or front panel

N9 Switcher

101681 Multi-Screen Splicing Video Processor

NOVASTAR

Specifications:

DP1.1:	1
DP1.2:	1
HDMI 1.3:	2
DVI Single Link:	4
3G-SDI:	1
DP1.2 (loop):	1
HDMI 1.4 (Auxiliary):	2
HDMI (PVW / MVR):	1
DVI Single Link (loop):	8
DVI Dual Link (loop):	4
3G-SDI (loop):	1
SFP Slot Type:	10G
SFP Slots:	4
Ctrl SW:	Vcan
GenLock:	In & Out
Ctrl System:	Novastar
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	95 W
Pwr. Conn. In.:	IEC C13 female



FEATURES:

- Wide range of inputs: HDMI 1.3 / DP 1.1 & 1.2 / DVI / 3G-SDI
- 4 output groups with each 2 x DVI (main output & splicing preview)
- In-/output resolution can be customised by user
- Preview HDMI monitor output
- Genlock input & loop
- Control by ethernet or USB
- Control by V-can software or front panel



Multifunction Card MFN300

101614 **Multifunction Card**

NOVASTAR

Specifications:

RS-232:	1	Relay Cont. Type:	NC
Light Sens. Prt.:	4	Ctrl System:	Novastar
Temp. Sens. Prt.:	4	Port map.:	Software Based
Main Out. Conn.:	TRS balanced 3.5 mm	Pwr. Supp.:	5 VDC
Relay Cont.:	8	Pwr. Conn. In.:	Molex
		Data Conn. In:	RJ45
		Data Conn. Out:	RJ45

FEATURES:

- 2 x ethernet port connection for use at any position within the screen network
- 4 x external sensor inputs, to add light/temperature sensor
- Audio output
- RS-232 connection
- 8 x relay power switch control



Multifunction Box MFN300

101611 **Multifunction Box**

NOVASTAR

Specifications:

RS-232:	1	Relay Cont. Type:	NC
Light Sens. Prt.:	2	Ctrl System:	Novastar
Temp. Sens. Prt.:	2	Pwr. Supp.:	100-240 VAC 50-60 Hz
Main Out. Conn.:	TRS balanced 3.5 mm	Pwr. Cons.:	3.8 W
Relay Cont.:	8	Pwr. Conn. In.:	IEC C13 female
		Data Conn. In:	RJ45
		Data Conn. Out:	RJ45

FEATURES:

- 2 x ethernet port connection for use at any position within the screen network
- 2 x external sensor inputs for additional for additional Light/ Temperature sensor
- Audio output
- RS-232 connection
- 8 x relay power switch control



Light Sensor

101612 **5 m Cable**

101616 **10 m Cable**

101615 **30 m Cable**

NOVASTAR

Specifications:

Bright. Range:	0-65535 lx	Max. Cable Length:	100 m
Cable Length Sens.:	500 cm	Ctrl System:	Novastar
		Pwr. Supp.:	5 VDC

FEATURES:

- Automatic brightness adjustment / ambient brightness monitoring
- Waterproof IP65
- No external power supply required
- Available with 5–30 m cable



MTH 310

101613 **Temperature sensor**

NOVASTAR

Specifications:

Temp. Range:	-20 ~ +75 °C	Max. Cable Length:	100 m
Cable Length Sens.:	5000 cm	Ctrl System:	Novastar
		Pwr. Supp.:	5 VDC

FEATURES:

- Waterproof IP65
- No external power supply required

DIS-300 Splitter

101651 **Signal Converter & Splitters**

NOVASTAR

Specifications:

		Pwr. Supp.:	100-240 VAC 50-60 Hz
		Pwr. Cons.:	5.7 W
Main Out.:	8	Pwr. Conn. In.:	IEC C13 female
Ctrl System:	Novastar	Data Conn. In:	RJ45
Port map.:	Software Based	Data Conn. Out:	RJ45



FEATURES:

- Two split modes: one input mode: Input A to 8 x Output / or two input mode: A&B to 2 x four outputs
- Each RJ45 port can be independently adjusted, and supports read back parametres from cabinet

4G Module

101694 **For Taurus series Media Player / Sender Box**

NOVASTAR

Specifications:

Pwr. Cons.:	1.5 W



FEATURES:

- 4G module
- Access Taurus media player anywhere anytime
- Antenna included

LORA module for Taurus serie

101695

NOVASTAR

Specifications:

Pwr. Cons.:	0.1 W

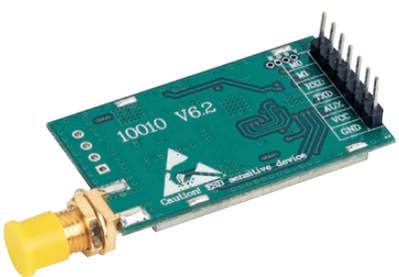

FEATURES:

- LORA RF module
- RF module for synchronisation of multiple Taurus units
- External antenna included







Grand VJ 2.6

50223 **Video Mixing Software - Midi controllable - Box**
50208 **Video Mixing Software - Midi controllable - License**

Specifications:

AV SW Vers.:	26
License Type:	Box
OS:	iOS / Windows
LED Map.:	No
Kling-Net Mapper:	No
Video Map.:	No
Geometric Corr.:	Basic
Soft Edge:	Basic
Synth Mode:	Yes
Mix Mode:	Yes
Sup. Cont. Layers:	16 Layers
In. Ctrl Protocol:	MIDI
Out. Ctrl Protocol:	Art-Net / Kling-Net / MIDI
NDI:	Yes

FEATURES:
- Realtime video mixing software for professional Lighting Designers
- Suitable for controlling LED Walls, LED DMX or Kling-net fixtures
- Supports Art-Net, Kling-Net, screen, Midi and video projector outputs
- Includes a video mapper
- Runs on Windows and macOS
- Vast library of video effects and sound driven video generators
- mix up to 8 layers

GrandVJ XT

50233 **Full version License**

Specifications:

AV SW Vers.:	2.5
License Type:	License
OS:	iOS / Windows
LED Map.:	No
Kling-Net Mapper:	No
Video Map.:	No
Geometric Corr.:	Basic
Soft Edge:	Basic
Synth Mode:	Yes
Mix Mode:	Yes
Sup. Cont. Layers:	16 Layers
In. Ctrl Protocol:	MIDI
Out. Ctrl Protocol:	Art-Net / Kling-Net / MIDI
NDI:	Yes

FEATURES:
- Complete live video mixing software for pro Lighting Designers
- Video Mapper extension
- Allows projection mapping and advanced management of multiple displays
- Mix up to 16 layers
- A/B crossfading mode
- Browser Preview feature for preparing your transitions, visuals and FX
- Supports MIDI, Art-net, Kling-Net and controllable via iPhone or iPad

LED Master

50180 **Box**
50209 **License**

Specifications:

AV SW Vers.:	1.2
License Type:	Box
OS:	iOS / Windows
LED Map.:	Yes
Kling-Net Mapper:	Yes
Video Map.:	Yes
In. Ctrl Protocol:	Art-Net / Kling-Net / MIDI
Out. Ctrl Protocol:	Art-Net / DMX 512 / Kling-Net / MIDI

FEATURES:
- Easy LED-show software for PC or MAC
- Supports Kling-Net, MIDI, Art-Net and DMX
- 3 modes (mapping, programming and performance)
- Timeline based editor
- Live Pattern generator



USB License Dongle

50196 **Always take your license with you...**

ARKAOS

Specifications:

AV SW Vers.:	4
License Type:	Box
OS:	iOS / Windows

FEATURES:
- License dongle for Media Master 4 and higher
- Suitable for touring
- No internet connection required for activating MediaMaster software

Mediamaster Express 5

102101 **DMX Controllable Media Server software - Box**
102100 **License**
102102 **Backup license**
ARKAOS



Specifications:

AV SW Vers.:	5	Soft Edge:	Basic
License Type:	Box	Theater Mode:	Yes
OS:	iOS / Windows	Media Hub:	Yes
LED Map.:	Yes	Sup. Cont. Layers:	12 Layers
Kling-Net Mapper:	Yes	In. Ctrl Protocol:	Art-Net / DMX 512 / MIDI / SMPTE
Video Map.:	Yes	Out. Ctrl Protocol:	Art-Net / DMX 512 / Kling-Net
Geometric Corr.:	Basic	NDI:	Yes

FEATURES:
- Intuitive and easy to use
- Store up to 60,000 visuals
- Work on a single DMX universe or MIDI channel
- Cue Player

Mediamaster Pro 5

102201 **DMX Controllable Media Server software - Box**
102200 **License**
102202 **Backup license**
ARKAOS



Specifications:

AV SW Vers.:	561	Synth Mode:	Yes
License Type:	Box	Mix Mode:	Yes
OS:	iOS / Windows	Theater Mode:	Yes
LED Map.:	Yes	Media Hub:	Yes
Kling-Net Mapper:	Yes	Sup. Cont. Layers:	36 Layers
Video Map.:	Yes	In. Ctrl Protocol:	Art-Net / DMX 512 / MIDI / SMPTE
Geometric Corr.:	Advanced	Out. Ctrl Protocol:	Art-Net / DMX 512 / Kling-Net
Soft Edge:	Advanced	NDI:	Yes

FEATURES:
- Intuitive and easy to use
- Store up to 60,000 visuals
- Work on a single DMX universe or MIDI channel
- Cue Player







Stage Server

502263 incl Media Master Express

ARKAOS

Specifications:

DVI Dual Link:	1	OS:	Windows 10 PRO
Main Out.:	2	AV SW Incl.:	Yes
DVI Dual Link (loop):	2	AV SW Pack.:	Arkaos
Out. Resol.:	2 x Full HD	Pwr. Supp.:	100-240 VAC 50-60 Hz
		Pwr. Conn. In.:	IEC C13 female
		DMX Conn.:	XLR 5P In/Out

FEATURES:

- Media server with ArKaos engine from MediaMaster Express
- Suitable for live entertainment, theatre, educational and AV
- Smooth visuals that can be triggered by DMX and MIDI
- Works with all market leading DMX lighting desks
- 2 Full-HD outputs
- Plug-and-play
- Quick & easy setup



Studio server

50190 incl Media Master Pro

ARKAOS

Specifications:

Stereo In. Conn.:	3-pin XLR	Out. Resol.:	/ 4 x Full HD
DVI Dual Link:	1	OS:	Windows 10 PRO
HD-SDI:	1	AV SW Incl.:	Yes
Main Out.:	4	AV SW Pack.:	Arkaos
DVI Single Link (loop):	4	Pwr. Supp.:	100-240 VAC 50-60 Hz
3G-SDI (loop):	1	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
		DMX Conn.:	XLR 5P In/Out

FEATURES:

- Full-option media server with Media Master Pro 4.0
- Designed for professional Lighting Designers
- Vast library of high quality digital media
- Works directly with all market leading DMX lighting desks
- Full HD video
- 4 EDID managed outputs
- HD-SDI input & fast SSD drives



Stadium server

502265

ARKAOS

Specifications:

DVI Dual Link:	1	OS:	Windows 10 PRO
HD-SDI:	2	AV SW Incl.:	Yes
Main Out.:	6	AV SW Pack.:	Arkaos
DVI Dual Link (loop):	6	Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Resol.:	6 x Full HD	Pwr. Conn. In.:	powerCON Blue
		DMX Conn.:	XLR 5P In/Out

FEATURES:

- Most powerful and versatile ArKaos Media Server
- Designed for professional Lighting Designers
- Vast library of high quality digital media
- Works directly with all market leading DMX lighting desks
- Full HD video
- 6 EDID managed outputs
- 2 HD-SDI inputs & fast SSD drives

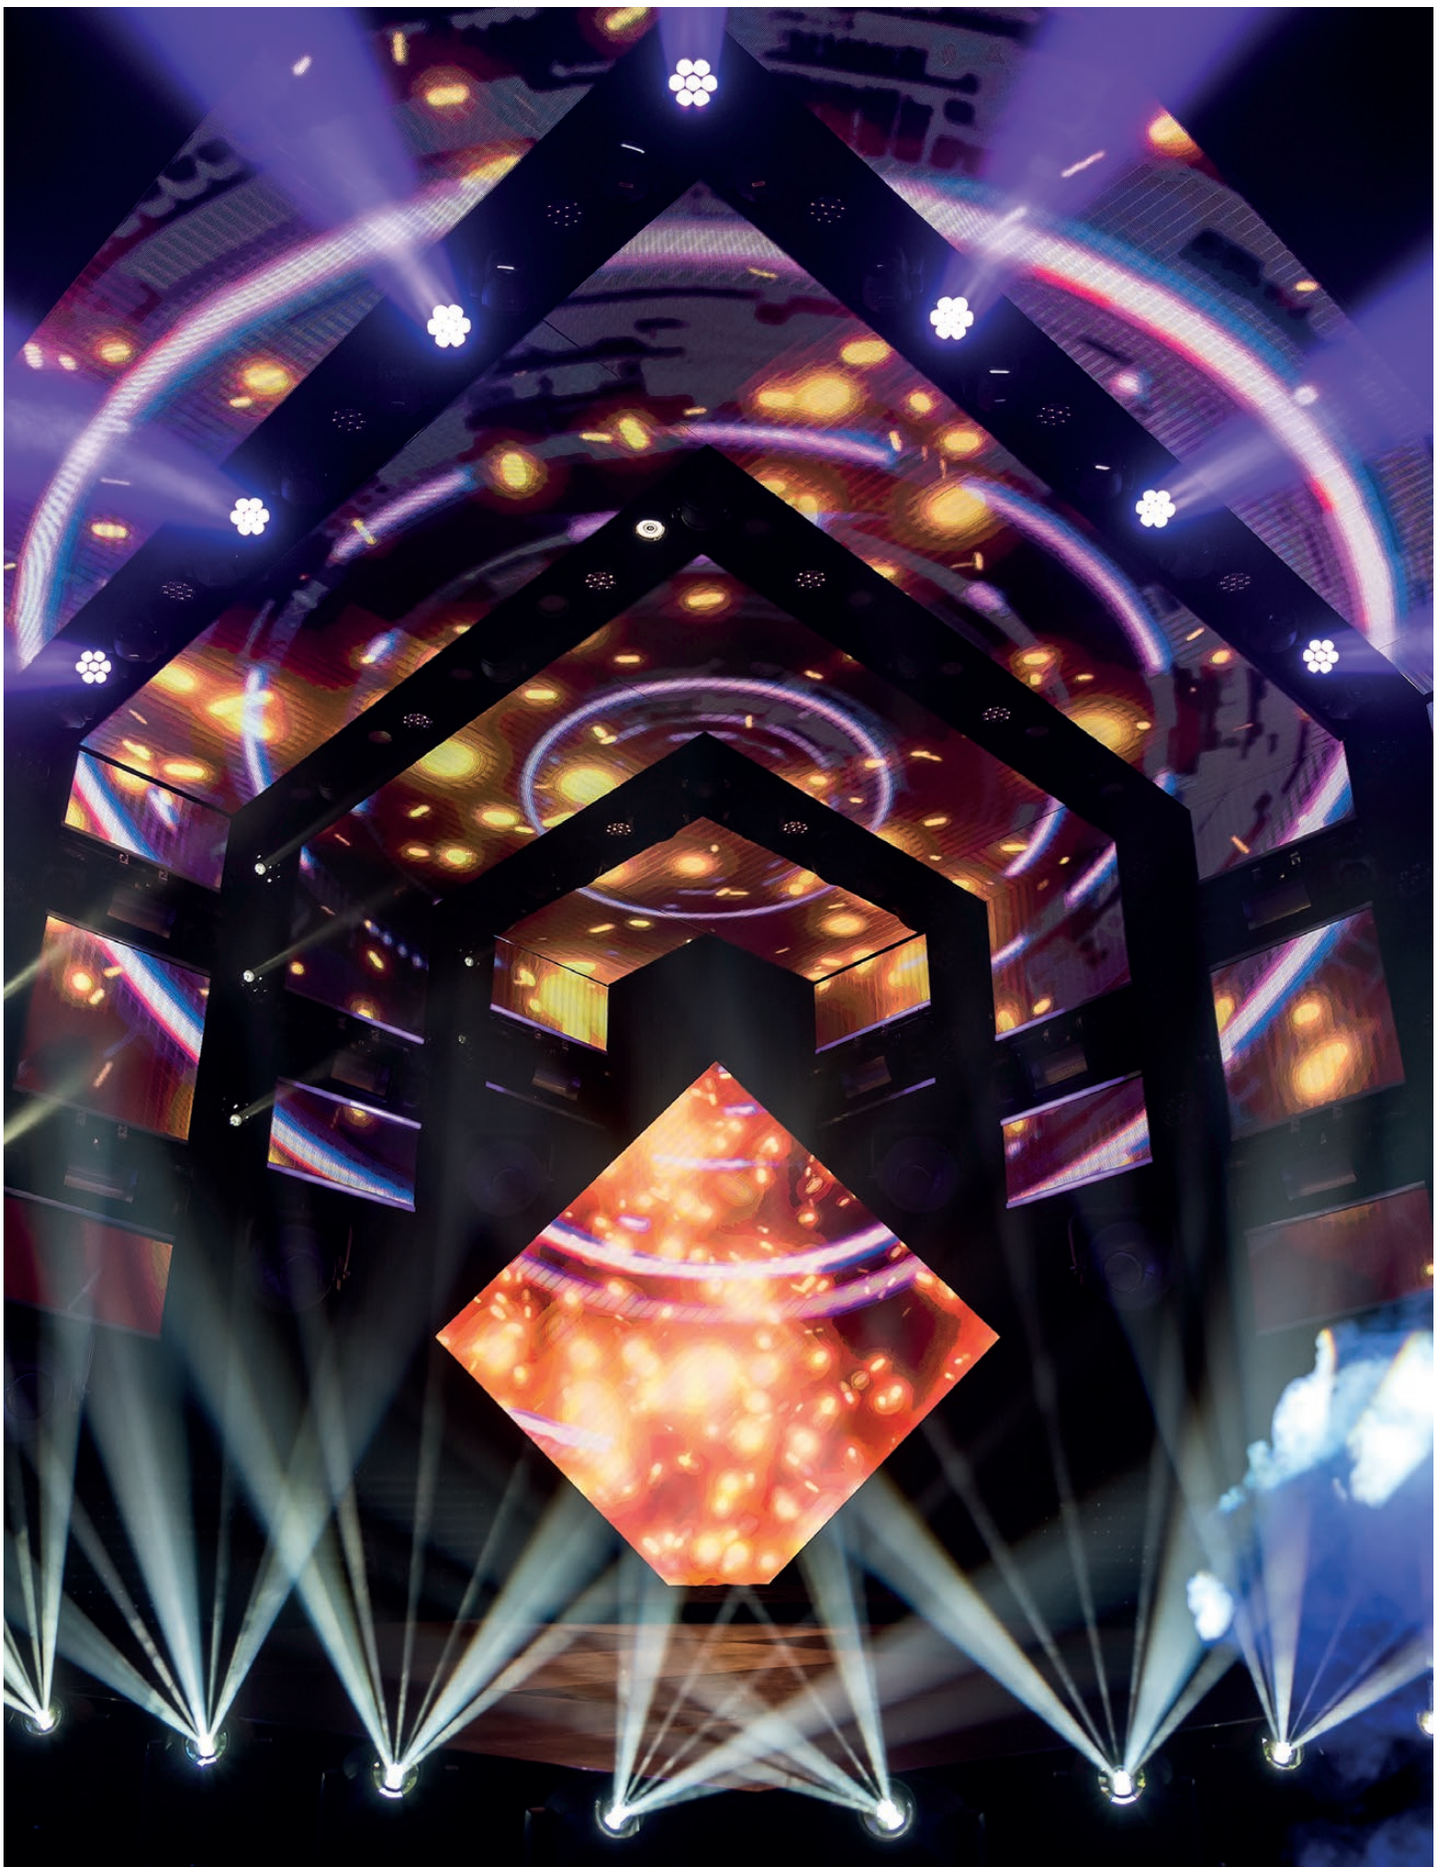



HDMI 2.0 Splitter 1 in 4 out

102500 **1 in, 4 out, 4K 60 Hz, 18 Gbps**

SHOWGEAR

Specifications:

HDMI 2.0:	1
HDMI 2.0 (out):	4
Pwr. Supp.:	5 VDC
Pwr. Cons.:	5 W
Pwr. Conn. In.:	Low Voltage DC plug

FEATURES:

- HDMI 2.1 splitter
- Suitable up to 4K @60 Hz
- Backwards compatible (HDMI 1.4)
- Strong aluminium housing
- Black
- Plug & Play



VT101 - HDMI Matrix 4x4

101221 **4-in / 4-out Routable HDMI Switch with remote**

DMT

Specifications:

HDMI 2.0:	4
HDMI 2.0 (out):	4
Max. In. Res.:	3840 x 2160
Max. Out. Res.:	3840 x 2160
Pwr. Supp.:	12 VDC
Pwr. Cons.:	15 W
Pwr. Conn. In.:	Low Voltage DC plug

FEATURES:

- 4x4 HDMI Matrix
- Flexible signal routing
- Suitable for smoothly reconnecting devices
- Resolution to up to 3840 x 2160P @60 Hz
- IR remote included



VT201 - 4K-KVM / USB Extender Set

101241 **Long-distance USB & HDMI Signal Solution**

DMT

Specifications:

USB 2.0 (in):	1
HDMI1.4b:	1
IR Port:	2
USB 2.0 (out):	2
HDMI 1.4b (out):	1
IR Port (out):	2
Max. In. Res.:	3840 x 2160
Max. Out. Res.:	3840 x 2160
Pwr. Supp.:	5 VDC
Pwr. Cons.:	7 W
Pwr. Conn. In.:	Low Voltage DC plug

FEATURES:

- USB & HDMI extender set
- Up to 100 m (additional 100 m with network switch)
- Resolution up to 3840 x 2160 @30 Hz
- USB 2.0
- Bi-Directional IR function

VT301 - HDMI Matrix Extender Set

101261 **Expandable Long-distance Video Signal Solution**

DMT

Specifications:

		Max. In. Res.:	1920 x 1080
		Max. Out. Res.:	1920 x 1080
HDMI 1.3:	1	Pwr. Supp.:	5 VDC
IR Port:	1	Pwr. Cons.:	4 W
HDMI 1.3 (out):	1	Pwr. Conn. In.:	Low Voltage DC plug
IR Port (out):	1		



FEATURES:

- Expandable HDMI Matrix Extender Set
- Private network to up to 253 devices
- Manual and remote control
- Up to 1920 x 1080P @60 Hz
- Up to 100 m (additional 100 m with network switch)
- IR remote included

VT301-R - HDMI Matrix Extender Receiver

101262 **Additional Receiver for VT301**

DMT

Specifications:

		Max. Out. Res.:	1920 x 1080
		Pwr. Supp.:	5 VDC
IR Port:	1	Pwr. Cons.:	2.7 W
HDMI 1.3 (out):	1	Pwr. Conn. In.:	Low Voltage DC plug



FEATURES:

- Additional HDMI Matrix Extender Receiver
- Suitable for VT301
- Up to 1920 x 1080P @60 Hz
- Up to 100 m/328 ft (additional 100 m with network switch)



DLD-84 - 8.4” LCD Display

101206 **8.4” Display with DVI link**

DMT

Specifications:

DVI Single Link:	1
DVI Single Link (loop):	1
Display Res. Width:	1280 px
Display Res. Height:	720 px
Max. In. Res.:	1920 x 1080
Pwr. Supp.:	100-240 VAC 50-60 Hz
Height (including handles):	129 mm
Width (including handles):	205 mm
Depth W/O Handles:	37 mm
R.U.:	3 U

FEATURES:

- 8.4” LCD
- DVI Input and Loop
- Optional 19” bracket available for 2 x DLD-84 (order-code:101207)

19” bracket for 2 x DLD-84 - 8.4“ LCD display

101207

DMT







DLD-72 MKII

101205 **Dual 7” Display with HDMI link**

DMT

Specifications:

HDMI 1.3:	2
VGA (in):	2
CVBS In. Ω:	75 Ω
Analog Video In.:	BNC / RCA
HDMI 1.3 (loop):	2
VGA (out):	2
CVBS Out. Ω:	75 Ω
Analogue Video Output:	BNC / RCA
Display:	TFT
Display Res. Width:	800 px
Display Res. Height:	480 px
Display Size:	7 “
Max. In. Res.:	1920 x 1080
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	25 W
Pwr. Conn. In.:	IEC C13 female
Height (including handles):	88.9 mm
Width (including handles):	482.6 mm
Depth W/O Handles:	133 mm
R.U.:	2 U

FEATURES:

- BNC, VGA, RCA & HDMI Inputs
- Link outputs
- 7” TFT
- Individual screen settings

CVT4K-S

101653 **Fibre Convertor for MCTRL4 K**

NOVASTAR



Specifications:

Main Out.:	16	Max. Transm. Dist.:	10000 m
SFP Slot Type:	10G	Pwr. Supp.:	100-240 VAC 50-60 Hz
SFP Slots:	4	Pwr. Cons.:	10 W
SFP Mod. Fibre Conn.:	LC	Pwr. Conn. In.:	IEC C13 female / powerCON Blue
SFP Mod. Incl.:	Yes	Data Conn. In:	etherCON / RJ45
Fibre Mode:	Single-mode	Data Conn. Out:	etherCON / RJ45

FEATURES:

- 16 x ethernet output ports
- 4 x fibre SFP fibre input ports
- Dual redundant power supply
- Plug&Play, no drivers required

CVT 310

101640 **Fibre convertor**

NOVASTAR



Specifications:

		Pwr. Supp.:	100-240 VAC 50-60 Hz
		Pwr. Cons.:	16 W
SFP Mod. Fibre Conn.:	LC	Pwr. Conn. In.:	IEC C13 female
SFP Mod. Incl.:	Yes	Data Conn. In:	RJ45
Fibre Mode:	Multi-mode		

FEATURES:

- Fibre converter to cover large distances between processor and LED screens
- Transmission distance up to 300 m
- Plug and play, no driver required

CVT 320

101641 **Fibre convertor**

NOVASTAR



Specifications:

		Pwr. Supp.:	100-240 VAC 50-60 Hz
		Pwr. Cons.:	16 W
SFP Mod. Fibre Conn.:	LC	Pwr. Conn. In.:	IEC C13 female
SFP Mod. Incl.:	Yes	Data Conn. In:	RJ45
Fibre Mode:	Single-mode		

FEATURES:

- Fibre converter to cover large distances between processor and LED screens
- Transmission distance up to 15 km
- Plug and play, no driver required

SFP Module

101623 **SFP Fibre Optic Module**

NOVASTAR



Specifications:

		Max. Transm. Dist.:	10000 m
SFP Mod. Fibre Conn. :	LC	Pwr. Supp.:	3 VDC
Fibre Mode:	Multi-mode	Pwr. Cons.:	1.5 W

FEATURES:

- LC-connector
- Transfer up to 10 km
- Supports 9.95 to 11.3 Gb/s bit rates
- Hot-pluggable



Drum of 100 m with 2 fibre Singlemode 9/125 Cable

102050 **Fibre optic Cable**

DAP

Specifications:

Fibre Conn. 1:	Q-ODC2	Fibre Cable Type:	9 / 125
Fibre Conn. 2:	Q-ODC2	Fibre Cable Length:	100 m
		Fibre Mode:	Single-mode

FEATURES:

- 2 x fibre single mode 9/125 cable
- IP67 rating
- Robust push-pull coupling mechanism



Break-out Cable 2 m, Q-ODC2-F to 2 x LC simplex

102051 **Fibre optic Cable**

DAP

Specifications:

Fibre Conn. 1:	Q-ODC2	Fibre Cable Type:	9 / 125
Fibre Conn. 2:	LC	Fibre Cable Length:	2 m
		Fibre Mode:	Single-mode

FEATURES:

- Break-out cable Q-ODC2-F to 2 x LC simplex
- 1 x Q-ODC2-F connector with Robust push-pull coupling mechanism
- 2 x LC connector



Q-ODC2-F socket with D-flange

102053 **Fibre optic Cable**

DAP

Specifications:

Fibre Conn. 1:	LC	Fibre Cable Type:	9 / 125
Fibre Conn. 2:	Q-ODC2	Fibre Mode:	Single-mode
		Cable Length:	0.44 m

FEATURES:

- Q-ODC2-F to 2 x LC connector
- Q-ODC2-F mounted in D-flange
- Q-ODC2-F robust push-pull coupling mechanism



Extension Cable 1 m with 2 x Q-ODC2-F

102052 **Fibre optic Cable**

DAP

Specifications:

Fibre Conn. 1:	Q-ODC2	Fibre Cable Type:	9 / 125
Fibre Conn. 2:	Q-ODC2	Fibre Cable Length:	1 m
		Fibre Mode:	Single-mode

FEATURES:

- Extension cable with 2 x Q-ODC2-F to extend optical fibre drum
- 2 x fibre single mode 9/125 cable
- IP67 rating
- Robust push-pull coupling mechanism

Electric Proscreens 4:3

DMT	100360 72”	100361 84”	100362 100”	100363 120”
Front view °:	160 °	160 °	160 °	160 °
Length (mm):	110 mm	110 mm	110 mm	110 mm
Height (mm):	120 mm	120 mm	120 mm	120 mm
Width (mm):	1650 mm	1940 mm	2265 mm	2630 mm
Aspect:	4:3	4:3	4:3	4:3
Screen Size:	72 inch	84 inch	100 inch	120 inch
View. Width:	1460 mm	1710 mm	2030 mm	2410 mm
View. Height:	1100 mm	1280 mm	1520 mm	1800 mm
Gain Front View:	1.0	1.0	1.0	1.0
Included Remotes:	IR Receiver / IR Remote	IR Receiver / IR Remote	IR Receiver / IR Remote	IR Receiver / IR Remote






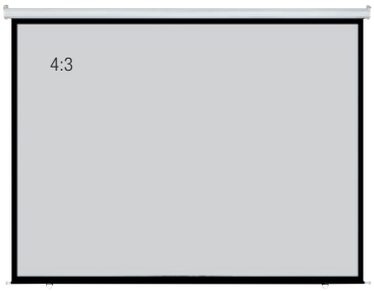

Electric Proscreens 16:9

DMT	100365 77”	100366 92”	100367 106”	100368 120”
Front view °:	160 °	160 °	160 °	160 °
Length (mm):	110 mm	110 mm	110 mm	110 mm
Height (mm):	120 mm	120 mm	120 mm	120 mm
Width (mm):	1940 mm	2260 mm	2565 mm	2910 mm
Aspect:	16:9	16:9	16:9	16:9
Screen Size:	77 inch	92 inch	106 inch	120 inch
View. Width:	1700 mm	2030 mm	2335 mm	2655 mm
View. Height:	960 mm	1140 mm	1320 mm	1500 mm
Gain Front View:	1.0	1.0	1.0	1.0
Included Remotes:	IR Receiver / IR Remote	IR Receiver / IR Remote	IR Receiver / IR Remote	IR Receiver / IR Remote








Manual Proscreens 4:3

DMT	100350 72”	100351 84”	100352 100”	100353 120”
Front view °:	160 °	160 °	160 °	160 °
Length (mm):	1584 mm	1864 mm	2204 mm	2508 mm
Height (mm):	1328 mm	1508 mm	1773 mm	1988 mm
Aspect:	4:3	4:3	4:3	4:3
Screen Size:	72 inch	84 inch	100 inch	120 inch
View. Width:	1460 mm	1710 mm	2030 mm	2228 mm
View. Height:	1100 mm	1280 mm	1520 mm	1755 mm
Gain Front View:	1.0	1.0	1.0	1.0





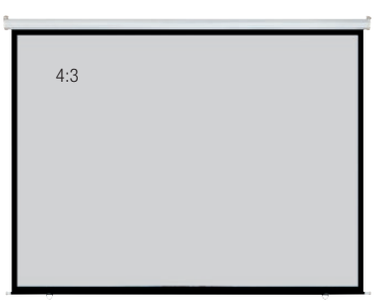

Manual Proscreens 16:9

DMT	100355 77”	100356 92”	100357 106”	100358 120”
Front view °:	160 °	160 °	160 °	160 °
Length (mm):	1838 mm	2204 mm	2508 mm	2831 mm
Height (mm):	1806 mm	1818 mm	1973 mm	2052 mm
Aspect:	16:9	16:9	16:9	16:9
Screen Size:	77 inch	92 inch	106 inch	120 inch
View. Width:	1704 mm	2030 mm	2340 mm	2656 mm
View. Height:	958 mm	1145 mm	1320 mm	1494 mm
Gain Front View:	1.0	1.0	1.0	1.0









Xpress Mobile Screens 4:3

DMT	100420 70”	100421 80”
Front view °:	160 °	160 °
Length (mm):	1582 mm	1785 mm
Height (mm):	1860 mm	2168 mm
Aspect:	4:3	4:3
Screen Size:	70 inch	80 inch
View. Width:	1422 mm	1625 mm
View. Height:	1067 mm	1220 mm
Gain Front View:	1.0	1.0

Xpress Mobile Screens 16:9

DMT	100423 70”	100424 80”
Front view °:	160 °	160 °
Length (mm):	1710 mm	1916 mm
Height (mm):	1951 mm	2281 mm
Aspect:	16:9	16:9
Screen Size:	70 inch	80 inch
View. Width:	1550 mm	1770 mm
View. Height:	871 mm	995 mm
Gain Front View:	1.0	1.0

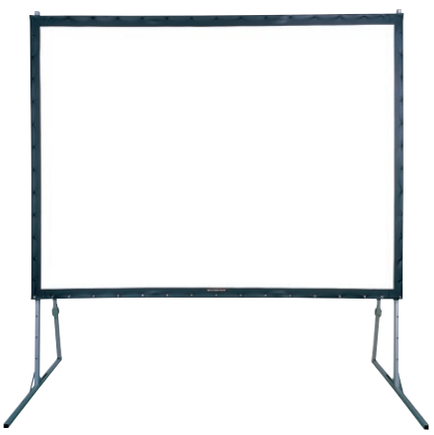

Fast-Setup Screens Pro 4:3

DMT	100430 100”	100431 120”	100432 150”	100433 200”
Front view °:	160 °	160 °	160 °	160 °
Rear view °:	140 °	140 °	140 °	140 °
Min. Height (mm):	2256 mm	2708 mm	3204 mm	3204 mm
Max. Height (mm):	2421 mm	3416 mm	4207 mm	4313 mm
Aspect:	4:3	4:3	4:3	4:3
Screen Size:	100 inch	120 inch	150 inch	200 inch
View. Width:	2032 mm	2438 mm	3048 mm	4046 mm
View. Height:	1524 mm	1828 mm	2286 mm	3048 mm
Gain Front View:	1.0	1.0	1.0	1.0
Gain Rear View:	0.8	0.8	0.8	0.8

Fast-Setup Screens Pro 16:9

DMT	100435 120”	100436 165”	100437 180”
Front view °:	160 °	160 °	160 °
Rear view °:	140 °	140 °	140 °
Min. Height (mm):	2275 mm	2850 mm	3205 mm
Max. Height (mm):	2757 mm	3391 mm	3559 mm
Aspect:	16:9	16:9	16:9
Screen Size:	120 inch	165 inch	180 inch
View. Width:	2660 mm	3660 mm	3990 mm
View. Height:	1578 mm	2050 mm	2245 mm
Gain Front View:	1.0	1.0	1.0
Gain Rear View:	0.8	0.8	0.8



Fast-Setup Screens Pro 4:3

DMT	100370 84”	100371 100”
Front view °:	50 °	50 °
Length (mm):	1760 mm	2110 mm
Height (mm):	1330 mm	1600 mm
Aspect:	4:3	4:3
Screen Size:	84 inch	100 inch
View. Width:	1710 mm	2030 mm
View. Height:	1280 mm	1520 mm
Gain Front View:	1.0	1.0

Front Projection Fabric
100460 for 100430 screen, 100”
DMT

Specifications:

Front view °:	160 °
Screen Size:	100 inch
View. Width:	2032 mm
View. Height:	1524 mm
Gain Front View:	1.0

Front Projection Fabric
100461 for 100431 screen, 120”
DMT

Specifications:

Front view °:	160 °
Screen Size:	120 inch
View. Width:	2438 mm
View. Height:	1828 mm
Gain Front View:	1.0



Front Projection Fabric
100462 for 100432 screen, 150”
DMT

Specifications:

Front view °:	160 °
Screen Size:	150 inch
View. Width:	3048 mm
View. Height:	2286 mm
Gain Front View:	1.0

Front Projection Fabric
100463 for 100433 screen, 200”
DMT

Specifications:

Front view °:	160 °
Screen Size:	200 inch
View. Width:	4046 mm
View. Height:	3048 mm
Gain Front View:	1.0

Rear Projection Fabric
100464 for 100430 screen, 100”
DMT

Specifications:

Rear view °:	140 °
Screen Size:	100 inch
View. Width:	2032 mm
View. Height:	1524 mm
Gain Rear View:	0.8

Rear Projection Fabric
100465 for 100431 screen, 120”
DMT

Specifications:

Rear view °:	140 °
Screen Size:	120 inch
View. Width:	2438 mm
View. Height:	1828 mm
Gain Rear View:	0.8



Rear Projection Fabric
100466 for 100432 screen, 150”
DMT

Specifications:

Rear view °:	140 °
Screen Size:	150 inch
View. Width:	3048 mm
View. Height:	2286 mm
Gain Rear View:	0.8

Rear Projection Fabric
100467 for 100433 screen, 200”
DMT

Specifications:

Rear view °:	140 °
Screen Size:	200 inch
View. Width:	4046 mm
View. Height:	3048 mm
Gain Rear View:	0.8





PLB-2246

100260 13”–42” LCD Bracket 6° adjustable

SHOWGEAR

Specifications:

Height (mm):	200 mm
Min. Height (mm):	75 mm
Max. Height (mm):	200 mm
Width (mm):	258 mm
Min. Screen Size (inch):	13
Max. Screen Size (inch):	42
VESA:	75 x 75 / 200 x 200 mm
Max. Load:	25 kg
Attach Points:	4
Tilt Adj.:	6 °



PLB-2370

100262 23”–70” LCD Bracket Super Slim Fixed Mount

SHOWGEAR

Specifications:

Height (mm):	400 mm
Min. Height (mm):	75 mm
Max. Height (mm):	400 mm
Width (mm):	431 mm
Min. Screen Size (inch):	23
Max. Screen Size (inch):	70
VESA:	75 x 75 / 400 x 400 mm
Max. Load:	40 kg



PLB-3255

100208 LCD Wall Mount 32”–55”

SHOWGEAR

Specifications:

Height (mm):	400 mm
Width (mm):	491 mm
Min. Screen Size (inch):	32
Max. Screen Size (inch):	55
VESA:	400 x 400 mm
Max. Load:	50 kg
Attach Points:	4
Tilt Adj. Down:	5 °
Tilt Adj. Up:	15 °

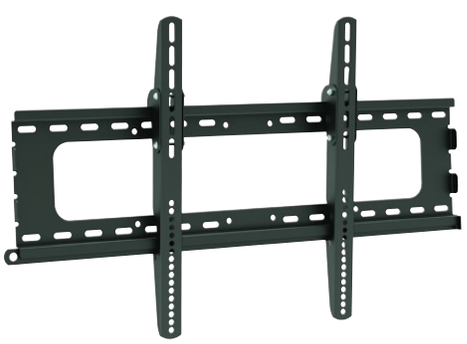

PLB-3260

100256 32”–60” LCD Bracket

SHOWGEAR

Specifications:

Height (mm):	480 mm
Width (mm):	765 mm
Min. Screen Size (inch):	32
Max. Screen Size (inch):	60
VESA:	600 x 400 mm
Max. Load:	75 kg
Attach Points:	6
Tilt Adj.:	5 °

PLB-3260A

100257 **32”–60” LCD Bracket 15° adjustable**

SHOWGEAR

Specifications:

Height (mm):	480 mm
Min. Height (mm):	75 mm
Max. Height (mm):	480 mm
Width (mm):	765 mm
Min. Screen Size (inch):	32
Max. Screen Size (inch):	60
VESA:	600 x 400 mm
Max. Load:	75 kg
Tilt Adj. Down:	15 °
Tilt Adj. Up:	15 °

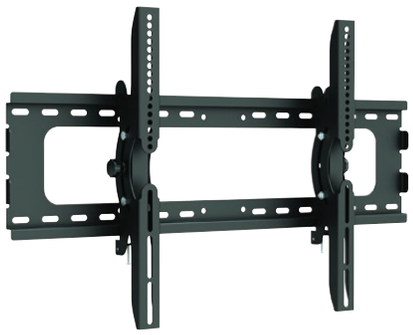

PLB-2342

100258 **23”–42” LCD Bracket**

SHOWGEAR

Specifications:

Height (mm):	330 mm
Min. Height (mm):	75 mm
Max. Height (mm):	330 mm
Width (mm):	516 mm
Min. Screen Size (inch):	23
Max. Screen Size (inch):	42
VESA:	400 x 300 mm
Max. Load:	75 kg
Tilt Adj.:	5 °

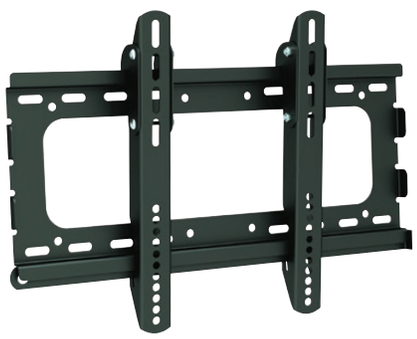

LCD-201L LCD Bracket Flat Mount

100254B **for 23”–42” - Up to VESA 200, black**

SHOWGEAR

Specifications:

Height (mm):	220 mm
Width (mm):	265 mm
Min. Screen Size (inch):	23
Max. Screen Size (inch):	46
Max. Load:	30 kg
Attach Points:	6



PLB2342 TV Wall Mount

100265 **32” to 42” - tiltable 10° down**

SHOWGEAR

Specifications:

Height (mm):	280 mm
Width (mm):	250 mm
Min. Screen Size (inch):	23
Max. Screen Size (inch):	42
VESA:	75 x 75 / 100 / 200 x 100 / 200 x 200 mm
Max. Load:	50 kg
Tilt Adj.:	10 °
Tilt Adj. Down:	10 °
Tilt Adj. Up:	0 °





PLB3255 TV Wall Mount

100266 **32” to 55” - tiltable 10° down**

SHOWGEAR

Specifications:

Height (mm):	425 mm
Width (mm):	448 mm
Min. Screen Size (inch):	32
Max. Screen Size (inch):	55
VESA:	200 x 200 / 300 x 300 / 400 x 200 / 400 x 400mm
Max. Load:	50 kg
Tilt Adj.:	10 °
Tilt Adj. Down:	10 °
Tilt Adj. Up:	0 °



PLB3770 TV Wall Mount

100267 **37” to 70” - tiltable 10° down**

SHOWGEAR

Specifications:

Height (mm):	425 mm
Width (mm):	653 mm
Min. Screen Size (inch):	37
Max. Screen Size (inch):	70
VESA:	200 x 200 / 300 x 300 / 400 x 200 / 400 x 400 / 600 x 400 mm
Max. Load:	50 kg
Tilt Adj.:	10 °
Tilt Adj. Down:	10 °
Tilt Adj. Up:	0 °

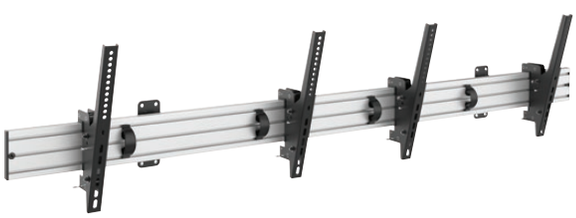

PWM4555-2 Dual Screen Wall Mount

100284 **45” to 55” - tiltable 20° down**

SHOWGEAR

Specifications:

Width (mm):	2008 mm
Min. Screen Size (inch):	45
Max. Screen Size (inch):	55
VESA:	200 x 200 / 200 x 300 / 300 x 200 / 300 x 300 / 400 x 200 / 400 x 400 /600 x 200 / 600 x 400 mm
Max. Load:	100 kg
Tilt Adj.:	20 °
Tilt Adj. Down:	20 °
Tilt Adj. Up:	0 °



PWM4555-3 Triple Screen Wall Mount

100285 **45” to 50” - tiltable 20° down**

SHOWGEAR

Specifications:

Height (mm):	440 mm
Width (mm):	3009 mm
Min. Screen Size (inch):	45
Max. Screen Size (inch):	50
VESA:	200 x 200 / 200 x 300 / 300 x 200 / 300 x 300 / 400 x 200 / 400 x 400 /600 x 200 / 600 x 400 mm
Max. Load:	150 kg
Tilt Adj.:	20 °
Tilt Adj. Down:	20 °
Tilt Adj. Up:	0 °

CLB3255S TV Ceiling Mount Short

100270 **32” to 55” - tiltable 25° down - adjustable length**

SHOWGEAR

Specifications:

Tilt Adj.:	25 °
Tilt Adj. Down:	25 °
Tilt Adj. Up:	0 °
Pan Adj.:	360 °
Min. Height (mm):	778 mm
Max. Height (mm):	1128 mm
Width (mm):	480 mm
Min. Screen Size (inch):	32
Max. Screen Size (inch):	55
VESA:	100 / 200 x 100 / 200 x 200 mm
Weight:	4.7 kg
Max. Load:	50 kg
Material:	Metal
Colour:	Black
Ref. Std.:	CE



CLB3255L TV Ceiling Mount Long

100271 **32” to 55” - tiltable 25° down - adjustable length**

SHOWGEAR

Specifications:

Tilt Adj.:	25 °
Tilt Adj. Down:	25 °
Tilt Adj. Up:	0 °
Pan Adj.:	360 °
Min. Height (mm):	1278 mm
Max. Height (mm):	1778 mm
Width (mm):	480 mm
Min. Screen Size (inch):	32
Max. Screen Size (inch):	55
VESA:	200 x 200 / 300 x 300 / 400 x 200 / 400 x 400 mm
Weight:	5.85 kg
Max. Load:	50 kg
Material:	Metal
Colour:	Black
Ref. Std.:	CE



CLB3255SD TV Ceiling Mount Short Double Sided

100272 **32” to 55” - tiltable 20° down - adjustable length**

SHOWGEAR

Specifications:

Tilt Adj.:	25 °
Tilt Adj. Down:	20 °
Tilt Adj. Up:	5 °
Pan Adj.:	180 °
Min. Height (mm):	778 mm
Max. Height (mm):	1128 mm
Width (mm):	480 mm
Min. Screen Size (inch):	32
Max. Screen Size (inch):	55
VESA:	200 x 200 / 300 x 300 / 400 x 200 / 400 x 400 mm
Weight:	7.8 kg
Max. Load:	50 kg
Material:	Metal
Colour:	Black
Ref. Std.:	CE



CLB3255LD TV Ceiling Mount Long Double Sided

100273 **32” to 55” - tiltable 20° down - adjustable length**

SHOWGEAR

Specifications:

Tilt Adj.:	25 °
Tilt Adj. Down:	20 °
Tilt Adj. Up:	5 °
Pan Adj.:	180 °
Min. Height (mm):	1278 mm
Max. Height (mm):	1778 mm
Width (mm):	480 mm
Min. Screen Size (inch):	32
Max. Screen Size (inch):	55
VESA:	200 x 200 / 300 x 300 / 400 x 200 / 400 x 400 mm
Weight:	8.65 kg
Max. Load:	50 kg
Material:	Metal
Colour:	Black
Ref. Std.:	CE





PCM4555S-2 Dual Screen Ceiling Mount Short

100280 **45” to 55” - tiltable 20° down - adjustable length**

SHOWGEAR

Specifications:

Tilt Adj.:	20 °
Tilt Adj. Down:	20 °
Tilt Adj. Up:	0 °
Min. Height (mm):	925 mm
Max. Height (mm):	1080 mm
Width (mm):	2009 mm
Min. Screen Size (inch):	45
Max. Screen Size (inch):	55
VESA:	200 x 200 / 200 x 300 / 300 x 200 / 300 x 300 / 400 x 200 / 400 x 400/ 600 x 200 / 600 x 400 mm
Weight:	21.4 kg
Max. Load:	100 kg
Material:	Aluminium / Steel
Colour:	Black
Ref. Std.:	CE



PCM4555L-2 Dual Screen Ceiling Mount Long

100281 **45” to 55” - tiltable 20° down - adjustable length**

SHOWGEAR

Specifications:

Tilt Adj.:	20 °
Tilt Adj. Down:	20 °
Tilt Adj. Up:	0 °
Pan Adj.:	0 °
Min. Height (mm):	1425 mm
Max. Height (mm):	1580 mm
Width (mm):	2009 mm
Min. Screen Size (inch):	45
Max. Screen Size (inch):	55
VESA:	200 x 200 / 200 x 300 / 300 x 300 / 400 x 200 / 400 x 400 / 600 x 200 / 600 x 400 mm
Weight:	25.9 kg
Max. Load:	100 kg
Material:	Aluminium / Metal
Colour:	Black
Ref. Std.:	CE



PCM4555S-3 Triple Screen Ceiling Mount Short

100282 **45” to 50” - tiltable 20° down - adjustable length**

SHOWGEAR

Specifications:

Tilt Adj.:	20 °
Tilt Adj. Down:	20 °
Tilt Adj. Up:	0 °
Min. Height (mm):	925 mm
Max. Height (mm):	1080 mm
Width (mm):	3009 mm
Min. Screen Size (inch):	45
Max. Screen Size (inch):	50
VESA:	200 x 300 / 300 x 200 / 300 x 300 / 400 x 200 / 400 x 400 / 600 x 200 / 600 x 400 mm
Weight:	36.1 kg
Max. Load:	150 kg
Material:	Aluminium / Metal
Colour:	Black
Ref. Std.:	CE



PCM4555L-3 Triple Screen Ceiling Mount Long

100283 **45” to 50” - tiltable 20° down - adjustable length**

SHOWGEAR

Specifications:

Tilt Adj.:	20 °
Tilt Adj. Down:	20 °
Tilt Adj. Up:	0 °
Min. Height (mm):	1425 mm
Max. Height (mm):	1580 mm
Width (mm):	3009 mm
Min. Screen Size (inch):	45
Max. Screen Size (inch):	50
VESA:	200 x 200 / 200 x 300 / 300 x 200 / 300 x 300 / 400 x 200 / 400 x 400 / 600 x 200 mm
Weight:	40.6 kg
Max. Load:	150 kg
Material:	Aluminium / Metal
Colour:	Black
Ref. Std.:	CE

LCD-504 Luxury Ceiling bracket Black

100205B

SHOWGEAR

Specifications:

Tilt Adj.:	20 °
Pan Adj.:	90 °
Min. Height (mm):	640 mm
Max. Height (mm):	900 mm
Min. Screen Size (inch):	13
Max. Screen Size (inch):	27
VESA:	50 / 75 / 100 mm
Weight:	1 kg
Max. Load:	30 kg
Material:	Metal
Colour:	Black



PRB-8 Projector Mount for Ceiling or Truss

100239 **360° rotatable & 50° tiltable**

SHOWGEAR

Specifications:

Tilt Adj. Down:	25 °
Tilt Adj. Up:	25 °
Pan Adj.:	180 °
Height (mm):	215 mm
Min. Height (mm):	215 mm
Max. Height (mm):	215 mm
Weight:	1.53 kg
Max. Load:	15 kg
Material:	Metal
Colour:	Black
Attach Points:	4
Ref. Std.:	CE



PRB-1

100230 **Ceiling Bracket for LCD Projector Short**

SHOWGEAR

Specifications:

Tilt Adj.:	15 °
Min. Height (mm):	125 mm
Max. Height (mm):	205 mm
Weight:	1.07 kg
Max. Load:	10 kg
Material:	Metal
Colour:	Silver
Ref. Std.:	CE



PRB-3

100232 **Projector bracket for LCD Projector**

SHOWGEAR

Specifications:

Pan Adj.:	360 °
Min. Height (mm):	120 mm
Max. Height (mm):	1050 mm
Weight:	2.12 kg
Max. Load:	10 kg
Material:	Metal
Colour:	Silver
Ref. Std.:	CE





PRB-6

100234 Projector Bracket 30–40 cm

SHOWGEAR

Specifications:

Tilt Adj.:	15 °
Pan Adj.:	5 °
Min. Height (mm):	300 mm
Max. Height (mm):	400 mm
Weight:	1.72 kg
Max. Load:	20 kg
Material:	Metal
Colour:	Black / Silver
Ref. Std.:	CE



PRB-7

100233 Projector Bracket 40–60 cm

SHOWGEAR

Specifications:

Tilt Adj.:	15 °
Pan Adj.:	5 °
Min. Height (mm):	400 mm
Max. Height (mm):	600 mm
Weight:	2 kg
Max. Load:	20 kg
Material:	Metal
Colour:	Black / Silver
Ref. Std.:	CE





Flatscreen Trolley 6 - 37”–55”

100218 **Telescopic 100–150 cm**

SHOWGEAR

Specifications:

Min. Height (mm):	1000 mm
Max. Height (mm):	1715 mm
Width (mm):	700 mm
Depth (mm):	700 mm
Min. Screen Size (inch):	37
Max. Screen Size (inch):	55
VESA:	200 x 200 / 300 x 300 / 400 x 200 / 400 x 400 / 600 x 400 mm
Weight:	15 kg
Max. Load:	40 kg
Material:	Steel
Colour:	Black
Pan Adj.:	10 °
Tilt Adj.:	10 °
Castors:	4

FEATURES:

- Height adjustable mount
- Vertical & Horizontal position
- Suitable for 37”–55” screens
- Black powder coated finish

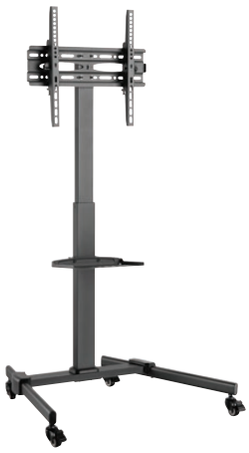

Flat Screen Trolley 7 - 32” to 55”

100209 **Tiltable TV trolley**

SHOWGEAR

Specifications:

Min. Height (mm):	1380 mm
Max. Height (mm):	1730 mm
Min. Screen Size (inch):	32
Max. Screen Size (inch):	55
VESA:	100 / 200 / 200 x 100 / 200 x 200 / 300 x 200 / 300 x 300 / 400 x 200 / 400 x 400 mm
Weight:	10.4 kg
Max. Load:	35 kg
Material:	Steel
Colour:	Black
Tilt Adj.:	10 °
Castors:	4

FEATURES:

- Compact Steel TV Cart
- Suitable for 32”–55” monitor
- Adjustable height (116–151 cm/3.8–5 ft)
- Screen is tiltable (10° up and down)
- No cables visible (internal cable management)
- Swivels with brake



Shelf for Flatscreen Trolley 6

100219

SHOWGEAR

Specifications:

Height (mm):	98 mm
Max. Height (mm):	88 mm
Width (mm):	485 mm
Depth (mm):	293 mm
Weight:	1.443 kg
Max. Load:	10 kg
Material:	Steel
Colour:	Black

Excellent audio solutions for everyone

Audio plays a significant role in how people feel once they enter a mall, a showroom, an event, or, in general, any venue. It can evoke moods, emotions, memories, actions, and even creativity.
A proper audio system helps you to create a specific mood or feeling and send out a call for action or a message to your audience.

This is where our audio solutions come into play. Our products do not only support the power of entertainment. Permanent installations for public spaces, businesses, clubs, and mobile applications will also find products tailored to their needs.

Great sound in any setting, that's what our loudspeakers, amplifiers, microphones, and mixers aim to deliver. The best materials, sophisticated functionalities, and multifunctional modular designs allow you to pick the right audio solution for your target audience.




Odin
AUDIOSYSTEMS BY DAP
Odin
AUDIOSYSTEMS BY DAP



DRX-8

D3630 8" Passive Full-range Speaker

DAP

Specifications:

RMS In. Pwr.:	100 W
Peak In. Pwr.:	200 W
Pass. In. Conn.:	NL4
Speaker Sys.:	2-way
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	113 dB
Freq. Resp. (-6dB) Min.:	68 Hz
Freq. Resp. (-6dB) Max.:	20 Hz
X-over Freq. High:	3.2 Hz
Woofer V.C.:	1.5 "
Comp. Driver V.C.:	1 "
Horz. °:	50 °
Vert. °:	50 °
Height (mm):	542 mm
Width (mm):	360 mm
Length (mm):	352 mm
Material:	MDF
Weight:	9 kg
Rigging Options:	Flying

FEATURES:

- 200 watt
- Lightweight: 9 kg
- Reinforced cabinet
- High driver protection



DRX-10

D3631 10" Passive Full-range Speaker

DAP

Specifications:

RMS In. Pwr.:	120 W
Peak In. Pwr.:	240 W
Pass. In. Conn.:	NL4
Speaker Sys.:	2-way
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	118 dB
Freq. Resp. (-6dB) Min.:	58 Hz
Freq. Resp. (-6dB) Max.:	20 Hz
X-over Freq. High:	3.2 Hz
Woofer V.C.:	2 "
Comp. Driver V.C.:	1 "
Horz. °:	50 °
Vert. °:	50 °
Height (mm):	550 mm
Width (mm):	328 mm
Length (mm):	320 mm
Material:	MDF
Weight:	13 kg
Rigging Options:	Flying

FEATURES:

- 240 watt
- Lightweight: 13 kg
- Reinforced cabinet
- High driver protection

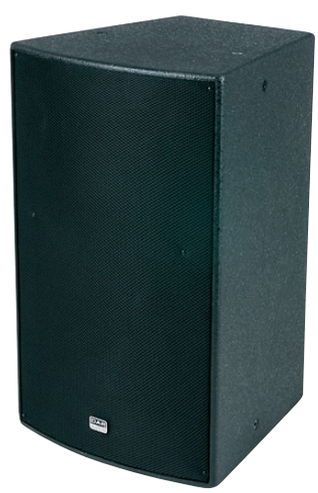

DRX-12

D3632 12" Passive Full-range Speaker

DAP

Specifications:

RMS In. Pwr.:	150 W
Peak In. Pwr.:	300 W
Pass. In. Conn.:	NL4
Speaker Sys.:	2-way
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	120.3 dB
Freq. Resp. (-6dB) Min.:	55 Hz
Freq. Resp. (-6dB) Max.:	20 Hz
X-over Freq. High:	2.8 Hz
Woofer V.C.:	2 "
Comp. Driver V.C.:	1 "
Horz. °:	50 °
Vert. °:	50 °
Height (mm):	584 mm
Width (mm):	353 mm
Length (mm):	360 mm
Material:	MDF
Weight:	14.5 kg
Rigging Options:	Flying

FEATURES:

- 300 watt
- Lightweight: 14.5 kg
- Reinforced cabinet
- High driver protection

DRX-15

D3633 15" Passive Full-range Speaker

DAP

Specifications:

RMS In. Pwr.:	200 W
Peak In. Pwr.:	400 W
Pass. In. Conn.:	NL4
Speaker Sys.:	2-way
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	122 dB
Freq. Resp. (-6dB) Min.:	50 Hz
Freq. Resp. (-6dB) Max.:	20 Hz
X-over Freq. High:	2.8 Hz
Woofer V.C.:	2 "
Comp. Driver V.C.:	1 "
Horz. °:	50 °
Vert. °:	50 °
Height (mm):	736 mm
Width (mm):	486 mm
Length (mm):	522 mm
Material:	MDF
Weight:	18 kg
Rigging Options:	Flying

FEATURES:

- 400 watt
- Lightweight: 18 kg
- Reinforced cabinet
- High driver protection



DRX-10B

D3643 10" Passive Reflex Subwoofer

DAP

Specifications:

RMS In. Pwr.:	250 W
Peak In. Pwr.:	500 W
Pass. In. Conn.:	NL4
Speaker Sys.:	Subwoofer
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	121 dB
Freq. Resp. (-6dB) Min.:	55 Hz
Freq. Resp. (-6dB) Max.:	500 Hz
Woofer V.C.:	2.5 "
Height (mm):	325 mm
Width (mm):	465 mm
Length (mm):	421 mm
Material:	MDF
Weight:	15.03 kg
Rigging Options:	Stacking

FEATURES:

- 500 watt
- 121 dB
- Compact design
- Lightweight: 15.03 kg



DRX-15B

D3645 15" Passive Reflex Subwoofer

DAP

Specifications:

RMS In. Pwr.:	300 W
Peak In. Pwr.:	600 W
Pass. In. Conn.:	NL4
Speaker Sys.:	Subwoofer
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	124 dB
Freq. Resp. (-6dB) Min.:	45 Hz
Freq. Resp. (-6dB) Max.:	400 Hz
Woofer V.C.:	2.5 "
Height (mm):	450 mm
Width (mm):	580 mm
Length (mm):	480 mm
Material:	MDF
Weight:	21.3 kg
Rigging Options:	Stacking

FEATURES:

- 600 watt
- 124 dB
- Compact design
- Lightweight: 21.3 kg





Pure-10

D3740 10” Passive Full-range Speaker

DAP

Specifications:

RMS In. Pwr.:	250 W
Peak In. Pwr.:	500 W
Pass. In. Conn.:	NL4
Speaker Sys.:	2-way
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	124 dB
Freq. Resp. (-10dB) Min.:	48 Hz
Freq. Resp. (-10dB) Max.:	20 Hz
X-over Freq. Low:	50 Hz
X-over Freq. High:	2200 Hz
Woofer V.C.:	2 “
Comp. Driver V.C.:	1.75 “
Horz. °:	90 °
Vert. °:	45 °
Height (mm):	500 mm
Width (mm):	320 mm
Length (mm):	324 mm
Material:	Wood
Weight:	11.8 kg
Rigging Options:	Flying

FEATURES:

- 500 watt
- Rotatable 90° x 60° Horn
- Lightweight: 11.8 kg
- Scratch resistant painting



Pure-12

D3741 12” Passive Full-range Speaker

DAP

Specifications:

RMS In. Pwr.:	300 W
Peak In. Pwr.:	600 W
Pass. In. Conn.:	NL4
Speaker Sys.:	2-way
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	126 dB
Freq. Resp. (-10dB) Min.:	45 Hz
Freq. Resp. (-10dB) Max.:	20 Hz
X-over Freq. Low:	42 Hz
X-over Freq. High:	2100 Hz
Woofer V.C.:	2.5 “
Comp. Driver V.C.:	1.75 “
Horz. °:	75 °
Vert. °:	50 °
Height (mm):	550 mm
Width (mm):	355 mm
Length (mm):	363 mm
Material:	Wood
Weight:	18.9 kg
Rigging Options:	Flying

FEATURES:

- 600 watt
- 90° x 45° dispersion for even coverage
- Lightweight: 18.9 kg
- Scratch resistant painting



Pure-15

D3742 15” Passive Full-range Speaker

DAP

Specifications:

RMS In. Pwr.:	400 W
Peak In. Pwr.:	800 W
Pass. In. Conn.:	NL4
Speaker Sys.:	2-way
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	128 dB
Freq. Resp. (-10dB) Min.:	40 Hz
Freq. Resp. (-10dB) Max.:	20 Hz
X-over Freq. Low:	42 Hz
X-over Freq. High:	2000 Hz
Woofer V.C.:	2.5 “
Comp. Driver V.C.:	1.75 “
Horz. °:	75 °
Vert. °:	50 °
Height (mm):	648 mm
Width (mm):	407 mm
Length (mm):	415 mm
Material:	Wood
Weight:	25 kg
Rigging Options:	Flying

FEATURES:

- 800 watt
- 90° x 45° dispersion for even coverage
- High sensitivity: 99 dB/1 W/1 m
- Scratch resistant painting

Pure-15S

D3743 15” Passive Subwoofer

DAP

Specifications:

RMS In. Pwr.:	600 W	Freq. Resp. (-10dB) Max.:	200 Hz
Peak In. Pwr.:	1200 W	X-over Freq. Low:	36 Hz
Pass. In. Conn.:	NL4	Woofer V.C.:	4 “
Speaker Sys.:	Subwoofer	Height (mm):	570 mm
Speaker Ω:	8 Ω	Width (mm):	454 mm
Max. SPL. at 1 m:	131 dB	Length (mm):	552 mm
Freq. Resp. (-10dB) Min.:	35 Hz	Material:	Wood
		Weight:	31 kg
		Rigging Options:	Stacking



FEATURES:

- 1200 watt
- 15” die-cast woofer with 4” voice-coil
- Optimised for best size/weight to SPL output ratio
- M20/35 mm Pole Mount

Pure-18S

D3744 18” Passive Subwoofer

DAP

Specifications:

RMS In. Pwr.:	800 W	Freq. Resp. (-10dB) Max.:	200 Hz
Peak In. Pwr.:	1600 W	X-over Freq. Low:	32 Hz
Pass. In. Conn.:	NL4	Woofer V.C.:	4 “
Speaker Sys.:	Subwoofer	Height (mm):	655 mm
Speaker Ω:	8 Ω	Width (mm):	520 mm
Max. SPL. at 1 m:	133 dB	Length (mm):	602 mm
Freq. Resp. (-10dB) Min.:	32 Hz	Material:	Wood
		Weight:	36 kg
		Rigging Options:	Stacking



FEATURES:

- 1600 watt
- 18” die-cast woofer with 4” voice-coil
- Optimised for best size/weight to SPL output ratio
- M20/35 mm Pole Mount





DRX-8A

D3634 8" Active Full-range Speaker

DAP

Specifications:

Low Driver Pwr.:	150 W
High Driver Pwr.:	25 W
RMS Out. Pwr.:	175 W
Peak Out. Pwr.:	350 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class AB
Speaker Sys.:	2-way
Max. SPL. at 1 m:	119.5 dB
Freq. Resp. (-6dB) Min.:	68 Hz
Freq. Resp. (-6dB) Max.:	20000 Hz
Woofer V.C.:	1.5 "
Comp. Driver V.C.:	1 "
Horz. °:	50 °
Vert. °:	50 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	117 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	542 mm
Width (mm):	360 mm
Length (mm):	352 mm
Material:	Wood
Weight:	13 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Thermal

FEATURES:

- 175 watt
- Bi-amp
- Lightweight: 13 kg
- Reinforced cabinet



DRX-10A

D3635 10" Active Full-range Speaker

DAP

Specifications:

Low Driver Pwr.:	170 W
High Driver Pwr.:	25 W
RMS Out. Pwr.:	195 W
Peak Out. Pwr.:	390 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class AB
Speaker Sys.:	2-way
Max. SPL. at 1 m:	120 dB
Freq. Resp. (-6dB) Min.:	55 Hz
Freq. Resp. (-6dB) Max.:	20000 Hz
Woofer V.C.:	2 "
Comp. Driver V.C.:	1 "
Horz. °:	50 °
Vert. °:	50 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	201 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	550 mm
Width (mm):	320 mm
Length (mm):	328.8 mm
Material:	Wood
Weight:	16 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Thermal

FEATURES:

- 195 watt
- Bi-amp
- Lightweight: 16 kg
- Reinforced cabinet

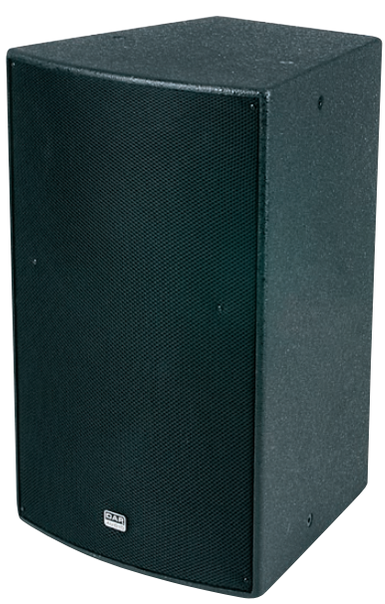

DRX-12A

D3636 12" Active Full-range Speaker

DAP

Specifications:

Low Driver Pwr.:	200 W
High Driver Pwr.:	30 W
RMS Out. Pwr.:	230 W
Peak Out. Pwr.:	460 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class AB
Speaker Sys.:	2-way
Max. SPL. at 1 m:	122 dB
Freq. Resp. (-6dB) Min.:	50 Hz
Freq. Resp. (-6dB) Max.:	20000 Hz
Woofer V.C.:	2 "
Comp. Driver V.C.:	1 "
Horz. °:	50 °
Vert. °:	50 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	350 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	573.5 mm
Width (mm):	370.8 mm
Length (mm):	360 mm
Material:	Wood
Weight:	18 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Thermal

FEATURES:

- 230 watt
- Bi-amp
- Lightweight: 18 kg
- Reinforced cabinet

DRX-15A

D3637 15" Active Full-range Speaker

DAP

Specifications:

Low Driver Pwr.:	220 W
High Driver Pwr.:	30 W
RMS Out. Pwr.:	250 W
Peak Out. Pwr.:	500 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class AB
Speaker Sys.:	2-way
Max. SPL. at 1 m:	123.5 dB
Freq. Resp. (-6dB) Min.:	50 Hz
Freq. Resp. (-6dB) Max.:	20000 Hz
Woofer V.C.:	2 "
Comp. Driver V.C.:	1 "
Horz. °:	50 °
Vert. °:	50 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	245 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	736 mm
Width (mm):	486 mm
Length (mm):	522 mm
Material:	Wood
Weight:	22 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Thermal



FEATURES:

- 250 watt
- Bi-amp
- Lightweight: 22 kg
- Reinforced cabinet





DRX-10BA

D3640 10" Active Reflex Subwoofer

DAP

Specifications:

Low Driver Pwr.:	300 W
RMS Out. Pwr.:	300 W
Peak Out. Pwr.:	600 W
Mono In.:	2
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class D
Speaker Sys.:	Subwoofer
Max. SPL. at 1 m:	121.8 dB
Freq. Resp. (-6dB) Min.:	50 Hz
Freq. Resp. (-6dB) Max.:	120 Hz
X-over Freq. High:	100 Hz
Woofer V.C.:	2.5 "
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	325 mm
Width (mm):	465 mm
Length (mm):	421 mm
Material:	Wood
Weight:	15.46 kg
Electronic Prot.:	Clip limiter (fixed) / Convection-fan / DC voltage / Thermal

FEATURES:

- 600 watt
- High Pass output
- Compact design
- Lightweight: 15.46 kg



DRX-12BA

D3641 12" Active Reflex Subwoofer

DAP

Specifications:

Low Driver Pwr.:	300 W
RMS Out. Pwr.:	300 W
Peak Out. Pwr.:	600 W
Mono In.:	2
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class D
Speaker Sys.:	Subwoofer
Max. SPL. at 1 m:	123.8 dB
Freq. Resp. (-6dB) Min.:	47 Hz
Freq. Resp. (-6dB) Max.:	125 Hz
X-over Freq. High:	100 Hz
Woofer V.C.:	2.5 "
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	370 mm
Width (mm):	530 mm
Length (mm):	480 mm
Material:	Wood
Weight:	18.6 kg
Electronic Prot.:	Clip limiter (fixed) / Convection-fan / DC voltage / Thermal

FEATURES:

- 600 watt
- High Pass output
- Compact design
- Lightweight: 18.6 kg

DRX-15BA

D3642 15" Active Reflex Subwoofer

DAP

Specifications:

Low Driver Pwr.:	300 W
RMS Out. Pwr.:	300 W
Peak Out. Pwr.:	600 W
Mono In.:	2
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class D
Speaker Sys.:	Subwoofer
Max. SPL. at 1 m:	124.8 dB
Freq. Resp. (-6dB) Min.:	45 Hz
Freq. Resp. (-6dB) Max.:	125 Hz
X-over Freq. High:	100 Hz
Woofer V.C.:	2.5 "
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	450 mm
Width (mm):	580 mm
Length (mm):	480 mm
Material:	Wood
Weight:	22.4 kg
Electronic Prot.:	Clip limiter (fixed) / Convection-fan / DC voltage / Thermal

FEATURES:

- 600 watt
- High Pass output
- Compact design
- Lightweight: 22.4 kg



DRX-18BA

D3647 18" Active Reflex Subwoofer

DAP

Specifications:

Low Driver Pwr.:	350 W
RMS Out. Pwr.:	350 W
Peak Out. Pwr.:	700 W
Mono In.:	2
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class D
Speaker Sys.:	Subwoofer
Max. SPL. at 1 m:	126 dB
Freq. Resp. (-6dB) Min.:	35 Hz
Freq. Resp. (-6dB) Max.:	120 Hz
X-over Freq. High:	100 Hz
Woofer V.C.:	3 "
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	350 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	535 mm
Width (mm):	661 mm
Length (mm):	515 mm
Material:	Wood
Weight:	27.4 kg
Electronic Prot.:	Clip limiter (fixed) / Convection-fan / DC voltage / Thermal

FEATURES:

- 700 watt
- High Pass output
- Multidimensional design
- 35 - 120 Hz





Splash 8A

D3588 8" Active Full-range Speaker

DAP

Specifications:

Low Driver Pwr.:	90 W
High Driver Pwr.:	30 W
RMS Out. Pwr.:	120 W
Peak Out. Pwr.:	240 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	113 dB
Freq. Resp. (-6dB) Min.:	68 Hz
Freq. Resp. (-6dB) Max.:	20000 Hz
X-over Freq. High:	2.2 Hz
Woofer V.C.:	1.5 "
Comp. Driver V.C.:	1 "
Horz. °:	90 °
Vert. °:	45 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	44 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	420 mm
Width (mm):	270 mm
Length (mm):	240 mm
Material:	ABS
Weight:	5.53 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Softstart / Thermal

FEATURES:

- Compact, lightweight and robust ABS housing
- High sound pressure
- Universally applicable



Splash 10A

D3589 10" Active Full-range Speaker

DAP

Specifications:

Low Driver Pwr.:	90 W
High Driver Pwr.:	30 W
RMS Out. Pwr.:	120 W
Peak Out. Pwr.:	240 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	116 dB
Freq. Resp. (-6dB) Min.:	65 Hz
Freq. Resp. (-6dB) Max.:	20 Hz
X-over Freq. High:	2.8 Hz
Woofer V.C.:	1.5 "
Comp. Driver V.C.:	1 "
Horz. °:	90 °
Vert. °:	45 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	75 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	460 mm
Width (mm):	285 mm
Length (mm):	265 mm
Material:	ABS
Weight:	6.92 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Softstart / Thermal

FEATURES:

- Compact, lightweight and robust ABS housing
- High sound pressure
- Universally applicable

Splash 12A

D3590 12" Active Full-range Speaker

DAP

Specifications:

Low Driver Pwr.:	150 W
High Driver Pwr.:	50 W
RMS Out. Pwr.:	200 W
Peak Out. Pwr.:	400 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class AB & D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	119 dB
Freq. Resp. (-6dB) Min.:	55 Hz
Freq. Resp. (-6dB) Max.:	20000 Hz
X-over Freq. High:	3.5 Hz
Woofer V.C.:	2 "
Comp. Driver V.C.:	1 "
Horz. °:	90 °
Vert. °:	45 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	175 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	607 mm
Width (mm):	380 mm
Length (mm):	337 mm
Material:	ABS
Weight:	13.75 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Softstart / Thermal

FEATURES:

- Compact, lightweight and robust ABS housing
- Switchable Contour function
- High sound pressure
- Universally applicable



Splash 15A

D3591 15" Active Full-range Speaker

DAP

Specifications:

Low Driver Pwr.:	150 W
High Driver Pwr.:	50 W
RMS Out. Pwr.:	200 W
Peak Out. Pwr.:	400 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 80 dB
Amp Technology:	Class AB & D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	121 dB
Freq. Resp. (-6dB) Min.:	50 Hz
Freq. Resp. (-6dB) Max.:	20000 Hz
X-over Freq. High:	3.5 Hz
Woofer V.C.:	2 "
Comp. Driver V.C.:	1 "
Horz. °:	90 °
Vert. °:	45 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	260 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	625 mm
Width (mm):	386 mm
Length (mm):	366 mm
Material:	ABS
Weight:	14.86 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Softstart / Thermal

FEATURES:

- Compact, lightweight and robust ABS housing
- Switchable Contour function
- High sound pressure
- Universally applicable





M10

D3660 10" Active Monitor

DAP

Specifications:

Low Driver Pwr.:	350 W
High Driver Pwr.:	65 W
RMS Out. Pwr.:	415 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 90 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	126 dB
Freq. Resp. (-10dB) Min.:	70 Hz
Freq. Resp. (-10dB) Max.:	20000 Hz
Woofer V.C.:	2.5 "
Comp. Driver V.C.:	1 "
Horz. °:	70 °
Vert. °:	70 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	80 W
Pwr. Conn. In.:	powerCON Blue
Height (mm):	278 mm
Width (mm):	364 mm
Length (mm):	430 mm
Material:	Wood
Weight:	11.4 kg
Electronic Prot.:	Clip limiter (fixed) / Convection-fan / DC voltage / Thermal

FEATURES:

- Compact and lightweight
- Powerful 415 W Class D amplifier
- Easy daisy chain with XLR and powerCON
- Stage proof design with rugged metal protective grill



M12

D3661 12" Active Monitor

DAP

Specifications:

Low Driver Pwr.:	350 W
High Driver Pwr.:	65 W
RMS Out. Pwr.:	415 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 90 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	127 dB
Freq. Resp. (-10dB) Min.:	65 Hz
Freq. Resp. (-10dB) Max.:	20000 Hz
Woofer V.C.:	2.5 "
Comp. Driver V.C.:	1 "
Horz. °:	70 °
Vert. °:	70 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	80 W
Pwr. Conn. In.:	powerCON Blue
Height (mm):	314 mm
Width (mm):	394 mm
Length (mm):	495 mm
Material:	Wood
Weight:	14.4 kg
Electronic Prot.:	Clip limiter (fixed) / Convection-fan / DC voltage / Thermal

FEATURES:

- Compact and lightweight
- Powerful 415 W Class D amplifier
- Easy daisy chain with XLR and powerCON
- Stage proof design with rugged metal protective grill



M15

D3662 15" Active Monitor

DAP

Specifications:

Low Driver Pwr.:	350 W
High Driver Pwr.:	65 W
RMS Out. Pwr.:	415 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 90 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	128 dB
Freq. Resp. (-10dB) Min.:	60 Hz
Freq. Resp. (-10dB) Max.:	20 Hz
Woofer V.C.:	2.5 "
Comp. Driver V.C.:	1 "
Horz. °:	70 °
Vert. °:	70 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	80 W
Pwr. Conn. In.:	powerCON Blue
Height (mm):	342 mm
Width (mm):	495 mm
Length (mm):	538 mm
Material:	Wood
Weight:	18.4 kg
Electronic Prot.:	Clip limiter (fixed) / Convection-fan / DC voltage / Thermal

FEATURES:

- Compact and lightweight
- Powerful 415 W Class D amplifier
- Easy daisy chain with XLR and powerCON
- Stage proof design with rugged metal protective grill





Odin SF-12A

D3930 **12" Active Full-range Speaker**

DAP

Specifications:

Low Driver Pwr.:	350 W
High Driver Pwr.:	130 W
RMS Out. Pwr.:	800 W
Peak Out. Pwr.:	3200 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 90 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	128 dB
X-over Freq. High:	1600 Hz
Woofer V.C.:	3 "
Comp. Driver V.C.:	1.75 "
Horz. °:	80 °
Vert. °:	60 °
Presets:	Yes
Presets Capacity:	10
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Conn. In.:	powerCON Blue
Data Conn. In:	etherCON
Height (mm):	646 mm
Width (mm):	396 mm
Length (mm):	379 mm
Material:	Wood
Weight:	26 kg
Electronic Prot.:	Convection-fan / Digital limiter / Overload / Thermal

FEATURES:

- Celestion driven 2-way full range speaker
- Road proof design and water resistant coating
- Integrated DSP processor
- Active bi-amp system
- Neutrik powerCON Connector In & Out

Case for 2x Odin SF-12A

D7226 **Premium Line**



Odin SF-15A

D3931 **15" Active Full-range Speaker**

DAP

Specifications:

Low Driver Pwr.:	350 W
High Driver Pwr.:	130 W
RMS Out. Pwr.:	800 W
Peak Out. Pwr.:	3200 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 90 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	129 dB
X-over Freq. High:	1600 Hz
Woofer V.C.:	3 "
Comp. Driver V.C.:	1.75 "
Horz. °:	80 °
Vert. °:	60 °
Presets:	Yes
Presets Capacity:	10
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	320 W
Pwr. Conn. In.:	powerCON Blue
Data Conn. In:	etherCON
Height (mm):	711 mm
Width (mm):	439 mm
Length (mm):	395 mm
Material:	Wood
Weight:	28 kg
Electronic Prot.:	Convection-fan / Digital limiter / Overload / Thermal

FEATURES:

- Celestion driven 2-way full range speaker
- Road proof design and water resistant coating
- Integrated DSP processor
- Neutrik powerCON Connector In & Out
- Active bi-amp system

Case for 2x Odin SF-15A

D7227 **Premium Line**

Odin T-8A

D3900 **2x 8'' Active Line-Array Satellite**

DAP

Specifications:

Low Driver Pwr.:	650 W
High Driver Pwr.:	150 W
RMS Out. Pwr.:	800 W
Peak Out. Pwr.:	3200 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 90 dB
Amp Technology:	Class AB & D
Speaker Sys.:	2-way Line-Array
Max. SPL. at 1 m:	129 dB
X-over Freq. High:	1600 Hz
Woofer V.C.:	2 "
Comp. Driver V.C.:	1.75 "
Horz. °:	100 °
Vert. °:	10 °
Presets:	Yes
Presets Capacity:	10
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Conn. In.:	powerCON Blue
Data Conn. In:	etherCON
Height (mm):	300 mm
Width (mm):	635 mm
Length (mm):	468 mm
Material:	Wood
Weight:	22.5 kg
Electronic Prot.:	Convection-fan / Digital limiter / Overload / Thermal



FEATURES:

- Celestion components inside
- Waveguide for optimised low-mid frequency directivity
- Single user 3-point suspension system
- DSP optimised Amplification ensures highest reliability
- Multivoltage Power supply with active PFC





Odin S-18A

D3901 **18" Active Line-Array Subwoofer**

DAP

Specifications:

Low Driver Pwr.:	1200 W
RMS Out. Pwr.:	1500 W
Peak Out. Pwr.:	6000 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 90 dB
Amp Technology:	Class D
Speaker Sys.:	Subwoofer
Max. SPL. at 1 m:	136 dB
X-over Freq. High:	90 Hz
Woofer V.C.:	4 "
Presets:	Yes
Presets Capacity:	10
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	1150 W
Pwr. Conn. In.:	powerCON Blue
Data Conn. In:	etherCON
Height (mm):	665 mm
Width (mm):	635 mm
Length (mm):	700 mm
Material:	Wood
Weight:	58.5 kg
Electronic Prot.:	Convection-fan / Digital limiter / Overload / Thermal

FEATURES:

- Celestion 18" woofer inside
- High Power 1.5 KW Class-D Amplifier
- DSP optimised Amplification ensures highest reliability
- Multivoltage Power supply with active PFC



Odin S-218A

D3902 **2x 18" Active Line-Array Subwoofer**

DAP

Specifications:

Low Driver Pwr.:	1600 W
RMS Out. Pwr.:	4000 W
Peak Out. Pwr.:	10000 W
Mono In.:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 90 dB
Amp Technology:	Class D
Speaker Sys.:	Subwoofer
Max. SPL. at 1 m:	141 dB
Freq. Resp. (-6dB) Min.:	28 Hz
Freq. Resp. (-6dB) Max.:	110 Hz
X-over Freq. High:	90 Hz
Woofer V.C.:	5 "
Presets:	Yes
Presets Capacity:	10
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	3100 W
Pwr. Conn. In.:	powerCON Blue
Data Conn. In:	etherCON
Height (mm):	665 mm
Width (mm):	1400 mm
Length (mm):	635 mm
Material:	Wood
Weight:	115.5 kg
Electronic Prot.:	Convection-fan / Digital limiter / Overload / Thermal

FEATURES:

- Celestion 2 x 18" woofers inside, 5" Voice coil
- High Power 4 KW Class-D Amplifier
- DSP optimised Amplification ensures highest reliability
- Frequency Response (-6 dB) 28 Hz-110 Hz


Odin
Odin



Odin Satellite Set

D3900SET01

DAP

Specifications:

The Odin Satellite set consists of:

4pcs Odin T-8A Line array satellites
2pcs Odin S-18A Line array subs
2pcs Odin PM-01 polemount adapter
2pcs Distance tube M20
1pcs Odin case for 4x T-8A
2pcs Transportcover for Odin S-18A
4pcs Blue wheel swivel 100mm
4pcs Blue wheel swivel & brake 100mm
1pcs Daily case 22
2pcs 10.0mtr powerCON input cable
2pcs 1.5mtr powerCON Link cable
2pcs 3,0mtr powerCON Link cable
2pcs 1,5mtr Neutrik XLR-XX M/F cable
2pcs 3.0mtr Neutrik XLR-XX M/F cable
2pcs 10.0mtr Neutrik XLR-XX M/F cable

FEATURES:

- CELESTION components inside
- Waveguide for optimised low-mid frequency directivity
- DSP optimised Amplification ensures highest reliability
- 9 Audio application presets
- Multivoltage Power supply with active PFC



Odin Stack set

D3900SET02

DAP

Specifications:

The Odin Stack set consists of:

8pcs Odin T-8A Line array satellites
4pcs Odin S-18A Line array subs
2pcs Odin case for 4x T-8A
2pcs Odin flybar FB-02
2pcs Odin CA-01 Connection adapter
1pcs Odin CL-4 Connect
8pcs 1.5mtr Powercon powercable m/f
4pcs 10.0mtr Blue power connector/schuko
2pcs Transportcover for Odin S-18A
2pcs Odin castorboard
1pcs Daily case 47
10pcs 1,5mtr Neutrik XLR-XX M/F cable
2pcs 10.0mtr Neutrik XLR-XX M/F cable
2pcs 15,0mtr FL55 Cat-5 cable
10pcs1.5mtr Cat 5E cable with Neutrik Ethercon

FEATURES:

- Complete speaker setup & transport
- 8 x Odin T-8A satellite speaker
- 4 x Odin S-18A sub
- 2 x DAP T-8A Flight Case
- 2 x FB-02 flybar
- Including cables, connectors, adapters, castor boards and internet hub
- Daily case 47 to transport accessories and transport covers

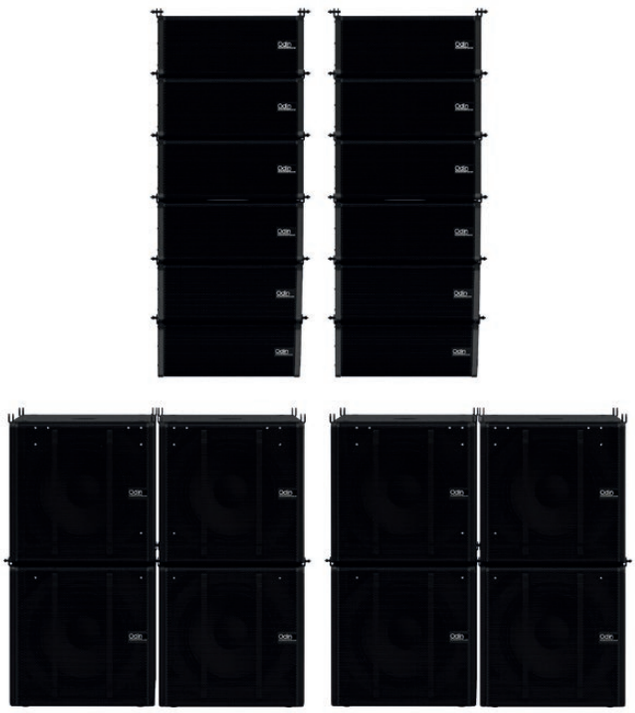



Odin Array set

D3900SET03

DAP

Specifications:

The Odin Array set consists of:

12pcs Odin T-8A Line array satellites
8pcs Odin S-18A Line array subs
3pcs Odin case for 4x T-8A
2pcs Odin flybar FB-01
2pcs Odin flybar FB-02
2pcs Odin CA-01 Connection adapter
1pcs Odin CL-4 Connect
16pcs 1.5mtr Powercon powercable m/f
4pcs 10.0mtr Blue power connector/schuko
4pcs Transportcover for 2x Odin S-18A
4pcs Odin castorboard
1pcs Daily case 47
16pcs 1,5mtr Neutrik XLR-XX M/F cable
4pcs 10.0mtr Neutrik XLR-XX M/F cable
2pcs 10,0mtr FL55 Cat-5 cable
2pcs 15,0mtr FL55 Cat-5 cable
16pcs1.5mtr Cat 5E cable with Neutrik Ethercon
2pcs MAT-350 Line array tower
2pcs Riggingbar 3 for MAT-series

FEATURES:

- Complete speaker setup & transport
- 12 x Odin T-8A satellite speaker including 2 x stands
- 8 x Odin S-18A sub
- 3 x DAP T-8A Flight Case
- 2 x FB-01 & 1 x FB-02 flybar
- Including cables, connectors, adapters, castor boards and ethernet hub
- Daily case 47 to transport accessories and transport covers



Pure-10A

D3719 10" Active Full-range Speaker

DAP

Specifications:

Low Driver Pwr.:	130 W
High Driver Pwr.:	20 W
RMS Out. Pwr.:	600 W
Peak Out. Pwr.:	1200 W
Mono In.:	2
Auxiliary Inputs:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 105 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	125 dB
Freq. Resp. (-6dB) Min.:	52 Hz
Freq. Resp. (-6dB) Max.:	20000 Hz
X-over Freq. High:	2100 Hz
Woofer V.C.:	2 "
Comp. Driver V.C.:	1.75 "
Horz. °:	90 °
Vert. °:	60 °
Presets:	Yes
Presets Capacity:	6
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Conn. In.:	Pro Power Blue
Height (mm):	500 mm
Width (mm):	320 mm
Length (mm):	324 mm
Material:	Wood
Weight:	13 kg
Electronic Prot.:	Compressor / Convect ion-fan / Digital limiter / Overload / Thermal

FEATURES:

- 600 W RMS
- Active speaker system
- 24-bit DSP processor with LCD-display
- 2-CH Input Mixer
- 35 mm Pole Mount



Pure-12A

D3721 12" Active Full-range Speaker

DAP

Specifications:

Low Driver Pwr.:	500 W
High Driver Pwr.:	100 W
RMS Out. Pwr.:	600 W
Peak Out. Pwr.:	1200 W
Mono In.:	2
Auxiliary Inputs:	1
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 105 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Max. SPL. at 1 m:	126 dB
Freq. Resp. (-6dB) Min.:	45 Hz
Freq. Resp. (-6dB) Max.:	20000 Hz
X-over Freq. High:	2200 Hz
Woofer V.C.:	2.5 "
Comp. Driver V.C.:	1.75 "
Horz. °:	75 °
Vert. °:	50 °
Presets:	Yes
Presets Capacity:	6
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Conn. In.:	Pro Power Blue
Height (mm):	550 mm
Width (mm):	365 mm
Length (mm):	356 mm
Material:	Wood
Weight:	23 kg
Electronic Prot.:	Compressor / Convection-fan / Digital limiter / Overload / Thermal

FEATURES:

- 600 W RMS
- Active speaker system
- 24-bit DSP processor with LCD-display
- 2-CH Input Mixer
- 35 mm Pole Mount

Pure-15A

D3720 15" Active Full-range Speaker

DAP



Specifications:

Low Driver Pwr.:	500 W	Horz. °:	75 °
High Driver Pwr.:	100 W	Vert. °:	50 °
RMS Out. Pwr.:	600 W	Presets:	Yes
Peak Out. Pwr.:	1200 W	Presets Capacity:	6
Mono In.:	2	Pwr. Supp.:	100-240 VAC 50-60 Hz
Auxiliary Inputs:	1	Pwr. Cons.:	600 W
THD Level:	< 0.5 %	Pwr. Conn. In.:	Pro Power Blue
Signal-to-noise Ratio:	> 105 dB	Height (mm):	640 mm
Amp Technology:	Class D	Width (mm):	426 mm
Speaker Sys.:	2-way	Length (mm):	410 mm
Max. SPL. at 1 m:	128 dB	Material:	Wood
Freq. Resp. (-6dB) Min.:	40 Hz	Weight:	29 kg
Freq. Resp. (-6dB) Max.:	20000 Hz	Electronic Prot.:	Compressor / Convection-fan / Digital limiter / Overload / Thermal
X-over Freq. High:	2100 Hz		
Woofer V.C.:	3 "		
Comp. Driver V.C.:	1.75 "		

FEATURES:

- 600 W RMS
- Active speaker system
- 24-bit DSP processor with LCD-display
- 2-CH Input Mixer
- 35 mm Pole Mount





Pure-15AS

D3726 15" Active Subwoofer

DAP

Specifications:

Low Driver Pwr.:	800 W
RMS Out. Pwr.:	800 W
Peak Out. Pwr.:	1600 W
Mono In.:	2
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 105 dB
Amp Technology:	Class D
Speaker Sys.:	Subwoofer
Max. SPL. at 1 m:	128 dB
Freq. Resp. (-6dB) Min.:	38 Hz
Freq. Resp. (-6dB) Max.:	150 Hz
Woofer V.C.:	4 "
Presets:	Yes
Presets Capacity:	6
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	620 W
Pwr. Conn. In.:	Pro Power Blue
Height (mm):	570 mm
Width (mm):	454 mm
Length (mm):	552 mm
Material:	Wood
Weight:	33.76 kg
Electronic Prot.:	Compressor / Convection-fan / Digital limiter / Thermal

FEATURES:

- 800 W RMS, 1600 W Class-D
- Active speaker system
- 24-bit DSP processor with LCD-display
- 2-CH Input Mixer
- M20/35 mm Pole Mount



Pure-18AS

D3725 18" Active Subwoofer

DAP

Specifications:

Low Driver Pwr.:	800 W
RMS Out. Pwr.:	800 W
Peak Out. Pwr.:	1600 W
Mono In.:	2
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 105 dB
Amp Technology:	Class D
Speaker Sys.:	Subwoofer
Max. SPL. at 1 m:	129 dB
Freq. Resp. (-6dB) Min.:	35 Hz
Freq. Resp. (-6dB) Max.:	150 Hz
Woofer V.C.:	4 "
Presets:	Yes
Presets Capacity:	6
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	612 W
Pwr. Conn. In.:	Pro Power Blue
Height (mm):	655 mm
Width (mm):	520 mm
Length (mm):	602 mm
Material:	Wood
Weight:	38 kg
Electronic Prot.:	Compressor / Convection-fan / Digital limiter / Overload / Thermal

FEATURES:

- 800 W RMS, 1600 W Class-D
- Active speaker system
- 24-bit DSP processor with LCD-display
- 2-CH Input Mixer
- M20/35 mm Pole Mount

Pure Club 12

D3760 **12" + 6" Active Speaker Set**

DAP



Specifications:

RMS Out. Pwr.:	590 W
Peak Out. Pwr.:	1180 W
Top Cabinet High Driver Pwr.:	120 W
Top Cabinet Low Driver Pwr.:	120 W
Sub Pwr.:	350 W
Passive High Out. Conn.:	NL4
Mono In.:	2
Mono In. Conn.:	3-pin XLR / RCA / TRS balanced 6.3 mm
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 100 dB
Amp Technology:	Class AB
Damping Factor:	100 :1
Speaker Sys.:	Active Sub-Top Set
Speaker Sens. (1 W/1 m):	95 dB
Sub. Sens. (1 W/1 m):	100 dB
Max. SPL. subwoofer at 1 m:	125.4 dB
Max. SPL. top cabinet at 1 m:	115.8 dB
Freq. Resp. Min.:	45 Hz
Freq. Resp. Max.:	20000 Hz
X-over Freq. High:	2700 Hz
Woofer Ø:	12 "
Woofer V.C.:	2 "
Sat. Woofer:	6.5
Sat. Woofer V.C.:	1.5
Comp. Driver Ø:	1 "
Comp. Driver V.C.:	1 "
Subwoofer Horz. ° :	360 °
Subwoofer Vert. °:	180 °
Satellite Horz. °:	90 °
Satellite Vert. °:	60 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
Height Top:	388 mm
Width Top:	245 mm
Length Top:	240 mm
Height Sub:	507 mm
Width Sub:	450 mm
Length Sub:	595 mm
Material:	Wood
Material Thickn.:	12 mm
Weight Top:	6.24 kg
Weight Sub:	27.42 kg
Electronic Prot.:	Clip limiter (fixed) / Convection-fan / DC voltage / Softstart / Thermal

FEATURES:

- Built-in amplifiers & dynamics
- HiFi Sound quality
- Adjustable subwoofer level
- Phase invert switch

Pure Club 15

D3761 **15" + 8" Active Speaker Set**

DAP



Specifications:

RMS Out. Pwr.:	700 W
Peak Out. Pwr.:	1400 W
Top Cabinet High Driver Pwr.:	150 W
Top Cabinet Low Driver Pwr.:	150 W
Sub Pwr.:	400 W
Passive High Out. Conn.:	NL4
Mono In.:	2
Mono In. Conn.:	3-pin XLR / RCA / TRS balanced 6.3 mm
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 103 dB
Amp Technology:	Class D /Class H
Damping Factor:	400 :1
Speaker Sys.:	Active Sub-Top Set
Speaker Sens. (1 W/1 m):	102 dB
Subwoofer Sens. (1 W/1 m):	95 dB
Max. SPL. sub. at 1 m:	128 dB
Max. SPL. top cabinet at 1 m:	116.8 dB
Freq. Resp. Min.:	40 Hz
Freq. Resp. Max.:	20 Hz
X-over Freq. High:	2.7 Hz
Woofer Ø:	15 "
Woofer V.C.:	3 "
Sat. Woofer:	8
Sat. Woofer V.C.:	2
Comp. Driver Ø:	1 "
Comp. Driver V.C.:	1 "
Horz. °:	90 °
Vert. °:	60 °
Subwoofer Horz. ° :	360 °
Subwoofer Vert. °:	180 °
Satellite Horz. °:	90 °
Satellite Vert. °:	60 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	1200 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
Height Top:	420 mm
Width Top:	250 mm
Length Top:	265 mm
Height Sub:	570 mm
Width Sub:	454 mm
Length Sub:	625 mm
Material:	Wood
Material Thickn.:	12 mm
Weight Top:	7.9 kg
Weight Sub:	32.5 kg
Electronic Prot.:	Clip limiter / DC voltage / Digital limiter / High frequency / Overheat / RF / Short circuit / Softstart

FEATURES:

- Compact & Powerful
- 24-bit DSP Processor with LCD-display
- Natural sound quality
- Fully customizable EQ



PSS-106

D2612 **6” Battery Speaker, without Microphone**

D2613 **6” Battery Speaker, incl. Wireless Handheld Microphone**

DAP

Specifications:

RMS Out. Pwr.:	160 W
Mono In.:	2
Mono In. Conn.:	3-pin XLR / TRS unbalanced 6.3 mm
Auxiliary Inputs:	1
Auxiliary Input Conn.:	TRS balanced 3.5 mm
Supp. Audio Files:	MP3
Media I/O:	USB-A / SD Card
Max. SPL. at 1 m:	110 dB
Freq. Resp. Min.:	70 Hz
Freq. Resp. Max.:	20000 Hz
Woofer Ø:	6.5 “
Comp. Driver Ø:	1 “
WL Mic. Freq. Start:	863 MHz
WL Mic. Freq. End:	865 MHz
Batt. Type:	Lithium ion
Runtime @Full:	5 h
Charging Time:	4 h
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	200 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	323 mm
Width (mm):	240 mm
Length (mm):	265 mm
Weight:	7 kg
IP Rate:	IP20 (indoor use only)

FEATURES:

- Battery Operated
- MP3 Player
- Bluetooth functionality



PSS-110 MKIII

D2611 **10” Battery Speaker, incl. Wireless Handheld Microphone**

DAP

Specifications:

Low Driver Pwr.:	135 W
High Driver Pwr.:	65 W
RMS Out. Pwr.:	200 W
Mono In.:	1
Mono In. Conn.:	3-pin XLR / TRS bal. 6.3 mm
Auxiliary Inputs:	1
Auxiliary Input Conn.:	RCA / TRS bal. 3.5 mm
Supp. Audio Files:	MP3
Media I/O:	USB-A
THD Level:	< 0.1%
Signal-to-noise Ratio Mic:	> 70dB
Signal-to-noise Ratio Line:	> 75 dB
Amp Technology:	Class D /Class H
Max. SPL. at 1 m:	117 dB
Freq. Resp. Min.:	65 Hz
Freq. Resp. Max.:	20 Hz
Woofer Ø:	10 “
Comp. Driver Ø:	1 “
Horz. °:	90 °
Vert. °:	45 °
WL Mic. Freq. Start:	615 MHz
WL Mic. Freq. End:	637 MHz
Batt. Type:	AA / Lithium ion
Runtime @Full:	3 h
Charging Time:	5 h
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	40 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	910 mm
Width (mm):	290 mm
Length (mm):	300 mm
Weight:	13 kg
IP Rate:	IP20(indoor use only)
Castors:	2

FEATURES:

- Main power & battery operation
- Built-in battery charger with overload protection
- All in one concept: USB player, mixer and wireless mic
- Trolley model makes transportation easy

Handheld Microphone for PSS-106 DAP

D2621



Mic receiver for PSS-106 DAP

D2625



Xi-3

D3432 **4” Passive Installation Speaker - Black (2 Pcs)**
D3433 **4” Passive Installation Speaker - White (2 Pcs)**

DAP

Specifications:

RMS In. Pwr.:	30 W
Peak In. Pwr.:	90 W
Pass. In. Conn.:	TRS unbalanced 6,3mm
Passive Out. Conn.:	TRS unbalanced 6.3 mm
THD Level:	< 0.5 %
Speaker Sys.:	2-way
Speaker Sens.(1 W/1 m):	88 dB
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	94 dB
Freq. Resp. Min.:	100 Hz
Freq. Resp. Max.:	20000 Hz
Freq. Resp. (-10dB) Min.:	100 Hz
Freq. Resp. (-10dB) Max.:	20 Hz
Woofer Ø:	4 “
Woofer V.C.:	1 “
Comp. Driver Ø:	0.5 “
Horz. °:	110 °
Vert. °:	20 °
Height (mm):	141 mm
Width (mm):	170 mm
Length (mm):	145 mm
Material:	Aluminium
Colour:	Black
Weight:	1.5 kg
IP Rate:	IP20 (indoor use only)





FEATURES:

- 4-inch passive installation speaker
- Clean full-range hi-fi sound (2-way system)
- 0° to 12° dispersion angle
- Daisy chainable
- 20 cm TRS unbalanced cable included (6.3 mm jack)

Xi-5

D3540 **5” Passive Installation Speaker - Black**
D3541 **5” Passive Installation Speaker - White**

DAP

Specifications:

RMS Power Input:	125 W
Peak Power Input:	500 W
Pass. In. Conn.:	NL4 / Terminal
Speaker Sys.:	2-Way
Speaker Sens. (1W/1m):	93 dB
Max. SPL.. (1 m):	120 dB
Freq. Resp. Min. :	80 Hz
Freq. Resp. Max. :	20000 Hz
Freq. Resp. (-6dB) Min.:	80 Hz
Freq. Resp. (-10dB) Min.:	80 Hz
Freq. Resp. (-10dB) Max.:	20000 Hz
Woofer Ø:	5 “
Woofer V.C.:	1.5 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	1 “
Horz. °:	90 °
Vert. °:	60 °
Length (mm):	225 mm
Height (mm):	275 mm
Width (mm):	205 mm
Weight:	4,9 kg
IP Rate:	IP20(indoor use only)
Material:	Plywood
Housing:	Wood
Colour:	Black
Rotatable Horn:	No
Speaker Grill:	Steel





FEATURES:

- 5.25 inch passive installation speaker
- Clean full-range Hi-Fi sound (2-way system)
- Multiple mounting & connectivity options
- Rotatable logo for vertical mounting
- Easy detachable magnet mounted grill
- Suitable to any 16 Ω audio infrastructure
- Available in either black and white





Xi-6

D3542 6” Passive Installation Speaker - Black
D3543 6” Passive Installation Speaker - White

DAP

Specifications:

RMS Power Input:	175 W
Peak Power Input:	700 W
Pass. In. Conn.:	NL4 / Terminal
Speaker Sys.:	2-Way
Speaker Sens. (1W/1m):	92 dB
Max. SPL.. (1 m):	122 dB
Freq. Resp. Min.:	80 Hz
Freq. Resp. Max.:	20000 Hz
Freq. Resp. (-6dB) Min.:	80 Hz
Freq. Resp. (-10dB) Min.:	60 Hz
Freq. Resp. (-10dB) Max.:	20000 Hz
Woofer Ø:	6.5 “
Woofer V.C.:	1.5 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	1 “
Horz. °:	90 °
Vert. °:	60 °
Length (mm):	226 mm
Height (mm):	333 mm
Width (mm):	250 mm
Weight:	6 kg
IP Rate:	IP20(indoor use only)
Material:	Plywood
Housing:	Wood
Colour:	Black
Rotatable Horn:	No
Speaker Grill:	Steel

FEATURES:

- 6.5 inch passive installation speaker
- Clean full-range Hi-Fi sound (2-way system)
- Multiple mounting & connectivity options
- Rotatable logo for vertical mounting
- Easy detachable magnet mounted grill
- Suitable to any 16 Ω audio infrastructure
- Available in either black and white





Xi-8

D3544 8” Passive Installation Speaker - Black
D3545 8” Passive Installation Speaker - White

DAP

Specifications:

RMS Power Input:	250 W
Peak Power Input:	1000 W
Pass. In. Conn.:	NL4 / Terminal
Speaker Sys.:	2-Way
Speaker Sens. (1W/1m):	125 dB
Max. SPL.. (1 m):	125 dB
Freq. Resp. Min.:	55 Hz
Freq. Resp. Max.:	20000 Hz
Freq. Resp. (-6dB) Min.:	45 Hz
Freq. Resp. (-10dB) Min.:	55 Hz
Freq. Resp. (-10dB) Max.:	20000 Hz
Woofer Ø:	8 “
Woofer V.C.:	2 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	1.4 “
Horz. °:	90 °
Vert. °:	60 °
Length (mm):	290 mm
Height (mm):	430 mm
Width (mm):	263 mm
Weight:	10,7 kg
IP Rate:	IP20(indoor use only)
Material:	Plywood
Housing:	Wood
Colour:	Black
Rotatable Horn:	Yes
Speaker Grill:	Steel

FEATURES:

- 8 inch passive installation speaker
- Clean full-range Hi-Fi sound (2-way system)
- Multiple mounting & connectivity options
- Rotatable horn and logo for vertical mounting
- Easy detachable magnet mounted grill
- Suitable to any 8 Ω audio infrastructure
- Available in either black and white

Xi-10

D3546 **10” Passive Installation Speaker - Black**
D3547 **10” Passive Installation Speaker - White**

DAP

Specifications:

RMS Power Input:	300 W	Woofer V.C.:	2.5 “
Peak Power Input:	1200 W	Comp. Driver Ø:	1 “
Pass. In. Conn.:	NL4 / Terminal	Comp. Driver V.C.:	1.4 “
Speaker Sys.:	2-Way	Horz. °:	90 °
Speaker Sens. (1W/1m):	96 dB	Vert. °:	60 °
Max. SPL.. (1 m):	127 dB	Length (mm):	300 mm
Freq. Resp. Min.:	45 Hz	Height (mm):	528 mm
Freq. Resp. Max.:	20000 Hz	Width (mm):	350 mm
Freq. Resp. (-6dB) Min.:	40 Hz	Weight:	14 kg
Freq. Resp. (-10dB) Min.:	45 Hz	IP Rate:	IP20(indoor use only)
Freq. Resp. (-10dB) Max.:	20000 Hz	Material:	Plywood
Woofer Ø:	10 “	Housing:	Wood
		Colour:	White
		Rotatable Horn:	Yes





FEATURES:

- 10 inch passive installation speaker
- Clean full-range Hi-Fi sound (2-way system)
- Multiple mounting & connectivity options
- Rotatable horn and logo for vertical mounting
- Easy detachable magnet mounted grill
- Suitable to any 8 Ω audio infrastructure
- Available in either black and white





Xi-28 MKII

D3452 **2x 8” Passive Installation Subwoofer - Black**

D3453 **2x 8” Passive Installation Subwoofer - White**

DAP

Specifications:

RMS In. Pwr.:	400 W
Peak In. Pwr.:	1600 W
Pass. In. Conn.:	NL4
Speaker Sys.:	Subwoofer
Speaker Sens. (1 W/1 m):	100 dB
Speaker Ω:	4 Ω
Max. SPL. at 1 m:	132 dB
Freq. Resp. Min.:	45 Hz
Freq. Resp. Max.:	4000 Hz
Freq. Resp. (-10dB) Min.:	45 Hz
Freq. Resp. (-10dB) Max.:	4500 Hz
Woofer Ø:	8 “
Woofer V.C.:	2 “
Subwoofer Horz. ° :	360 °
Subwoofer Vert. °:	180 °
Height (mm):	240 mm
Width (mm):	520 mm
Length (mm):	540 mm
Material:	Wood
Colour:	Black
Weight:	17 kg
IP Rate:	IP20(indoor use only)

FEATURES:

- Double 8” 4 ohm compact sub
- Natural high pressure bass reproduction
- Extreme tight mountable
- Recessed speakON chassis



Xi-12B

D3442 **12” Passive Installation Subwoofer - Black**

D3443 **12” Passive Installation Subwoofer - White**

DAP

Specifications:

RMS In. Pwr.:	300 W
Peak In. Pwr.:	900 W
Pass. In. Conn.:	NL4 / Terminal
Passive Out. Conn.:	NL4
Speaker Sys.:	Subwoofer
Speaker Sens. (1 W/1 m):	122 dB
Speaker Ω:	4 Ω
Max. SPL. at 1 m:	125 dB
Freq. Resp. Min.:	45 Hz
Freq. Resp. Max.:	2800 Hz
Woofer Ø:	12 “
Woofer V.C.:	2.55 “
Subwoofer Horz. ° :	360 °
Subwoofer Vert. °:	180 °
Height (mm):	500 mm
Width (mm):	350 mm
Length (mm):	542 mm
Material:	Wood
Colour:	Black
Weight:	20.5 kg
IP Rate:	IP20(indoor use only)

FEATURES:

- High Peak SPL: 125 dB
- Smooth frequency response
- Compact design
- Lightweight: 20.5 kg

DCS-6230-16

D6585 6” Passive Ceiling Speaker

DAP

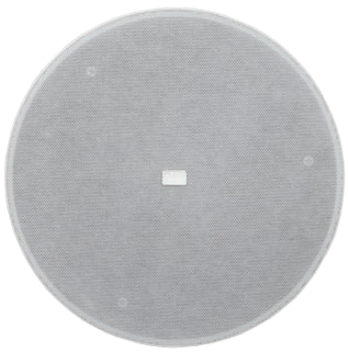

Specifications:

RMS In. Pwr.:	30 W
Peak In. Pwr.:	60 W
Pass. In. Conn.:	Terminal
Speaker Sys.:	2-way
Speaker Sens. (1 W/1 m):	86 dB
Speaker Ω:	16 Ω
Max. SPL. at 1 m:	101 dB
Freq. Resp. Min.:	46 Hz
Freq. Resp. Max.:	19000 Hz
Woofer Ø:	6.5 “
Woofer V.C.:	1 “
Comp. Driver Ø:	0.75 “
Comp. Driver V.C.:	0.5 “
Horz. °:	80 °
Vert. °:	80 °
Height (mm):	102 mm
Width (mm):	237 mm
Length (mm):	237 mm
Inst. Depth Ex. Conn.:	98 mm
Material:	Plastic
Colour:	White
Weight:	1.5 kg
IP Rate:	IP20(indoor use only)

FEATURES:

- 30 W recessed ceiling speaker
- 2-way system
- 16 Ω
- 6.5” woofer
- White

DCS-8240-16

D6584 8” Passive Ceiling Speaker

DAP



Specifications:

RMS In. Pwr.:	100 W
Peak In. Pwr.:	200 W
Pass. In. Conn.:	Terminal
Speaker Sys.:	2-way
Speaker Sens. (1 W/1 m):	90 dB
Speaker Ω:	16 Ω
Max. SPL. at 1 m:	110 dB
Freq. Resp. Min.:	50 Hz
Freq. Resp. Max.:	20 Hz
Woofer Ø:	8 “
Woofer V.C.:	1.5 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	1 “
Height (mm):	110 mm
Width (mm):	281 mm
Length (mm):	281 mm
Inst. Depth Ex. Conn.:	105 mm
Ø:	245 mm
Material:	Plastic
Colour:	White
Weight:	2.61 kg
IP Rate:	IP20(indoor use only)

FEATURES:

- 100 W recessed ceiling speaker
- 2-way system
- 16 Ω
- 8” woofer
- White

WCSS-230

D6450 6” Active Wireless Ceiling Speaker (2 Pcs)

DAP

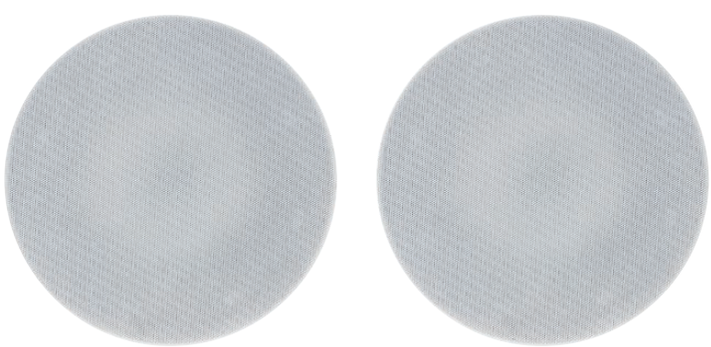

Specifications:

Stereo In.:	1
Stereo In. Conn.:	RCA
RMS In. Pwr.:	30 W
Peak In. Pwr.:	60 W
Passive Out. Conn.:	Terminal
THD Level:	< 0.3 %
Signal-to-noise Ratio:	> 100 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Speaker Sens. (1 W/1 m):	90 dB
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	110 dB
Freq. Resp. Min.:	40 Hz
Freq. Resp. Max.:	20000 Hz
Woofer Ø:	6.5 “
Woofer V.C.:	1.5 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	0.75 “
Horz. °:	80 °
Vert. °:	80 °
Carr. Freq.:	2,4 GHz
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	50 W
Pwr. Conn. In.:	IEC C7 Non-polar
Data Conn. In:	RJ45
Height (mm):	98 mm
Width (mm):	233 mm
Length (mm):	233 mm
Inst. Depth Ex. Conn.:	100 mm
Ø:	210 mm
Material:	Plastic
Colour:	White
Weight:	3.4 kg
IP Rate:	IP20(indoor use only)

FEATURES:

- Set of 2 speakers
- Wi-Fi and Wired network connection
- Airplay, DNLA, Internet radio
- Direct stream from smart phones
- Multi-room configuration





EVO 4

D3670 4” Passive Installation Speaker - Black (2 Pcs)
D3671 4” Passive Installation Speaker - White (2 Pcs)

DAP

Specifications:

RMS In. Pwr.:	40 W
Peak In. Pwr.:	80 W
Pass. In. Conn.:	Terminal
Speaker Sys.:	2-way
Speaker Sens. (1 W/1 m):	88 dB
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	110 dB
Freq. Resp. Min.:	100 Hz
Freq. Resp. Max.:	20 Hz
Woofer Ø:	4 “
Woofer V.C.:	1 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	0.5 “
Horz. °:	110 °
Vert. °:	90 °
Height (mm):	195 mm
Width (mm):	126 mm
Length (mm):	127 mm
Material:	ABS
Colour:	Black
Weight:	1.8 kg
IP Rate:	IP54

FEATURES:

- IP54 Protection Rate
- Multi angled Brackets
- Fast and easy installation
- High power handling





EVO 5

D3672 5” Passive Installation Speaker - Black (2 Pcs)
D3673 5” Passive Installation Speaker - White (2 Pcs)

DAP

Specifications:

RMS In. Pwr.:	60 W
Peak In. Pwr.:	120 W
Pass. In. Conn.:	Terminal
Speaker Sys.:	2-way
Speaker Sens. (1 W/1 m):	89 dB
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	113 dB
Freq. Resp. Min.:	80 Hz
Freq. Resp. Max.:	20 Hz
Woofer Ø:	5.25 “
Woofer V.C.:	1 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	0.5 “
Horz. °:	110 °
Vert. °:	90 °
Height (mm):	252 mm
Width (mm):	163 mm
Length (mm):	163 mm
Material:	ABS
Colour:	Black
Weight:	2.3 kg
IP Rate:	IP54

FEATURES:

- IP54 Protection Rate
- Multi angled Brackets
- Fast and easy installation
- High power handling

EVO 6

D3674 **6” Passive Installation Speaker - Black (2 Pcs)**
D3675 **6” Passive Installation Speaker - White (2 Pcs)**

DAP

Specifications:

RMS In. Pwr.:	70 W
Peak In. Pwr.:	140 W
Pass. In. Conn.:	Terminal
Speaker Sys.:	2-way
Speaker Sens. (1 W/1 m):	90 dB
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	114 dB
Freq. Resp. Min.:	50 Hz
Freq. Resp. Max.:	20 Hz
Woofer Ø:	6.5 “
Woofer V.C.:	1.5 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	1 “
Horz. °:	110 °
Vert. °:	90 °
Height (mm):	302 mm
Width (mm):	196 mm
Length (mm):	193 mm
Material:	ABS
Colour:	Black
Weight:	3.7 kg
IP Rate:	IP54





FEATURES:

- IP54 Protection Rate
- Multi angled Brackets
- Fast and easy installation
- High power handling

EVO 8

D3676 **8” Passive Installation Speaker - Black (2 Pcs)**
D3677 **8” Passive Installation Speaker - White (2 Pcs)**

DAP

Specifications:

RMS In. Pwr.:	80 W
Peak In. Pwr.:	160 W
Pass. In. Conn.:	Terminal
Speaker Sys.:	2-way
Speaker Sens. (1 W/1 m):	90 dB
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	115 dB
Freq. Resp. Min.:	48 Hz
Freq. Resp. Max.:	20 Hz
Woofer Ø:	8 “
Woofer V.C.:	1.5 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	1 “
Horz. °:	100 °
Vert. °:	90 °
Height (mm):	385 mm
Width (mm):	250 mm
Length (mm):	227 mm
Material:	ABS
Colour:	Black
Weight:	5.1 kg
IP Rate:	IP54





FEATURES:

- IP54 Protection Rate
- Multi angled Brackets
- Fast and easy installation
- High power handling





EVO 5A

D3688 **5” Active Installation Speaker - Black (2 Pcs)**
D3689 **5” Active Installation Speaker - White (2 Pcs)**

DAP

Specifications:

Stereo In.:	1
Stereo In. Conn.:	Phoenix / RCA
RMS In. Pwr.:	25 W
Peak In. Pwr.:	50 W
Passive Out. Conn.:	Terminal
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 90 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Speaker Sens. (1 W/1 m):	89 dB
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	109 dB
Freq. Resp. Min.:	80 Hz
Freq. Resp. Max.:	20000 Hz
Woofer Ø:	5.25 “
Woofer V.C.:	1 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	0.5 “
Horz. °:	110 °
Vert. °:	90 °
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	55 W
Pwr. Conn. In.:	IEC C7 Non-polar
Height (mm):	252 mm
Width (mm):	163 mm
Length (mm):	163 mm
Material:	ABS
Colour:	Black
Weight:	5.9 kg
IP Rate:	IP20(indoor use only)

FEATURES:

- Built-in amplifier
- Multi angled Brackets
- Fast and easy installation
- Balanced inputs





EVO 6A

D3690 **6” Active Installation Speaker - Black (2 Pcs)**
D3691 **6” Active Installation Speaker - White (2 Pcs)**

DAP

Specifications:

Stereo In.:	1
Stereo In. Conn.:	Phoenix / RCA
RMS In. Pwr.:	35 W
Peak In. Pwr.:	70 W
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 90 dB
Amp Technology:	Class D
Speaker Sys.:	2-way
Speaker Sens. (1 W/1 m):	90 dB
Speaker Ω:	8 Ω
Max. SPL. at 1 m:	111 dB
Freq. Resp. Min.:	50 Hz
Freq. Resp. Max.:	20000 Hz
Woofer Ø:	6.5 “
Woofer V.C.:	1.5 “
Comp. Driver Ø:	1 “
Comp. Driver V.C.:	1 “
Horz. °:	110 °
Vert. °:	90 °
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	55 W
Pwr. Conn. In.:	IEC C7 Non-polar
Height (mm):	302 mm
Width (mm):	196 mm
Length (mm):	193 mm
Material:	ABS
Colour:	Black
Weight:	8.8 kg
IP Rate:	IP20(indoor use only)

FEATURES:

- Built-in amplifier
- Multi angled Brackets
- Fast and easy installation
- Balanced inputs

EVO 8A

D3692 **8” Active Installation Speaker - Black (2 Pcs)**
D3693 **8” Active Installation Speaker - White (2 Pcs)**
DAP





Specifications:

Stereo In.:	1	Woofer Ø:	8 “
Stereo In. Conn.:	Phoenix / RCA	Woofer V.C.:	2 “
RMS In. Pwr.:	80 W	Comp. Driver Ø:	1 “
Peak In. Pwr.:	160 W	Comp. Driver V.C.:	1 “
Passive Out. Conn.:	Terminal	Horz. °:	100 °
THD Level:	< 0.3 %	Vert. °:	90 °
Signal-to-noise Ratio:	> 100 dB	Pwr. Supp.:	240 VAC 50-60 Hz
Amp Technology:	Class D	Pwr. Cons.:	198 W
Speaker Sys.:	2-way	Pwr. Conn. In.:	IEC C7 Non-polar
Speaker Sens. (1 W/1 m):	92 dB	Height (mm):	385 mm
Speaker Ω:	8 Ω	Width (mm):	250 mm
Max. SPL. at 1 m:	114 dB	Length (mm):	227 mm
Freq. Resp. Min.:	40 Hz	Material:	ABS
Freq. Resp. Max.:	20000 Hz	Colour:	Black
		Weight:	13.5 kg
		IP Rate:	IP20(indoor use only)

FEATURES:

- Built-in amplifier
- Multi angled Brackets
- Fast and easy installation
- Balanced inputs



Speaker Covers
Speakers

Transport Cover for Pure Club 12 DAP

D3762



Transport Cover for Pure Club 15 DAP

D3763



Rain Cover for Odin T-8A DAP

D3916



Rain/Transport Cover for 6 x T-8A DAP

D3922



Rain/Transport Cover for 2 x S-18A DAP

D3923



Transport Cover for Odin S-18A DAP

D3920



Transport Cover for 2 x Odin S-18A DAP

D3921



Transport Cover for Odin S-218A DAP

D3924



Rain/Transport Cover for Odin S-218A

D3925



DAP

Transport Cover for Pure-10(A) DAP

D3784



Transport Cover for Pure-12(A) DAP

D3780



Transport Cover for Pure-15(A) DAP

D3781



Transport Cover for Pure-12(A) DAP

D3780



Transport Cover for Pure-15(A)S DAP

D3782



Transport Cover for Pure-18(A)S DAP

D3783



Speaker Hanging Eye — SHOWGEAR

D8435 Ring, M8
D8436 Ring, M10

Height (mm):	72 mm
Width (mm):	30 mm
Length (mm):	30 mm
Weight:	0.052 kg
Material:	Metal



Plastic Outer Adapter 35mm — SHOWGEAR

D5502 180 x 120 mm



Metal Inner Adapter 35mm — SHOWGEAR

D5505 96 x Ø110 mm



Aluminium Inner Adapter 35mm

D5506 95 x Ø110 mm



SHOWGEAR

Small Flying Stud — SHOWGEAR

D8428 Small



Single Point Flying Stud — SHOWGEAR

D8451



Double Stud Flying Point — SHOWGEAR

D8452



Wall Bracket for Xi-3 — DAP

D3434 Black
D3435 White/silver

Height (mm):	231 mm
Width (mm):	128 mm
Length (mm):	377 mm
Weight:	263 kg
Material:	Steel



Suspension Bracket for Xi-3 — DAP

D3436 Black
D3437 White/silver

Height (mm):	95 mm
Width (mm):	128 mm
Length (mm):	145 mm
Weight:	0.9 kg
Material:	Steel
Rigging Eye Thread:	M10



Mobile Bracket for Xi-3 — DAP

D3438 Black
D3439 White

Height (mm):	95 mm
Width (mm):	128 mm
Length (mm):	155 mm
Weight:	0.85 kg
Material:	Steel
Pole Mount:	35 mm



Hanging Bracket for Xi-5 — DAP

D3422HB Black, Incl. 4 x M6 x 30
D3422WHB White, Incl. 4 x M6 x 30

Height (mm):	60 mm
Width (mm):	284 mm
Length (mm):	198 mm
Weight:	0.93 kg
Material:	Steel



Hanging Bracket for Xi-6 — DAP

D3423HB Black, Incl. 4 x M6 x 30
D3423WHB White, Incl. 4 x M6 x 30

Height (mm):	57 mm
Width (mm):	337 mm
Length (mm):	218 mm
Weight:	1.05 kg
Material:	Steel



Hanging Bracket for Xi-8 — DAP

D3424HB Black, Incl. 4 x M6 x 30
D3424WHB White, Incl. 4 x M6 x 30

Height (mm):	74 mm
Width (mm):	438 mm
Length (mm):	222 mm
Weight:	1.56 kg
Material:	Steel



Hanging Bracket for Xi-10 — DAP

D3425HB Black, Incl. 4 x M6 x 30
D3425WHB White, Incl. 4 x M6 x 30

Height (mm):	76 mm
Width (mm):	534 mm
Length (mm):	258 mm
Weight:	2.03 kg
Material:	Steel



Hanging Bracket for Xi-28B — DAP

D3426HB Black

Height (mm):	85 mm
Width (mm):	480 mm
Length (mm):	10 mm
Weight:	1.31 kg
Material:	Steel



Odin FB-01 Flybar — DAP

D3910 For 12 x Odin T-8A



Odin FB-02 Flybar/Stack Frame — DAP

D3911 For 4 x Odin T-8A



Odin PM-01 Pole Mount Adapter — DAP

D3912 For 2 x Odin T-8A



Odin CA-01 +6° Adapter — DAP

D3913 6° Extra Tilt Adapter for FB-02



Odin AF-01 Adjustable Foot — DAP

D3914 For using FB-01 as Stack Frame



Odin CL-4 Connect — DAP

D3915 Wi-Fi + LAN Network Interface



Odin Castor Board — DAP

D3918 For 2 x S-18A or 1 x S-218A



Pure (A)S Castor Board — DAP

D3730 Pure-15(A)S
D3731 Pure-18(A)S

Height (mm):	456 mm
Width (mm):	146 mm
Length (mm):	552 mm
Weight:	6.35 kg
Material:	Wood
IP Rate:	IP20(indoor use only)
Castors:	4







HP-500

D4175 **2 x 200 W Amp**

DAP

Specifications:

2 Ohms Stable:	No
Output per Chan. into 8 ohms at 1 kHz:	150 W
Output per Chan. into 4 ohm at 1 kHz:	200 W
Bridge Output into 8 ohms at 1 kHz:	400 W
Out. Ch.:	2
Out. Mode:	Bridge / Parallel / Stereo
Out. Conn.:	NL4
Mono In. Conn.:	3-pin XLR
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 100 dB
SLEW Rate:	10 V/µs

Amp Technology:	Class AB
Damping Factor:	100 :1
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	325 W
Height (mm):	88 mm
Width (mm):	483 mm
Length (mm):	310 mm
R.U.:	2 U
Weight:	8 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Overheat / Overload / Short circuit / Softstart / Thermal

FEATURES:

- Full protection circuits
- Efficient forced air cooling
- Stereo & Bridge mode



HP-900

D4176 **2 x 450 W Amp**

DAP

Specifications:

2 Ohms Stable:	No
Output per Chan. into 8 ohms at 1 kHz:	350 W
Output per Chan. into 4 ohm at 1 kHz:	450 W
Bridge Output into 8 ohms at 1 kHz:	900 W
Out. Ch.:	2
Out. Mode:	Bridge / Parallel / Stereo
Out. Conn.:	NL4
Mono In. Conn.:	3-pin XLR
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 100 dB
SLEW Rate:	13 V/µs

Amp Technology:	Class AB
Damping Factor:	100 :1
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	1100 W
Height (mm):	88 mm
Width (mm):	483 mm
Length (mm):	310 mm
R.U.:	2 U
Weight:	10 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Overheat / Overload / Short circuit / Softstart / Thermal

FEATURES:

- Full protection circuits
- Efficient forced air cooling
- Stereo & Bridge mode



HP-1500

D4177 **2 x 750 W Amp**

DAP

Specifications:

2 Ohms Stable:	No
Output per Chan. into 8 ohms at 1 kHz:	500 W
Output per Chan. into 4 ohm at 1 kHz:	750 W
Bridge Output into 8 ohms at 1 kHz:	1500 W
Out. Ch.:	2
Out. Mode:	Bridge / Parallel / Stereo
Out. Conn.:	NL4
Mono In. Conn.:	3-pin XLR
THD Level:	< 0.5 %
Signal-to-noise Ratio:	> 100 dB
SLEW Rate:	16 V/µs

Amp Technology:	Class H
Damping Factor:	250 :1
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	1520 W
Height (mm):	88 mm
Width (mm):	483 mm
Length (mm):	360 mm
R.U.:	2 U
Weight:	13 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Overheat / Overload / Short circuit / Softstart / Thermal

FEATURES:

- Full protection circuits
- Efficient forced air cooling
- Stereo & Bridge mode

HP-2100

D4178 **2 x 1000 W Amp**

DAP



Specifications:

2 Ohms Stable:	No		Amp Technology:	Class H
Output per Chan. into 8 ohms at 1 kHz:		700 W	Damping Factor:	250 :1
Output per Chan. into 4 ohm at 1 kHz:		1000 W	Pwr. Supp.:	220V-240 VAC 50 Hz
Bridge Output into 8 ohms at 1 kHz:		2000 W	Pwr. Cons.:	2000 W
Out. Ch.:	2		Height (mm):	88 mm
Out. Mode:	Bridge / Parallel / Stereo		Width (mm):	483 mm
Out. Conn.:	NL4		Length (mm):	360 mm
Mono In. Conn.:	3-pin XLR		R.U.:	2 U
THD Level:	< 0.5 %		Weight:	14 kg
Signal-to-noise Ratio:	> 100 dB		Electronic Prot.:	Clip limiter (fixed) / DC voltage / Overheat / Overload / Short circuit / Softstart / Thermal
SLEW Rate:	20 V/µs			

FEATURES:

- Full protection circuits
- Efficient forced air cooling
- Stereo & Bridge mode

HP-3000

D4179 **2 x 1400 W Amp**

DAP



Specifications:

2 Ohms Stable:	No		Amp Technology:	Class H
Output per Chan. into 8 ohms at 1 kHz:		1200 W	Damping Factor:	100 :1
Output per Chan. into 4 ohm at 1 kHz:		1400 W	Pwr. Supp.:	220V-240 VAC 50 Hz
Bridge Output into 8 ohms at 1 kHz:		2800 W	Pwr. Cons.:	1900 W
Out. Ch.:	2		Height (mm):	88 mm
Out. Mode:	Bridge / Parallel / Stereo		Width (mm):	483 mm
Out. Conn.:	NL4		Length (mm):	400 mm
Mono In. Conn.:	3-pin XLR		R.U.:	2 U
THD Level:	< 0.5 %		Weight:	17 kg
Signal-to-noise Ratio:	> 100 dB		Electronic Prot.:	Clip limiter (fixed) / DC voltage / Overheat / Overload / Short circuit / Softstart / Thermal
SLEW Rate:	25 V/µs			

FEATURES:

- Full protection circuits
- Efficient forced air cooling
- Stereo & Bridge mode





CA-2150

D4510 2 x 150 W Amp

DAP

Specifications:

2 Ohms Stable:	Yes
Output per Chan. into 8 ohms at 1 kHz:	90 W
Output per Chan. into 4 ohm at 1 kHz:	150 W
Output per Chan. into 2 ohm at 1 kHz:	230 W
Bridge Output into 8 ohms at 1 kHz:	190 W
Bridge Output into 4 ohms at 1 kHz :	275 W
Out. Ch.:	2
Out. Mode:	Bridge / Stereo
Out. Conn.:	NL4 / TRS unbalanced 6.3 mm
Mono In. Conn.:	3-pin XLR / TRS balanced 6.3 mm
THD Level:	< 0.1%
Signal-to-noise Ratio:	> 96 dB
SLEW Rate:	15 V/µs
Amp Technology:	Class D
Damping Factor:	180 :1
Freq. Resp. Min.:	20 Hz
Freq. Resp. Max.:	20 Hz
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	425 W
Height (mm):	44 mm
Width (mm):	484 mm
Length (mm):	281 mm
R.U.:	1 U
Weight:	3.7 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Overheat / Overload / Short circuit / Softstart

FEATURES:

- Soft start technology
- Advanced protection circuits
- SMPS & Class-D Amp Technology



CA-4150

D4512 4 x 150 W Amp

DAP

Specifications:

2 Ohms Stable:	Yes
Output per Chan. into 8 ohms at 1 kHz:	90 W
Output per Chan. into 4 ohm at 1 kHz:	150 W
Output per Chan. into 2 ohm at 1 kHz:	230 W
Bridge Output into 8 ohms at 1 kHz:	190 W
Bridge Output into 4 ohms at 1 kHz :	275 W
Out. Ch.:	4
Out. Mode:	4-Chan. / Bridge / Stereo
Out. Conn.:	Terminal
Mono In. Conn.:	Phoenix
THD Level:	< 0.1%
Signal-to-noise Ratio:	> 96 dB
SLEW Rate:	15 V/µs
Amp Technology:	Class D
Damping Factor:	180 :1
Freq. Resp. Min.:	20 Hz
Freq. Resp. Max.:	20 Hz
X-over filter types:	Built-in X-over
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	636 W
Height (mm):	44 mm
Width (mm):	484 mm
Length (mm):	281 mm
R.U.:	1 U
Weight:	4.85 kg
Electronic Prot.:	Clip limiter (fixed) / DC volt age / Overheat / Overload / Short circuit / Softstart / Thermal

FEATURES:

- Soft start technology
- Advanced protection circuits
- SMPS & Class-D Amp Technology
- Configurable Crossover built-in

CA-2300

D4513 2 x 300 W Amp

DAP

Specifications:

2 Ohms Stable:	Yes	
Output per Chan. into 8 ohms at 1 kHz:		180 W
Output per Chan. into 4 ohm at 1 kHz:		300 W
Bridge Output into 8 ohms at 1 kHz:		525 W
Bridge Output into 4 ohms at 1 kHz :		600 W
Out. Ch.:	2	
Out. Mode:	Bridge / Stereo	
Out. Conn.:	NL4 / TRS unbalanced 6.3 mm	
Mono In. Conn.:	3-pin XLR / TRS balanced 6.3 mm	
THD Level:	< 0.1%	
Signal-to-noise Ratio:	> 98 dB	
SLEW Rate:	20 V/µs	
Amp Technology:	Class D	
Damping Factor:	180 :1	
Freq. Resp. Min.:	20 Hz	
Freq. Resp. Max.:	20 Hz	
Pwr. Supp.:	220V-240 VAC 50 Hz	
Pwr. Cons.:	595 W	
Height (mm):	44 mm	
Width (mm):	484 mm	
Length (mm):	281 mm	
R.U.:	1 U	
Weight:	4.7 kg	
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Overheat / Overload / Short circuit / Softstart / Thermal	



FEATURES:

- Soft start technology
- Advanced protection circuits
- SMPS & Class-D Amp Technology

CA-4500 DSP

D4515 4 x 500 W Amp

DAP

Specifications:

2 Ohms Stable:	No	
Output per Chan. into 8 ohms at 1 kHz:		250 W
Output per Chan. into 4 ohm at 1 kHz:		500 W
Bridge Output into 8 ohms at 1 kHz:		1000 W
Out. Ch.:	4	
Out. Mode:	4-Chan. / Bridge / Mono / Stereo	
Out. Conn.:	NL4	
Mono In. Conn.:	3-pin XLR	
THD Level:	< 0.15 %	
Signal-to-noise Ratio:	> 96 dB	
SLEW Rate:	25 V/µs	
Amp Technology:	Class D	
Damping Factor:	180 :1	
Freq. Resp. Min.:	20 Hz	
Freq. Resp. Max.:	20 Hz	
PEQ In.:	8 Bands	
PEQ Out.:	8 Bands	
X-over filter types:	Bessel / Butterworth / Linkwitz Riley	
Pwr. Supp.:	220V-240 VAC 50 Hz	
Pwr. Cons.:	1741 W	
Height (mm):	44 mm	
Width (mm):	483 mm	
Length (mm):	285 mm	
R.U.:	1 U	
Weight:	5.9 kg	
Electronic Prot.:	Clip limiter (fixed) / DC voltage / Overheat / Overload / Short circuit / Softstart / Thermal	



FEATURES:

- 4-channel DSP powered amplifier
- OLED display and PC configurable
- SMPS & Class-D Amp Technology
- Advanced protection circuits
- Low impedance and 70/100 V output



Qi-4200

D4530 4 x 200 W Amp

DAP

Specifications:

2 Ohms Stable:	No	
Output per Chan. into 8 ohms at 1 kHz:		120 W
Output per Chan. into 4 ohm at 1 kHz:		200 W
Bridge Output into 8 ohms at 1 kHz:		400 W
Out. Ch.:	4	
Out. Mode:	4-Chan. / Bridge / Stereo	
Out. Conn.:	NL4	
Mono In. Conn.:	3-pin XLR	
THD Level:	< 0.5 %	
Signal-to-noise Ratio:	> 90 dB	
SLEW Rate:	15 V/µs	
Amp Technology:	Class D	

Damping Factor:	200 :1
Freq. Resp. Min.:	10 Hz
Freq. Resp. Max.:	20 Hz
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	725 W
Height (mm):	44 mm
Width (mm):	483 mm
Length (mm):	390 mm
R.U.:	1 U
Weight:	6.4 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / RF / Short circuit / Softstart / Thermal

FEATURES:

- 4 channels @ 1U housing
- Soft start technology
- Individual bridge control
- SMPS & Class-D amp



Qi-4400

D4531 4 x 400 W Amp

DAP

Specifications:

2 Ohms Stable:	No	
Output per Chan. into 8 ohms at 1 kHz:		250 W
Output per Chan. into 4 ohm at 1 kHz:		400 W
Bridge Output into 8 ohms at 1 kHz:		800 W
Out. Ch.:	4	
Out. Mode:	4-Chan. / Bridge / Stereo	
Out. Conn.:	NL4	
Mono In. Conn.:	3-pin XLR	
THD Level:	< 0.5 %	
Signal-to-noise Ratio:	> 90 dB	
SLEW Rate:	20 V/µs	
Amp Technology:	Class D	

Damping Factor:	200 :1
Freq. Resp. Min.:	10 Hz
Freq. Resp. Max.:	20 Hz
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	875 W
Height (mm):	44 mm
Width (mm):	483 mm
Length (mm):	390 mm
R.U.:	1 U
Weight:	5.8 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / RF / Short circuit / Softstart / Thermal

FEATURES:

- 4 channels @ 1U housing
- Soft start technology
- Individual bridge control
- SMPS & Class-D amp



Qi-4600

D4532 4 x 600 W Amp

DAP

Specifications:

2 Ohms Stable:	No	
Output per Chan. into 8 ohms at 1 kHz:		360 W
Output per Chan. into 4 ohm at 1 kHz:		600 W
Bridge Output into 8 ohms at 1 kHz:		1200 W
Out. Ch.:	4	
Out. Mode:	4-Chan. / Bridge / Stereo	
Out. Conn.:	NL4	
Mono In. Conn.:	3-pin XLR	
THD Level:	< 0.5 %	
Signal-to-noise Ratio:	> 90 dB	
SLEW Rate:	25 V/µs	
Amp Technology:	Class D	

Damping Factor:	200 :1
Freq. Resp. Min.:	10 Hz
Freq. Resp. Max.:	20000 Hz
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	1490 W
Height (mm):	44 mm
Width (mm):	483 mm
Length (mm):	390 mm
R.U.:	1 U
Weight:	6 kg
Electronic Prot.:	Clip limiter (fixed) / DC voltage / RF / Short circuit / Softstart / Thermal

FEATURES:

- 4 channels @ 1U housing
- Soft start technology
- Individual bridge control
- SMPS & Class-D amp

GIG-62

D2281 6-Channel Live Mixer

DAP

Specifications:

Mono In.:	2	Freq. Resp. Min.:	22 Hz
Stereo In.:	2	Freq. Resp. Max.:	22000 Hz
2-Track In.:	Yes	Phantom Pwr.:	48 V
Stereo Ret. In.:	Yes	PEQ Ch:	2 Bands
Main Out.:	1	Ch. In. Freq. Fix.:	80, 12.000 Hz
Auxiliary Outputs:	1	PEQ Mic:	3 Bands
Ctrl. Room Out.:	1	Mic In. Freq. Fix.:	80, 2.500, 12.000 Hz
Phones Out.:	1	Pwr. Supp.:	240 VAC 50-60 Hz
THD Level:	< 0.03 %	Pwr. Cons.:	14 W
Signal-to-noise Ratio:	> 100 dB	Height (mm):	60 mm
		Width (mm):	19.6 mm
		Length (mm):	244 mm



FEATURES:

- Ultra-low noise discrete MIC Preamps with +48 V Phantom Power
- 3-band EQ and Peak LEDs on each MIC channels
- 2-band EQ and Peak LEDs on Stereo channels
- AUX Sends per channel for external effects and monitoring

GIG-83CFX

D2282 8-Channel Live Mixer Incl. Dynamics & DSP

DAP

Specifications:

Mono In.:	4	Freq. Resp. Max. :	22000 Hz
Stereo In.:	3	Phantom Pwr.:	48 V
2-Track In.:	Yes	PEQ Ch:	2 Bands
Stereo Ret. In.:	Yes	Ch. In. Freq. Fix.:	80, 12.000 Hz
Main Out.:	1	PEQ Mic:	3 Bands
FX Send Out.:	1	Mic In. Freq. Fix.:	80, 2.500, 12.000 Hz
Ctrl. Room Out.:	1	Dynam. Type:	Compressor
Phones Out.:	1	Built-in FX:	Yes
THD Level:	< 0.03 %	Pwr. Supp.:	240 VAC 50-60 Hz
Signal-to-noise Ratio:	> 100 dB	Pwr. Cons.:	40 W
Freq. Resp. Min. :	22 Hz	Height (mm):	63 mm
		Width (mm):	254 mm
		Length (mm):	343 mm



FEATURES:

- Ultra-low noise discrete MIC Preamps with +48 V Phantom Power
- Compressors control on first MIC channels
- 3-band EQ and Peak LEDs on each MIC channels
- 2-band EQ and Peak LEDs on Stereo channels
- Built-in 24-bit DSP effect with 100 presets
- Optional expandable with USB/Record Module





GIG-104C

D2283 **10-Channel Live Mixer Incl. Dynamics**

DAP

Specifications:

Mono In.:	4
Stereo In.:	4
2-Track In.:	Yes
Stereo Ret. In.:	Yes
Main Out.:	1
Auxiliary Outputs:	1
Ctrl. Room Out.:	1
Phones Out.:	1
THD Level:	< 0.03 %
Signal-to-noise Ratio:	> 100 dB
Freq. Resp. Min.:	22 Hz
Freq. Resp. Max.:	22000 Hz
Phantom Pwr.:	48 V
PEQ Ch:	2 Bands
Ch. In. Freq. Fix.:	80, 12.000 Hz
PEQ Mic:	3 Bands
Mic In. Freq. Fix.:	80, 2.500, 12.000 Hz
Dynam. Type:	Compressor
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	24 W
Height (mm):	63 mm
Width (mm):	254 mm
Length (mm):	343 mm

FEATURES:

- Ultra-low noise discrete MIC Preamps with +48 V Phantom Power
- Compressors control on first MIC channels
- 3-band EQ and Peak LEDs on each MIC channels
- 2-band EQ and Peak LEDs on Stereo channels
- 1 AUX Sends POST Fader
- Optional expandable with USB/Record Module



GIG-124CFX

D2285 **12-Channel Live Mixer Incl. Dynamics & DSP**

DAP

Specifications:

Mono In.:	6
Stereo In.:	4
2-Track In.:	Yes
Stereo Ret. In.:	Yes
FX Return In.:	1
Main Out.:	1
Auxiliary Outputs:	1
Grp. Out.:	2
FX Send Out.:	1
Ctrl. Room Out.:	1
Phones Out.:	1
THD Level:	< 0.03 %
Signal-to-noise Ratio:	> 100 dB
Freq. Resp. Min.:	22 Hz
Freq. Resp. Max.:	22000 Hz
Phantom Pwr.:	48 V
PEQ Ch:	2 Bands
Ch. In. Freq. Fix.:	80, 12.500 Hz
PEQ Mic:	3 Bands
Mic In. Freq. Fix.:	80, 2.500, 12.500 Hz
Dynam. Type:	Compressor
Built-in FX:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	40 W
Height (mm):	93 mm
Width (mm):	340 mm
Length (mm):	416 mm

FEATURES:

- Ultra-low noise discrete MIC Preamps with +48 V Phantom Power
- Compressor on first four MIC channels
- 3-band EQ and Peak LEDs on each MIC channel
- 2-band EQ and Peak LEDs on Stereo channels
- Built-in 24-bit DSP effect with 100 presets
- Optionally expandable with USB/Record Module

GIG-164CFX

D2287 **16-Channel Live Mixer Incl. Dynamics & DSP**

DAP



Specifications:

Mono In.:	10
Stereo In.:	4
2-Track In.:	No
Stereo Ret. In.:	No
Insert Ch.:	Yes
Main Out.:	1
Auxiliary Outputs:	4
Grp. Out.:	4
FX Send Out.:	1
Ctrl. Room Out.:	1
Phones Out.:	1
USB In. Audio Interface:	1
THD Level:	< 0.03 %
Signal-to-noise Ratio:	> 114 dB

Freq. Resp. Min.:	22 Hz
Freq. Resp. Max.:	22000 Hz
Phantom Pwr.:	48 V
PEQ Ch:	4 Bands
Ch. In. Freq. Fix.:	80, 500, 3.000, 12.000 Hz
PEQ Mic:	3 Bands
Mic In. Freq. Sweep:	100 - 8.000 Hz
Mic In. Freq. Fix.:	80, 12.000 Hz
GEQ Main:	7 Bands
Dynam. Type:	Compressor
Built-in FX:	Yes
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	50 W
Height (mm):	85 mm
Width (mm):	435 mm
Length (mm):	535 mm

FEATURES:

- Ultra-low noise discrete MIC Preamps with +48 V Phantom Power
- Compressors control on first 6 MIC channels
- 3-band EQ with sweepable MID and Peak LEDs on each MIC channels
- 4-band EQ and Peak LEDs on Stereo channels
- Built-in 24-bit DSP effect with 100 presets
- Built-in USB Soundcard

GIG-244CFX

D2288 **24-Channel Live Mixer Incl. Dynamics & DSP**

DAP



Specifications:

Mono In.:	18
Stereo In.:	4
2-Track In.:	No
Stereo Ret. In.:	No
Insert Ch.:	Yes
Main Out.:	1
Auxiliary Outputs:	4
Grp. Out.:	4
FX Send Out.:	1
Ctrl. Room Out.:	1
Phones Out.:	1
USB In. Audio Interface:	1
THD Level:	< 0.03 %
Signal-to-noise Ratio:	> 100 dB

Freq. Resp. Min.:	22 Hz
Freq. Resp. Max.:	22000 Hz
Phantom Pwr.:	48 V
PEQ Ch:	4 Bands
Ch. In. Freq. Fix.:	80, 500, 3.000, 12.000 Hz
PEQ Mic:	3 Bands
Mic In. Freq. Sweep:	100 - 8.000 Hz
Mic In. Freq. Fix.:	80, 12.000 Hz
GEQ Main:	7 Bands
Dynam. Type:	Compressor
Built-in FX:	Yes
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	60 W
Height (mm):	85 mm
Width (mm):	435 mm
Length (mm):	753 mm

FEATURES:

- Ultra-low noise discrete MIC Preamps with +48 V Phantom Power
- Compressors control on first 8 MIC channels
- 3-band EQ with sweepable MID and Peak LEDs on each MIC channels
- 4-band EQ and Peak LEDs on Stereo channels
- Built-in 24-bit DSP effect with 100 presets
- Built-in USB Soundcard



Compact 6.2

D2320 6-Channel 1U Install Mixer / USB Player, 2 Zones

DAP

Specifications:

Mono In.:	2	Freq. Resp. Max.:	20000 Hz
Stereo In.:	2	Phantom Pwr.:	48 V
Auxiliary Inputs:	1	PEQ Main:	3 Bands
Main Out.:	2	Dynam. Type:	Compressor
Media I/O:	USB-A	Pwr. Supp.:	240 VAC 50-60 Hz
THD Level:	< 0.01 %	Pwr. Cons.:	10.5 W
Freq. Resp. Min.:	20 Hz	Height (mm):	44 mm
		Width (mm):	175 mm
		Length (mm):	481 mm

FEATURES:

- Mic input with Comp/Limit
- USB Player with pitch control
- Display with ID3 Text
- Direct MP3/Phone input
- 2 x Master & Monitor output



Compact 9.2

D2322 9-Channel 1U Install Mixer, 2 Zones

DAP

Specifications:

Mono In.:	3	Freq. Resp. Max. :	20 Hz
Stereo In.:	7	PEQ Zone:	3 Bands
Main Out.:	2	Pwr. Supp.:	240 VAC 50-60 Hz
THD Level:	< 0.01 %	Pwr. Cons.:	6 W
Freq. Resp. Min. :	20 Hz	Height (mm):	44 mm
		Width (mm):	175 mm
		Length (mm):	481 mm

FEATURES:

- Channel displays that show the input source
- Gain settings at back panel
- Main EQ settings at back panel
- Front input for Phone/MP3 devices
- Ideal for non-technical users



Compact 8.1

D2321 8-Channel 1U Install Mixer, 1 Output

DAP

Specifications:

Mono In.:	8	Freq. Resp. Min. :	20 Hz
Stereo In.:	8	Freq. Resp. Max. :	20 Hz
Main Out.:	1	Phantom Pwr.:	48 V
Mon. Out.:	1	PEQ Main:	3 Bands
Phones Out.:	1	Pwr. Supp.:	240 VAC 50-60 Hz
Rec. Out.:	1	Pwr. Cons.:	12 W
THD Level:	< 0.01 %	Height (mm):	44 mm
		Width (mm):	175 mm
		Length (mm):	481 mm

FEATURES:

- 8 combined Mic Line inputs
- EQ with mid sweep
- Phantom power
- Selectable Hi-pass filter

IMIX-7.1

D2350 **7-Channel 2U Install Mixer, 3 Outputs**

DAP

Specifications:

Mono In.:	2	Freq. Resp. Min.:	20 Hz
Stereo In.:	10	Freq. Resp. Max.:	20 Hz
Phono In. :	2	PEQ Mic:	3 Bands
Auxiliary Inputs:	1	PEQ Main:	3 Bands
Main Out.:	3	Pwr. Supp.:	240 VAC 50-60 Hz
Phones Out.:	1	Pwr. Cons.:	16.5 W
Rec. Out.:	1	Height (mm):	88 mm
THD Level:	< 0.05 %	Width (mm):	95 mm
		Length (mm):	481 mm



FEATURES:

- Gain settings at backside
- Special front input for phone/MP3 devices
- 2 Mic, 11 Line inputs

IMIX-7.3

D2351 **7-Channel 2U Install Mixer, 3 Zones**

DAP

Specifications:

Mono In.:	2	Freq. Resp. Min.:	20 Hz
Stereo In.:	10	Freq. Resp. Max.:	20 Hz
Phono In. :	2	PEQ Mic:	3 Bands
Auxiliary Inputs:	1	PEQ Main:	3 Bands
Main Out.:	3	Pwr. Supp.:	240 VAC 50-60 Hz
Phones Out.:	1	Pwr. Cons.:	19.1 W
Rec. Out.:	1	Height (mm):	88 mm
THD Level:	< 0.05 %	Width (mm):	95 mm
		Length (mm):	481 mm



FEATURES:

- Gain settings at backside
- Special front input for phone/MP3 devices
- Zone control for 3 balanced outputs
- 2 Mic, 11 Line inputs





IMIX-5.3

D2352 5-Channel 4U Install Mixer, 3 Zones

DAP

Specifications:

Mono In.:	1	Freq. Resp. Min. :	20 Hz
Stereo In.:	8	Freq. Resp. Max. :	20 Hz
Phono In. :	2	PEQ Mic:	3 Bands
Main Out.:	3	PEQ Zone:	3 Bands
Zone Out. :	3	Pwr. Supp.:	240 VAC 50-60 Hz
Phones Out.:	1	Pwr. Cons.:	15 W
THD Level:	< 0.05 %	Height (mm):	176 mm
		Width (mm):	89 mm
		Length (mm):	481 mm

FEATURES:

- Master outputs with 3-way tone control
- Special front input for phone/MP3 devices
- Zone control for 3 balanced outputs
- 1 Mic, 7 Line, 2 Phono inputs



IMIX-7.2 USB

D2353 7-Channel 6U Install Mixer USB, 2 Zones

DAP

Specifications:

Mono In.:	2	Freq. Resp. Min.:	20 Hz
Stereo In.:	7	Freq. Resp. Max.:	20 Hz
Auxiliary Inputs:	1	Phantom Pwr.:	No
Main Out.:	2	PEQ Ch:	3 Bands
Zone Out. :	2	PEQ Mic:	3 Bands
Mon. Out.:	1	Built-in FX:	Yes
Phones Out.:	1	Pwr. Supp.:	100-240 VAC 50-60 Hz
Rec. Out.:	1	Pwr. Cons.:	33 W
USB In. Audio Interface:	2	Height (mm):	266 mm
THD Level:	< 0.05 %	Width (mm):	135 mm
		Length (mm):	481 mm

FEATURES:

- Channel displays that show the input source
- 2 built-in USB-Audio interfaces
- VCA controlLED faders
- Reverb & talk-over on microphone channels
- Individual in- and output VU's
- No extra height units needed due to recessed connectors



GIG-143 TAB

D2301 14-Channel digital Mixer Incl. Dynamics & DSP

DAP

Specifications:

Mono In.:	8	Phantom Pwr.:	48 V
Stereo In.:	3	PEQ Ch:	4 Bands
Main Out.:	1	PEQ Mic:	4 Bands
Auxiliary Outputs:	4	Dynam. Type:	Compressor / Gate / Limiter
Ctrl. Room Out.:	1	Built-in FX:	Yes
Phones Out.:	1	Ctrl. Mode:	Manual / PC Software
THD Level:	< 0.01 %	Pwr. Supp.:	100-240 VAC 50-60 Hz
Freq. Resp. Min.:	20 Hz	Pwr. Cons.:	40 W
Freq. Resp. Max.:	20000 Hz	Height (mm):	134 mm
		Width (mm):	483 mm
		Length (mm):	321 mm

FEATURES:

- Ultra-low noise discrete preamps with +48 V Phantom Power
- High-definition ADCs (114 dB dynamic range)
- Bright OLED Screen
- Digital Gate/Compressor/4-band full parametric EQ on each input
- Intuitive PC software for remote control
- 8 direct access buttons for easy channel control
- 31-band graphical EQ on main output
- 24-bit FX engine
- 14 analogue inputs
- 6 x user definable DCAs

CORE Scratch

D2312 2-Channel DJ Mixer

DAP



Specifications:

Mono In.:	1	Freq. Resp. Min.:	20 Hz
Stereo In.:	4	Freq. Resp. Max.:	20000 Hz
Main Out.:	1	EQ Range Ch. In:	12 dB
Mon. Out.:	1	EQ Range Mic. In:	12 dB
Phones Out.:	1	BT Range:	25 m
Rec. Out.:	1	Pwr. Supp.:	240 VAC 50-60 Hz
THD Level:	< 0.05 %	Pwr. Cons.:	5 W
Signal-to-noise Ratio:	> 85 dB	Height (mm):	84 mm
		Width (mm):	203 mm
		Length (mm):	279 mm

FEATURES:

- Bluetooth playback
- Master & Booth output
- 60 mm faders
- MP3/Phone input selector

CORE Beat

D2313 3-Channel DJ Mixer

DAP



Specifications:

Mono In.:	1	Freq. Resp. Min.:	20 Hz
Stereo In.:	6	Freq. Resp. Max.:	20000 Hz
Main Out.:	1	EQ Range Ch. In:	12 dB
Mon. Out.:	1	EQ Range Mic. In:	12 dB
Phones Out.:	1	BT Range:	25 m
Rec. Out.:	1	Pwr. Supp.:	240 VAC 50-60 Hz
THD Level:	< 0.05 %	Pwr. Cons.:	8 W
Signal-to-noise Ratio:	> 85 dB	Height (mm):	84 mm
		Width (mm):	247 mm
		Length (mm):	331 mm

FEATURES:

- Bluetooth playback
- Talk over function
- VU channel indication
- MP3/Phone input selector

CORE Club

D2314 4-Channel DJ Mixer

DAP



Specifications:

Mono In.:	1	Freq. Resp. Max.:	20000 Hz
Stereo In.:	8	EQ Range Ch. In:	12 dB
Main Out.:	1	EQ Range Mic. In:	12 dB
Mon. Out.:	1	BT Range:	25 m
Rec. Out.:	1	Pwr. Supp.:	240 VAC 50-60 Hz
THD Level:	< 0.05 %	Pwr. Cons.:	82 W
Signal-to-noise Ratio:	> 80 dB	Height (mm):	84 mm
Freq. Resp. Min.:	20 Hz	Width (mm):	292 mm
		Length (mm):	356 mm

FEATURES:

- Bluetooth playback
- Talk over function
- VU channel indication
- MP3/Phone input selector



CORE MIX-2 USB

D2302 **2-Channel DJ Mixer with USB Interface**

DAP

Specifications:

Mono In.:	1
Stereo In.:	4
Phono In. :	1
Main Out.:	2
Mon. Out.:	1
Phones Out.:	1
Rec. Out.:	1
USB In. Audio Interface:	2
I/O Audio Module:	SD Card / USB-A
THD Level:	< 0.1%
Freq. Resp. Min.:	20 Hz
Freq. Resp. Max.:	20 Hz
EQ Range Ch. In:	26 dB
EQ Range Mic. In:	12 dB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	8 W
Height (mm):	88 mm
Width (mm):	300 mm
Length (mm):	240 mm

FEATURES:

- 2 built-in USB PC/MAC audio interfaces
- High quality components and structure
- 60 mm VCA faders
- MP3 USB SD recorder
- LED VU metre each channel



CORE MIX-3 USB

D2303 **3-Channel DJ Mixer with USB Interface**

DAP

Specifications:

Mono In.:	1
Stereo In.:	6
Phono In. :	1
FX Return In.:	1
Main Out.:	2
FX Send Out.:	1
Mon. Out.:	1
Phones Out.:	1
Rec. Out.:	1
USB In. Audio Interface:	2
Supp. Files Module:	MP3
I/O Audio Module:	SD Card / USB-A
THD Level:	< 0.1%
Freq. Resp. Min.:	20 Hz
Freq. Resp. Max.:	20000 Hz
EQ Range Ch. In:	12 dB
EQ Range Mic. In:	12 dB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	10 W
Height (mm):	88 mm
Width (mm):	268 mm
Length (mm):	381 mm

FEATURES:

- 2 built-in USB PC/MAC audio interfaces
- 60 mm VCA faders
- MP3 USB SD recorder
- Variable FX send / Return each channel
- LED VU metre each channel



CORE MIX-4 USB

D2304 **4-Channel DJ Mixer with USB Interface**

DAP

Specifications:

Mono In.:	2
Stereo In.:	8
Phono In. :	2
FX Return In.:	1
Main Out.:	2
FX Send Out.:	1
Mon. Out.:	1
Phones Out.:	1
Rec. Out.:	1
USB In. Audio Interface:	2
Supp. Files Module:	MP3
I/O Audio Module:	SD Card / USB-A
THD Level:	< 0.1%
Freq. Resp. Min.:	20 Hz
Freq. Resp. Max.:	20000 Hz
EQ Range Ch. In:	12 dB
EQ Range Mic. In:	12 dB
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	13 W
Height (mm):	100 mm
Width (mm):	310 mm
Length (mm):	378 mm

FEATURES:

- 2 built-in USB PC/MAC audio interfaces
- 60 mm VCA faders
- MP3 USB SD recorder
- Variable FX send / Return each channel
- LED VU metre each channel

19-inch Rack Mounts for Core Mix-4

DAP

D2310

Length (mm): 375 mm
Height (mm): 1 mm
Width (mm): 90 mm
R.U.: 85 U



19" GIG Rack Mounts 124C/124CFX

DAP

D2294

Length (mm): 310.5 mm
Height (mm): 1 mm
Width (mm): 87 mm
R.U.: 7 U



19" GIG Rack Mounts 83CFX /104C

DAP

D2293

Length (mm): 338 mm
Height (mm): 1 mm
Width (mm): 128 mm
R.U.: 8 U



19" GIG Rack Mounts 1000CFX

DAP

D2296

Length (mm): 431 mm
Height (mm): 25 mm
Width (mm): 65 mm
R.U.: 10 U



GIG Stand Adapter

DAP

D2295 for GIG-62, GIG-83CFX, GIG-104C

Length (mm): 45 mm
Height (mm): 130 mm
Width (mm): 85 mm



MP3 USB Record Module for GIG

DAP

D2291

Length (mm): 40 mm
Height (mm): 55 mm
Width (mm): 142 mm







AS-8

D1904 Audio Splitter & Mixer

DAP

Specifications:

Mono In.:	8	THD Level:	< 0.002 %
Main Out.:	8	Signal-to-noise Ratio:	> 95 dB
		Freq. Resp. Min. :	5 Hz
		Freq. Resp. Max. :	40 Hz

FEATURES:

- Selectable splitter/mixer function
- Wide range headroom
- 8 inputs
- 8 outputs



AGI-101

D1526 Audio Ground Loop Isolator

DAP

Specifications:

Stereo In.:	1	THD Level:	< 0.01 %
Main Out.:	1	Freq. Resp. Min.:	20 Hz
		Freq. Resp. Max.:	20000 Hz

FEATURES:

- No power-supply needed
- In-line connection
- No extra cables needed



PMM-401

D1531 4-Channel Passive Mixer

DAP

Specifications:

Mono In.:	5	THD Level:	< 0.005 %
Main Out.:	5	Signal-to-noise Ratio:	> 110 dB
		Freq. Resp. Min. :	20 Hz
		Freq. Resp. Max. :	20000 Hz

FEATURES:

- No power-supply needed
- Stereo in- and outputs
- 4-in, 1-out mixer
- 1-in, 4-out splitter

AMM-401

D1532 4-Channel Active Mixer

DAP

Specifications:

Mono In.:	2	Main Out.:	1
Stereo In.:	2	THD Level:	< 0.01 %
		Freq. Resp. Min. :	20 Hz
		Freq. Resp. Max. :	20000 Hz

FEATURES:

- 2 stereo inputs
- 2 mono inputs
- Balanced outputs
- Selectable line/instrument mono inputs



PRE-202

D1533 2-Channel Microphone Preamp

DAP

Specifications:

Mono In.:	2	THD Level:	< 0.01 %
Main Out.:	2	Freq. Resp. Min. :	20 Hz
		Freq. Resp. Max. :	20 Hz

FEATURES:

- Switchable Phantom power
- Switchable low cut
- Level control
- Low noise preamps



ASC-202

D1535 2-way Stereo Converter

DAP

Specifications:

Mono In.:	2	Main Out.:	2
Stereo In.:	1	THD Level:	< 0.01 %
		Freq. Resp. Min. :	20 Hz
		Freq. Resp. Max. :	20000 Hz

FEATURES:

- Road proof housing
- High quality components
- Professional balanced XLR outputs
- Level control





AMP-104

D1536 4-Channel Headphone Amplifier

DAP

Specifications:

Stereo In.:	1	Phones Out.:	8
Main Out.:	4	THD Level:	< 0.01 %
		Freq. Resp. Min. :	20 Hz
		Freq. Resp. Max. :	20000 Hz

FEATURES:

- Jack TRS & RCA input
- Separate volume control
- 2 x 4 outputs
- Road proof housing



ELI-101

D1537 Stereo Hum Eliminator

DAP

Specifications:

Mono In.:	2
Main Out.:	2
Freq. Resp. Min. :	20 Hz
Freq. Resp. Max. :	20 Hz

FEATURES:

- No power supply needed
- XLR in- outputs
- Road proof housing



PRE-101

D1530 Phono RIAA equalized Pre-amp

DAP

Specifications:

Stereo In.:	1	THD Level:	< 0.01 %
Main Out.:	1	Signal-to-noise Ratio:	> 90 dB
		Freq. Resp. Min. :	20 Hz
		Freq. Resp. Max. :	20000 Hz

FEATURES:

- Solid housing
- RIAA Equalization
- High quality components

SC-20

D1529 Stereo USB Soundcard

DAP

Specifications:



FEATURES:

- 2-channel USB-Audio interface
- Suitable for PC and MAC
- Low-noise preamp
- XLR and (mini)jack headphone output
- USB-powered / no additional power supply
- No driver installation needed

DCP-24 MKII

D2083 Digital Cross Over 2-in, 4-out

DAP

Specifications:

Mono In.:	2
Mono Bal. In. Max. Lvl.:	22 dBu
Main Out.:	4
THD Level:	< 0.01 %
Signal-to-noise Ratio:	> 90 dB
DSP Bitrate:	64-bit
Freq. Resp. Min. :	20 Hz
Freq. Resp. Max. :	20000 Hz
OS:	Windows

EQ Range:	12 dB
PEQ In.:	5 Bands
PEQ Out.:	5 Bands
X-over filter types:	Bessel / Butterworth / Linkwitz Riley
X-over slopes:	6 / 12 / 24 / 48 dB
Max. Out. Delay:	8 ms
Ctrl. Mode:	Manual / PC Software
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	2.8 W



FEATURES:

- 48 kHz, 64Bits Sample rate
- 5 parametric EQ's each in- and output
- USB interface and user-friendly software included
- 50 User Presets

DCP-26 MKII

D2084 Digital Cross Over 2-in, 6-out

DAP

Specifications:

Mono In.:	2
Mono Bal. In. Max. Lvl.:	22 dBu
Main Out.:	6
THD Level:	< 0.01 %
Signal-to-noise Ratio:	> 90 dB
DSP Bitrate:	64-bit
Freq. Resp. Min. :	20 Hz
Freq. Resp. Max. :	20000 Hz
OS:	Windows

EQ Range:	12 dB
PEQ In.:	5 Bands
PEQ Out.:	5 Bands
X-over filter types:	Bessel / Butterworth / Linkwitz Riley
X-over slopes:	6 / 12 / 24 / 48 dB
Max. Out. Delay:	8 ms
Ctrl. Mode:	Manual / PC Software
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	2.9 W



FEATURES:

- 48 kHz, 64-bit Sample rate
- 5 parametric EQ's each in- and output
- USB interface and user-friendly software included
- 50 user Presets



DB Display

D1902 **Decibel Power Display**

DAP

Specifications:

Stereo In.:	1
Main Out.:	1
Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Volt.:	12 VDC
R.U.:	1 U



ADI-101

D1946 Active DI box

DAP

Specifications:

Mono In.:	1	Freq. Resp. Min.:	10 Hz
Main Out.:	1	Freq. Resp. Max.:	40 Hz
THD Level:	< 0.005 %	Phantom Pwr.:	18 V / 24 V / 48 V
Signal-to-noise Ratio:	> 105 dB	Batt. Type:	9 V block PP3
		Batt. Voltage:	9 V

FEATURES:

- Road proof housing with rubber feet
- Low distortion
- 9 V power supply or 18–48 V phantom power
- Ground lift
- -20 and -40 dB Attenuation switch



ADI-200

D1943 Active DI Box

DAP

Specifications:

Mono In.:	1	Freq. Resp. Min.:	10 Hz
Main Out.:	1	Freq. Resp. Max.:	40 Hz
THD Level:	< 0.005 %	Phantom Pwr.:	18 V / 24 V / 48 V
Signal-to-noise Ratio:	> 105 dB	Batt. Type:	9 V block PP3
		Batt. Voltage:	9 V

FEATURES:

- Road proof housing with rubber feet
- Low distortion
- Ground lift
- 20 dB Attenuation switch



PDI-200

D1944 Stereo Passive DI Box

DAP

Specifications:

Mono In.:	2	Signal-to-noise Ratio:	> 95 dB
Main Out.:	2	Crosstalk:	96 dBu
THD Level:	< 0.003 %	Freq. Resp. Min.:	30 Hz
		Freq. Resp. Max.:	50 Hz
		Phantom Pwr.:	No

FEATURES:

- Road proof housing with rubber feet
- Low distortion
- No power supply needed
- 0, 20 ,40 dB attenuation settings



SDI-202

D1947 Stereo Active DI box

DAP

Specifications:

Mono In.:	2	Signal-to-noise Ratio:	> 105 dB
Main Out.:	2	Freq. Resp. Min.:	10 Hz
THD Level:	< 0.005 %	Freq. Resp. Max.:	40 Hz
		Phantom Pwr.:	18 V / 24 V / 48 V
		Batt. Type:	9 V block PP3

FEATURES:

- Jack & RCA inputs
- 9 V power supply ore 18–48 V phantom power
- Ground lift
- Instrument & speaker inputs





CORE CDMP-750

D1155 **Table Top CD USB Player**

DAP

Specifications:

Main Out.:	2
Supp. Audio Files:	MP3
Max. Stor. Size:	2 TB
Media I/O:	USB-A
Anti-Shock Time:	15 sec
THD Level:	< 0.01 %
Signal-to-noise Ratio:	> 105 dB
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	20 W
Height (mm):	105 mm
Width (mm):	217 mm
Length (mm):	325 mm

FEATURES:

- 100 % pitch with Master tempo
- 4 cue / loop memories
- BPM related effects and loops
- Accurate scratch function



CDR-110 MKIV

D1259 **1U CD + USB Player / USB Recorder**

DAP

Specifications:

Auxiliary Inputs:	1
Main Out.:	1
Main Out Max. Lvl.:	4 dBu
Supp. Audio Files:	MP3
Max. Stor. Size:	32 GB
Media I/O:	USB-A / SD Card
Rec. Out. File:	MP3
THD Level:	< 0.1%
Signal-to-noise Ratio:	> 60 dB
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6.5 W
Height (mm):	44 mm
Width (mm):	482 mm
Length (mm):	250 mm
R.U.:	1 U

FEATURES:

- Backlite buttons
- Adjustable record Level with indication
- Combined CD/USB/SD output
- IR Remote control



MPR-200BT

D1248 **1U Radio + USB + Bluetooth Player / USB Recorder**

DAP

Specifications:

Stereo In.:	1
Main Out.:	4
Main Out Max. Lvl.:	4 dBu
Supp. Audio Files:	MP3
Max. Stor. Size:	32 GB
Media I/O:	USB-A / SD Card
Anti-Shock Time:	30 sec
Rec. Out. File:	MP3
THD Level:	< 0.1%
Signal-to-noise Ratio:	> 70 dB
BT Vers.:	3.0
BT Range:	25 m
FM Freq. Start:	87.5 MHz
FM Freq. End:	108 MHz
Presets:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6.9 W
Height (mm):	44 mm
Width (mm):	482 mm
Length (mm):	250 mm
R.U.:	1 U

FEATURES:

- Backlit buttons
- Recorder & Player
- Wide Bluetooth range
- IR remote control

UBR-180BT

D1258 **1U USB + Bluetooth Player / USB Recorder**

DAP

Specifications:

Auxiliary Inputs:	1
Main Out.:	2
Main Out Max. Lvl.:	4 dBu
Supp. Audio Files:	MP3
Max. Stor. Size:	32 GB
Media I/O:	USB-A / SD Card
Rec. Out. File:	MP3
THD Level:	< 0.1%
Signal-to-noise Ratio:	> 70 dB
BT Vers.:	3.0
BT Range:	25 m
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	5.2 W
Height (mm):	44 mm
Width (mm):	482 mm
Length (mm):	185 mm
R.U.:	1 U



FEATURES:

- Backlit buttons
- Bluetooth playback
- Separate USB, Bluetooth output
- Adjustable record Level with indication

IR-150BT

D1247 **1U (Internet) Radio + USB + Bluetooth Player**

DAP

Specifications:

Main Out.:	1
Supp. Audio Files:	AAC/AAC+ / FLAC / MP3
THD Level:	< 0.1%
Signal-to-noise Ratio:	> 70 dB
Carr. Freq.:	2,4 GHz
BT Vers.:	4.2
BT Range:	20 m
FM Freq. Start:	87 MHz
FM Freq. End:	108 MHz
DAB+ Freq. Start:	174.928 Mhz
DAB+ Freq. End:	239.2 Mhz
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	4.6 W
Height (mm):	44.5 mm
Width (mm):	483 mm
Length (mm):	270 mm
R.U.:	1 U



FEATURES:

- FM, internet & DAB+ radio
- Bluetooth
- Line output (RCA)
- Digital out (Toslink & coaxial)
- XLR output
- Full colour LCD display
- IR remote included





PA-250

D6160 250 W 100 V Amp

DAP

Specifications:

RMS Out. Pwr.:	250 W	Trafo:	100 V
Out. Ch.:	1	Phantom Pwr.:	No
Out. Mode:	Parallel	Pwr. Supp.:	240 VAC 50-60 Hz
Out. Conn.:	Terminal	Backup Pwr. Supp.:	24 VDC
Main Out.:	2	Pwr. Cons.:	500 W
Main Out. Conn.:	RCA	Pwr. Conn. In.:	IEC C13 female
Mono In.:	2	Height (mm):	88 mm
Mono In. Conn.:	3-pin XLR / Phoenix	Width (mm):	483 mm
Stereo In.:	1	Length (mm):	326 mm
Stereo In. Conn.:	RCA	R.U.:	2 U
		Weight:	12 kg
		Electronic Prot.:	Overload / Short circuit

FEATURES:

- 250 W
- Loop through connection
- RCA, XLR, Terminal input
- 24 V Back up power input



PA-500

D6161 500 W 100 V Amp

DAP

Specifications:

RMS Out. Pwr.:	500 W	Trafo:	100 V
Out. Ch.:	1	Phantom Pwr.:	No
Out. Mode:	Parallel	Pwr. Supp.:	240 VAC 50-60 Hz
Out. Conn.:	Terminal	Backup Pwr. Supp.:	24 VDC
Main Out.:	2	Pwr. Cons.:	1050 W
Main Out. Conn.:	RCA	Pwr. Conn. In.:	IEC C13 female
Mono In.:	2	Height (mm):	483 mm
Mono In. Conn.:	3-pin XLR / Phoenix	Width (mm):	88 mm
Stereo In.:	1	Length (mm):	326 mm
Stereo In. Conn.:	RCA	R.U.:	2 U
		Weight:	16 kg
		Electronic Prot.:	Overload / Short circuit

FEATURES:

- 500 W
- Loop through connection
- RCA, XLR, Terminal input
- 24 V Back up power input

PA-5500TU

D6175 500 W 100 V Amp

DAP

Specifications:

RMS Out. Pwr.:	460 W		
Out. per Chan. into 8 ohms at 1 kHz:		240 W	
Out. Ch.:	2		
Out. Mode:	Bridge / Stereo		
Out. Conn.:	Terminal		
Mono In.:	0		
Stereo In.:	4		
Stereo In. Conn.:	RCA		
Trafo:	100 V		
Supp. Audio Files:	AAC/AAC+ / FLAC / MP3		
THD Level:	< 0.1%		
Signal-to-noise Ratio:	> 100 dB		

Amp Technology:	Class D
Freq. Resp. Min.:	20 Hz
Freq. Resp. Max.:	20000 Hz
PEQ Main:	2 Bands
FM Freq. Start:	87 MHz
FM Freq. End:	108 MHz
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	96 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	44 mm
Width (mm):	483 mm
Length (mm):	250 mm
R.U.:	1 U
Weight:	3.7 kg
Electronic Prot.:	Overload / Short circuit



FEATURES:

- All in one solution:

PA-530TU

D6150 30 W 100 V Amp

DAP

Specifications:

RMS Out. Pwr.:	30 W		
Out. per Chan. at 70/100 V at 1 kHz:		30 W	
Out. Ch.:	1		
Out. Mode:	Parallel		
Out. Conn.:	Terminal		
Mono In.:	2		
Mono In. Conn.:	3-pin XLR / TRS unbalanced 6.3 mm		
Stereo In.:	1		
Stereo In. Conn.:	TRS balanced 3.5 mm		
Auxiliary Inputs:	1		
Auxiliary Input Connector:	RCA		
Trafo:	100 V		
Supp. Audio Files:	MP3 / WAV		
Media I/O:	USB-A		

Phantom Pwr.:	18 V
PEQ Main:	2 Bands
Speech Filter Range:	6 dB
Speech Filter Freq.:	300 Hz
FM Freq. Start:	87.5 MHz
FM Freq. End:	108 MHz
Pwr. Supp.:	240 VAC 50-60 Hz
Backup Pwr. Supp.:	24 VDC
Pwr. Cons.:	69 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. In:	USB
Height (mm):	95 mm
Width (mm):	270 mm
Length (mm):	262 mm
Weight:	6 kg
Chime:	No
Electronic Prot.:	Overload / Short circuit



FEATURES:

- Compact design
- Media player
- Tuner
- Front line input



PA-7120

D6151 120 W 100 V Amp

DAP

Specifications:

RMS Out. Pwr.:	120 W
Out. Ch.:	1
Out. Mode:	Parallel
Out. Conn.:	Terminal
Main Out.:	1
Main Out. Conn.:	RCA
Mono In.:	3
Mono In. Conn.:	3-pin XLR / Phoenix / TRS unbalanced 6.3 mm
Stereo In.:	3
Stereo In. Conn.:	RCA / TRS balanced 3.5 mm
Auxiliary Inputs:	1
Auxiliary Input Conn.:	RCA
Trafo:	100 V
Phantom Pwr.:	18 V
PEQ Ch:	2 Bands
PEQ Mic:	2 Bands
Speech Filter Range:	3 dB
Speech Filter Freq.:	300 Hz
Pwr. Supp.:	240 VAC 50-60 Hz
Backup Pwr. Supp.:	24 VDC
Pwr. Cons.:	253 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	88 mm
Width (mm):	483 mm
Length (mm):	328 mm
R.U.:	2 U
Weight:	9 kg
PTT:	Yes
Chime:	Yes
Tel. In.:	Yes
Electronic Prot.:	Overload / Short circuit

FEATURES:

- 1 zone
- 7 inputs
- Telephone input
- Chime & Ducking



ZA-7250

D6152 250 W 100 V Zone Amp

DAP

Specifications:

RMS Out. Pwr.:	250 W
Out. Ch.:	4
Out. Mode:	Parallel
Out. Conn.:	Terminal
Main Out.:	2
Main Out. Conn.:	3-pin XLR / RCA
Zone Out. :	4
Zone Out. Conn.:	Phoenix / RCA
Mono In.:	3
Mono In. Conn.:	3-pin XLR / Phoenix / TRS unbalanced 6.3 mm
Stereo In.:	3
Stereo In. Conn.:	TRS balanced 3.5 mm
Auxiliary Inputs:	1
Auxiliary Input Conn.:	RCA
Trafo:	100 V
Phantom Pwr.:	18 V
PEQ Ch:	2 Bands
PEQ Mic:	2 Bands
Speech Filter Range:	3 dB
Speech Filter Freq.:	300 Hz
Pwr. Supp.:	240 VAC 50-60 Hz
Backup Pwr. Supp.:	24 VDC
Pwr. Cons.:	517 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	88 mm
Width (mm):	483 mm
Length (mm):	328 mm
R.U.:	2 U
Weight:	12 kg
PTT:	Yes
Chime:	Yes
Tel. In.:	Yes
Electronic Prot.:	Overload / Short circuit

FEATURES:

- 4 zones
- 7 inputs
- Telephone input
- Zone line outputs

ZA-9120TU

D6153 **120 W 100 V Zone Amp**

DAP

Specifications:

RMS Out. Pwr.:	120 W	Phantom Pwr.:	18 V
Out. Ch.:	2	PEQ Ch:	2 Bands
Out. Mode:	Parallel	PEQ Mic:	2 Bands
Out. Conn.:	Terminal	Speech Filter Range:	3 dB
Main Out.:	1	Speech Filter Freq.:	300 Hz
Main Out. Conn.:	RCA	FM Freq. Start:	87.5 MHz
Zone Out. :	2	FM Freq. End:	108 MHz
Zone Out. Conn.:	Phoenix	Pwr. Supp.:	240 VAC 50-60 Hz
Mono In.:	3	Backup Pwr. Supp.:	24 VDC
Mono In. Conn.:	3-pin XLR / Phoenix / TRS unbalanced 6.3 mm	Pwr. Cons.:	253 W
		Pwr. Conn. In.:	IEC C13 female
		Data Conn. In:	USB
Stereo In.:	3	Height (mm):	88 mm
Stereo In. Conn.:	RCA / TRS balanced 3.5 mm	Width (mm):	483 mm
		Length (mm):	328 mm
		R.U.:	2 U
Auxiliary Inputs:	1	Weight:	9 kg
Auxiliary Input Conn.:	TRS balanced 3.5 mm	PTT:	Yes
Trafo:	100 V	Chime:	Yes
Supp. Audio Files:	MP3 / WAV	Tel. In.:	Yes
Media I/O:	USB-A	Electronic Prot.:	Overload / Short circuit



FEATURES:

- 2 zones
- Media player
- Telephone input
- USB on front and backside

ZA-9250TU

D6154 **250 W 100 V Zone Amp**

DAP

Specifications:

RMS Out. Pwr.:	250 W	Phantom Pwr.:	18 V
Out. Ch.:	4	PEQ Ch:	2 Bands
Out. Mode:	Parallel	PEQ Mic:	2 Bands
Out. Conn.:	Terminal	Speech Filter Range:	3 dB
Main Out.:	1	Speech Filter Freq.:	300 Hz
Main Out. Conn.:	RCA	FM Freq. Start:	87.5 MHz
Zone Out. :	4	FM Freq. End:	108 MHz
Zone Out. Conn.:	Phoenix / RCA	Pwr. Supp.:	240 VAC 50-60 Hz
Mono In.:	3	Backup Pwr. Supp.:	24 VDC
Mono In. Conn.:	3-pin XLR / Phoenix / TRS unbalanced 6.3 mm	Pwr. Cons.:	500 W
		Pwr. Conn. In.:	IEC C13 female
		Data Conn. In:	USB
Stereo In.:	3	Height (mm):	88 mm
Stereo In. Conn.:	RCA / TRS balanced 3.5 mm	Width (mm):	483 mm
		Length (mm):	328 mm
		R.U.:	2 U
Auxiliary Inputs:	1	Weight:	12 kg
Auxiliary Input Conn.:	RCA	PTT:	Yes
Trafo:	100 V	Chime:	Yes
Supp. Audio Files:	MP3 / WAV	Tel. In.:	Yes
Media I/O:	USB-A	Electronic Prot.:	Overload / Short circuit



FEATURES:

- 4 zones
- Media player
- Zone line outputs
- USB on front and backside



ZA-9250VTU

D6155 **250 W 100 V Zone Amp**

DAP

Specifications:

RMS Out. Pwr.:	250 W
Out. Ch.:	4
Out. Mode:	Parallel
Out. Conn.:	Terminal
Main Out.:	2
Main Out. Conn.:	3-pin XLR / RCA
Zone Out. :	4
Zone Out. Conn.:	Phoenix / RCA
Mono In.:	3
Mono In. Conn.:	3-pin XLR / Phoenix / TRS unbalanced 6.3 mm
Stereo In.:	3
Stereo In. Conn.:	RCA / TRS balanced 3.5 mm
Auxiliary Inputs:	1
Auxiliary Input Conn.:	RCA
Trafo:	100 V
Supp. Audio Files:	MP3 / WAV
Media I/O:	USB-A
Phantom Pwr.:	18 V
PEQ Ch:	2 Bands
PEQ Mic:	2 Bands
Speech Filter Range:	3 dB
Speech Filter Freq.:	300 Hz
FM Freq. Start:	87.5 MHz
FM Freq. End:	108 MHz
Pwr. Supp.:	240 VAC 50-60 Hz
Backup Pwr. Supp.:	24 VDC
Pwr. Cons.:	514 W
Pwr. Conn. In.:	IEC C13 female
Data Conn. In:	USB
Height (mm):	134 mm
Width (mm):	483 mm
Length (mm):	328 mm
R.U.:	3 U
Weight:	14 kg
PTT:	Yes
Chime:	Yes
Tel. In.:	Yes
Electronic Prot.:	Overload / Short circuit

FEATURES:

- 4 zones
- Media player
- Built-in volume controllers
- USB on front & backside



MA-8120 Matrix Amplifier

D6195 **480 W 100 V Matrix Amp**

DAP

Specifications:

RMS Out. Pwr.:	480 W	
Out. per Chan. at 70/100 V at 1 kHz:		120 W
Out. per Chan. at 100 V at 1 kHz:		120 W
Out. Ch.:	4	
Out. Mode:	Parallel	
Out. Conn.:	Terminal	
Zone Out. :	4	
Zone Out. Connector:	Phoenix	
Mono In.:	8	
Mono In. Conn.:	3-pin XLR / TRS unbalanced 6.3 mm	
Stereo In.:	4	
Stereo In. Conn.:	RCA	
Trafo:	70+100 V	
THD Level:	< 0.1%	
Freq. Resp. Min.:	20 Hz	
Freq. Resp. Max.:	20000 Hz	
Phantom Pwr.:	18 V / 24 V	
PEQ Mic:	3 Bands	
PEQ Main:	2 Bands	
Pwr. Supp.:	240 VAC 50-60 Hz	
Backup Pwr. Supp.:	No	
Pwr. Cons.:	500 W	
Pwr. Conn. In.:	IEC C13 female	
Data Conn. In:	RJ45	
Data Conn. Out:	RJ45	
Height (mm):	88 mm	
Width (mm):	483 mm	
Length (mm):	328 mm	
R.U.:	2 U	
Weight:	9 kg	

FEATURES:

- Matrix system
- Up to 4 external wall panels
- 8 inputs
- 4 independent digital 120 W amplifiers

EVO 4T

D3680 **4” Passive 100 V Installation Speaker - Black (2 Pcs)**
D3681 **4” Passive 100 V Installation Speaker - White (2 Pcs)**
DAP

Specifications:

RMS In. Pwr.:	40 W	Freq. Resp. Max.:	20000 Hz
Peak In. Pwr.:	80 W	Woofer Ø:	4 “
Trafo:	70+100 V	Comp. Driver Ø:	0.5 “
Line Trafo Taps:	2 / 4 / 8 / 16 W	Horz. °:	110 °
Pass. In. Conn.:	Terminal	Vert. °:	90 °
Speaker Sys.:	2-way	Height (mm):	195 mm
Speaker Sens. (1 W/1 m):	88 dB	Width (mm):	127 mm
Speaker Ω:	8 Ω	Length (mm):	115 mm
Freq. Resp. Min.:	100 Hz	Inst. Depth Ex. Conn.:	157 mm
		Weight:	1.8 kg
		IP Rate:	IP54





FEATURES:
- IP54 Protection Rate
- Multi angled Brackets
- Fast and easy installation
- 100 V Power taps & Low impedance

EVO 5T

D3682 **5” Passive 100 V Installation Speaker - Black (2 Pcs)**
D3683 **5” Passive 100 V Installation Speaker - White (2 Pcs)**
DAP

Specifications:

RMS In. Pwr.:	60 W	Freq. Resp. Max.:	20000 Hz
Peak In. Pwr.:	120 W	Woofer Ø:	5.25 “
Trafo:	70+100 V	Comp. Driver Ø:	0.5 “
Line Trafo Taps:	2 / 4 / 8 / 16 W	Horz. °:	110 °
Pass. In. Conn.:	Terminal	Vert. °:	90 °
Speaker Sys.:	2-way	Height (mm):	250 mm
Speaker Sens. (1 W/1 m):	89 dB	Width (mm):	165 mm
Speaker Ω:	8 Ω	Length (mm):	150 mm
Freq. Resp. Min.:	80 Hz	Inst. Depth Ex. Conn.:	205 mm
		Weight:	2.7 kg
		IP Rate:	IP54





FEATURES:
- IP54 Protection Rate
- Multi angled Brackets
- Fast and easy installation
- 100 V Power taps & Low impedance



EVO 6T

D3684 **6” Passive 100 V Installation Speaker - Black (2 Pcs)**
D3685 **6” Passive 100 V Installation Speaker - White (2 Pcs)**

DAP

Specifications:			
		Freq. Resp. Max.:	20000 Hz
		Woofer Ø:	6.5 “
RMS In. Pwr.:	70 W	Comp. Driver Ø:	1 “
Peak In. Pwr.:	140 W	Horz. °:	110 °
Trafo:	70+100 V	Vert. °:	90 °
Line Trafo Taps:	4 / 8 / 16 / 32 W	Height (mm):	300 mm
Pass. In. Conn.:	Terminal	Width (mm):	195 mm
Speaker Sys.:	2-way	Length (mm):	185 mm
Speaker Sens. (1 W/1 m):	90 dB	Inst. Depth Ex. Conn.:	245 mm
Speaker Ω:	8 Ω	Weight:	3.7 kg
Freq. Resp. Min.:	50 Hz	IP Rate:	IP54

FEATURES:
- IP54 Protection Rate
- Multi angled Brackets
- Fast and easy installation
- 100 V Power taps & Low impedance



EVO 8T

D3686 **8” Passive 100 V Installation Speaker - Black (2 Pcs)**
D3687 **8” Passive 100 V Installation Speaker - White (2 Pcs)**

DAP

Specifications:			
		Freq. Resp. Max.:	20000 Hz
		Woofer Ø:	8 “
RMS In. Pwr.:	80 W	Comp. Driver Ø:	1 “
Peak In. Pwr.:	160 W	Horz. °:	110 °
Trafo:	70+100 V	Vert. °:	90 °
Line Trafo Taps:	6.5 / 12.5 / 25 / 50 W	Height (mm):	385 mm
Pass. In. Conn.:	Terminal	Width (mm):	245 mm
Speaker Sys.:	2-way	Length (mm):	232 mm
Speaker Sens. (1 W/1 m):	90 dB	Inst. Depth Ex. Conn.:	313 mm
Speaker Ω:	8 Ω	Weight:	5.1 kg
Freq. Resp. Min.:	48 Hz	IP Rate:	IP54

FEATURES:
- IP54 Protection Rate
- Multi angled Brackets
- Fast and easy installation
- 100 V Power taps & Low impedance



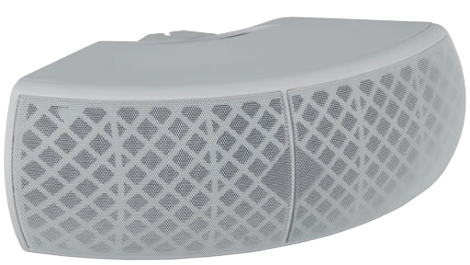

WMS-40

D6556 **2 x 4” Passive 100 V Installation Speaker - Black**
D6557 **2 x 4” Passive 100 V Installation Speaker - White**

DAP

Specifications:			
		Freq. Resp. Min.:	90 Hz
		Freq. Resp. Max.:	20000 Hz
Peak In. Pwr.:	40 W	Woofer Ø:	4 “
Trafo:	70+100 V	Comp. Driver Ø:	1 “
Line Trafo Taps:	2.5 / 5 / 10 / 20 / 40 W	Height (mm):	140 mm
Pass. In. Conn.:	Terminal	Width (mm):	260 mm
Speaker Sys.:	2-way	Length (mm):	360 mm
Speaker Sens. (1 W/1 m):	90 dB	Weight:	3.7 kg
Speaker Ω:	4 Ω	IP Rate:	IP40

FEATURES:
- 40 W / 70 + 100 V wall mount speaker
- Multiple speakers can be linked for extending the dispersion angle up to 360°
- 2-way system
- 4 Ω
- 2x 4” woofer
- IP40
- Black

PSU-510P

D6550 5” Passive Unidirectional 100 V Projector Speaker

DAP

Specifications:

Peak In. Pwr.:	10 W	Max. SPL. at 1 m:	100 dB
Trafo:	100 V	Freq. Resp. Min.:	130 Hz
Line Trafo Taps:	2.5 / 5 / 10 W	Freq. Resp. Max.:	15000 Hz
Pass. In. Conn.:	Open End	Woofer Ø:	5 “
Speaker Sys.:	Coaxial	Height (mm):	117 mm
Speaker Sens. (1 W/1 m):	91 dB	Width (mm):	138 mm
Speaker Ω:	8 Ω	Length (mm):	205 mm
		Weight:	1.4 kg
		IP Rate:	IP55



FEATURES:

- 10 W / 100 V unidirectional projection speaker
- 5” woofer
- Protected against dust ingress (IP55)
- White

PSU-510M

D6553 5” Passive Unidirectional 100 V Projector Speaker

DAP

Specifications:

Peak In. Pwr.:	10 W	Freq. Resp. Min.:	110 Hz
Trafo:	100 V	Freq. Resp. Max.:	15000 Hz
Line Trafo Taps:	5 / 10 / 20 W	Woofer Ø:	5 “
Pass. In. Conn.:	Open End	Height (mm):	130 mm
Speaker Sys.:	Coaxial	Width (mm):	130 mm
Speaker Sens. (1 W/1 m):	91 dB	Length (mm):	225 mm
Speaker Ω:	8 Ω	Weight:	2.3 kg
		IP Rate:	IP55



FEATURES:

- 10 W / 100 V unidirectional projection speaker
- 5” woofer
- Protected against dust ingress (IP55)
- White

PSB-510P

D6552 5” Passive Bidirectional 100 V Projector Speaker

DAP

Specifications:

Peak In. Pwr.:	12 W	Freq. Resp. Min.:	130 Hz
Trafo:	100 V	Freq. Resp. Max.:	15000 Hz
Line Trafo Taps:	3 / 6 / 12.5 W	Vert. °:	130 °
Pass. In. Conn.:	Open End	Height (mm):	140 mm
Speaker Sys.:	Coaxial	Width (mm):	140 mm
Speaker Sens. (1 W/1 m):	91 dB	Length (mm):	200 mm
Speaker Ω:	8 Ω	Weight:	1.7 kg
		IP Rate:	IP55



FEATURES:

- 10 W / 100 V bidirectional projection speaker
- 2x 5” woofer
- Protected against dust ingress (IP55)
- 130° dispersion angle
- White



PSB-510M

D6555 5” Passive Bidirectional 100 V Projector Speaker

DAP

Specifications:			
		Freq. Resp. Max.:	15000 Hz
		Woofer Ø:	5 “
Peak In. Pwr.:	20 W	Vert. °:	130 °
Trafo:	100 V	Height (mm):	135 mm
Line Trafo Taps:	5 / 10 / 20 W	Width (mm):	135 mm
Pass. In. Conn.:	Open End	Length (mm):	202 mm
Speaker Sys.:	Coaxial	Weight:	2.8 kg
Speaker Sens. (1 W/1 m):	92 dB	IP Rate:	IP55
Freq. Resp. Min.:	110 Hz		

FEATURES:

- 10 W / 100 V bidirectional projection speaker
- 2x 5” woofer
- Protected against dust ingress (IP55)
- 130° dispersion angle
- White



PSU-620P

D6551 6” Passive Unidirectional 100 V Projector Speaker

DAP

Specifications:			
		Max. SPL. at 1 m:	101 dB
		Freq. Resp. Min.:	110 Hz
Peak In. Pwr.:	20 W	Freq. Resp. Max.:	15000 Hz
Trafo:	100 V	Woofer Ø:	6 “
Line Trafo Taps:	5 / 10 / 20 W	Height (mm):	160 mm
Pass. In. Conn.:	Open End	Width (mm):	160 mm
Speaker Sys.:	Coaxial	Length (mm):	245 mm
Speaker Sens. (1 W/1 m):	92 dB	Weight:	1.8 kg
Speaker Ω:	8 Ω	IP Rate:	IP55

FEATURES:

- 20 W / 100 V unidirectional projection speaker
- 6” woofer
- Protected against dust ingress (IP55)
- White



PSU-620M

D6554 6” Passive Unidirectional 100 V Projector Speaker

DAP

Specifications:			
		Freq. Resp. Min.:	110 Hz
		Freq. Resp. Max.:	15000 Hz
Peak In. Pwr.:	20 W	Woofer Ø:	6 “
Trafo:	100 V	Height (mm):	165 mm
Line Trafo Taps:	5 / 10 / 20 W	Width (mm):	165 mm
Pass. In. Conn.:	Open End	Length (mm):	270 mm
Speaker Sys.:	Coaxial	Weight:	2.8 kg
Speaker Sens. (1 W/1 m):	92 dB	IP Rate:	IP55

FEATURES:

- 20 W / 100 V unidirectional projection speaker
- 6” woofer
- Protected against dust ingress (IP55)
- White

CS-330

D6562 4 x 3” Passive 100 V Column Speaker

DAP

Specifications:

		Freq. Resp. Min.:	170 Hz
		Freq. Resp. Max.:	15000 Hz
Peak In. Pwr.:	30 W	Woofer Ø:	3 “
Trafo:	100 V	Height (mm):	75 mm
Line Trafo Taps:	10 / 20 W	Width (mm):	106 mm
Pass. In. Conn.:	Open End	Length (mm):	405 mm
Speaker Sys.:	Column	Weight:	2 kg
Speaker Sens. (1 W/1 m):	91 dB	IP Rate:	IP44
Max. SPL. at 1 m:	101 dB		

FEATURES:

- 30 W / 100 V wall column speaker
- 4x 3” woofer
- IP44
- White
- Bracket and screws included



CS-360

D6561 8 x 3” Passive 100 V Column Speaker

DAP

Specifications:

		Freq. Resp. Min.:	130 Hz
		Freq. Resp. Max.:	17000 Hz
Peak In. Pwr.:	60 W	Woofer Ø:	3 “
Trafo:	100 V	Height (mm):	75 mm
Line Trafo Taps:	20 / 40 W	Width (mm):	106 mm
Pass. In. Conn.:	Open End	Length (mm):	691 mm
Speaker Sys.:	Column	Weight:	1 kg
Speaker Sens. (1 W/1 m):	92 dB	IP Rate:	IP44
Max. SPL. at 1 m:	106 dB		

FEATURES:

- 60 W / 100 V wall column speaker
- 8x 3” woofer
- IP44
- White
- Bracket and screws included



SCS-230

D6612 4 x 2” Passive 100 V Column Speaker

DAP

Specifications:

		Freq. Resp. Min.:	180 Hz
		Freq. Resp. Max.:	18000 Hz
Peak In. Pwr.:	30 W	Woofer Ø:	2 “
Trafo:	100 V	Comp. Driver Ø:	1 “
Line Trafo Taps:	7.5 / 15 / 30 W	Height (mm):	400 mm
Pass. In. Conn.:	Open End	Width (mm):	74 mm
Speaker Sys.:	2-way	Length (mm):	68 mm
Speaker Sens. (1 W/1 m):	91 dB	Weight:	1.7 kg
Speaker Ω:	8 Ω	IP Rate:	IP44

FEATURES:

- 30 W / 100 V wall column speaker
- 2-way
- Slim line
- 4x 2” woofer
- IP44
- White
- Bolt & washer, bracket and cable glands included



SCS-250

D6613 **10 x 2” Passive 100 V Column Speaker**

DAP

Specifications:

Peak In. Pwr.:	50 W	Freq. Resp. Min.:	180 Hz
Trafo:	100 V	Freq. Resp. Max.:	18000 Hz
Line Trafo Taps:	12.5 / 25 / 50 W	Woofer Ø:	2 “
Pass. In. Conn.:	Open End	Comp. Driver Ø:	1 “
Speaker Sys.:	Column	Height (mm):	800 mm
Speaker Sens. (1 W/1 m):	91 dB	Width (mm):	74 mm
Speaker Ω:	8 Ω	Length (mm):	68 mm
		Weight:	3.7 kg
		IP Rate:	IP44

FEATURES:

- 50 W / 100 V wall column speaker
- 2-way
- Slim line
- 10x 2” woofer
- IP44
- White
- Bolt & washer, bracket and cable glands included



WS-6W

D6560 **5” Passive 100 V Installation Speaker - White**

DAP

Specifications:

Peak In. Pwr.:	6 W	Freq. Resp. Min.:	130 Hz
Trafo:	100 V	Freq. Resp. Max.:	17000 Hz
Line Trafo Taps:	3 / 6 W	Woofer Ø:	5 “
Pass. In. Conn.:	Terminal	Height (mm):	77 mm
Speaker Sys.:	Coaxial	Width (mm):	166 mm
Speaker Sens. (1 W/1 m):	92 dB	Length (mm):	266 mm
Speaker Ω:	8 Ω	Weight:	1 kg
		IP Rate:	IP40

FEATURES:

- 6 W / 100 V wall mount speaker
- 5” woofer
- IP40
- White



SS-105

D6563 5” Passive Spherical 100 V Speaker - White

DAP



Specifications:

Peak In. Pwr.:	10 W	Freq. Resp. Max.:	15000 Hz
Trafo:	100 V	Woofer Ø:	5 “
Line Trafo Taps:	2.5 / 5 / 10 W	Horz. °:	360 °
Pass. In. Conn.:	Open End	Vert. °:	120 °
Speaker Sys.:	Coaxial	Height (mm):	160 mm
Speaker Sens. (1 W/1 m):	92 dB	Width (mm):	180 mm
Speaker Ω:	8 Ω	Length (mm):	180 mm
Freq. Resp. Min.:	150 Hz	Weight:	1.1 kg
		IP Rate:	IP55

FEATURES:

- Modern 10 W / 100 V ceiling speaker
- 5” woofer
- Wide 120° dispersion angle
- Protected against dust ingress (IP55)
- White

SS-208

D6564 8” Passive Spherical 100 V Speaker - White

DAP



Specifications:

Peak In. Pwr.:	20 W	Freq. Resp. Max.:	18000 Hz
Trafo:	100 V	Woofer Ø:	8 “
Line Trafo Taps:	5 / 10 / 20 W	Horz. °:	360 °
Pass. In. Conn.:	Open End	Vert. °:	120 °
Speaker Sys.:	Coaxial	Height (mm):	234 mm
Speaker Sens. (1 W/1 m):	92 dB	Width (mm):	254 mm
Speaker Ω:	8 Ω	Length (mm):	254 mm
Freq. Resp. Min.:	80 Hz	Weight:	2.2 kg
		IP Rate:	IP55

FEATURES:

- 20 W / 100 V ceiling speaker
- 8” woofer
- Wide 120° dispersion angle
- Protected against dust ingress (IP55)
- White

SS-306

D6565 6” Passive Spherical 100 V Speaker - White

DAP



Specifications:

Peak In. Pwr.:	30 W	Freq. Resp. Max.:	18000 Hz
Trafo:	100 V	Woofer Ø:	6 “
Line Trafo Taps:	7.5 / 15 / 30 W	Horz. °:	360 °
Pass. In. Conn.:	Terminal	Vert. °:	120 °
Speaker Sys.:	Coaxial	Height (mm):	302 mm
Speaker Sens. (1 W/1 m):	90 dB	Width (mm):	254 mm
Speaker Ω:	8 Ω	Length (mm):	254 mm
Freq. Resp. Min.:	110 Hz	Weight:	2.2 kg
		IP Rate:	IP55

FEATURES:

- 30 W / 100 V ceiling speaker
- 6” woofer
- 2-way system
- Wide 120° dispersion angle
- Protected against dust ingress (IP55)
- White



HS-510P

D6568 **5” Passive Hanging Speaker 100 V - White**

DAP

Specifications:

Peak In. Pwr.:	10 W	Freq. Resp. Max.:	15000 Hz
Trafo:	100 V	Woofer Ø:	5 “
Line Trafo Taps:	2.5 / 5 / 10 W	Horz. °:	130 °
Pass. In. Conn.:	Open End	Height (mm):	200 mm
Speaker Sys.:	Coaxial	Width (mm):	130 mm
Speaker Sens. (1 W/1 m):	91 dB	Length (mm):	130 mm
Freq. Resp. Min.:	130 Hz	Weight:	1.5 kg
		IP Rate:	IP55

FEATURES:

- 10 W / 100 V ceiling speaker
- 5” woofer
- Wide 130° dispersion angle
- Protected against dust ingress (IP55)
- White



HS-620P

D6566 **6” Passive Hanging Speaker 100 V - White**

DAP

Specifications:

Peak In. Pwr.:	20 W	Freq. Resp. Max.:	15000 Hz
Trafo:	100 V	Woofer Ø:	6 “
Line Trafo Taps:	5 / 10 / 20 W	Horz. °:	130 °
Pass. In. Conn.:	Open End	Height (mm):	260 mm
Speaker Sys.:	Coaxial	Width (mm):	165 mm
Speaker Sens. (1 W/1 m):	92 dB	Length (mm):	165 mm
Freq. Resp. Min.:	110 Hz	Weight:	1.7 kg
		IP Rate:	IP55

FEATURES:

- 20 W / 100 V ceiling speaker
- 6” woofer
- Wide 130° dispersion angle
- Protected against dust ingress (IP55)
- White



HS-510M

D6569 **5” Passive Hanging Speaker 100 V - White**

DAP

Specifications:

Peak In. Pwr.:	10 W	Freq. Resp. Max.:	15000 Hz
Trafo:	100 V	Woofer Ø:	5 “
Line Trafo Taps:	2.5 / 5 / 10 W	Horz. °:	140 °
Pass. In. Conn.:	Open End	Height (mm):	200 mm
Speaker Sys.:	Coaxial	Width (mm):	130 mm
Speaker Sens. (1 W/1 m):	91 dB	Length (mm):	130 mm
Freq. Resp. Min.:	130 Hz	Weight:	2.2 kg
		IP Rate:	IP55

FEATURES:

- 10 W / 100 V ceiling speaker
- 5” woofer
- Wide 140° dispersion angle
- Protected against dust ingress (IP55)
- White

HS-620M

D6567 6” Passive Hanging Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	20 W	Freq. Resp. Max.:	15000 Hz
Trafo:	100 V	Woofer Ø:	6 “
Line Trafo Taps:	5 / 10 / 20 W	Horz. °:	140 °
Pass. In. Conn.:	Open End	Height (mm):	165 mm
Speaker Sys.:	Coaxial	Width (mm):	260 mm
Speaker Sens. (1 W/1 m):	92 dB	Length (mm):	165 mm
Freq. Resp. Min.:	110 Hz	Weight:	2.6 kg
		IP Rate:	IP55



FEATURES:

- 20 W / 100 V ceiling speaker
- 6” woofer
- Wide 140° dispersion angle
- Protected against dust ingress (IP55)
- Strong aluminium housing
- White





DCS-4220

D6578 4” Passive Ceiling Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	20 W	Freq. Resp. Max.:	20000 Hz
Trafo:	100 V	Woofer Ø:	4 “
Line Trafo Taps:	5 / 10 / 20 W	Comp. Driver Ø:	0.5 “
Pass. In. Conn.:	Open End	Horz. °:	130 °
Speaker Sys.:	2-way	Height (mm):	80 mm
Speaker Sens. (1 W/1 m):	88 dB	Width (mm):	183 mm
Speaker Ω:	8 Ω	Length (mm):	183 mm
Freq. Resp. Min.:	110 Hz	Weight:	1 kg
		IP Rate:	IP40
		Mounting Size:	Ø 160 mm

FEATURES:

- Recessed installation
- 2-way speaker system
- Magnetic grill assembly
- Ultra-thin border



DCS-5230

D6579 5” Passive Ceiling Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	20 W	Freq. Resp. Max.:	20000 Hz
Trafo:	100 V	Woofer Ø:	5 “
Line Trafo Taps:	5 / 10 / 20 W	Comp. Driver Ø:	0.75 “
Pass. In. Conn.:	Open End	Horz. °:	130 °
Speaker Sys.:	2-way	Height (mm):	80 mm
Speaker Sens. (1 W/1 m):	88 dB	Width (mm):	203 mm
Speaker Ω:	8 Ω	Length (mm):	203 mm
Freq. Resp. Min.:	100 Hz	Weight:	1.1 kg
		IP Rate:	IP40
		Mounting Size:	Ø 180 mm

FEATURES:

- Recessed installation
- 2-way speaker system
- Magnetic grill assembly
- Ultra-thin border



DCS-6230

D6580 6” Passive Ceiling Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	30 W	Freq. Resp. Max.:	20000 Hz
Trafo:	100 V	Woofer Ø:	6 “
Line Trafo Taps:	7.5 / 15 / 30 W	Comp. Driver Ø:	0.5 “
Pass. In. Conn.:	Open End	Horz. °:	130 °
Speaker Sys.:	2-way	Height (mm):	95 mm
Speaker Sens. (1 W/1 m):	88 dB	Width (mm):	230 mm
Speaker Ω:	8 Ω	Length (mm):	230 mm
Freq. Resp. Min.:	90 Hz	Weight:	1.85 kg
		IP Rate:	IP40
		Mounting Size:	Ø 200 mm

FEATURES:

- Recessed installation
- 2-way speaker system
- Magnetic grill assembly
- Ultra-thin border

DCS-8240

D6581 8” Passive Ceiling Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	40 W	Freq. Resp. Max.:	20000 Hz
Trafo:	100 V	Woofer Ø:	8 “
Line Trafo Taps:	10 / 20 / 40 W	Comp. Driver Ø:	1 “
Pass. In. Conn.:	Open End	Height (mm):	115 mm
Speaker Sys.:	2-way	Width (mm):	280 mm
Speaker Sens. (1 W/1 m):	90 dB	Length (mm):	280 mm
Speaker Ω:	8 Ω	Weight:	2.85 kg
Freq. Resp. Min.:	50 Hz	IP Rate:	IP40
		Mounting Size:	Ø 245 mm



FEATURES:

- 40 W / 100 V recessed ceiling speaker
- 8” woofer
- 2-way system
- Wide 140° dispersion angle
- White






EDCS-526

D6592B **5” Passive Ceiling Speaker 100 V - Black**
D6592W **5” Passive Ceiling Speaker 100 V - White**

DAP

Specifications:

Peak In. Pwr.:	6 W	Freq. Resp. Min.:	100 Hz
Trafo:	100 V	Freq. Resp. Max.:	15000 Hz
Line Trafo Taps:	3 / 6 W	Woofer Ø:	5 “
Pass. In. Conn.:	Open End	Height (mm):	54 mm
Speaker Sys.:	Coaxial	Width (mm):	160 mm
Speaker Sens. (1 W/1 m):	93 dB	Length (mm):	160 mm
Speaker Ω:	8 Ω	Weight:	0.5 kg
Max. SPL. at 1 m:	97 dB	IP Rate:	IP20(indoor use only)
		Mounting Size:	Ø 145 mm

FEATURES:

- Excellent price performance ratio
- Modern and stylish design
- Magnetic cover for easy installation and maintenance




EDCS-626

D6593B **5” Passive Ceiling Speaker 100 V - Black**
D6593W **6” Passive Ceiling Speaker 100 V - White**

DAP

Specifications:

Peak In. Pwr.:	6 W	Freq. Resp. Min.:	100 Hz
Trafo:	100 V	Freq. Resp. Max.:	15000 Hz
Line Trafo Taps:	3 / 6 W	Woofer Ø:	6 “
Pass. In. Conn.:	Terminal	Height (mm):	74 mm
Speaker Sys.:	Coaxial	Width (mm):	186 mm
Speaker Sens. (1 W/1 m):	93 dB	Length (mm):	186 mm
Max. SPL. at 1 m:	97 dB	Weight:	0.76 kg
		IP Rate:	IP20(indoor use only)
		Mounting Size:	Ø 170 mm

FEATURES:

- Modern and stylish design
- Magnetic cover for easy installation and maintenance
- Excellent price performance ratio




EDCS-8210

D6594B **8” Passive Ceiling Speaker 100 V - Black**
D6594W **8” Passive Ceiling Speaker 100 V - White**

DAP

Specifications:

		Freq. Resp. Max.:	15000 Hz
		Woofer Ø:	8 “
Peak In. Pwr.:	10 W	Horz. °:	360 °
Trafo:	100 V	Vert. °:	180 °
Line Trafo Taps:	5 / 10 W	Height (mm):	88 mm
Pass. In. Conn.:	Open End	Width (mm):	232 mm
Speaker Sys.:	Coaxial	Length (mm):	232 mm
Speaker Sens. (1 W/1 m):	93 dB	Weight:	0.9 kg
Speaker Ω:	8 Ω	IP Rate:	IP20(indoor use only)
Max. SPL. at 1 m:	98 dB	Mounting Size:	Ø 210 mm
Freq. Resp. Min.:	100 Hz		

FEATURES:

- Excellent price performance ratio
- Modern and stylish design
- Magnetic cover for easy installation and maintenance

CS-36

D6574 3” Passive Ceiling Speaker 100 V - White

DAP



Specifications:

Peak In. Pwr.:	6 W	Freq. Resp. Max.:	20000 Hz
Trafo:	100 V	Woofer Ø:	3 “
Line Trafo Taps:	3 / 6 W	Horz. °:	140 °
Pass. In. Conn.:	Open End	Height (mm):	80 mm
Speaker Sys.:	Coaxial	Width (mm):	103 mm
Speaker Sens. (1 W/1 m):	87 dB	Length (mm):	103 mm
Freq. Resp. Min.:	120 Hz	Weight:	0.4 kg
		IP Rate:	IP40
		Mounting Size:	Ø 95 mm

FEATURES:

- 6 W / 100 V recessed ceiling speaker
- 3” woofer
- Wide 140° dispersion angle
- White

CS-4230BC

D6571 4” Passive Ceiling Speaker 100 V - White

DAP



Specifications:

Peak In. Pwr.:	20 W	Freq. Resp. Min.:	70 Hz
Trafo:	70+100 V	Freq. Resp. Max.:	20000 Hz
Line Trafo Taps:	2.5 / 5 / 10 / 20 W	Woofer Ø:	4 “
Pass. In. Conn.:	Terminal	Height (mm):	165 mm
Speaker Sys.:	Coaxial	Width (mm):	220 mm
Speaker Sens. (1 W/1 m):	87 dB	Length (mm):	220 mm
Speaker Ω:	8 Ω	Weight:	1.8 kg
		IP Rate:	IP40

FEATURES:

- 30 W / 70 + 100 V speaker back can
- 2-way system
- 4” woofer
- Wide 130° dispersion angle
- White

CS-6230BC

D6570 5” Passive Ceiling Speaker 100 V - White

DAP



Specifications:

Peak In. Pwr.:	30 W	Freq. Resp. Min.:	80 Hz
Trafo:	70+100 V	Freq. Resp. Max.:	20000 Hz
Line Trafo Taps:	3.8 / 7.5 / 15 / 30 W	Woofer Ø:	5 “
Pass. In. Conn.:	Terminal	Horz. °:	130 °
Speaker Sys.:	2-way	Height (mm):	150 mm
Speaker Sens. (1 W/1 m):	88 dB	Width (mm):	239 mm
Speaker Ω:	8 Ω	Length (mm):	239 mm
		Weight:	2 kg
		IP Rate:	IP40

FEATURES:

- 30 W / 70 + 100 V speaker back can
- 2-way system
- 5” woofer
- Wide 130° dispersion angle
- White



DCS-6230BC

D6586 **6” Passive Ceiling Speaker 100 V - White**

DAP

Specifications:

Peak In. Pwr.:	30 W	Freq. Resp. Max.:	20000 Hz
Trafo:	100 V	Woofer Ø:	6.5 “
Line Trafo Taps:	1.8 / 3.75 / 7.5 / 15 / 30 W	Comp. Driver Ø:	1 “
Pass. In. Conn.:	Terminal	Height (mm):	190 mm
Speaker Sys.:	2-way	Width (mm):	226 mm
Speaker Sens. (1 W/1 m):	88 dB	Length (mm):	226 mm
Speaker Ω:	8 Ω	Inst. Depth Ex. Conn.:	190 mm
Freq. Resp. Min.:	60 Hz	Weight:	2.7 kg
		IP Rate:	IP55
		Mounting Size:	Ø 240 mm

FEATURES:

- 30 W / 100 V ceiling speaker back can
- Modern design
- 6” woofer
- 2-way system
- White
- Terminal input connection



CS-56

D6573 **5” Passive Ceiling Speaker 100 V - White**

DAP

Specifications:

Peak In. Pwr.:	6 W	Freq. Resp. Max.:	15000 Hz
Trafo:	100 V	Woofer Ø:	5 “
Line Trafo Taps:	3 / 6 W	Horz. °:	140 °
Pass. In. Conn.:	Open End	Height (mm):	67 mm
Speaker Sys.:	Coaxial	Width (mm):	200 mm
Speaker Sens. (1 W/1 m):	90 dB	Length (mm):	200 mm
Speaker Ω:	8 Ω	Weight:	0.7 kg
Freq. Resp. Min.:	110 Hz	IP Rate:	IP40
		Mounting Size:	Ø 170 mm

FEATURES:

- 6 W / 100 V recessed ceiling speaker
- 5” woofer
- Wide 140° dispersion angle
- White



CS-520

D6582 **5” Passive Ceiling Speaker 100 V - White**

DAP

Specifications:

Peak In. Pwr.:	20 W	Freq. Resp. Min.:	110 Hz
Trafo:	100 V	Freq. Resp. Max.:	15000 Hz
Line Trafo Taps:	5 / 10 / 20 W	Woofer Ø:	5 “
Pass. In. Conn.:	Open End	Height (mm):	50 mm
Speaker Sys.:	Coaxial	Width (mm):	200 mm
Speaker Sens. (1 W/1 m):	94 dB	Length (mm):	200 mm
Speaker Ω:	8 Ω	Weight:	0.7 kg
		IP Rate:	IP20(indoor use only)
		Mounting Size:	Ø 170 mm

FEATURES:

- 20 W / 100 V recessed ceiling speaker
- 5” woofer
- White

CS-66

D6572 6” Passive Ceiling Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	6 W	Freq. Resp. Max.:	15 Hz
Trafo:	100 V	Woofer Ø:	6 “
Line Trafo Taps:	3 / 6 W	Horz. °:	140 °
Pass. In. Conn.:	Open End	Height (mm):	95 mm
Speaker Sys.:	Coaxial	Width (mm):	245 mm
Speaker Sens. (1 W/1 m):	90 dB	Length (mm):	245 mm
Speaker Ω:	8 Ω	Weight:	1 kg
Freq. Resp. Min.:	110 Hz	IP Rate:	IP40
		Mounting Size:	Ø 225 mm



FEATURES:

- 6 W / 100 V recessed ceiling speaker
- 6” woofer
- Wide 140° dispersion angle
- White

CS-620

D6583 6” Passive Ceiling Speaker 100 V - White

DAP

Specifications:

		Freq. Resp. Min.:	110 Hz
		Freq. Resp. Max.:	15000 Hz
Peak In. Pwr.:	20 W	Woofer Ø:	6 “
Trafo:	100 V	Height (mm):	60 mm
Line Trafo Taps:	5 / 10 / 20 W	Width (mm):	245 mm
Pass. In. Conn.:	Terminal	Length (mm):	245 mm
Speaker Sys.:	Coaxial	Weight:	1.1 kg
Speaker Sens. (1 W/1 m):	94 dB	IP Rate:	IP20(indoor use only)
Speaker Ω:	8 Ω	Mounting Size:	Ø 225 mm



FEATURES:

- 20 W / 100 V recessed ceiling speaker
- 6” woofer
- White
- Terminal input connection

CS-850S

D6588 8” Passive Ceiling Subwoofer 100 V - White

DAP

Specifications:

		Freq. Resp. Min.:	28 Hz
		Freq. Resp. Max.:	20000 Hz
Peak In. Pwr.:	50 W	Woofer Ø:	8 “
Trafo:	70+100 V	Height (mm):	165 mm
Line Trafo Taps:	3 / 5 / 15 / 30 / 50 W	Width (mm):	260 mm
Pass. In. Conn.:	Open End	Length (mm):	260 mm
Speaker Sys.:	Coaxial	Weight:	3 kg
Speaker Sens. (1 W/1 m):	90 dB	IP Rate:	IP20(indoor use only)
Speaker Ω:	8 Ω	Mounting Size:	Ø 230 mm



FEATURES:

- 50 W / 70 + 100 V ceiling speaker
- 8” woofer
- 2-way system
- Modern design
- White
- Terminal input connection



FCS-56

D6576 5” Passive Fireproof Ceiling Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	6 W	Freq. Resp. Max.:	18000 Hz
Trafo:	100 V	Woofer Ø:	6 “
Line Trafo Taps:	0.75 / 1.5 / 3 / 6 W	Height (mm):	135 mm
Pass. In. Conn.:	Terminal	Width (mm):	180 mm
Speaker Sys.:	Coaxial	Length (mm):	180 mm
Speaker Sens. (1 W/1 m):	92 dB	Weight:	1.4 kg
Freq. Resp. Min.:	120 Hz	IP Rate:	IP40
		Mounting Size:	Ø 160 mm
		Fire Ret.:	Yes

FEATURES:

- 6 W / 100 V fireproof speaker back can
- 6” woofer
- Wide 140° dispersion angle
- Fire retardant
- White
- Terminal input connection



FCS-66

D6575 6” Passive Fireproof Ceiling Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	6 W	Freq. Resp. Max.:	18000 Hz
Trafo:	100 V	Woofer Ø:	6 “
Line Trafo Taps:	0.75 / 1.5 / 3 / 6 W	Height (mm):	135 mm
Pass. In. Conn.:	Open End	Width (mm):	230 mm
Speaker Sys.:	Coaxial	Length (mm):	230 mm
Speaker Sens. (1 W/1 m):	92 dB	Weight:	1.7 kg
Freq. Resp. Min.:	120 Hz	IP Rate:	IP40
		Mounting Size:	Ø 204 mm
		Fire Ret.:	Yes

FEATURES:

- 6 W / 100 V fireproof speaker back can
- 6” woofer
- Wide 140° dispersion angle
- Fire retardant
- White



CST-6506

D6590 6.5” Passive EN 54-24 Ceiling Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	6 W	Freq. Resp. Max.:	20000 Hz
Trafo:	100 V	Woofer Ø:	6.5 “
Line Trafo Taps:	1.5 / 3 / 6 W	Height (mm):	74 mm
Pass. In. Conn.:	Open End	Width (mm):	198 mm
Speaker Sys.:	Coaxial	Length (mm):	198 mm
Speaker Sens. (1 W/1 m):	92 dB	Weight:	0.9 kg
Freq. Resp. Min.:	110 Hz	IP Rate:	IP40
		Mounting Size:	Ø164mm
		Fire Ret.:	Yes

FEATURES:

- Designed for full-range broadcast
- Ideal for airport, hotel, school or office
- Metal grill and housing
- EN 54-24 certified



CST-6520

D6591 6.5” Passive EN 54-24 Ceiling Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	20 W	Freq. Resp. Max.:	20000 Hz
Trafo:	100 V	Woofer Ø:	6.5 “
Line Trafo Taps:	5 / 10 / 20 W	Height (mm):	74 mm
Pass. In. Conn.:	Open End	Width (mm):	198 mm
Speaker Sys.:	Coaxial	Length (mm):	198 mm
Speaker Sens. (1 W/1 m):	92 dB	Weight:	1.1 kg
Freq. Resp. Min.:	95 Hz	IP Rate:	IP40
		Mounting Size:	Ø 178 mm
		Fire Ret.:	Yes

FEATURES:

- Designed for full-range broadcast
- Ideal for airport, hotel, school or office
- Metal grill and housing
- EN 54-24 certified



WCS-46

D6577 4” Passive Waterproof Ceiling Speaker 100 V - White

DAP

Specifications:

Peak In. Pwr.:	6 W	Freq. Resp. Min.:	150 Hz
Trafo:	100 V	Freq. Resp. Max.:	18000 Hz
Line Trafo Taps:	3 / 6 W	Woofer Ø:	4 “
Pass. In. Conn.:	Open End	Height (mm):	130 mm
Speaker Sys.:	Coaxial	Width (mm):	140 mm
Speaker Sens. (1 W/1 m):	91 dB	Length (mm):	140 mm
Speaker Ω:	8 Ω	Weight:	0.9 kg
Max. SPL. at 1 m:	95 dB	IP Rate:	IP55
		Mounting Size:	Ø 125 mm

FEATURES:

- 6 W / 100 V speaker back can
- 4” woofer
- Protected against dust ingress and water jets (IP55)
- Wide 140° dispersion angle
- White





HS-15S

D6541 Passive Square Horn Speaker 100 V

DAP

Specifications:

Peak In. Pwr.:	15 W	Speaker Ω:	8 Ω
Trafo:	70+100 V	Freq. Resp. Min.:	300 Hz
Line Trafo Taps:	1.9 / 3.75 / 7.5 / 15 W	Freq. Resp. Max.:	8000 Hz
Pass. In. Conn.:	Open End	Height (mm):	232 mm
Speaker Sys.:	Horn	Width (mm):	162 mm
Speaker Sens. (1 W/1 m):	105 dB	Length (mm):	222 mm
		Weight:	1.4 kg
		IP Rate:	IP66

FEATURES:

- 15 W / 70 + 100 V horn speaker
- Square horn
- Suitable for outdoor use (IP66)
- Light grey
- Bracket included



HS-30S

D6540 Passive Square Horn Speaker 100 V

DAP

Specifications:

Peak In. Pwr.:	30 W	Speaker Ω:	8 Ω
Trafo:	70+100 V	Freq. Resp. Min.:	350 Hz
Line Trafo Taps:	1.9 / 3.75 / 7.5 / 15 / 30 W	Freq. Resp. Max.:	8000 Hz
Pass. In. Conn.:	Open End	Height (mm):	205 mm
Speaker Sys.:	Horn	Width (mm):	280 mm
Speaker Sens. (1 W/1 m):	105 dB	Length (mm):	285 mm
		Weight:	1.84 kg
		IP Rate:	IP66

FEATURES:

- 30 W / 70 + 100 V horn speaker
- Square horn
- Suitable for outdoor use (IP66)
- Light grey
- Bracket included



HS-30R

D6542 Passive Round Horn Speaker 100 V

DAP

Specifications:

Peak In. Pwr.:	30 W	Freq. Resp. Min.:	380 Hz
Trafo:	70+100 V	Freq. Resp. Max.:	6500 Hz
Line Trafo Taps:	3.8 / 7.5 / 15 / 30 W	Driver Ø:	39.5 mm
Pass. In. Conn.:	Open End	Height (mm):	250 mm
Speaker Sys.:	Horn	Width (mm):	245 mm
Speaker Sens. (1 W/1 m):	107 dB	Length (mm):	290 mm
Speaker Ω:	8 Ω	Weight:	2.1 kg
		IP Rate:	IP66

FEATURES:

- 30 W / 70 + 100 V horn speaker
- Round horn
- Suitable for outdoor use (IP66)
- Light grey
- Bracket included

HS-50R

D6543 Passive Round Horn Speaker 100 V

DAP



Specifications:

Peak In. Pwr.:	50 W	Speaker Ω:	16 Ω
Trafo:	70+100 V	Freq. Resp. Min.:	380 Hz
Line Trafo Taps:	6.25 / 12.5 / 25 / 50 W	Freq. Resp. Max.:	6500 Hz
Pass. In. Conn.:	Open End	Height (mm):	325 mm
Speaker Sys.:	Horn	Width (mm):	325 mm
Speaker Sens. (1 W/1 m):	109 dB	Length (mm):	340 mm
		Weight:	3 kg
		IP Rate:	IP66

FEATURES:

- 50 W / 70 + 100 V horn speaker
- 16 Ω
- Suitable for outdoor use (IP66)
- Round horn
- Light grey
- Bracket included

MHS-30S

D6544 Passive Square Horn Speaker 100 V

DAP



Specifications:

Peak In. Pwr.:	30 W	Freq. Resp. Min.:	100 Hz
Trafo:	70+100 V	Freq. Resp. Max.:	10000 Hz
Line Trafo Taps:	3.8 / 7.5 / 15 / 30 W	Driver Ø:	25.9 mm
Pass. In. Conn.:	Open End	Height (mm):	253 mm
Speaker Sys.:	Horn	Width (mm):	310 mm
Speaker Sens. (1 W/1 m):	97 dB	Length (mm):	363 mm
Speaker Ω:	8 Ω	Weight:	3.9 kg
		IP Rate:	IP66

FEATURES:

- 30 W / 70 + 100 V horn speaker
- Square horn
- Suitable for outdoor use (IP66)
- Light grey
- Bracket included

MHS-50S

D6545 Passive Square Horn Speaker 100 V

DAP



Specifications:

Peak In. Pwr.:	50 W	Freq. Resp. Min.:	90 Hz
Trafo:	100 V	Freq. Resp. Max.:	20000 Hz
Line Trafo Taps:	2.5 / 4.5 / 9 / 12.5 / 25 / 50 W	Woofer Ø:	6.5 “
Pass. In. Conn.:	Terminal	Comp. Driver Ø:	1 “
Speaker Sys.:	2-way	Horz. °:	105 °
Speaker Sens. (1 W/1 m):	98 dB	Vert. °:	140 °
Speaker Ω:	8 Ω	Height (mm):	31 mm
Max. SPL. at 1 m:	113 dB	Width (mm):	253 mm
		Length (mm):	363 mm
		Weight:	3.9 kg
		IP Rate:	IP66

FEATURES:

- 50 W / 100 V horn speaker
- 2-way system
- Suitable for outdoor use (IP66)
- Square horn
- Light grey
- Bracket included



MHS-80S

D6546 Passive Hexagon Horn Speaker 100 V

DAP

Specifications:

Peak In. Pwr.:	80 W	Freq. Resp. Min.:	90 Hz
Trafo:	100 V	Freq. Resp. Max.:	20000 Hz
Line Trafo Taps:	10 / 20 / 40 / 80 W	Woofer Ø:	6.5 “
Pass. In. Conn.:	Terminal	Comp. Driver Ø:	1 “
Speaker Sys.:	2-way	Height (mm):	288 mm
Speaker Sens. (1 W/1 m):	99 dB	Width (mm):	348 mm
Speaker Ω:	8 Ω	Length (mm):	348 mm
Max. SPL. at 1 m:	114 dB	Weight:	4.7 kg
		IP Rate:	IP66

FEATURES:

- 80 W / 100 V horn speaker
- 2-way system
- Suitable for outdoor use (IP66)
- Octagonal horn
- Light grey
- Bracket included



D-100

D6547D Passive Driver 100 V

DAP

Specifications:

Peak In. Pwr.:	100 W	Speaker Ω:	16 Ω
Trafo:	100 V	Freq. Resp. Min.:	150 Hz
Line Trafo Taps:	50 / 100 W	Freq. Resp. Max.:	6000 Hz
Pass. In. Conn.:	Open End	Height (mm):	145 mm
Speaker Sys.:	Horn	Width (mm):	135 mm
Speaker Sens. (1 W/1 m):	110 dB	Length (mm):	173 mm
		Weight:	414 kg
		IP Rate:	IP66

FEATURES:

- 100 W / 100 V horn driver
- 16 Ω
- Horn not included
- Suitable for outdoor use (IP66)
- Light grey
- Bracket included

GS-520

D6611 5” Passive Garden Speaker 100 V

DAP



Specifications:

Peak In. Pwr.:	20 W	Freq. Resp. Min.:	80 Hz
Trafo:	100 V	Freq. Resp. Max.:	15000 Hz
Line Trafo Taps:	10 / 20 W	Woofer Ø:	5 “
Pass. In. Conn.:	Open End	Height (mm):	245 mm
Speaker Sys.:	2-way	Width (mm):	215 mm
Speaker Sens. (1 W/1 m):	95 dB	Length (mm):	215 mm
Speaker Ω:	8 Ω	Weight:	2.04 kg
		IP Rate:	IP65

FEATURES:

GS-630

D6610 6” Passive Garden Speaker 100 V

DAP



Specifications:

Peak In. Pwr.:	30 W	Freq. Resp. Min.:	80 Hz
Trafo:	100 V	Freq. Resp. Max.:	20000 Hz
Line Trafo Taps:	7.5 / 15 / 30 W	Woofer Ø:	6 “
Pass. In. Conn.:	Open End	Comp. Driver Ø:	1 “
Speaker Sys.:	2-way	Height (mm):	330 mm
Speaker Sens. (1 W/1 m):	90 dB	Width (mm):	325 mm
Speaker Ω:	8 Ω	Length (mm):	325 mm
		Weight:	3.6 kg
		IP Rate:	IP65

FEATURES:

MF-25F

D6422 Hand Megaphone

SHOWGEAR



Specifications:

		Batt. Voltage:	1.5 V
		Height (mm):	230 mm
Peak Out. Pwr.:	25 W	Width (mm):	370 mm
Range Min.:	800 m	Length (mm):	230 mm
Range Max.:	2000 m		

FEATURES:

VCB - Volume Controller

DAP

D6531 6 W
D6532 12 W
D6533 36 W



H-100

DAP

D6547H Round Horn for D6547D (D-100 Driver)

Trafo:	100 V
Freq. Resp. Min.:	150 Hz
Freq. Resp. Max.:	6000 Hz
Height (mm):	370 mm
Width (mm):	515 mm
Length (mm):	515 mm



CB-1 - Cover Box for Volume Controller

DAP

D6536 1 Unit

Height (mm):	80 mm
Width (mm):	80 mm
Length (mm):	50 mm



CB-2 - Cover Box for Volume Controller

DAP

D6537 2 Units

Height (mm):	157 mm
Width (mm):	83 mm
Length (mm):	51 mm



VPC- Volume & Program Controller

DAP

D6534 12 W
D6535 36 W

Output per Chan. at 70/100 V at 20Hz > 20 kHz: 12 W

Passive Out. Conn.:	Terminal
Height (mm):	154 mm
Width (mm):	80 mm
Length (mm):	67 mm



Bracket for 4 x D6556 / D6557 (WMS-40)

DAP

D6558 Black
D6559 White

Height (mm):	77 mm
Width (mm):	103 mm
Length (mm):	103 mm





PM-160

D6191 Announcement Microphone with Chime

DAP

Specifications:

		Freq. Resp. Min.:	22 Hz
		Freq. Resp. Max.:	23000 Hz
Main Out.:	1	Pwr. Conn. In.:	Low Voltage DC plug
Main Out. Conn.:	3-pin XLR / TRS unbalanced 6.3 mm	Height (mm):	132 mm
		Width (mm):	155 mm
Mic. Type:	Condenser	Length (mm):	380 mm
Mic. Sensitivity:	230 mV	Chime:	Yes

FEATURES:

- Mic- volume adjustable on backside
- Chime volume adjustable on backside
- Talk button on upside
- Built-in four tone Chime



MA8120PM

D6197 Paging Microphone with Chime

DAP

Specifications:

		Freq. Resp. Min.:	45 Hz
		Freq. Resp. Max.:	15000 Hz
Zone Out. :	4	Data Conn. Out:	RJ45
Mono In.:	1	Height (mm):	139 mm
Mono In. Conn.:	3-pin XLR	Width (mm):	470 mm
THD Level:	< 0.1%	Length (mm):	203 mm
Mic. Type:	Condenser	Chime:	Yes

FEATURES:

- Zone selection
- Chime Switch
- Level Control
- Easy to connect with RJ45



VCR-650

D6538 6 x 50 W Rackmount 100 V Volume Controller

DAP

Specifications:

		Main Out.:	6
		Trafo:	100 V
Output per Chan. at 70/100 V at 20Hz > 20 kHz:	50 W	Height (mm):	88 mm
		Width (mm):	483 mm
Passive Out. Conn.:	Terminal	Length (mm):	190 mm

FEATURES:



MA-8120WP

D6196 Wall Control

DAP

Specifications:

		Signal-to-noise Ratio:	> 100 dB
		Freq. Resp. Min.:	20 Hz
Main Out.:	1	Freq. Resp. Max.:	20000 Hz
Mono In.:	1	Data Conn. Out:	RJ45
Mono In. Conn.:	3-pin XLR	Height (mm):	80 mm
Stereo In.:	1	Width (mm):	80 mm
Stereo In. Conn.:	RCA	Length (mm):	45 mm
THD Level:	< 0.1%		

FEATURES:

- Line and Microphone input
- Fits European sizes wall boxes
- Volume control
- Easy to connect with RJ45





COM-ART

D1414 Wireless Audio System

DAP

Specifications:

WL Audio Freq. Start:	606 MHz
WL Audio Freq. End:	630 MHz
RF Pwr.:	10 mW
RF Bandwidth:	30 MHz
THD Level:	< 0.3 %
Signal-to-noise Ratio:	> 98 dB
Freq. Resp. Min.:	30 Hz
Freq. Resp. Max.:	17000 Hz
Mono In. Conn.:	3-pin XLR
Main Out. Conn.:	3-pin XLR
Batt. Type:	AA
Runtime @Full:	5 h
Pwr. Conn. In.:	USB

FEATURES:

- Battery powered
- Up to 50 m (line of sight)
- Receiver & Transmitter
- 16 channels



WPS Guitar

D1456 Wireless Guitar System

DAP

Specifications:

WL Audio Freq. Start:	863 MHz
WL Audio Freq. End:	865 MHz
RF Pwr.:	10 mW
RF Bandwidth:	2 MHz
THD Level:	< 0.6 %
Signal-to-noise Ratio:	> 105 dB
Freq. Resp. Min.:	40 Hz
Freq. Resp. Max.:	18000 Hz
Mono In. Conn.:	TRS unbalanced 6.3 mm
Main Out. Conn.:	TRS unbalanced 6.3 mm
Batt. Type:	AA
Pwr. Conn. In.:	Low Voltage DC plug
Weight Transmitter:	0.04 kg

FEATURES:

- No belt-pack needed
- 16 switchable frequencies
- 8 hours with one AAA battery
- 863-865 MHz can be used in many countries



COM-41

D1408 **Wireless Handheld System**

DAP

Specifications:

WL Mic. Freq. Start:	863550 MHz
WL Mic. Freq. End:	863550 MHz
RF Pwr.:	10 mW
THD Level:	< 1.0 %
Mic. Type:	Dynamic
Polar Pattern:	Cardioid
Freq. Resp. Min.:	50 Hz
Freq. Resp. Max.:	18000 Hz
RF Ant. In.:	2
RF Ant. In. Conn.:	Fixed
Mic. Output:	1
Mic. Output Connection:	3-pin XLR / TRS balanced 6.3 mm
Batt. Type:	AA
Transmitter:	Handheld
Receiver:	Single Receiver
Pwr. Conn. In.:	Low Voltage DC plug
Weight Transmitter:	0.2 kg

FEATURES:
- Plug and play
- Low battery indication







COM-41

D1409 **Wireless Beltpack System**

DAP

Specifications:

WL Mic. Freq. Start:	8648 MHz
WL Mic. Freq. End:	8648 MHz
RF Pwr.:	10 mW
THD Level:	< 1.0 %
Freq. Resp. Min.:	50 Hz
Freq. Resp. Max.:	18000 Hz
Phantom Pwr.:	No
RF Ant. In.:	2
RF Ant. In. Conn.:	Fixed
Mic. Output:	1
Mic. Output Connection:	3-pin XLR / TRS balanced 6.3 mm
Batt. Type:	9 V block PP3
Transmitter:	Beltpack
Receiver:	Single Receiver
Pwr. Conn. In.:	Low Voltage DC plug
Weight Transmitter:	0.1 kg

FEATURES:
- Plug and play
- Low battery indication
- Guitar cable lavalier microphone and headset included







COM-42

D1464 **Wireless 2-Channel Handheld System**

DAP

Specifications:

WL Mic. Freq. Start:	606 MHz
WL Mic. Freq. End:	630 MHz
RF Pwr.:	10 mW
RF Bandwidth:	24 MHz
THD Level:	< 1.0 %
Signal-to-noise Ratio:	> 100 dB
Mic. Type:	Dynamic moving coil
Mic. Sensitivity:	2.2 mV
Polar Pattern:	Cardioid
Max. SPL.:	135 dB
Freq. Resp. Min.:	50 Hz
Freq. Resp. Max.:	16000 Hz
RF Ant. In.:	2
RF Ant. In. Conn.:	BNC
Mic. Output:	1
Mic. Output Connection:	3-pin XLR / TRS unbalanced 6.3 mm
Batt. Type:	AA
Avg. Runtime:	6 h
Transmitter:	Handheld
Receiver:	True diversity
Pwr. Conn. In.:	Low Voltage DC plug
Weight Transmitter:	0.27 kg

FEATURES:
- Compact 2-channel receiver
- Infra-red synchronisation technique
- Metal handheld microphone
- Colour coding stickers included









Beltpack for PSS-110

D2620 **including headset**

DAP

Specifications:

Signal-to-noise Ratio:	> 90 dB
Mic. Sensitivity:	2.2 mV
Freq. Resp. Min.:	615 Hz
Freq. Resp. Max.:	638 Hz
Mono In. Conn.:	4-pin mini XLR
Batt. Type:	AA
Runtime @Full:	18 h

FEATURES:

- Belt pack sender dedicated for DAP PSS-110s
- Suitable for (condenser) microphone and instrument
- Frequency range: 615 - 638 MHz
- Phantom power supply
- Headset included



Beltpack for COM-42

D1465

DAP

Specifications:

WL Audio Freq. Start:	606 MHz
WL Audio Freq. End:	630 MHz
RF Pwr.:	10 mW
RF Bandwidth:	24 MHz
Mic. Sensitivity:	2.2 mV
Freq. Resp. Min.:	50 Hz
Freq. Resp. Max.:	16000 Hz
Phantom Pwr.:	5 V
Mono In. Conn.:	4-pin mini XLR
Batt. Type:	AA
Avg. Runtime:	6 h
Transmitter:	Beltpack

FEATURES:

- 606-630 MHz
- 99 Channels
- Powered by 2 AA (UM3) batteries
- 6 hour runtime



EDGE EHS-1

D1475B **Wireless Handheld System**

DAP

Specifications:

WL Mic. Freq. Start:	606 MHz
WL Mic. Freq. End:	668 MHz
RF Pwr.:	30 mW
RF Bandwidth:	60 MHz
THD Level:	< 1.0 %
Signal-to-noise Ratio:	> 100 dB
Mic. Type:	Condenser
Mic. Sensitivity:	2.2 mV
Polar Pattern:	Cardioid
Max. SPL.:	130 dB
Freq. Resp. Min.:	60 Hz
Freq. Resp. Max.:	18000 Hz
RF Ant. In.:	2
RF Ant. In. Conn.:	BNC
Mic. Output:	1
Mic. Output Connection:	3-pin XLR / TRS unbalanced 6.3 mm
Batt. Type:	AA
Avg. Runtime:	10 h
Transmitter:	Handheld
Receiver:	True diversity
Pwr. Conn. In.:	Low Voltage DC plug
Pwr. Conn. Out.:	Low Voltage DC Socket
Weight Transmitter:	0.38 kg

FEATURES:

- UHF true-diversity receiver with full colour LCD
- Band Scan function for interference elimination
- Hand-held microphone with OLED display
- High-quality cardioid condenser capsule
- Easy operation with clear and pure sound

EDGE EBS-1

D1476B **Wireless Beltpack System**

DAP

Specifications:

WL Audio Freq. Start:	606 MHz
WL Audio Freq. End:	668 MHz
RF Pwr.:	30 mW
RF Bandwidth:	60 MHz
THD Level:	< 1.0 %
Signal-to-noise Ratio:	> 100 dB
Mic. Sensitivity:	1.9 mV
Max. SPL.:	133 dB
Freq. Resp. Min.:	50 Hz
Freq. Resp. Max.:	19000 Hz
Phantom Pwr.:	5 V
Mono In. Conn.:	4-pin mini XLR
RF Ant. In.:	2
RF Ant. In. Conn.:	BNC
Mic. Output:	1
Mic. Output Connection:	3-pin XLR / TRS unbalanced 6.3 mm
Batt. Type:	AA
Avg. Runtime:	10 h
Transmitter:	Beltpack
Receiver:	True diversity
Pwr. Conn. In.:	Low Voltage DC plug
Pwr. Conn. Out.:	Low Voltage DC Socket
Weight Transmitter:	0.11 kg

FEATURES:

- UHF true-diversity receiver with full colour LCD
- Band Scan function for interference elimination
- Belt-pack transmitter with OLED display
- High-quality cardioid condenser headset
- Easy operation with clear and pure sound



EDGE EHM-1

D1477B **Handheld Microphone**

DAP

Specifications:

WL Mic. Freq. Start:	606 MHz
WL Mic. Freq. End:	668 MHz
RF Pwr.:	30 mW
RF Bandwidth:	60 MHz
Signal-to-noise Ratio:	> 100 dB
Mic. Type:	Condenser
Mic. Sensitivity:	2.2 mV
Polar Pattern:	Cardioid
Max. SPL.:	130 dB
Freq. Resp. Min.:	60 Hz
Freq. Resp. Max.:	18000 Hz
Batt. Type:	AA
Avg. Runtime:	10 h
Transmitter:	Handheld

FEATURES:

- Hand-held microphone with OLED display
- High-quality cardioid condenser capsule
- Easy operation with clear and pure sound



EDGE EBT-1

D1478B **Beltpack Transmitter**

DAP

Specifications:

WL Audio Freq. Start:	606 MHz
WL Audio Freq. End:	668 MHz
RF Pwr.:	30 mW
RF Bandwidth:	60 MHz
Signal-to-noise Ratio:	> 100 dB
Max. SPL.:	133 dB
Freq. Resp. Min.:	50 Hz
Freq. Resp. Max.:	19000 Hz
Phantom Pwr.:	5 V
Mono In. Conn.:	4-pin mini XLR
Batt. Type:	AA
Avg. Runtime:	10 h
Transmitter:	Beltpack

FEATURES:

- Belt-pack transmitter with OLED display
- High-quality cardioid condenser headset
- Easy operation with clear and pure sound





PL-08

D1303 Dynamic Vocal Microphone

DAP

Specifications:

Mic. Output Conn.:	3-pin XLR	Max. SPL.:	137 dB
Mic. Ω:	600 Ω	Freq. Resp. Min.:	50 Hz
Mic. Type:	Dynamic moving coil	Freq. Resp. Max.:	16500 Hz
Mic. Sensitivity:	1.8 mV	Height (mm):	51 mm
Polar Pattern:	Cardioid	Width (mm):	51 mm
		Length (mm):	160 mm
		Weight:	0.315 kg

FEATURES:

- Cardioid dynamic microphone
- Steel mesh grill
- For professional vocal use



PL-08S

D1304 Dynamic Vocal Microphone

DAP

Specifications:

Mic. Output Conn.:	3-pin XLR	Max. SPL.:	137 dB
Mic. Ω:	600 Ω	Freq. Resp. Min.:	50 Hz
Mic. Type:	Dynamic moving coil	Freq. Resp. Max.:	16500 Hz
Mic. Sensitivity:	1.8 mV	Height (mm):	51 mm
Polar Pattern:	Cardioid	Width (mm):	51 mm
		Length (mm):	160 mm
		Weight:	0.298 kg

FEATURES:

- Cardioid dynamic microphone
- Steel mesh grill
- For professional vocal use



PL-08ß

D1305 Dynamic Vocal Microphone

DAP

Specifications:

Mic. Output Conn.:	3-pin XLR	Max. SPL.:	137 dB
Mic. Ω:	600 Ω	Freq. Resp. Min.:	50 Hz
Mic. Type:	Dynamic moving coil	Freq. Resp. Max.:	16 Hz
Mic. Sensitivity:	2.9 mV	Height (mm):	51 mm
Polar Pattern:	Cardioid	Width (mm):	51 mm
		Length (mm):	160 mm
		Weight:	0.28 kg

FEATURES:

- Super cardioid dynamic microphone
- Steel mesh grill
- For professional vocal use

PDM-Pack

D1344 **3 Pack with Dynamic Vocal Microphones**

DAP

Specifications:

Mic. Output Conn.:	3-pin XLR	Freq. Resp. Min.:	80 Hz
Mic. Ω:	500 Ω	Freq. Resp. Max.:	12000 Hz
Mic. Type:	Dynamic	Phantom Pwr.:	No
Mic. Sensitivity:	2.2 mV	Height (mm):	54 mm
Polar Pattern:	Super Cardioid	Width (mm):	54 mm
Max. SPL.:	130 dB	Length (mm):	180 mm
		Weight:	0.25 kg



FEATURES:

- 3-in-1 Value pack
- Dynamic all-round microphones
- Hard case carrying box
- Including clips & adapters

CM-50

D1322 **Back Electret Condenser Vocal/Instrument Microphone**

DAP

Specifications:

Mic. Output Conn.:	3-pin XLR	Freq. Resp. Min.:	50 Hz
Mic. Ω:	200 Ω	Freq. Resp. Max.:	16 Hz
Mic. Type:	Condenser	Phantom Pwr.:	9 V / 12 V / 18 V / 24 V / 48 V
Mic. Sensitivity:	4.5 mV	Height (mm):	48 mm
Polar Pattern:	Super Cardioid	Width (mm):	48 mm
Max. SPL.:	140 dB	Length (mm):	175 mm
		Weight:	0.26 kg



FEATURES:

- Super cardioid back electret condenser microphone
- Steel mesh grill with pop filter
- For professional vocal use
- Maximum SPL 140 dB

VM-60

D1381 **Dynamic 1960s Vintage Microphone**

DAP

Specifications:

Mic. Output Conn.:	3-pin XLR	Freq. Resp. Min.:	40 Hz
Mic. Ω:	300 Ω	Freq. Resp. Max.:	18000 Hz
Mic. Type:	Dynamic moving coil	Phantom Pwr.:	No
Mic. Sensitivity:	2.1 mV	Height (mm):	190 mm
Polar Pattern:	Cardioid	Width (mm):	75 mm
Max. SPL.:	137 dB	Length (mm):	75 mm
		Weight:	1 kg



FEATURES:

- 1960s sound character



CM-67

D1366 FET Condenser Studio Microphone

DAP

Specifications:

		Freq. Resp. Min.:	30 Hz
		Freq. Resp. Max.:	20000 Hz
Mic. Output Conn.:	3-pin XLR	Phantom Pwr.:	48 V
Mic. Ω:	200 Ω	Length (mm):	151 mm
Mic. Type:	Condenser	Height (mm):	50 mm
Mic. Sensitivity:	14 mV	Width (mm):	50 mm
Polar Pattern:	Cardioid	Ø:	50 mm
Max. SPL.:	128 dB	Weight:	390 kg

FEATURES:

- Large-diaphragm condenser microphone
- 30–20000 Hz
- Maximum SPL 128 dB
- Cardioid pickup pattern
- Low cut filter



CM-87

D1365 FET Condenser Studio Microphone

DAP

Specifications:

		Freq. Resp. Min.:	20 Hz
		Freq. Resp. Max.:	20000 Hz
Mic. Output Conn.:	3-pin XLR	Phantom Pwr.:	48 V
Mic. Ω:	200 Ω	Attenuation:	-10dB
Mic. Type:	Condenser	Length (mm):	167 mm
Mic. Sensitivity:	8 mV	Height (mm):	50 mm
Polar Pattern:	Cardioid / Figure-of-8 / Omni	Width (mm):	50 mm
		Ø:	50 mm
Max. SPL.:	140 dB	Weight:	0.47 kg

FEATURES:

- Large-diaphragm condenser microphone
- 20–20000 Hz
- Maximum SPL 140 dB
- Switchable polar pattern (Cardioid, Figure-of-8, Omni)
- Low cut filter
- -10 dB pad



URM-1

D1601 USB Condenser Studio Microphone

DAP

Specifications:

		Freq. Resp. Max.:	18000 Hz
		Phantom Pwr.:	No
THD Level:	< 1.0 %	Data Conn. In:	USB
Signal-to-noise Ratio:	> 68 dB	Length (mm):	185 mm
Mic. Type:	Condenser	Height (mm):	45 mm
Polar Pattern:	Cardioid	Width (mm):	45 mm
Max. SPL.:	140 dB	Ø:	45 mm
Freq. Resp. Min.:	30 Hz	Weight:	0.384 kg

FEATURES:

- Plug and play
- Works with PC and MAC
- High quality AD converter
- For vocal recordings
- Shock mount & USB-Cable included

PL-07

D1301 Dynamic Instrument Microphone

DAP



Specifications:

		Freq. Resp. Min.:	40 Hz
		Freq. Resp. Max.:	16500 Hz
Mic. Output Conn.:	3-pin XLR	Phantom Pwr.:	No
Mic. Ω:	600 Ω	Height (mm):	32 mm
Mic. Type:	Dynamic moving coil	Width (mm):	32 mm
Mic. Sensitivity:	1.7 mV	Length (mm):	157 mm
Polar Pattern:	Cardioid	Weight:	0.245 kg
Max. SPL.:	137 dB		

FEATURES:

- Omnidirectional dynamic microphone
- Suitable for studio and live applications
- For Saxophone, Harmonica, Snare, Tom, Conga and Guitar-Bass Amp
- Including 6 m XLR cable

PL-07B

D1302 Dynamic Instrument Microphone

DAP



Specifications:

		Freq. Resp. Min.:	50 Hz
		Freq. Resp. Max.:	16000 Hz
Mic. Output Conn.:	3-pin XLR	Phantom Pwr.:	No
Mic. Ω:	600 Ω	Height (mm):	42 mm
Mic. Type:	Dynamic moving coil	Width (mm):	42 mm
Mic. Sensitivity:	2.6 mV	Length (mm):	160 mm
Polar Pattern:	Cardioid	Weight:	0.271 kg
Max. SPL.:	137 dB		

FEATURES:

- Cardioid Dynamic Microphone
- Suitable for instruments and vocals
- Including 6 m XLR cable and leather pouch

DM-20

D1332 Dynamic Instrument Microphone

DAP



Specifications:

		Freq. Resp. Min.:	20 Hz
		Freq. Resp. Max.:	12500 Hz
Mic. Output Conn.:	3-pin XLR	Phantom Pwr.:	No
Mic. Ω:	500 Ω	Height (mm):	43 mm
Mic. Type:	Dynamic moving coil	Width (mm):	43 mm
Mic. Sensitivity:	2.2 mV	Length (mm):	117 mm
Polar Pattern:	Super Cardioid	Weight:	0.212 kg
Max. SPL.:	134 dB		

FEATURES:

- Specially designed for kick drum and LF instruments
- Integrated stand mount
- Dynamic moving coil
- Super cardioid pick-up pattern
- Aluminium housing



DM-45

D1353 Dynamic Instrument Microphone

DAP

Specifications:

		Freq. Resp. Min.:	50 Hz
		Freq. Resp. Max.:	18000 Hz
Mic. Output Conn.:	3-pin XLR	Phantom Pwr.:	No
Mic. Ω:	200 Ω	Height (mm):	42 mm
Mic. Type:	Dynamic	Width (mm):	42 mm
Mic. Sensitivity:	2 mV	Length (mm):	144 mm
Polar Pattern:	Super Cardioid	Weight:	0.2 kg
Max. SPL.:	135 dB		

FEATURES:

- Drum clamp & anti shock mount included



DM-35

D1356 Dynamic Guitar Amp Microphone

DAP

Specifications:

		Freq. Resp. Min.:	80 Hz
		Freq. Resp. Max.:	18000 Hz
Mic. Output Conn.:	3-pin XLR	Phantom Pwr.:	No
Mic. Ω:	200 Ω	Low Filter:	No
Mic. Type:	Dynamic	Height (mm):	46 mm
Mic. Sensitivity:	1.8 mV	Width (mm):	54 mm
Polar Pattern:	Super Cardioid	Length (mm):	136 mm
Max. SPL.:	150 dB	Weight:	0.17 kg

FEATURES:

- High SPL
- Designed for close amp recording



DM-55

D1357 Dynamic Kick Drum Microphone

DAP

Specifications:

		Freq. Resp. Min.:	30 Hz
		Freq. Resp. Max.:	10000 Hz
Mic. Output Connection:	3-pin XLR	Phantom Pwr.:	No
Mic. Ω:	200 Ω	Height (mm):	58 mm
Mic. Type:	Dynamic	Width (mm):	58 mm
Mic. Sensitivity:	0.9 mV	Length (mm):	140 mm
Polar Pattern:	Super Cardioid	Weight:	0.36 kg
Max. SPL.:	148 dB		

FEATURES:

- Combine with CM-95 for an excellent kick drum sound
- Dynamic microphone
- 148 dB max SPL
- High gain before feedback
- Built-in mic clamp

CM-95

D1355 Condenser Boundary Kick Drum Microphone

DAP

Specifications:

Mic. Output Conn.:	3-pin XLR	Freq. Resp. Max.:	18000 Hz
Mic. Ω:	600 Ω	Phantom Pwr.:	12 V / 48 V
Mic. Type:	Back-electret Condenser	Low Filter:	No
Signal-to-noise Ratio:	> 70 dB	Equiv. Noise SPL.:	24 dB
Mic. Sensitivity:	1 mV	Dyn. Range:	125 dB
Polar Pattern:	Cardioid	Height (mm):	85 mm
Max. SPL.:	149 dB	Width (mm):	85 mm
Freq. Resp. Min.:	30 Hz	Length (mm):	20.5 mm
		Weight:	0.27 kg



FEATURES:

- Combine with DM-55 for an excellent kick drum sound
- 149 dB max SPL
- Frequency response maximized for kickdrum
- Wide dynamic range

CM-1

D1360 Condenser Small Diagram Microphone

DAP

DAP

Specifications:

		Freq. Resp. Min.:	30 Hz
		Freq. Resp. Max.:	22000 Hz
Mic. Output Conn.:	3-pin XLR	Phantom Pwr.:	48 V
Mic. Ω:	200 Ω	Low Filter:	No
Mic. Type:	Condenser	Height (mm):	25.4 mm
Mic. Sensitivity:	10 mV	Width (mm):	25.4 mm
Polar Pattern:	Omni or Cardioid	Length (mm):	133 mm
Max. SPL.:	132 dB	Weight:	0.2 kg



FEATURES:

- Cardoid & omni element included
- 132 dB max SPL
- Condenser microphone
- Excellent dynamics

CM-10

D1334 Back Electret Condenser Instrument Microphone

DAP

Specifications:

		Freq. Resp. Min.:	50 Hz
		Freq. Resp. Max.:	16000 Hz
Mic. Output Connection:	3-pin XLR	Phantom Pwr.:	9 V / 12 V / 48 V
Mic. Ω:	200 Ω	Height (mm):	29 mm
Mic. Type:	Back-electret Condenser	Width (mm):	29 mm
Mic. Sensitivity:	7 mV	Length (mm):	165 mm
Polar Pattern:	Super Cardioid	Weight:	0.18 kg
Max. SPL.:	137 dB		



FEATURES:

- Designed for acoustic instruments and vocals
- Max. SPL 137 dB
- Back electret condenser
- Super cardioid pick-up pattern
- Aluminium housing



CM-45

D1354 Condesor Overhead Microphone

DAP

Specifications:

Mic. Output Conn.:	3-pin XLR	Freq. Resp. Max.:	20 Hz
Mic. Ω:	200 Ω	Phantom Pwr.:	12 V / 48 V
Mic. Type:	Back-electret Condenser	Low Filter:	Yes
Signal-to-noise Ratio:	> 69 dB	Equiv. Noise SPL.:	25 dB
Mic. Sensitivity:	7.1 mV	Dyn. Range:	115 dB
Polar Pattern:	Cardioid	Attenuation:	-10dB
Max. SPL.:	140 dB	Height (mm):	20 mm
Freq. Resp. Min.:	40 Hz	Width (mm):	20 mm
		Length (mm):	155 mm
		Weight:	0.3 kg

FEATURES:

- -10 dB Pad switch
- Low cut filter
- Including D8946 microphone clamp



DCLM-60

D1421 Condenser Instrument Clip-On Microphone

DAP

Specifications:

		Max. SPL.:	130 dB
		Freq. Resp. Min.:	50 Hz
Mic. Output Conn.:	3-pin XLR	Freq. Resp. Max.:	18000 Hz
Mic. Ω:	220 Ω	Phantom Pwr.:	48 V
Mic. Type:	Back-electret Condenser	Length (mm):	72 mm
Mic. Sensitivity:	3.9 mV	Weight:	0.095 kg
Polar Pattern:	Super Cardioid		

FEATURES:

- Ext. freq. response and wide dynamic range for natural sound delivery
- Flexible gooseneck and adj. axis ensure a precise mic positioning
- Clamp with soft grip to secure a microphone
- Mounting without damaging the instrument
- Cardioid pattern prevents interception of nearby instruments



ECLM-70

D1418 Condenser Instrument Clip-On Microphone

DAP

Specifications:

		Max. SPL.:	130 dB
		Freq. Resp. Min.:	50 Hz
Mic. Output Conn.:	4pole Mini XLR	Freq. Resp. Max.:	18000 Hz
Mic. Ω:	220 Ω	Phantom Pwr.:	5 V
Mic. Type:	Back-electret Condenser	Length (mm):	125 mm
Mic. Sensitivity:	3.9 mV	Weight:	0.071 kg
Polar Pattern:	Cardioid		

FEATURES:

- Ext. freq. response and wide dynamic range for natural sound delivery
- Flexible gooseneck and adj. axis ensure a precise mic positioning
- Clamp with soft grip to secure a microphone
- Mounting without damaging the instrument
- Windscreen to prevent pop noise effectively
- Mini-XLR-connector for use with the belt-packs from the eclipse range

HM-30

D1380 Dynamic Blues-harp/Harmonica Microphone

DAP

Specifications:

		Freq. Resp. Min.:	40 Hz
		Freq. Resp. Max.:	16000 Hz
Mic. Output Conn.:	3-pin XLR	Phantom Pwr.:	No
Mic. Ω:	220 Ω	Height (mm):	90 mm
Mic. Type:	Dynamic moving coil	Width (mm):	77 mm
Mic. Sensitivity:	1.2 mV	Length (mm):	68 mm
Polar Pattern:	Cardioid	Weight:	0.267 kg
Max. SPL.:	140 dB		



FEATURES:

- Designed for Richter-tuned harmonica (blues harp)
- Max. SPL 140 dB
- Dynamic moving coil
- Cardioid pick-up pattern
- Aluminium housing

DK-5

D1331 5Pcs Instrument Microphone Kit

DAP

Specifications:

Contents:
1 x DM-20 (Base),
2 x DM-25 (Tom & Snare)
2 x CM-10 (Overhead & Hi-Hat)



FEATURES:

- Drumkit microphone set
- 1 x DAP DM-20 (kick)
- 2 x DAP DM-25 (tom & snare)
- 2 x DAP CM-10 (overhead & hi-hat)
- Including microphone clamps
- Plastic case

DK-7

D1330 7Pcs Instrument Microphone Kit

DAP

Specifications:

Contents:
- 4 x DM-25 (Tom & Snare)
- 1 x DM-20 (Base)
- 2 x CM-10 (Overhead & Hi-Hat)

Dimensions: 365 x 290 x 85 mm (LxWxH)
Weight: 2,3 kg



FEATURES:

- Drumkit microphone set
- 1 x DAP DM-20 (kick)
- 4 x DAP DM-25 (tom & snare)
- 2 x DAP CM-10 (overhead & hi-hat)
- Including microphone clamps
- Plastic case



EDGE ED-1

D1485 **Antenna Distributor**

DAP

Specifications:

RF Ant. In.:	2
RF Ant. In. Conn.:	BNC
RF Ant. Out.:	10
RF. Ant. Out. Conn.:	BNC
WL Audio Freq. Start:	470 MHz
WL Audio Freq. End:	980 MHz
Pwr. Supp.:	240 VAC 50-60 Hz
Out. Volt.:	12 VDC
Pwr. Conn. In.:	Low Voltage DC plug
Height (mm):	44.5 mm
Width (mm):	215 mm
Length (mm):	151 mm
Weight:	1.02 kg

FEATURES:
- DC-power and antenna signal distribution
- Cascade function for connecting extra distributors



EDGE EUA-1

D1486 **Set of 2 Unidirectional Antennas**

DAP

Specifications:

RF Ant. Out.:	1
RF. Ant. Out. Conn.:	BNC
WL Audio Freq. Start:	470 MHz
WL Audio Freq. End:	980 MHz
Polar Pattern:	Super Cardioid
Height (mm):	26 mm
Width (mm):	270 mm
Length (mm):	305 mm
Weight:	0.6 kg

FEATURES:
- Powered by antenna distributor or EDGE-receiver
- Microphone stand mount adapter
- Unidirectional pick-up pattern



EH-1

D1416 **Condenser Headset Microphone**

DAP

Specifications:

Mic. Output Conn.:	4pole Mini XLR
Mic. Output Ω:	220 Ω
Mic. Type:	Back-electret Condenser
Mic. Sensitivity:	3.9 mV
Polar Pattern:	Super Cardioid
Max. SPL.:	125 dB
Freq. Resp. Min.:	100 Hz
Freq. Resp. Max.:	18000 Hz
Phantom Pwr.:	5 V
Height (mm):	60 mm
Width (mm):	130 mm
Length (mm):	150 mm
Ø:	12 mm
Weight:	0.056 kg

FEATURES:
- Uni-direction for high-quality voice pick-up
- Excellent gain-before-feedback and noise isolation
- Lightweight and hands free design provide great freedom
- Ergonomic design ensures comfortable wearing

Procell AA PROCELL

98043 **LR6, MN1500, 1.5 V**



Procell AAA PROCELL

98044 **LR03, MN2400, 1.5 V**



Procell 9 V PROCELL

98045 **6LF22, MN1604, 9 V**



EHM-AS1 DAP

D1490 **Adapter Ring**



EH-5

D1440 **Condenser Headset Microphone**

DAP

Specifications:

		Max. SPL.:	127 dB
		Phantom Pwr.:	5 V
Mic. Output Conn.:	4pole Mini XLR	Height (mm):	12 mm
Mic. Output Ω:	220 Ω	Width (mm):	140 mm
Mic. Type:	Back-electret Condenser	Length (mm):	205 mm
Mic. Sensitivity:	1.9 mV	Ø:	12 mm
Polar Pattern:	Cardioid	Weight:	0.056 kg



FEATURES:

- Back-electret Condenser microphone
- Cardioid
- 4-pin Mini XLR
- 5 V phantom power
- Windscreen included

EH-3

D1426 **Condenser Headset Microphone**

DAP

Specifications:

		Freq. Resp. Min.:	20 Hz
		Freq. Resp. Max.:	20000 Hz
Mic. Output Conn.:	4pole Mini XLR	Phantom Pwr.:	5 V
Mic. Output Ω:	2000 Ω	Height (mm):	125 mm
Mic. Type:	Back-electret Condenser	Width (mm):	33 mm
Polar Pattern:	Omni Directional	Length (mm):	205 mm
Max. SPL.:	140 dB	Weight:	0.022 kg



FEATURES:

- Back electret condenser mirophone
- Skin colour
- Compact (nearly visible)
- Removable extension cable
- Suitable for Eclipse series beltpacks (4-pin mini XLR)
- Fit for theatre and TV applicationis

EH-4

D1433 **Condenser Headset Microphone with Detachable Cable**

DAP

Specifications:

		Freq. Resp. Min.:	60 Hz
		Freq. Resp. Max.:	15000 Hz
Mic. Output Conn.:	4pole Mini XLR	Phantom Pwr.:	5 V
Mic. Output Ω:	2200 Ω	Height (mm):	60 mm
Mic. Type:	Back-electret Condenser	Width (mm):	155 mm
Mic. Sensitivity:	1 mV	Length (mm):	100 mm
Polar Pattern:	Omni Directional	Ø:	5 mm
Max. SPL.:	130 dB	Weight:	0.033 kg



FEATURES:

- Comfortable fit and lightweight
- Smooth frequency response
- High quality steel adjustable head band assures durability
- Mini gooseneck for best mic position

Spare Cable for EH-3 DAP

D1427



Spare Cable for EH-4 DAP

D1434





EL-1

D1415 Condenser Lavalier Microphone

DAP

Specifications:

Mic. Output Conn.:	4pole Mini XLR	Freq. Resp. Max.:	18000 Hz
Mic. Type:	Back-electret Condenser	Phantom Pwr.:	5 V
Mic. Sensitivity:	3.9 mV	Height (mm):	12 mm
Polar Pattern:	Super Cardioid	Width (mm):	12 mm
Max. SPL.:	125 dB	Length (mm):	17 mm
Freq. Resp. Min.:	100 Hz	Ø:	12 mm
		Weight:	0.024 kg

FEATURES:

- Uni-direction for high-quality voice pick-up
- Wide dynamic range and frequency response for high quality sound
- Small size for minimum visibility
- Together with clothing clip for easy attaching to a tie, lapel, dress et cetera



EL-2

D1419 Condenser Lavalier Microphone (Eclipse Range)

DAP

Specifications:

		Freq. Resp. Min.:	60 Hz
		Freq. Resp. Max.:	15000 Hz
Mic. Output Conn.:	4pole Mini XLR	Phantom Pwr.:	5 V
Mic. Output Ω:	2200 Ω	Height (mm):	5 mm
Mic. Type:	Back-electret Condenser	Width (mm):	5 mm
Mic. Sensitivity:	1 mV	Length (mm):	9 mm
Polar Pattern:	Omni	Ø:	5 mm
Max. SPL.:	130 dB	Weight:	0.05 kg

FEATURES:

- Omni-directional condenser microphone
- Suitable for voice pick-up
- High quality sound
- Including bag, clothing clip and windscreen



Antenna Distributor

D1444 For Eclipse Range

DAP

Specifications:

		Pwr. Supp.:	100-240 VAC 50-60 Hz
		Out. Volt.:	15 VDC
RF Ant. In.:	2	Pwr. Conn. In.:	IEC C13 female
RF Ant. In. Conn.:	BNC	Pwr. Conn. Out.:	Low Voltage DC Socket
RF Ant. Out.:	8	Height (mm):	45 mm
RF. Ant. Out. Conn.:	BNC	Width (mm):	480 mm
WL Audio Freq. Start:	470 MHz	Length (mm):	250 mm
WL Audio Freq. End:	870 MHz	Weight:	2.15 kg

FEATURES:

- 2 antenna inputs / 8 antenna outputs
- 1U
- Suitable for eclipse range

Antenna Booster

DAP

D1425 **For Eclipse Range**

RF Ant. In.:	1
RF Ant. In. Conn.:	BNC
WL Audio Freq. Start:	470 MHz
WL Audio Freq. End:	870 MHz
Height (mm):	105 mm
Width (mm):	40 mm
Length (mm):	315 mm
Weight:	0.198 kg



Separate Antenna for Booster/Splitter

DAP

D1448

RF. Ant. Out. Conn.:	BNC
WL Audio Freq. Start:	580 MHz
WL Audio Freq. End:	640 MHz
Height (mm):	10 mm
Width (mm):	10 mm
Length (mm):	246 mm
Weight:	0.027 kg



Aerobic Arm Bag

SHOWGEAR

D1428

Height (mm):	105 mm
Width (mm):	75 mm
Length (mm):	30 mm



Aerobic Belt Bag

SHOWGEAR

D1429

Height (mm):	105 mm
Width (mm):	75 mm
Length (mm):	30 mm



GC-1

DAP

D1417

Conn. 1:	XLR 4P mini
Conn. 2:	TRS 6.3 mm unbalanced
Height (mm):	14 mm
Width (mm):	90 mm
Length (mm):	14 mm
Weight:	0.047 kg



Rack Mount 1 x COM-42

DAP

D1466

Height (mm):	44 mm
Width (mm):	270 mm
Length (mm):	25 mm
Weight:	0.133 kg



ADA-20 Active UHF

DAP

D1446 **Directional Antenna Receiver**

RF Ant. Out.:	1
RF. Ant. Out. Conn.:	BNC
WL Audio Freq. Start:	470 MHz
WL Audio Freq. End:	870 MHz
Effective Working Angle Max.:	100 °
Phantom Pwr.:	12 V
Height (mm):	350 mm
Width (mm):	357 mm
Length (mm):	34 mm
Weight:	0.04 kg



PDA-20 Passive UHF

DAP

D1447 **Directional Antenna Receiver**

RF Ant. Out.:	1
RF. Ant. Out. Conn.:	BNC
WL Audio Freq. Start:	470 MHz
WL Audio Freq. End:	870 MHz
Effective Working Angle Max.:	100 °
Phantom Pwr.:	No
Height (mm):	350 mm
Width (mm):	360 mm
Length (mm):	34 mm
Weight:	0.04 kg



PAS-2

DAP

D1445 **Passive Antenna Splitter**

RF Ant. In.:	1
RF Ant. In. Conn.:	BNC
RF Ant. Out.:	2
RF. Ant. Out. Conn.:	BNC
WL Audio Freq. Start:	470 MHz
WL Audio Freq. End:	960 MHz
Height (mm):	72 mm
Width (mm):	55 mm
Length (mm):	24 mm
Weight:	0.048 kg



DDS-02 SHOWGEAR

D1396 Acoustic Diffuser Screen



Mic. Grill for PL-08 Series SHOWGEAR

D1312 Fits on D1303 & D1304



Mic. Grill for PL-07ß & PL-06 SHOWGEAR

D1311 Fits on D1302



Nylon Pop Filter SHOWGEAR

D1750



Metal Pop Filter SHOWGEAR

D1751



DWS-66 - Mic. Wind Screen Set

D1320 6 Pcs, Black



SHOWGEAR

DWS-56 - Mic. Wind Screen Set

D1317 6 Pcs, Multi-colour



SHOWGEAR

DWT-01 Wind Screen SHOWGEAR

D1318 For Condenser Mic.

Height (mm):	160 mm
Width (mm):	30 mm
Length (mm):	30 mm
Ø:	30 mm



DWB-01 Wind Screen SHOWGEAR

D1319 Big size

Height (mm):	95 mm
Width (mm):	83 mm
Length (mm):	83 mm
Ø:	83 mm
Ø Max. Mic.:	51 mm



HP-280 Pro

D1810 **Professional semi-open Studio Headphones**

DAP



Specifications:

		Max. SPL.:	117 dB
		Driver Ø:	50 mm
Stereo In. Conn.:	TRS balanced 3.5 mm / TRS balanced 6.3 mm	Coupling Ear:	Circumaural
		Cable Length:	2 m
Stereo In. Ω:	32 Ω	Weight:	0.28 kg
Peak In. Pwr.:	0.3 W		

FEATURES:

- Semi-open headphone
- Natural & Deep sound
- Self-adjusting head band
- Comfortable fit

HP-290 Pro

D1811 **Professional closed Studio Headphones**

DAP



Specifications:

		Max. SPL.:	117 dB
		Driver Ø:	50 mm
Stereo In. Conn.:	TRS balanced 3.5 mm / TRS balanced 6.3 mm	Coupling Ear:	Circumaural
		Cable Length:	2 m
Stereo In. Ω:	32 Ω	Weight:	0.28 kg
Peak In. Pwr.:	0.3 W		

FEATURES:

- Closed back headphone
- Natural & Deep sound
- Self-adjusting headband
- Comfortable fit



Speaker Stand Set

SHOWGEAR

D8324 Incl. Carrying Bag

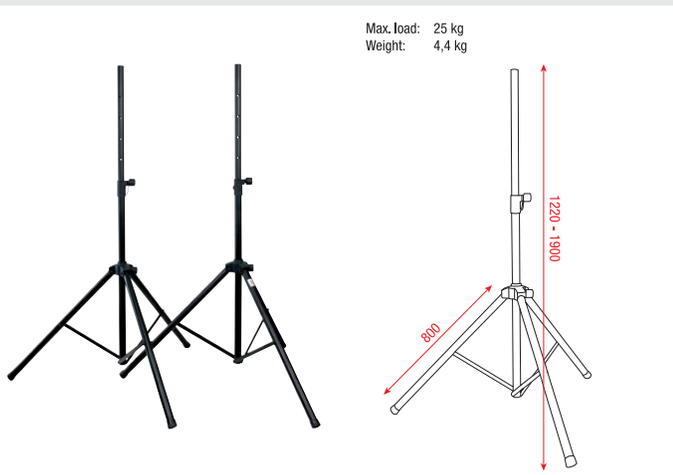

Speaker Stand Set

SHOWGEAR

D8425 Incl. Speaker Cable & Carrying Bag

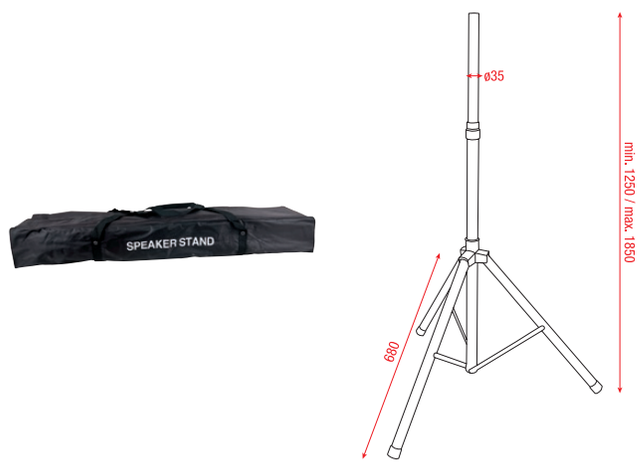

Air Pressure Speaker Stand

SHOWGEAR

D8426 Aluminium - 1300-1900 mm - 35 mm - Max Load: 40 kg



Speaker Stand

SHOWGEAR

D8321 Aluminium - 1220-1800 mm - 35/38 mm - Max Load: 25 kg



Speaker Stand Pro

SHOWGEAR

D8322 Steel - 1230-1900 mm - 38/41 mm - Max Load: 40 kg

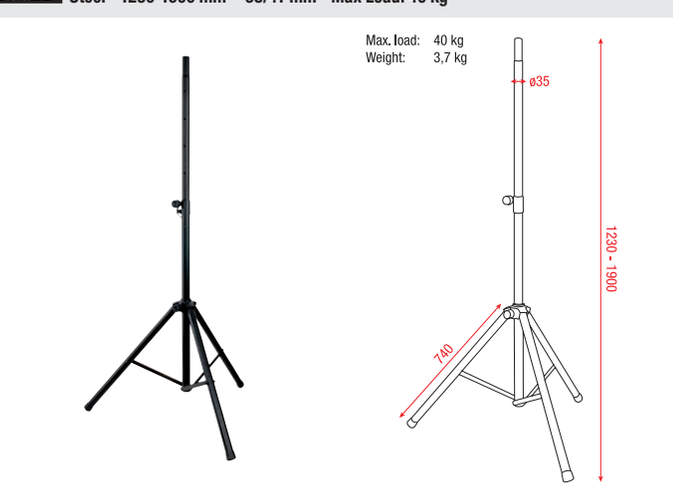

Mammoth Speaker Stand

SHOWGEAR

D8600 Aluminium - 1300-1900 mm - 35 mm - Max Load: 40 kg

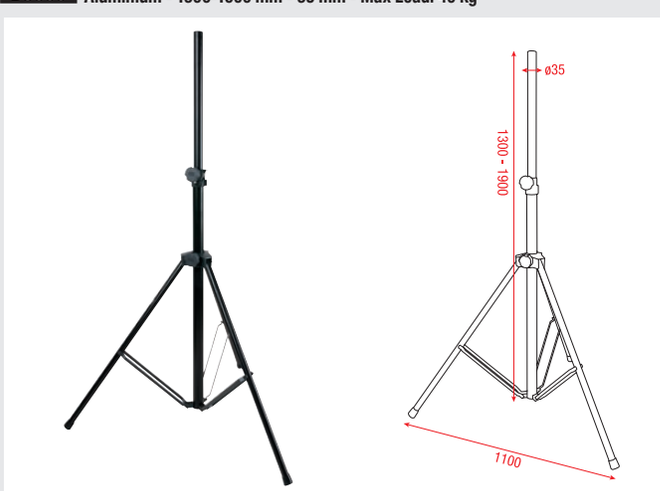

Mammoth Speaker Stand

SHOWGEAR

D8601 **Aluminium - 1260-2100 mm - 35 mm - Max Load: 45 kg**



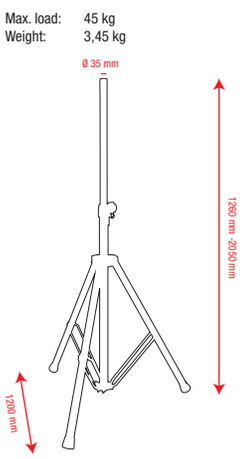

Mammoth Distance Tube

SHOWGEAR

D8610 **Steel - 870-1250 mm - 35 mm - Max Load: 50 kg**





Mammoth Distance Tube

SHOWGEAR

D8611 **Steel - 830-1190 mm - M20 - Max Load: 50 kg**





Speaker Stand with Baseplate

SHOWGEAR

D8602 **Metal - 1100-1800 mm - 35 mm - Max Load: 20 kg**



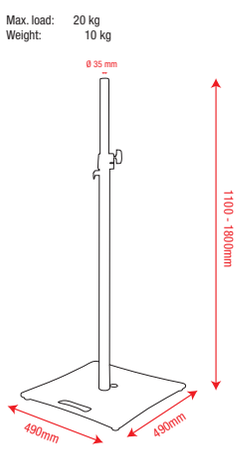

Windup Speaker Stand

SHOWGEAR

D8427 **Steel - 780-1300 mm - M20 - Max Load: 38 kg**



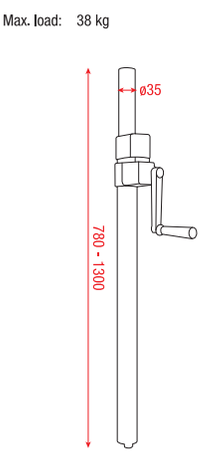

Monitor Speaker Stand

SHOWGEAR

D8320 **Steel - 760 -1320 mm - Max Load: 15 kg**



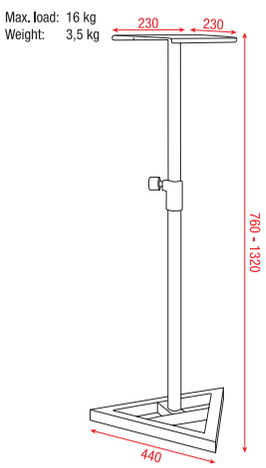

Speaker Wall Bracket 35 mm

SHOWGEAR

D8415 Max Load: 20 kg





Adjustable Speaker Bracket 35 mm

SHOWGEAR

D8412 Max Load: 30 kg





Adjustable Speaker Bracket 35 mm

SHOWGEAR

D8413 Max Load: 30 kg





Mammoth Adjustable Speaker Bracket 35 mm

SHOWGEAR

D8615 Max Load: 30 kg





Compact Speaker Wall Bracket

SHOWGEAR

D8429 Black





Compact Speaker Wall Bracket

SHOWGEAR

D8429W White





Microphone Stand - Value Line

SHOWGEAR

D8300 900-1400 mm

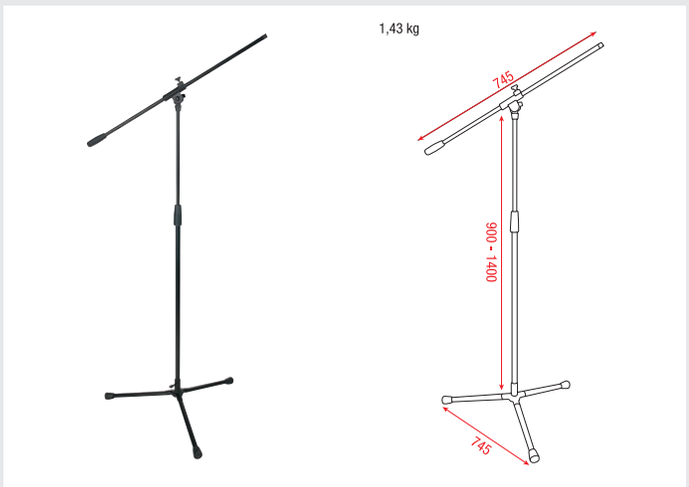

Microphone Stand - Eco

SHOWGEAR

D8301 890-1460 mm, Plastic Base Part

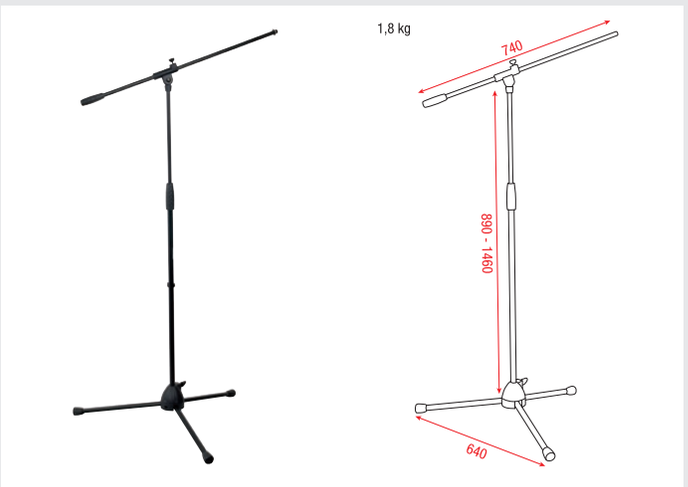

Microphone Stand - Ergo 1

SHOWGEAR

D8111B 905-1600 mm

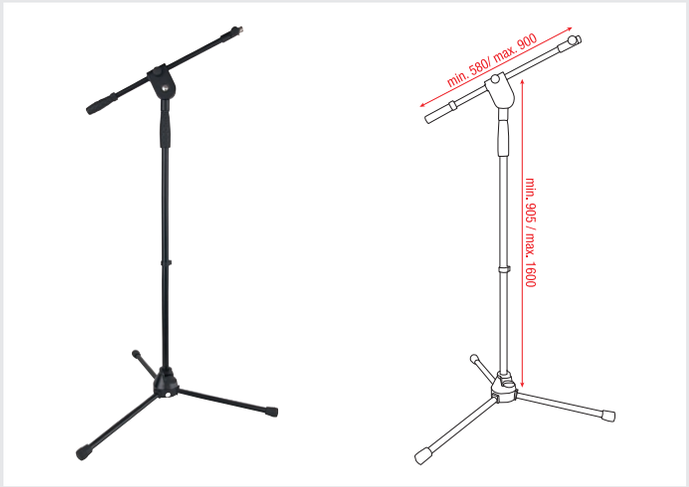

Microphone Stand - Ergo 2

SHOWGEAR

D8112B 415-660 mm

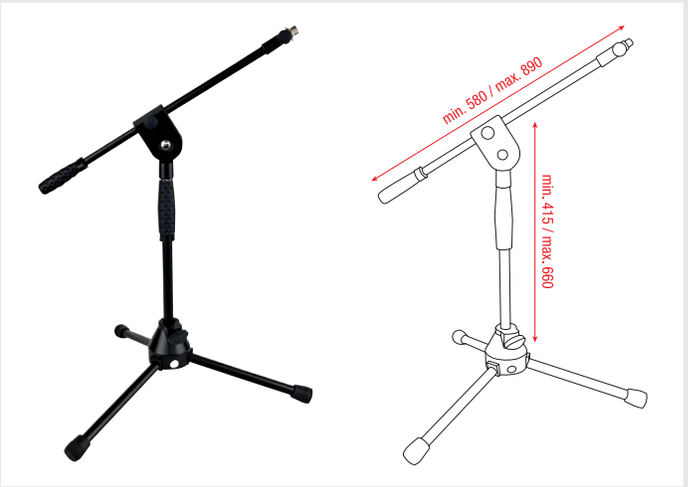

Microphone Stand - Pro

SHOWGEAR

D8304 850-1430 mm, Metal Base Part

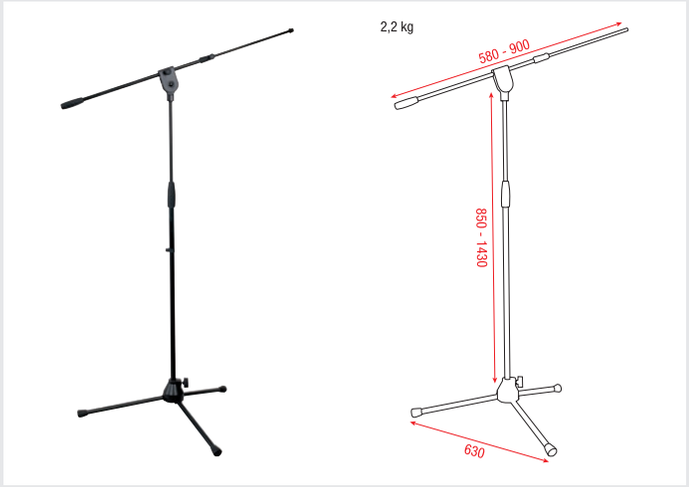

Microphone Stand - Pro

SHOWGEAR

D8305 430-690 mm

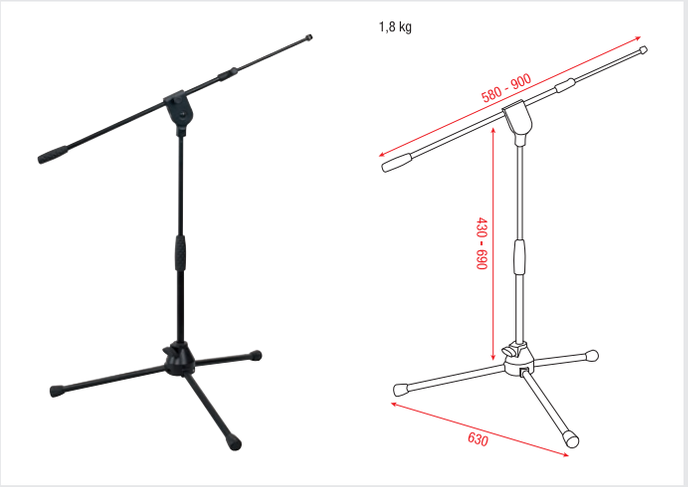

Mammoth Microphone Stand - Low

SHOWGEAR

D8622 350 mm

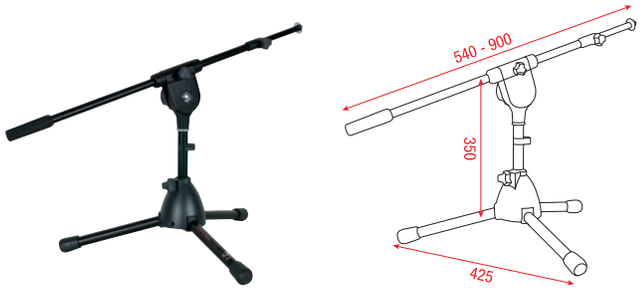

Mammoth Microphone Stand - Medium

SHOWGEAR

D8621 535-755 mm

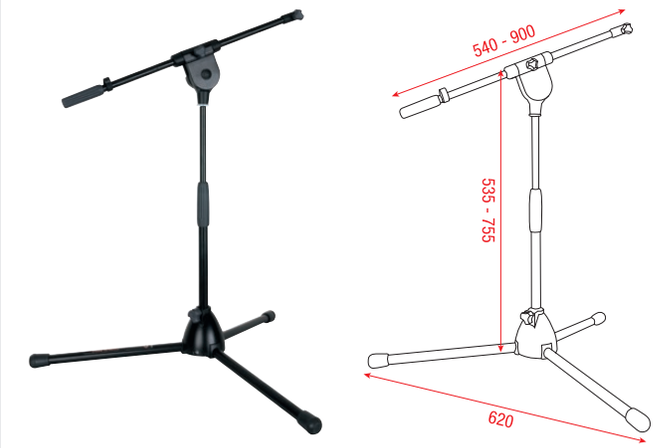

Mammoth Microphone Stand - High

SHOWGEAR

D8620 1000-1560 mm

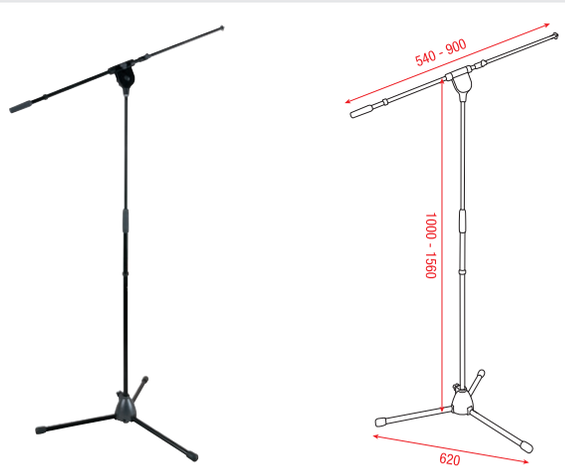

Microphone Stand - Overhead

SHOWGEAR

D8307 1470-3250 mm



Microphone Stand - Quick Lock

SHOWGEAR

D8115B 1020-1670 mm



Microphone Stand

SHOWGEAR

D8105C 960-1600 mm

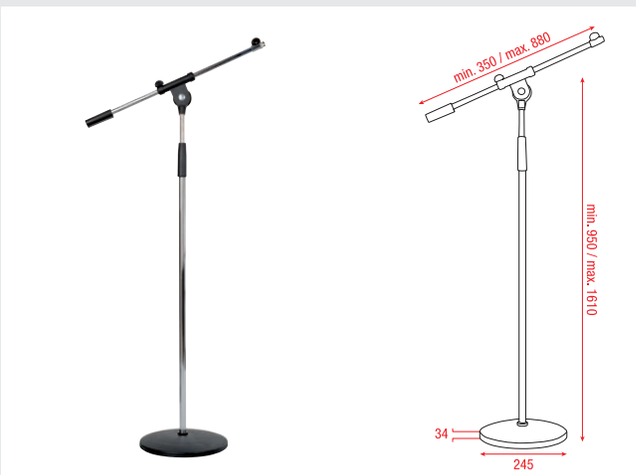

Microphone Pole

SHOWGEAR

D8306 870-1500 mm, with Counterweight

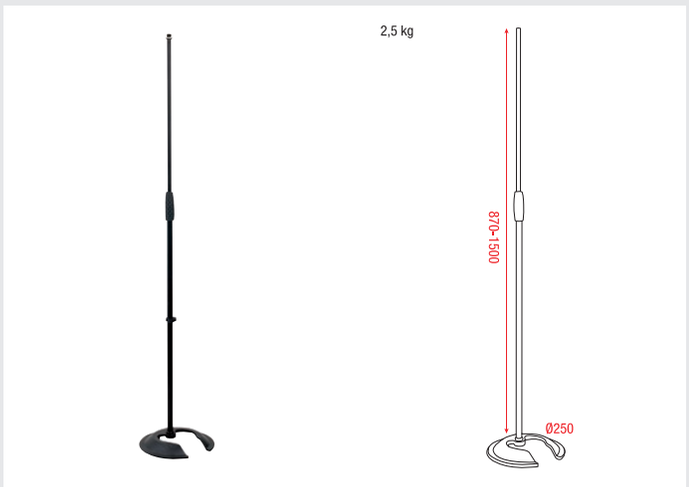

Microphone Pole - Quick Lock

SHOWGEAR

D8308 956-1520 mm, with Counterweight



Desk Microphone Stand

SHOWGEAR

D8203C 350 mm



Desk Microphone Stand

SHOWGEAR

D8202B 230-370 mm



Desk Microphone Stand

SHOWGEAR

D8204C 390-600 mm

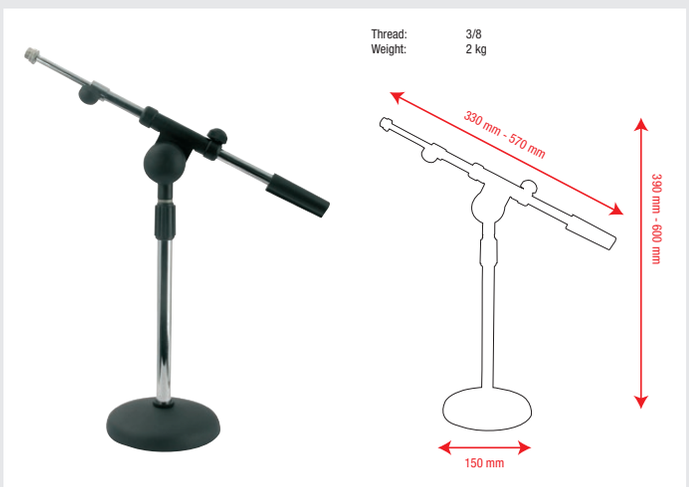

Desk Microphone Stand - Mini

SHOWGEAR

D8205C 135-170 mm

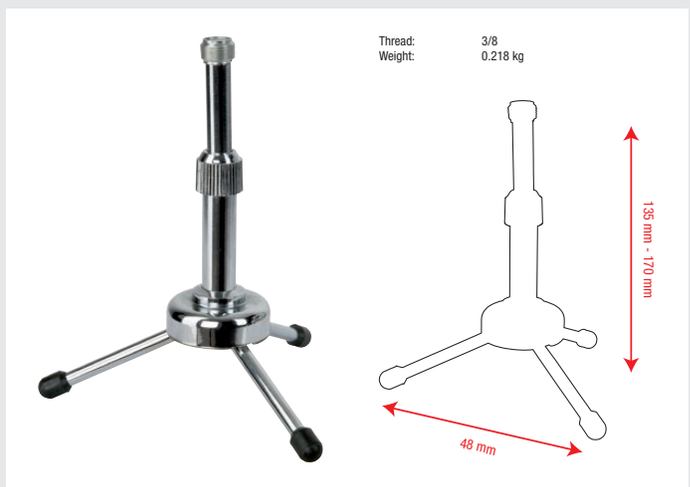

Desk Microphone Stand - Mini

SHOWGEAR

D8206C 146.5 mm



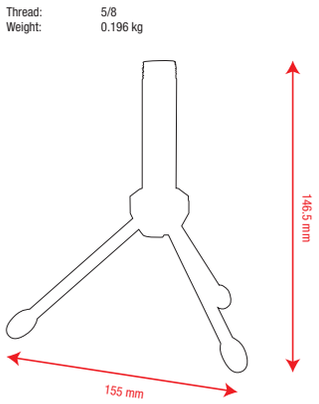

Desk Microphone Stand - Mini

SHOWGEAR

D8207C 89 mm





Broadcast Stand

SHOWGEAR

D8110 1650-2200 mm



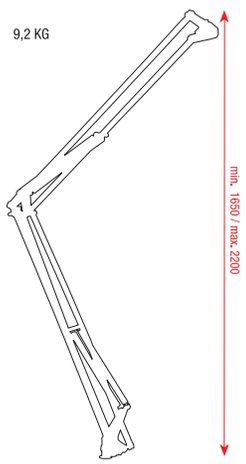

Broadcast Stand PRO

SHOWGEAR

D8120 200-900 mm, incl. Neutrik Connectors



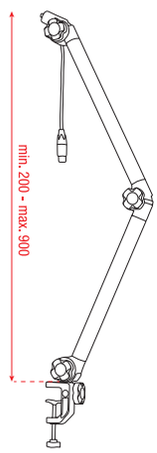



Music Stand - Eco

SHOWGEAR

D8350 Steel - 480-1070 mm

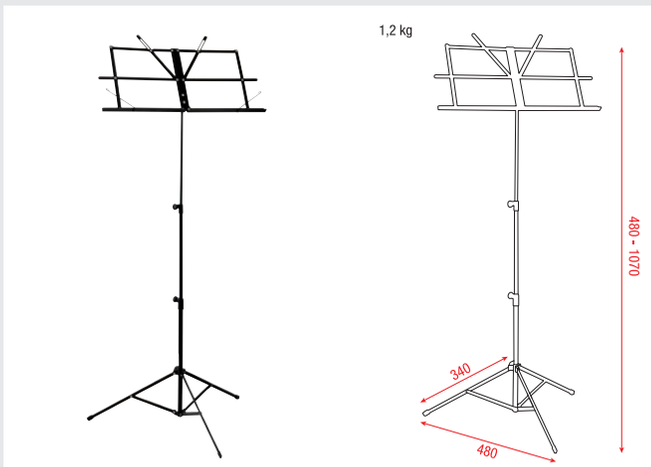

Music Stand

SHOWGEAR

D8351 Steel - 470-1150 mm, incl. Bag

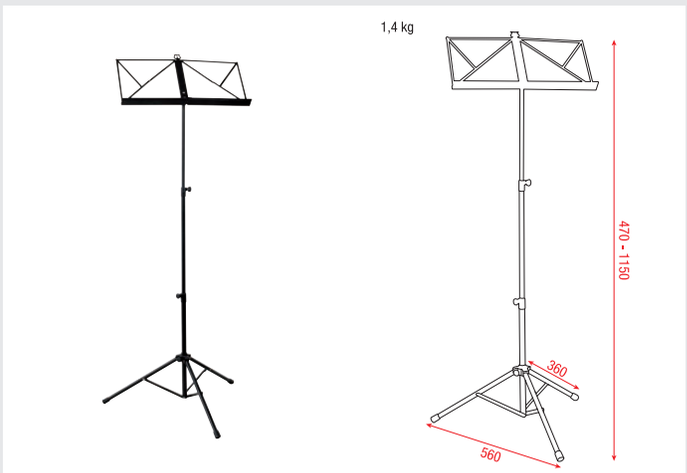

Music Stand - Pro

SHOWGEAR

D8352 Steel - 730-1200 mm

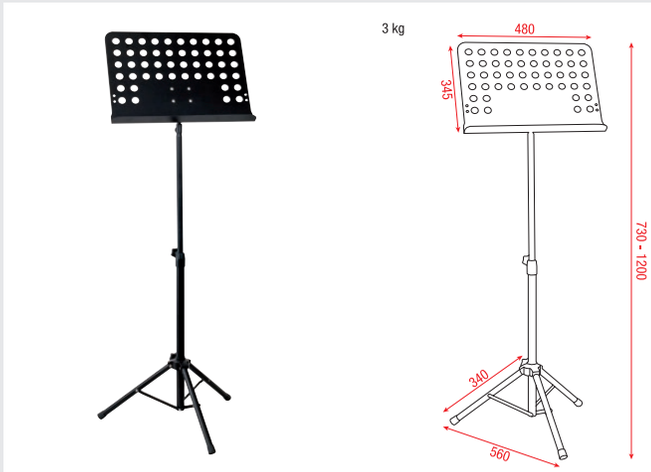

Acoustic Guitar Stand

SHOWGEAR

D8374 Steel

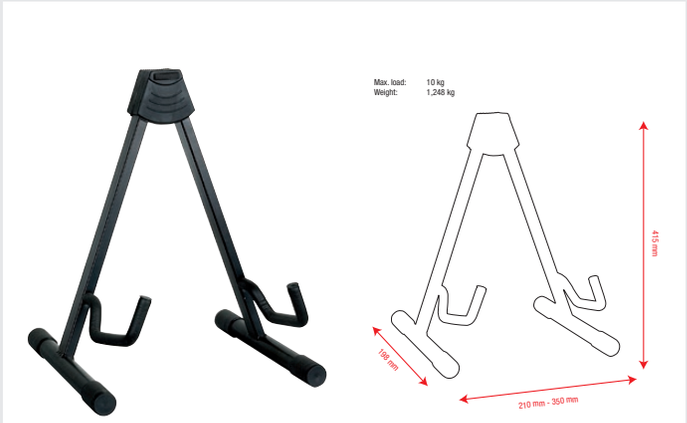

Electric Guitar Stand

SHOWGEAR

D8375 Steel

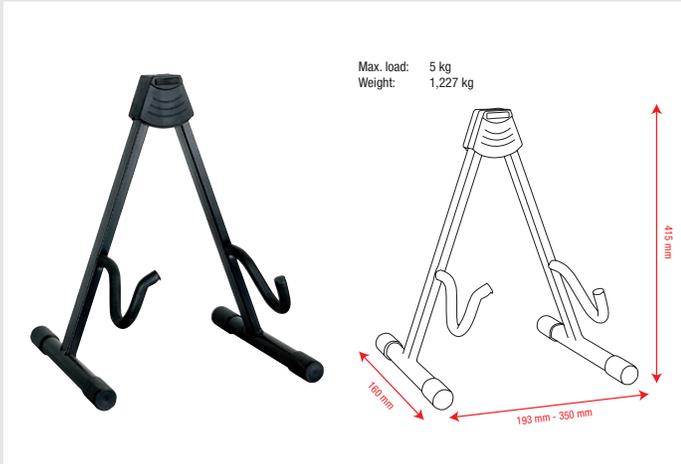

Mammoth Guitar Stand

SHOWGEAR

D8510 Metal



Guitar Player Foot Stand — SHOWGEAR

D8373 Steel



19 Inch Rack Metal — SHOWGEAR

D8552 With adjustable Top Loading

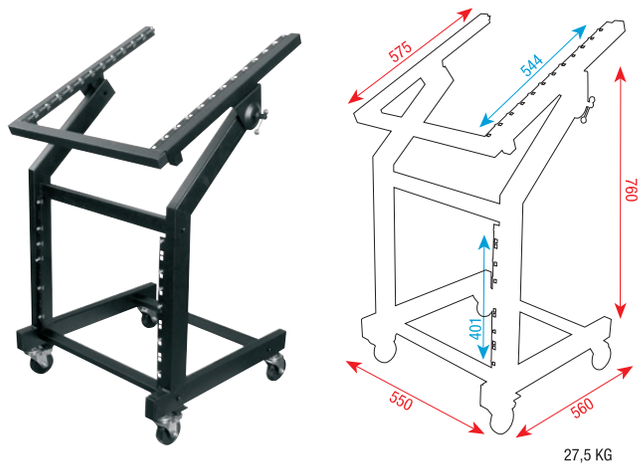

Keyboard Stand — SHOWGEAR

D8363 Single Frame, detachable Foot, Max Load: 25 kg

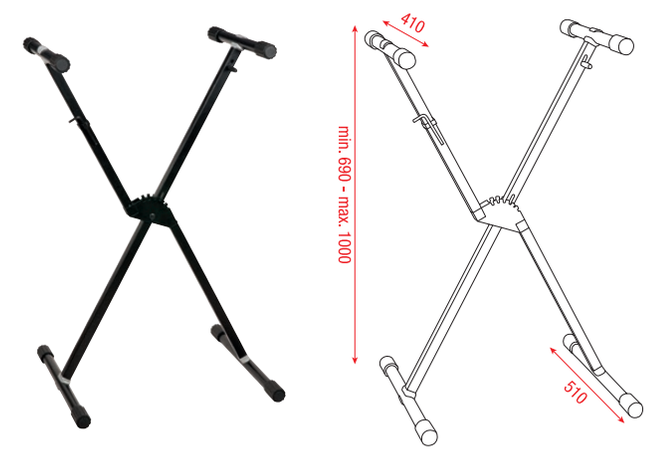

Keyboard Stand — SHOWGEAR

D8364 Double Frame, detachable Foot, Max Load: 35 kg

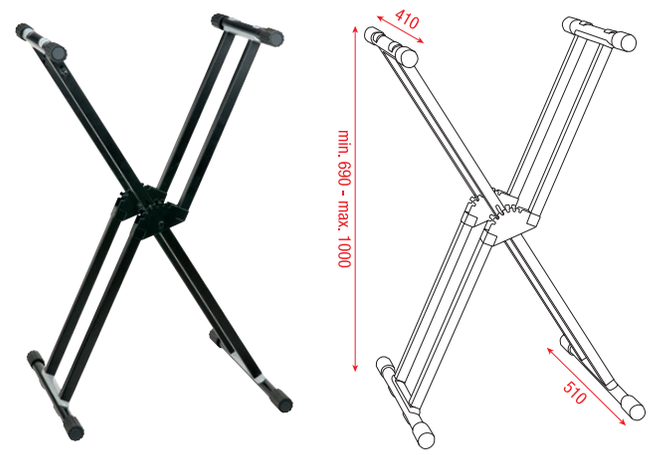

Keyboard Stand Ergo1 — SHOWGEAR

D8505 Single Frame, Max Load: 30 kg



Keyboard Stand Ergo2 — SHOWGEAR

D8506 Double Frame, Max Load: 30 kg

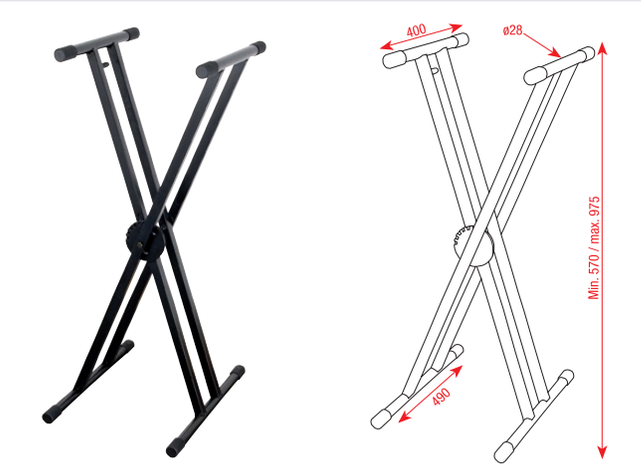

Keyboard Stand Double Layer MKII

SHOWGEAR

D8361 Double Frame, Max Load: 45 kg



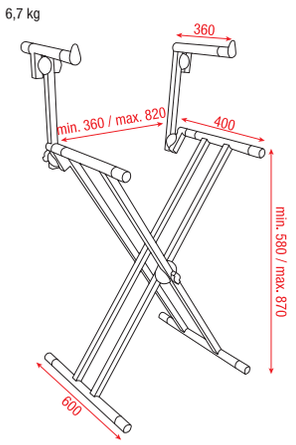

Keyboard Stand Professional

SHOWGEAR

D8507 Max Load: 30 kg per layer



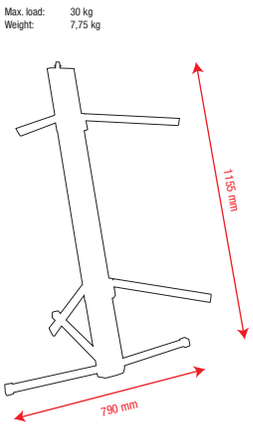

Keyboard Bench Pro

SHOWGEAR

D8362 Steel - 510-700 mm



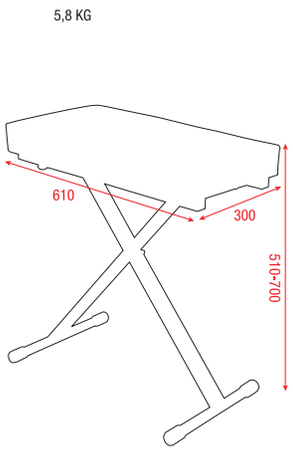

Laptop Stand

SHOWGEAR

D8370 Steel





Foldable Laptop Stand

SHOWGEAR

D8376 Steel



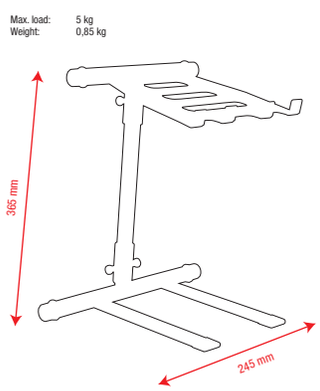

DJ Player Stand

SHOWGEAR

D8378 Steel - 330-480 mm



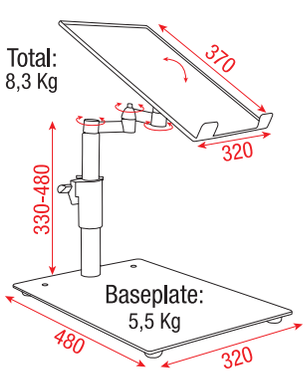

iPhone Holder for Microphone Stand

SHOWGEAR

D8966 Suitable for iPhone 5, 6 (Plus), 7 (Plus)



iPad Holder For Microphone Stand

SHOWGEAR

D8965 Suitable for iPad 1, 2



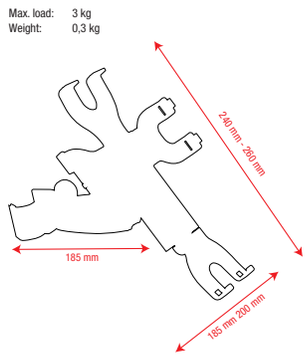

iPad Mini Holder for Microphone Stand

SHOWGEAR

D8967 Suitable for iPad Mini



Multifunctional Tablet Stand

SHOWGEAR

D8379 Suitable for 6-10" tablets



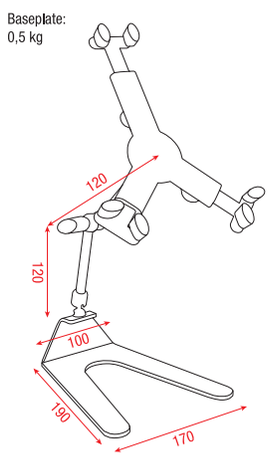

Mammoth DJ Stand Set

SHOWGEAR

D8660 Incl. Transport Bag





Warning Strip SHOWGEAR

D8319 For Speaker & Light Stands



Warning Strip XL SHOWGEAR

D8318 For Speaker & Light Stands





Microphone Holder 28 mm SHOWGEAR

D8940 5/8 Thread



Microphone Holder 22 mm SHOWGEAR

D8941 5/8 Thread



Microphone Holder 32mm SHOWGEAR

D8942 5/8 Thread



Microphone Holder 22 mm SHOWGEAR

D8943 5/8 Thread



Microphone Holder 32mm SHOWGEAR

D8944 5/8 Thread, Spring



Microphone Holder 28 mm SHOWGEAR

D8925 5/8 Thread



Microphone Holder 25 mm SHOWGEAR

D8926 5/8 Thread



Microphone Holder 45 mm SHOWGEAR

D8945 3/8 Thread, Anti-Shock



Microphone Holder 20-24 mm

D8946 3/8 Thread



SHOWGEAR

Microphone Holder 32 mm SHOWGEAR

D8923 3/8 Thread, Shock-Mount



Microphone Holder 30 mm SHOWGEAR

D8922 5/8 Thread



Microphone Holder 22 mm SHOWGEAR

D8920 5/8 Thread



Microphone Holder 44-48 mm

D1701 5/8 Thread, Anti-Shock, Black



SHOWGEAR

Microphone Holder 44-48 mm

D1702 5/8 Thread, Anti-Shock, Grey



SHOWGEAR

Microphone Holder 22-24 mm

D1703 5/8 Thread, Anti-Shock, Black



SHOWGEAR

Microphone Holder 22-24 mm

D1704 5/8 Thread, Anti-Shock, Grey



SHOWGEAR

Microphone Clamp 44 mm SHOWGEAR

D8921 5/8 Thread, Spring



Microphone Clamp 23-28 mm

D8928 3/8 Thread



SHOWGEAR

Microphone Clamp 30 mm SHOWGEAR

D8929 3/8 Thread



Drum Microphone Clamp SHOWGEAR

D8930 3/8 - 5/8 Thread



Drum Microphone Clamp SHOWGEAR

D8931 3/8 - 5/8 Thread



Screw Knob Thread Adapter SHOWGEAR

D8954 3/8 Thread



Microphone Adapter Clamp SHOWGEAR

D8963 For 1 Microphone, 5/8 Thread



Headphone Holder SHOWGEAR

D8964 For Microphone stands



Microphone T-bar SHOWGEAR

D8961 For 2 Microphones, 5/8 Thread



Microphone T-bar SHOWGEAR

D8962 For 4 Microphones, 5/8 Thread



Thread Adapter SHOWGEAR

D8951 From 5/8 Outer to 3/8 Inner



Mounting Plate for Gooseneck

D8911B Black, 60 mm



SHOWGEAR

Mounting Plate for Gooseneck

D8911C Chrome, 60 mm



SHOWGEAR

Thread Adapter SHOWGEAR

D8952 From 3/8 Outer to 5/8 Inner



Thread Adapter SHOWGEAR

D8953 From 5/8 Outer to 3/8 Inner



ASM-01 SHOWGEAR

D1390 Acoustic black Foam, 50x50 cm, 5 cm thick



ASM-03 SHOWGEAR

D1392 Acoustic black Foam, 50x50 cm, 10 cm thick



Speaker Cover Clothing SHOWGEAR

D6990 10m Roll, 1.4 m height, 2 mm thick





Precision lighting and dazzling effects, infusing events with energy and excitement

Lighting can make or brake a show. Using the right lights and effects engages artists and audiences, and evokes emotions and euphoria to the benefit of all.

Our entertainment lights are used at live concerts, in theme parks, TV studios, and in theatres, right up to the latest museum installations. We offer solutions for both professional and commercial use.

Static and moving lights to effects and controllers. Our entertainment lighting portfolio has it all. We build our entertainment lighting products to be robust, durable, and high in light quality. This solid approach consistently lowers the total cost of ownership and improves profits for rental companies and distributors accordingly.







Chimp 100.G2

55004 **2 Universe DMX Console incl. Wireless Transmitter**

INFINITY

Specifications:

Ctrl. Mode:	DMX / MIDI	Pwr. Cons.:	75 W
DMX Ch.:	1024	Pwr. Conn. In.:	IEC C13 female
Display Ext.:	Yes	DMX Conn. in:	XLR 5P
Fixture Ch.:	1024	DMX Conn. out:	XLR 5P
Cue Lists:	200	Data Conn. In:	etherCON / RJ45 / USB
Memories:	5000	Data Conn. Out:	etherCON / RJ45 / USB
OSC:	Yes	Midi Conn.:	Yes
Playback Buttons:	10	HDMI Out.:	2
Playback Faders:	10	Ethernet Ports:	1
Playback Pages:	40	Audio Trig.:	6
Art-Net:	Yes	Length (mm):	400 mm
FX Engine:	Yes	Width (mm):	575 mm
Universes:	2	Height (mm):	160 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Weight:	9 kg
		Housing:	Metal / Plastic
		Colour:	Black

Dust Cover for Chimp 100 INFINITY

55001



FEATURES:

- Familiar keys, numeric keypad and 4 encoders
- Minimum 1024 channels of DMX (expandable)
- Unlimited Fixtures
- Libraries provided by Altabase
- Tracking and non-tracking options
- Wireless DMX transmitter as standard
- Ethernet / Art-Net / sACN

Case for Chimp 100

D7250 **Premium Line**





Chimp 100.G2 Tourpack

55004SET01 **Complete Chimp 100.G2 Set with touchscreen**

INFINITY

Specifications:

Ctrl. Mode:	DMX / Manual / MIDI	Pwr. Supp.:	100-240 VAC 50-60 Hz
DMX Ch.:	1024	Pwr. Cons.:	75 W
Display:	Touch	Pwr. Conn. In.:	Pro Power Blue
Display Size:	22 "	DMX Conn. out:	XLR 5P
Fixture Ch.:	120	Data Conn. In:	etherCON / RJ45 / USB
Cue Lists:	200	Data Conn. Out:	etherCON / RJ45 / USB
Memories:	5000	Midi Conn.:	Yes
OSC:	Yes	HDMI Out.:	1
Playback Buttons:	10	Ethernet Ports:	1
Playback Faders:	10	Audio Trig.:	6
Playback Pages:	40	Length (mm):	700 mm
Art-Net:	Yes	Width (mm):	630 mm
FX Engine:	Yes	Height (mm):	320 mm
Universes:	2	Weight:	44 kg
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Infinity Chimp 100.G2
- 22 Inch Capacitive Full HD Touchscreen
- Premium Line Flight Case
- Dust cover
- 2 x white COB XLR mini-lite
- Power box
- 3 m power cable

Chimp Tour Pack

55031 **Chimp 100.G2 with Wing and flightcase**

INFINITY

Specifications:

Ctrl. Mode:	DMX / Manual / MIDI	Pwr. Supp.:	100-240 VAC 50-60 Hz
DMX Ch.:	2048	Pwr. Cons.:	100 W
Display:	LCD / Touch	Pwr. Conn. In.:	Pro Power Blue
Display Size:	22 "	DMX Conn. in:	XLR 5P
Display Ext.:	Yes	DMX Conn. out:	XLR 5P
Fixture Ch.:	120	Data Conn. In:	etherCON / RJ45 / USB
Cue Lists:	200	Data Conn. Out:	etherCON / RJ45 / USB
Memories:	5000	Midi Conn.:	Yes
OSC:	Yes	Ethernet Ports:	1
Playback Buttons:	10	Audio Trig.:	6
Playback Faders:	30	Length (mm):	1290 mm
Playback Pages:	40	Width (mm):	630 mm
Art-Net:	Yes	Height (mm):	320 mm
FX Engine:	Yes	Weight:	70 kg
Universes:	4	Housing:	Flightcase / Metal / Plastic
		Colour:	Black

FEATURES:

- Infinity Chimp 100.G2
- 2 x 22 Inch Capacitive Full HD Touchscreen
- Banana wing (extension wing)
- Premium Line Flight Case
- 2 x white COB XLR mini-lite
- Power box
- 3 m power cable



Chimp 300.G2

55014 **4 Universe DMX Console incl. Wireless Transmitter**

INFINITY

Specifications:

Ctrl. Mode:	DMX / MIDI	Pwr. Supp.:	100-240 VAC 50-60 Hz
DMX Ch.:	2048	Pwr. Cons.:	125 W
Display:	LCD / Touch	Pwr. Conn. In.:	IEC C13 female
Display Size:	22 "	DMX Conn. in:	XLR 5P
Fixture Ch.:	2048	DMX Conn. out:	XLR 5P
Cue Lists:	400	Data Conn. In:	etherCON / RJ45 / USB
Memories:	10000	Data Conn. Out:	etherCON / RJ45 / USB
OSC:	Yes	Midi Conn.:	Yes
Playback Buttons:	10	HDMI Out.:	1
Playback Faders:	10	Ethernet Ports:	1
Playback Pages:	60	Audio Trig.:	6
Art-Net:	Yes	Length (mm):	647 mm
SMPTE:	Yes	Width (mm):	575 mm
FX Engine:	Yes	Height (mm):	279 mm
Universes:	4	Weight:	18 kg
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- 22 Inch Capacitive Full HD Touchscreen
- Familiar keys, numeric keypad and 4 encoders
- Minimum 2048 channels of DMX (expandable)
- Unlimited Fixtures
- Libraries provided by Altabase
- Tracking and non-tracking options
- Wireless DMX transmitter as standard
- Ethernet / Art-Net / sACN



Dustcover for Chimp 300 INFINITY

55011



Case for Chimp 300

D7251 **Premium Line**



Chimp 300.G2 Tourpack

55014SET01 **Complete Chimp 300.G2 Set with flightcase**

INFINITY

Specifications:

Ctrl. Mode:	DMX / Manual / MIDI	Pwr. Cons.:	125 W
DMX Ch.:	2048	Pwr. Conn. In.:	IEC C13 female
Display:	LCD / Touch	DMX Conn. in:	XLR 5P
Display Size:	22 “	DMX Conn. out:	XLR 5P
Fixture Ch.:	120	Data Conn. In:	etherCON / RJ45 / USB
Cue Lists:	400	Data Conn. Out:	etherCON / RJ45 / USB
Memories:	10000	Midi Conn.:	Yes
OSC:	Yes	HDMI Out.:	1
Playback Buttons:	10	Ethernet Ports:	1
Playback Faders:	10	Audio Trig.:	6
Playback Pages:	60	Length (mm):	722 mm
Art-Net:	Yes	Width (mm):	632 mm
SMPTE:	Yes	Height (mm):	374 mm
FX Engine:	Yes	Weight:	52 kg
Universes:	4	Housing:	Aluminium / Metal / Plastic / Wood
Pwr. Supp.:	100-240 VAC 50-60 Hz	Colour:	Black

FEATURES:

- Infinity Chimp 300.G2 with integrated 22” HD touchscreen
- Premium Line Flight Case
- Dust cover
- 2 x white COB XLR mini-lite
- 3 m power cable



Banana Wing

55020 **2 Universe Expansion Wing**

INFINITY

Specifications:

Ctrl. Mode:	DMX / PC Software	DMX Conn. out:	XLR 5P
DMX Ch.:	1024	Data Conn. In:	USB
Playback Faders:	20	Data Conn. Out:	USB
Pwr. Supp.:	100-240 VAC 50-60 Hz	Length (mm):	487 mm
Pwr. Cons.:	25 W	Width (mm):	400 mm
Pwr. Conn. In.:	IEC C13 female	Height (mm):	115 mm
DMX Conn. in:	XLR 5P	Weight:	7.5 kg
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Suitable for the Infinity Chimp
- Expands any Chimp console with 2 universes
- Enables playback information on external screen
- Adds 2 DMX outputs onto your Chimp setup
- Adds 20 extra playback faders

Case for Banana Wing

D7262 **Premium Line**

Dustcover for Banana Wing INFINITY

55021



SideKick

55007 Chimp OnPC Wing

INFINITY

Specifications:

Ctrl. Mode:	DMX / PC Software	Pwr. Cons.:	2.5 W
DMX Ch.:	1024	Pwr. Conn. In.:	USB
OSC:	Yes	Data Conn. In:	USB
sACN:	Yes	Length (mm):	295 mm
Art-Net:	Yes	Width (mm):	510 mm
SMPTE:	Optional	Height (mm):	45 mm
Universes:	2	Weight:	4.95 kg
Pwr. Supp.:	5 VDC	Housing:	Metal
		Colour:	Black



FEATURES:

- Console for Chimp OnPC
- Suitable for preparing your show at any location
- Releases 2 universes (Art-Net and sACN)
- USB powered
- Lightweight

Peanut Box

55008 Chimp 4-universe expansion kit

INFINITY

Specifications:

Ctrl. Mode:	DMX / PC Software	Pwr. Conn. In.:	Low Voltage DC plug
DMX Ch.:	2048	DMX Conn. out:	XLR 5P
OSC:	Yes	Data Conn. In:	USB
sACN:	Yes	Midi Conn.:	Yes
Art-Net:	Yes	Audio Trig.:	6
SMPTE:	Yes	Length (mm):	125 mm
Universes:	4	Width (mm):	175 mm
Pwr. Supp.:	5 VDC	Height (mm):	40 mm
Pwr. Cons.:	5 W	Weight:	0.35 kg
		Housing:	Metal
		Colour:	Black



FEATURES:

- Expansion kit for Infinity Chimp and OnPC software
- 4 additional universes (2048 channels)
- DMX, Art-Net & sACN
- Connectors for audio and midi
- Enables SMTPE timecode for Chimp 100 and OnPC software
- 1U height and fits in 19” rack
- USB-Cable and lockable power adapter included

Chimp Dongle for OnPC

55005 2 universes, 1 DMX output

INFINITY

Specifications:

Ctrl. Mode:	DMX	Pwr. Conn. In.:	USB
DMX Ch.:	1024	DMX Conn. out:	XLR 5P
sACN:	Yes	Length (mm):	39 mm
Art-Net:	Yes	Width (mm):	101 mm
Universes:	2	Height (mm):	39 mm
Pwr. Supp.:	5 VDC	Weight:	0.15 kg
Pwr. Cons.:	2 W	Housing:	Aluminium
		Colour:	Black



FEATURES:

- Dongle for the Infinity Chimp OnPC software
- Enables two universes
- DMX, Art-Net & sACN for capturing the show data
- Freedom to use any visualisation software
- Use Chimp OnPC software for a direct virtual stage experience



Lampy 20 1U

50733 **1 Universe 20-fader DMX console**

SHOWTEC

Specifications:

Ctrl. Mode:	DMX / MIDI	Pwr. Supp.:	100-240 VAC 50-60 Hz
DMX Ch.:	512	Pwr. Cons.:	50 W
Display:	LCD / Touch	Pwr. Conn. In.:	Pro Power Blue
Display Size:	10.1 “	DMX Conn. out:	XLR 3P / XLR 5P
Display Ext.:	Yes	Data Conn. In:	USB
Fixtures:	512	Data Conn. Out:	RJ45 / USB
Cue Lists:	90	Midi Conn.:	Yes
OSC:	Yes	Ethernet Ports:	1
Playback Buttons:	20	Audio Trig.:	3
Playback Faders:	20	Length (mm):	505 mm
Playback Pages:	9	Width (mm):	345 mm
sACN:	Optional	Height (mm):	128 mm
Art-Net:	Optional	Weight:	8.8 kg
FX Engine:	Yes	Housing:	Metal / Plastic
Universes:	1	Colour:	Black



FEATURES:

- 512 channel DMX console
- 10.1” touchscreen with Fixture View and Quick Colour Picker
- Multicolour indicator LEDs and 4 encoder wheels with 1.3” display
- Complete built-in effects engine for easy control
- Second (touch)screen possibility
- OSC for mobile control (Android/iOS)
- Optional second universe with 1024 channels, Art-Net and sACN

Case for LAMPY 20

D7332 **Flight Case**



Lampy 20 2U

50734 **2 Universe 20-fader DMX console**

SHOWTEC

Specifications:

Ctrl. Mode:	DMX / MIDI	Universes:	2
DMX Ch.:	1024	Pwr. Supp.:	100-240 VAC 50-60 Hz
Display:	LCD / Touch	Pwr. Cons.:	50 W
Display Size:	10.1 “	Pwr. Conn. In.:	Pro Power Blue
Display Ext.:	Yes	DMX Conn. out:	XLR 3P / XLR 5P
Fixtures:	1024	Data Conn. In:	RJ45 / USB
Cue Lists:	90	Data Conn. Out:	RJ45 / USB
OSC:	Yes	Midi Conn.:	Yes
Playback Buttons:	20	Ethernet Ports:	1
Playback Faders:	20	Audio Trig.:	3
Playback Pages:	9	Length (mm):	505 mm
sACN:	Yes	Width (mm):	345 mm
Art-Net:	Yes	Height (mm):	128 mm
FX Engine:	Yes	Weight:	8.8 kg
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- 1024-channel two universe DMX console
- 10.1” touchscreen with Fixture View and Quick Colour Picker
- Multicolour indicator LEDs and 4 encoder wheels with 1.3” display
- Complete built-in effects engine for easy control
- Second (touch)screen possibility
- OSC for mobile control (Android/iOS)
- Supports Art-Net and sACN protocols

Case for LAMPY 20

D7332 **Flight Case**

Dust Cover for Lampy 20 SHOWTEC

50738 **Fabric - black**



Lampy 40 1U

50735 **1 Universe 40-fader DMX console**

SHOWTEC



Specifications:

Ctrl. Mode:	DMX / MIDI	Universes:	1
DMX Ch.:	512	Pwr. Supp.:	100-240 VAC 50-60 Hz
Display:	LCD / Touch	Pwr. Cons.:	60 W
Display Size:	10.1 “	Pwr. Conn. In.:	Pro Power Blue
Display Ext.:	Yes	DMX Conn. out:	XLR 3P / XLR 5P
Fixtures:	512	Data Conn. In:	RJ45 / USB
Cue Lists:	90	Data Conn. Out:	RJ45 / USB
OSC:	Yes	Midi Conn.:	Yes
Playback Buttons:	40	Ethernet Ports:	1
Playback Faders:	40	Audio Trig.:	3
Playback Pages:	9	Length (mm):	721 mm
sACN:	Optional	Width (mm):	345 mm
Art-Net:	Optional	Height (mm):	128 mm
FX Engine:	Yes	Weight:	11.8 kg
		Housing:	Metal / Plastic
		Colour:	Black



FEATURES:

- 512 channel DMX console
- 10.1” touchscreen with Fixture View and Quick Colour Picker
- Multicolour indicator LEDs and 4 encoder wheels with 1.3” display
- Complete built-in effects engine for easy control
- Second (touch)screen possibility
- OSC for mobile control (Android/iOS)
- Optional second universe, 1024 channels, Art-Net and sACN

Case for LAMPY 40

D7333 **Flight Case**

Lampy 40 2U

50736 **2 Universe 40-fader DMX console**

SHOWTEC



Specifications:

Ctrl. Mode:	DMX / MIDI	Universes:	2
DMX Ch.:	1024	Pwr. Supp.:	100-240 VAC 50-60 Hz
Display:	LCD / Touch	Pwr. Cons.:	60 W
Display Size:	10.1 “	Pwr. Conn. In.:	Pro Power Blue
Display Ext.:	Yes	DMX Conn. out:	XLR 3P / XLR 5P
Fixtures:	1024	Data Conn. In:	RJ45 / USB
Cue Lists:	90	Data Conn. Out:	RJ45 / USB
OSC:	Yes	Midi Conn.:	Yes
Playback Buttons:	40	Ethernet Ports:	1
Playback Faders:	40	Audio Trig.:	3
Playback Pages:	9	Length (mm):	721 mm
sACN:	Yes	Width (mm):	345 mm
Art-Net:	Yes	Height (mm):	128 mm
FX Engine:	Yes	Weight:	11.8 kg
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- 1024-channel two universe DMX console
- 10.1” touchscreen with Fixture View and Quick Colour Picker
- Multicolour indicator LEDs and 4 encoder wheels with 1.3” display
- Complete built-in effects engine for easy control
- Second (touch)screen possibility
- OSC for mobile control (Android/iOS)
- Supports Art-Net and sACN protocols

Lampy DNGL

SHOWTEC

50737 **Unlock Key**



sACN:	Yes
Art-Net:	Yes
Universes:	1
Pwr. Cons.:	0.1 W
Length (mm):	75 mm
Width (mm):	21 mm
Height (mm):	10 mm
Weight:	0.01 kg
Housing:	Plastic
Colour:	Black

Dust Cover for Lampy 40

SHOWTEC

50739 **Fabric - black**



Case for LAMPY 40

D7333 **Flight Case**



SDC-6

50723 **6-Channel DMX Controller**

SHOWTEC

Specifications:

Ctrl. Mode:	DMX / Manual	DMX Conn. out:	XLR 3P
DMX Ch.:	6	Length (mm):	173 mm
Pwr. Supp.:	12 VDC	Width (mm):	149 mm
Pwr. Cons.:	1 W	Height (mm):	51 mm
Pwr. Conn. In.:	Low Voltage DC plug	Weight:	0.8 kg
		Housing:	Metal
		Colour:	Grey

FEATURES:

- Compact 6-channel DMX controller
- Master dim fader
- Battery operated
- Easy to use
- Ideal for exhibitions



Easy 16

50406 **16-Channel DMX Controller**

SHOWTEC

Specifications:

Ctrl. Mode:	DMX / Manual	DMX Conn. out:	XLR 3P
DMX Ch.:	32	Length (mm):	535 mm
Memories:	12	Width (mm):	195 mm
Pwr. Supp.:	9 VDC	Height (mm):	90 mm
Pwr. Cons.:	4.5 W	Weight:	2.8 kg
Pwr. Conn. In.:	Low Voltage DC plug	R.U.:	3 U
		Housing:	Metal
		Colour:	Grey

FEATURES:

- Ideal DMX controller for test setups or demonstrations
- 16-channel faders
- 32 DMX channels
- 16 Programmable scenes
- Built-in chase
- Detachable frame

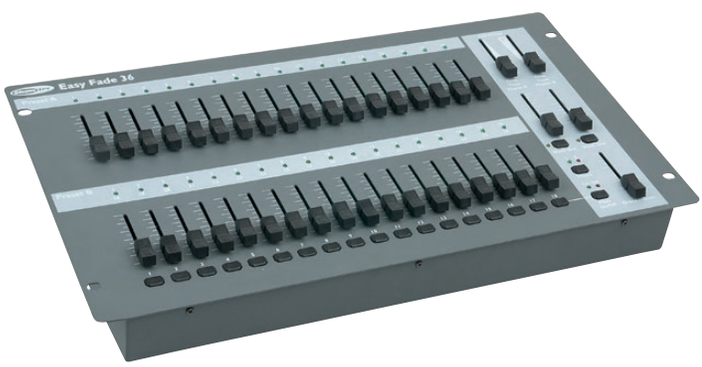

Easy Fade 36

50711 **Lighting Desk**

SHOWTEC

Specifications:

Ctrl. Mode:	DMX / Manual	Length (mm):	483 mm
DMX Ch.:	36	Width (mm):	266 mm
Pwr. Supp.:	12 VDC	Height (mm):	90 mm
Pwr. Cons.:	6 W	Weight:	4.3 kg
Pwr. Conn. In.:	Low Voltage DC plug	R.U.:	6 U
DMX Conn. out:	XLR 3P	Housing:	Metal
		Colour:	Grey

FEATURES:

- Easy to use
- No programming facilities
- Double preset
- Up to 36 channels



SM-8/2

50700 16-Channel Lighting Desk

SHOWTEC

Specifications:

Ctrl. Mode:	DMX / Manual / MIDI / Sound	DMX Conn. out:	XLR 3P / XLR 5P
DMX Ch.:	192	Length (mm):	482 mm
Fixtures:	12	Width (mm):	132 mm
Memories:	240	Height (mm):	80 mm
Pwr. Supp.:	9 VDC	Weight:	2.2 kg
Pwr. Cons.:	2.7 W	R.U.:	3 U
Pwr. Conn. In.:	Low Voltage DC plug	Housing:	Metal / Plastic
		Colour:	Black / Grey

FEATURES:

- Intelligent light DMX controller
- Control 12 fixtures up to 16 channels each
- Patchable channels for each fixture
- Programmable Speed & Fade time for chases
- 240 scenes & 6 chases

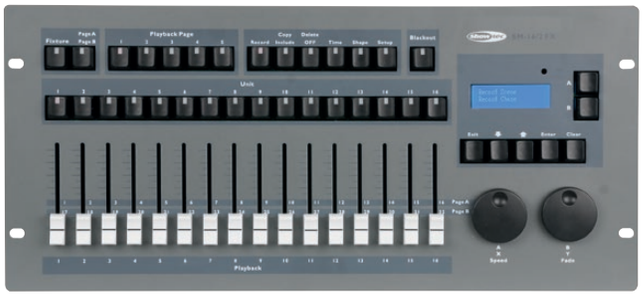

SM-16/2 FX

50702 32-Channel Lighting Desk with Shape Engine

SHOWTEC

Specifications:

		DMX Conn. out:	XLR 3P
		Data Conn. In:	USB
Ctrl. Mode:	Auto / DMX / Manual	Data Conn. Out:	USB
DMX Ch.:	512	Length (mm):	483 mm
Fixtures:	16	Width (mm):	220 mm
Memories:	80	Height (mm):	75 mm
Playback Faders:	16	Weight:	3.7 kg
Playback Pages:	5	R.U.:	5 U
Pwr. Supp.:	240 VAC 50-60 Hz	Housing:	Metal
Pwr. Cons.:	2 W	Colour:	Grey
Pwr. Conn. In.:	IEC C13 female		

FEATURES:

- Intelligent light DMX controller
- Control 16 fixtures up to 32 channels each
- Patchable channels for each fixture
- Ready-to-use Shape Engine
- Show backup on USB



Showmaster 24 MKII

50830 24-Channel Light Controller

SHOWTEC

Specifications:

		Midi Conn.:	Yes
		Audio Trig.:	2
Ctrl. Mode:	Manual / MIDI / Sound	Length (mm):	530 mm
DMX Ch.:	24	Width (mm):	330 mm
Memories:	23976	Height (mm):	150 mm
Pwr. Supp.:	12 VDC	Weight:	4.8 kg
Pwr. Cons.:	6 W	R.U.:	6 U
Pwr. Conn. In.:	Low Voltage DC plug	Housing:	Metal / Plastic
DMX Conn. out:	XLR 3P	Colour:	Black / Grey

FEATURES:

- 24 multifunctional channel faders
- Up to 48 Scenes / Chases with max 999 steps
- Detachable frame
- Midi In & Out
- Remote black out/full on possibility



Showmaster 48 MKII

50831 48-Channel Light Controller

SHOWTEC

Specifications:

		Midi Conn.:	Yes
		Audio Trig.:	2
Ctrl. Mode:	Manual / MIDI / Sound	Length (mm):	710 mm
DMX Ch.:	48	Width (mm):	267 mm
Memories:	23976	Height (mm):	90 mm
Pwr. Supp.:	12 VDC	Weight:	6.2 kg
Pwr. Cons.:	6 W	R.U.:	6 U
Pwr. Conn. In.:	Low Voltage DC plug	Housing:	Metal / Plastic
DMX Conn. out:	XLR 3P	Colour:	Grey

FEATURES:

- 48 Multifunctional channel faders
- Up to 96 Scenes / Chases with max 999 steps
- Midi In & Out
- Remote black out/full on possibility



ColorCue 1

50703 **Intelligent 1-fader, 6-colour LED Controller**

SHOWTEC

Specifications:

		Pwr. Conn. In.:	Low Voltage DC plug
		DMX Conn. out:	XLR 3P
Ctrl. Mode:	Built-in Program / Manual / Sound / Static Dimmer	Audio Trig.:	1
		Length (mm):	258 mm
DMX Ch.:	6	Width (mm):	150 mm
Protocols:	DMX	Height (mm):	79 mm
Faders:	1	Weight:	1.1 kg
Memories:	1212	R.U.:	3.5 U
Pwr. Supp.:	12 VDC	Housing:	Metal
Pwr. Cons.:	10 W	Colour:	Grey

FEATURES:

- Intelligent 1-fader LED DMX controller
- Suitable for 3 to 6 colour LEDs
- 12 fixed and 12 user colours
- 12 fixed and 12 user chases with up to 99 steps
- Manual, Auto run and Sound-controlled mode
- Dimmer and strobe control

Case for ColorCue 1

D7405 **Flight Case**



ColorCue 2

50704 **Intelligent 6-fader, 6-colour LED Controller**

SHOWTEC

Specifications:

		Pwr. Conn. In.:	Low Voltage DC plug
		DMX Conn. out:	XLR 3P
Ctrl. Mode:	Built-in Program / Manual / Sound / Static Dimmer	Audio Trig.:	1
		Length (mm):	385 mm
DMX Ch.:	36	Width (mm):	175 mm
Protocols:	DMX	Height (mm):	78 mm
Faders:	7	Weight:	1.85 kg
Memories:	2020	R.U.:	4 U
Pwr. Supp.:	12 VDC	Housing:	Metal
Pwr. Cons.:	15 W	Colour:	Grey

FEATURES:

- Intelligent 6-fader LED DMX controller
- Suitable for 3 to 6 colour LEDs
- 20 fixed and 20 user colours
- 20 fixed and 20 user chases with up to 99 steps
- Manual, Auto run and Sound-controlled mode
- Dimmer and strobe control

Case for ColorCue 2

D7406 **Flight Case**



ColorCue 3

50705 **Intelligent 24-fader, 6-colour LED Controller**

SHOWTEC



Specifications:

Ctrl. Mode:	Built-in Program / Manual / MIDI / Static Dimmer	Pwr. Conn. In.:	Low Voltage DC plug
		DMX Conn. out:	XLR 3P
		Audio Trig.:	1
		Length (mm):	482 mm
DMX Ch.:	144	Width (mm):	261 mm
Protocols:	DMX	Height (mm):	80 mm
Display:	LCD	Weight:	3.6 kg
Faders:	26	R.U.:	6 U
Memories:	1000	Housing:	Metal
Pwr. Supp.:	12 VDC	Colour:	Grey / Magenta
Pwr. Cons.:	15 W		

FEATURES:

- Intelligent 24-fader LED DMX controller
- Suitable for 3 to 6 colour LEDs
- 24 user colours
- 24 user chases with up to 99 steps
- Manual, Auto run and Sound-controlled mode
- Dimmer and strobe control

Case for ColorCue 3

D7407 **Flight Case**

ColorCue 4

50706 **Intelligent 48-fader, 6-colour LED Controller**

SHOWTEC



Specifications:

Ctrl. Mode:	Built-in Program / Sound / Static Dimmer	Pwr. Conn. In.:	Low Voltage DC plug
		DMX Conn. out:	XLR 3P
		Audio Trig.:	1
		Length (mm):	740 mm
DMX Ch.:	288	Width (mm):	280 mm
Protocols:	DMX	Height (mm):	100 mm
Display:	LCD	Weight:	5.6 kg
Faders:	50	R.U.:	6.3 U
Memories:	1000	Housing:	Metal
Pwr. Supp.:	12 VDC	Colour:	Grey / Neon Green
Pwr. Cons.:	15 W		

FEATURES:

- Intelligent 48-fader LED DMX controller
- Suitable for 3 to 6 colour LEDs
- 48 user colours
- 48 user chases with up to 99 steps
- Manual, Auto run and Sound-controlled mode
- Dimmer and strobe control

Case for ColorCue 4

D7408 **Flight Case**



Quick DMX D512S

50057 **512 Channels**

SHOWTEC

Specifications:

OS:	Mac / Windows	Pwr. Conn. In.:	USB
Ctrl. Mode:	Manual / MIDI / PC Software / Stand Alone	DMX Conn. out:	XLR 3P
		Data Conn. In:	USB
DMX Ch.:	512	Length (mm):	75 mm
Universes:	1	Width (mm):	35 mm
Pwr. Supp.:	5 VDC	Height (mm):	35 mm
Pwr. Cons.:	5 W	Weight:	0.08 kg
		Housing:	Metal
		Colour:	Black

FEATURES:

- Metal road proof casing
- Power & Link indication LEDs at front panel
- Unlimited nr. of different fixtures
- Full 512 DMX channels
- MIDI triggerable by “learning” mode



Quick DMX D1024

50056 **2 x 512 Channels, 40 Hz Refresh Rate**

SHOWTEC

Specifications:

OS:	Mac / Windows	Pwr. Conn. In.:	USB
Ctrl. Mode:	Manual / MIDI / PC Software / Stand Alone	DMX Conn. out:	XLR 3P
		Data Conn. In:	USB
DMX Ch.:	1024	Length (mm):	84 mm
Art-Net:	Yes	Width (mm):	75 mm
Universes:	2	Height (mm):	40 mm
Pwr. Supp.:	5 VDC	Weight:	0.17 kg
Pwr. Cons.:	5 W	Housing:	Metal
		Colour:	Black

FEATURES:

- Metal road proof casing
- Power & Link indication LEDs at front panel
- Unlimited nr. of different fixtures
- Full 1024 DMX channels
- MIDI triggerable by “learning” mode



Quick DMX N512

50055 **Network Dongle, 512 Channels**

SHOWTEC

Specifications:

OS:	Mac / Windows	Pwr. Conn. In.:	Low Voltage DC plug
Ctrl. Mode:	Manual / MIDI / PC Software	DMX Conn. out:	XLR 3P
		Data Conn. In:	RJ45
DMX Ch.:	512	Length (mm):	108 mm
Art-Net:	Yes	Width (mm):	80 mm
Universes:	1	Height (mm):	37 mm
Pwr. Supp.:	9 VDC	Weight:	0.2 kg
Pwr. Cons.:	2.7 W	Housing:	Aluminium
		Colour:	Black

FEATURES:

- Accessible by internet browser
- Calendar function
- 9 programmable scenes/chases
- Optical isolation at DMX output

Quick DMX Rack 1024

50058 **1024 Channels**

SHOWTEC

Specifications:

OS:	Mac / Windows	DMX Conn. out:	XLR 3P
Ctrl. Mode:	DMX / IR / PC Software	Data Conn. In:	USB
DMX Ch.:	1024	Length (mm):	483 mm
Universes:	2	Width (mm):	78 mm
Pwr. Supp.:	9 VDC	Height (mm):	44.5 mm
Pwr. Cons.:	2.7 W	Weight:	1.6 kg
Pwr. Conn. In.:	USB	R.U.:	1 U
		Housing:	Metal
		Colour:	Black



FEATURES:

- 1024-channel output
- Internal clock / calendar
- 8 external trigger contacts
- Including IR remote and external IR sensor

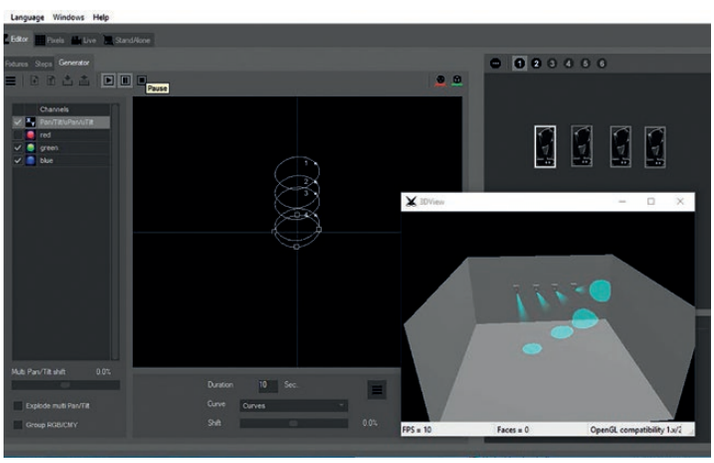







Tool Box

50829 **DMX / Wi-Fi / W-DMX Cross Convertor**

SHOWTEC

Specifications:

Batt. Type:	Lithium ion	DMX Conn. out:	XLR 3P
Pwr. Supp.:	5 VDC	Length (mm):	171 mm
Pwr. Cons.:	10 W	Width (mm):	78 mm
Pwr. Conn. In.:	USB	Height (mm):	50 mm
DMX Conn.:	XLR 3P In/Out	Weight:	0.85 kg
DMX Conn. in:	XLR 3P	Housing:	Aluminium
		Colour:	Black
		Ctrl. Mode:	DMX / RF to DMX

FEATURES:

- Versatile cross convertor
- Battery Operated
- Wireless Solutions G5 module built-in



DMX Recpack 4

50822 **DMX Recorder with Programmable Switch Pack**

SHOWTEC

Specifications:

		Height (mm):	44.5 mm
		Weight:	2.4 kg
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Metal / Plastic
Pwr. Cons.:	3450 W	Colour:	Black
Pwr. Conn. In.:	Pro Power Blue	Ctrl. Mode:	Auto / DMX / Manual / Timer
DMX Conn.:	XLR 3P In/Out	DMX Ch.:	512
DMX Conn. in:	XLR 3P	Protocols:	DMX
DMX Conn. out:	XLR 3P	Display:	OLED
Length (mm):	483 mm	Universes:	1
Width (mm):	145 mm		

FEATURES:

- 4 separate recordable DMX and switch outputs
- Programmable daily & weekly timers
- Programmable DMX input triggers
- 8 GB internal memory
- Manual, Auto, Semi-Auto Recording modes



DMX Merge

50359 **2-way DMX Merger**

SHOWTEC

Specifications:

		Width (mm):	73 mm
		Height (mm):	44.5 mm
Pwr. Supp.:	9 VDC	Weight:	1.15 kg
Pwr. Cons.:	4.5 W	Housing:	Aluminum die-cast
Pwr. Conn. In.:	Low Voltage DC plug	Colour:	Grey
DMX Conn.:	XLR 3P In/Out	Ctrl. Mode:	DMX
DMX Conn. in:	XLR 3P	DMX Ch.:	512
DMX Conn. out:	XLR 3P	Protocols:	DMX
Length (mm):	483 mm		

FEATURES:

- Merge two DMX controllers to one DMX line
- HTP / LTP function
- Select Backup or merge mode

DR Pro Rack

50821 **DMX Recorder**

SHOWTEC

Specifications:

Mem. Type:	SD-Card	Length (mm):	482 mm
Pwr. Supp.:	9-12 VDC	Width (mm):	78 mm
Pwr. Cons.:	5 W	Height (mm):	44 mm
Pwr. Conn. In.:	Low Voltage DC plug	Weight:	1.2 kg
DMX Conn.:	XLR 3P In/Out	Housing:	Metal / Plastic
DMX Conn. in:	XLR 3P	Colour:	Grey
DMX Conn. out:	XLR 3P	Ctrl. Mode:	Auto / GPIO / Manual
Data Conn. In:	USB	DMX Ch.:	512
Data Conn. Out:	USB	Protocols:	DMX
Midi Conn.:	Yes	SMPTE:	Yes
		Display:	LCD
		Universes:	1



FEATURES:

- 128 x 160 Pixels, Colour LCD
- 8 memories for scenes, chases or shows
- Manual control, Real-time trigger, SMPTE/MIDI time code trigger, DMX trigger and DMX monitor
- 5 hours internal recording time
- 4 recording modes, Manual, Auto, Semi-Auto & Smart

Multi Exchanger

50348 **DMX512 to 72-channel ANALOGUE output**

SHOWTEC

Specifications:

		Length (mm):	483 mm
		Width (mm):	126 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	44 mm
Pwr. Cons.:	50 W	Weight:	2.6 kg
Pwr. Conn. In.:	Schuko Plug	Housing:	Aluminum die-cast
DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out	Colour:	Grey
		Ctrl. Mode:	DMX / MIDI / Stand Alone
DMX Conn. in:	XLR 3P / XLR 5P	DMX Ch.:	72
DMX Conn. out:	XLR 3P / XLR 5P	Display:	LED
Midi Conn.:	Yes		



FEATURES:

- Converts DMX back into 0–10 V
- Converts MIDI back into 0–10 V
- Midi in and output
- 3 and 5-pin XLR
- Last Hold Scene





Truss Booster RDM 1-6

50793 **3-pin XLR**

SHOWTEC

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Width (mm):	124 mm
Pwr. Cons.:	5 W	Height (mm):	150 mm
Pwr. Conn. In.:	Pro Power Blue	Weight:	1.6 kg
DMX Conn.:	XLR 3P In/Out	Housing:	Metal / Plastic
DMX Conn. in:	XLR 3P	Colour:	Black
DMX Conn. out:	XLR 3P	Ctrl. Mode:	DMX
Length (mm):	240 mm	Protocols:	DMX / RDM
		Universes:	1

FEATURES:

- Small Design for easy truss mounting
- DMX/RDM splitter for 6 outputs
- powerCON in/out
- Supports Remote Device Management (RDM) Protocol



Truss Booster RDM 1-6

50794 **5-pin XLR**

SHOWTEC

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Width (mm):	124 mm
Pwr. Cons.:	5 W	Height (mm):	150 mm
Pwr. Conn. In.:	Pro Power Blue	Weight:	1.6 kg
DMX Conn.:	XLR 5P In/Out	Housing:	Metal / Plastic
DMX Conn. in:	XLR 5P	Colour:	Black
DMX Conn. out:	XLR 5P	Ctrl. Mode:	DMX
Length (mm):	240 mm	Protocols:	DMX / RDM
		Universes:	1

FEATURES:

- Small Design for easy truss mounting
- DMX/RDM splitter for 6 outputs
- powerCON in/out
- Supports Remote Device Management (RDM) Protocol



DB-1-4

50780 **4-Channel DMX Booster 3P & 5P XLR**

SHOWTEC

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Length (mm):	483 mm
Pwr. Cons.:	5 W	Width (mm):	134 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	46 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Weight:	2.5 kg
		Housing:	Metal / Plastic
		Colour:	Grey
		Ctrl. Mode:	DMX
DMX Conn. in:	XLR 3P / XLR 5P	Universes:	1
DMX Conn. out:	XLR 3P / XLR 5P		

FEATURES:

- DMX splitter for 4 outputs
- Electrical isolation between in and output
- DMX Indication LEDs on in-& outputs
- 3 & 5P XLR in- & outputs
- M10 nut at backside for truss clamp

DB-1-8

50783 **8-Channel DMX Booster 3P XLR**

SHOWTEC

Specifications:

		Length (mm):	483 mm
		Width (mm):	134 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	46 mm
Pwr. Cons.:	5 W	Weight:	2.5 kg
Pwr. Conn. In.:	Schuko Plug	Housing:	Metal / Plastic
DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out	Colour:	Grey
		Ctrl. Mode:	DMX
DMX Conn. in:	XLR 3P / XLR 5P	Universes:	1
DMX Conn. out:	XLR 3P / XLR 5P		



FEATURES:

- DMX splitter for 8 outputs
- Electrical isolation between in and output
- DMX Indication LEDs on in-& outputs
- 3P XLR outputs
- M10 nut at backside for truss clamps

DB-1-4/RDM

50785 **4-Channel DMX Booster with RDM 3P & 5P XLR**

SHOWTEC

Specifications:

		Length (mm):	483 mm
		Width (mm):	134 mm
Pwr. Supp.:	120-250 VAC 50-60 Hz	Height (mm):	46 mm
Pwr. Cons.:	5 W	Weight:	2.5 kg
Pwr. Conn. In.:	IEC C13 female	Housing:	Metal / Plastic
DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out	Colour:	Grey
		Ctrl. Mode:	DMX
DMX Conn. in:	XLR 3P / XLR 5P	Protocols:	DMX / RDM
DMX Conn. out:	XLR 3P / XLR 5P	Universes:	1



FEATURES:

- DMX/RDM splitter for 8 outputs
- DMX Indication LEDs on in-& outputs
- 3 & 5P XLR outputs
- Supports Remote Device Management (RDM) Protocol

DB-1-8/RDM

50786 **8-Channel DMX Booster with RDM 3P XLR**

SHOWTEC

Specifications:

		Length (mm):	483 mm
		Width (mm):	134 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	46 mm
Pwr. Cons.:	5 W	Weight:	2.5 kg
Pwr. Conn. In.:	Schuko Plug	Housing:	Metal / Plastic
DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out	Colour:	Grey
		Ctrl. Mode:	DMX
DMX Conn. in:	XLR 3P / XLR 5P	Protocols:	DMX / RDM
DMX Conn. out:	XLR 3P / XLR 5P	Universes:	1



FEATURES:

- DMX/RDM splitter for 8 outputs
- DMX Indication LEDs on in-& outputs
- 3P XLR outputs
- Supports Remote Device Management (RDM) Protocol



RDM Splitter Pro

50787 **4-Channel DMX Booster with RDM 3P & 5P XLR**

SHOWTEC

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Length (mm):	483 mm
Pwr. Cons.:	8 W	Width (mm):	135 mm
Pwr. Conn. In.:	Pro Power Blue	Height (mm):	46 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Weight:	2.2 kg
DMX Conn. in:	XLR 3P / XLR 5P	Housing:	Metal / Plastic
DMX Conn. out:	XLR 3P / XLR 5P	Colour:	Black
		Ctrl. Mode:	DMX
		Protocols:	DMX / RDM
		Universes:	1

FEATURES:

- Regenerates & Boosts DMX/RDM signal
- Optical isolated on each in- and output port
- DMX Indication LEDs on in-& outputs
- 3 & 5P XLR outputs



Booster Pro

50788 **2-8 DMX / RDM Booster, 3-pin XLR**

SHOWTEC

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Width (mm):	137 mm
Pwr. Cons.:	5 W	Height (mm):	46 mm
Pwr. Conn. In.:	Pro Power Blue	Weight:	2 kg
DMX Conn.:	XLR 3P In/Out	Housing:	Metal / Plastic
DMX Conn. in:	XLR 3P	Colour:	Black
DMX Conn. out:	XLR 3P	Ctrl. Mode:	DMX
Length (mm):	483 mm	Protocols:	DMX / RDM / USITT
		Display:	OLED
		Universes:	2

FEATURES:

- OLED Display
- Isolated outputs
- 2 inputs, selectable outputs
- Multiple monitoring functions



Booster Pro

50789 **2-8 DMX / RDM Booster, 5-pin XLR**

SHOWTEC

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Width (mm):	137 mm
Pwr. Cons.:	5 W	Height (mm):	46 mm
Pwr. Conn. In.:	Pro Power Blue	Weight:	2 kg
DMX Conn.:	XLR 5P In/Out	Housing:	Metal / Plastic
DMX Conn. in:	XLR 5P	Colour:	Black
DMX Conn. out:	XLR 5P	Ctrl. Mode:	DMX
Length (mm):	483 mm	Protocols:	DMX / RDM / USITT
		Display:	OLED
		Universes:	2

FEATURES:

- OLED Display
- Isolated outputs
- 2 inputs, selectable outputs
- Multiple monitoring functions

RDM Touch

50409 **DMX/RDM + Art-Net + Midi**

SHOWTEC



Specifications:

Batt. Type:	9 V block PP3	Length (mm):	67 mm
Pwr. Supp.:	9 VDC	Width (mm):	44 mm
Pwr. Cons.:	2.5 W	Height (mm):	113 mm
Pwr. Conn. In.:	Low Voltage DC plug	Weight:	0.4 kg
DMX Conn.:	XLR 5P In/Out	Housing:	Metal / Plastic
DMX Conn. in:	XLR 5P	Colour:	Black
DMX Conn. out:	XLR 5P	Ctrl. Mode:	Manual
Midi Conn.:	Yes	Protocols:	Art-Net / DMX / RDM / sACN
		Display:	LCD / Touch

FEATURES:

- TFT Touch display
- Art-Net
- RDM
- Multiple testing functions

NET-8/3

50809 **8-Channel Art-Net/Kling-Net node, 3P XLR**

SHOWTEC



Specifications:

		Width (mm):	143 mm
		Height (mm):	46 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Weight:	2.2 kg
Pwr. Cons.:	20 W	Housing:	Metal / Plastic
Pwr. Conn. In.:	Pro Power Blue	Colour:	Black
DMX Conn.:	XLR 3P In/Out	Ctrl. Mode:	Art-Net / DMX / PC Software
DMX Conn. in:	XLR 3P	Protocols:	Art-Net / DMX / Kling-Net /
DMX Conn. out:	XLR 3P		sACN / TCP-IPv4
Data Conn. In:	etherCON	Display:	LCD
Data Conn. Out:	etherCON	Universes:	8
Length (mm):	483 mm		

FEATURES:

- Supports Art-Net, sACN or Kling-Net protocol
- 1 GB/s data speed
- 8 universes DMX input or output
- High Speed Network in and output
- Web browser connection

NET-8/5

50810 **8-Channel Art-Net/Kling-Net node, 5P XLR**

SHOWTEC



Specifications:

		Width (mm):	143 mm
		Height (mm):	46 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Weight:	2.2 kg
Pwr. Cons.:	20 W	Housing:	Metal / Plastic
Pwr. Conn. In.:	Pro Power Blue	Colour:	Black
DMX Conn.:	XLR 5P In/Out	Ctrl. Mode:	Art-Net / DMX / PC Software
DMX Conn. in:	XLR 5P	Protocols:	Art-Net / DMX / Kling-Net /
DMX Conn. out:	XLR 5P		sACN / TCP-IPv4
Data Conn. In:	etherCON	Display:	LCD
Data Conn. Out:	etherCON	Universes:	8
Length (mm):	483 mm		

FEATURES:

- Supports Art-Net, sACN or Kling-Net protocol
- 1 GB/s data speed
- 8 universes DMX input or output
- High Speed Network in and output
- Web browser connection



NET-2/3 Pocket

50807 **2-Channel Art-Net node, 3P XLR**

SHOWTEC

Specifications:

Pwr. Supp.:	12VDC / 240VAC 50Hz	Width (mm):	67 mm
PoE:	Yes	Height (mm):	44 mm
Pwr. Cons.:	8 W	Weight:	0.3 kg
Pwr. Conn. In.:	Low Voltage DC plug	Housing:	Metal / Plastic
DMX Conn.:	XLR 3P In/Out	Colour:	Black
DMX Conn. in:	XLR 3P	Ctrl. Mode:	Art-Net / DMX
DMX Conn. out:	XLR 3P	Protocols:	Art-Net / DMX / sACN / TCP-IPv4
Data Conn. In:	etherCON	Display:	OLED
Length (mm):	115 mm	Universes:	2

FEATURES:

- Supports Art-Net and sACN protocol
- 2 universes DMX input or output
- Remote Setup Interface
- PoE (IEEE 802.3 Af)



NET-2/5 Pocket

50808 **2-Channel Art-Net node, 5P XLR**

SHOWTEC

Specifications:

Pwr. Supp.:	12VDC / 240VAC 50Hz	Width (mm):	67 mm
PoE:	Yes	Height (mm):	44 mm
Pwr. Cons.:	8 W	Weight:	0.3 kg
Pwr. Conn. In.:	Low Voltage DC plug	Housing:	Metal / Plastic
DMX Conn.:	XLR 5P In/Out	Colour:	Black
DMX Conn. in:	XLR 5P	Ctrl. Mode:	Art-Net / DMX
DMX Conn. out:	XLR 5P	Protocols:	Art-Net / DMX / sACN / TCP-IPv4
Data Conn. In:	etherCON	Display:	OLED
Length (mm):	115 mm	Universes:	2

FEATURES:

- Supports Art-Net and sACN protocol
- 2 universes DMX input or output
- Remote Setup Interface
- PoE (IEEE 802.3 Af)



NET-2 Panel

50812 **3-pin, black Housing**

SHOWTEC

Specifications:

Pwr. Supp.:	12-36 VDC	Width (mm):	113 mm
PoE:	Yes	Height (mm):	33 mm
Pwr. Cons.:	6 W	Weight:	0.275 kg
Pwr. Conn. In.:	Phoenix	Housing:	Plastic
DMX Conn.:	XLR 3P In/Out	Colour:	Black
DMX Conn. in:	XLR 3P	Ctrl. Mode:	Art-Net / DMX / TCP IPv4
DMX Conn. out:	XLR 3P	DMX Ch.:	1024
Data Conn. In:	RJ45	Protocols:	Art-Net / sACN / TCP-IPv4
Length (mm):	113 mm	Display:	OLED
		Universes:	2

FEATURES:

- Supports Art-Net and sACN protocol
- 2 universes DMX input or output
- Remote setup interface
- PoE (IEEE 802.3 Af)

NET-2 Panel

50814 **3-pin, white Housing**

SHOWTEC

Specifications:

Pwr. Supp.:	12-36 VDC
PoE:	Yes
Pwr. Cons.:	6 W
Pwr. Conn. In.:	Phoenix
DMX Conn.:	XLR 3P In/Out
DMX Conn. in:	XLR 3P
DMX Conn. out:	XLR 3P
Data Conn. In:	RJ45
Length (mm):	113 mm
Width (mm):	113 mm
Height (mm):	33 mm
Weight:	0.275 kg
Housing:	Plastic
Colour:	White
Ctrl. Mode:	Art-Net / DMX / TCP IPv4
DMX Ch.:	1024
Protocols:	Art-Net / sACN / TCP-IPv4
Display:	OLED
Universes:	2

FEATURES:

- Supports Art-Net and sACN protocol
- 2 universes DMX input or output
- Remote setup interface
- PoE (IEEE 802.3 Af)



NET-2 Panel

50813 **5-pin, black Housing**

SHOWTEC

Specifications:

Pwr. Supp.:	12-36 VDC
PoE:	Yes
Pwr. Cons.:	6 W
Pwr. Conn. In.:	Phoenix
DMX Conn.:	XLR 5P In/Out
DMX Conn. in:	XLR 5P
DMX Conn. out:	XLR 5P
Data Conn. In:	RJ45
Length (mm):	113 mm
Width (mm):	113 mm
Height (mm):	33 mm
Weight:	0.275 kg
Housing:	Plastic
Colour:	Black
Ctrl. Mode:	Art-Net / DMX / TCP IPv4
DMX Ch.:	1024
Protocols:	Art-Net / DMX / sACN / TCP-IPv4
Display:	OLED
Universes:	2

FEATURES:

- Supports Art-Net and sACN protocol
- 2 universes DMX input or output
- Remote setup interface
- PoE (IEEE 802.3 Af)



NET-2 Panel

50815 **5-pin, white Housing**

SHOWTEC

Specifications:

Pwr. Supp.:	12-36 VDC
PoE:	Yes
Pwr. Cons.:	6 W
Pwr. Conn. In.:	Phoenix
DMX Conn.:	XLR 5P In/Out
DMX Conn. in:	XLR 5P
DMX Conn. out:	XLR 5P
Data Conn. In:	RJ45
Length (mm):	113 mm
Width (mm):	113 mm
Height (mm):	33 mm
Weight:	0.275 kg
Housing:	Plastic
Colour:	White
Ctrl. Mode:	Art-Net / DMX / TCP IPv4
DMX Ch.:	1024
Protocols:	Art-Net / DMX / sACN / TCP-IPv4
Display:	OLED
Universes:	2

FEATURES:

- Supports Art-Net and sACN protocol
- 2 universes DMX input and output
- Remote setup interface
- PoE (IEEE 802.3 Af)





Net-5 PoE

50811 **PSE for 4 x PD**

SHOWTEC

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Width (mm):	137 mm
PoE:	Yes	Height (mm):	46 mm
Pwr. Cons.:	100 W	Weight:	1.2 kg
Pwr. Conn. In.:	Pro Power Blue	Housing:	Metal / Plastic
Data Conn. In:	etherCON	Colour:	Black
Data Conn. Out:	etherCON	Ctrl. Mode:	TCP IPv4
Length (mm):	483 mm	Protocols:	TCP-IPv4
		Display:	OLED

FEATURES:

- 5 x 1000BASE-T RJ45 ports
- 4 x PoE+ outputs
- Completely silent, no fans
- O-LED display for status check
- Connect up to 4 x Net-2 Pocket to create 8 Universes Network



Booster-4 Install

50795 **DIN Rail**

SHOWTEC

Specifications:

Pwr. Supp.:	12-36 VDC	Width (mm):	87 mm
Pwr. Cons.:	9 W	Height (mm):	58 mm
Pwr. Conn. In.:	Phoenix	Weight:	0.18 kg
DMX Conn.:	Phoenix In/Out	Housing:	Plastic
DMX Conn. in:	Phoenix	Colour:	Grey
DMX Conn. out:	Phoenix	DIN Rail Spacing:	35 mm
Length (mm):	106 mm	Ctrl. Mode:	DMX
		Protocols:	DMX / RDM
		Universes:	1

FEATURES:

- Wide range DC input voltage
- Fully isolated inputs and outputs
- RDM compliant
- DIN EN43880 form factor
- DIN EN60715 rail system



NET-2 Install

50816 **DIN Rail**

SHOWTEC

Specifications:

Pwr. Supp.:	12-36 VDC	Height (mm):	58 mm
PoE:	Yes	Weight:	0.18 kg
Pwr. Cons.:	6 W	Housing:	Plastic
Pwr. Conn. In.:	Phoenix	Colour:	Grey
DMX Conn.:	Phoenix In/Out	DIN Rail Spacing:	35 mm
DMX Conn. in:	Phoenix	Ctrl. Mode:	Art-Net / DMX / TCP IPv4
DMX Conn. out:	Phoenix	DMX Ch.:	1024
Data Conn. In:	RJ45	Protocols:	Art-Net / DMX / sACN / TCP-IPv4
Length (mm):	106 mm	Display:	OLED
Width (mm):	87 mm	Universes:	2

FEATURES:

- Wide range input voltage
- 2 universes DMX input or output
- Supports Art-Net and sACN
- Remote setup interface
- POE (IEEE 802.3 Af)
- DIN EN43880 form factor
- DIN EN60715 rail system

TR-512 Install

50826 DIN Rail

SHOWTEC

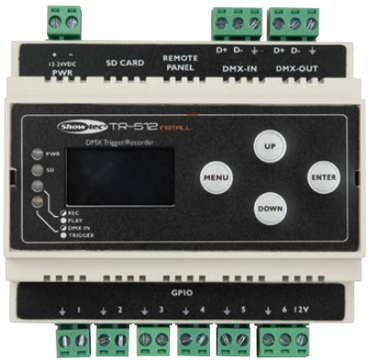

Specifications:

Mem. Type:	SD-Card	Height (mm):	58 mm
Pwr. Supp.:	12 VDC	Weight:	0.18 kg
Pwr. Cons.:	6 W	Housing:	Plastic
Pwr. Conn. In.:	Phoenix	Colour:	Grey
DMX Conn.:	Phoenix In/Out	DIN Rail Spacing:	35 mm
DMX Conn. in:	Phoenix	Ctrl. Mode:	DMX / GPIO / Manual / Remote
DMX Conn. out:	Phoenix	DMX Ch.:	512
Length (mm):	106 mm	Protocols:	DMX
Width (mm):	87 mm	Display:	OLED
		Universes:	1

FEATURES:

- Bi-directional communication to wall panel
- 6 external universal triggers (GPIO)
- Dedicated Wall Remote panel (50827/28)
- Optical isolated DMX ports
- Record and playback function
- DIN EN43880 form factor
- DIN EN60715 rail system

Wall Panel Remote for TR-512 Install/Pocket

50827 Black front panel

50828 Silver front panel

SHOWTEC



Specifications:

		Width (mm):	85 mm
		Height (mm):	7 mm
Pwr. Supp.:	12 VDC	Weight:	0.1 kg
Pwr. Cons.:	1 W	Housing:	Aluminium
Pwr. Conn. In.:	RJ45	Colour:	Black
Length (mm):	85 mm	Ctrl. Mode:	Remote

FEATURES:

- Bi-directional communication with TR-512 Install/Pocket
- 6 playback buttons
- Power over RJ45 connector
- Trigger status indication via backlight
- Sleek install
- Available with either black and silver front panel

TR-512 Pocket

50823 DMX Trigger/Recorder

SHOWTEC



Specifications:

		Height (mm):	45 mm
		Weight:	0.45 kg
Mem. Type:	SD-Card	Housing:	Metal
Pwr. Supp.:	12 VDC	Colour:	Black
PoE:	No	Ctrl. Mode:	DMX / GPIO / Manual / Remote
Pwr. Cons.:	6 W		
Pwr. Conn. In.:	Low Voltage DC plug	DMX Ch.:	512
DMX Conn.:	XLR 3P In/Out	Protocols:	DMX
Data Conn. In:	RJ45	Display:	OLED
Length (mm):	115 mm	Universes:	1
Width (mm):	85 mm		

FEATURES:

- Bi-directional communication to Wall Panel Remote
- 6 External universal triggers (GPIO)
- Dedicated Wall Panel Remote for TR-512 Install/Pocket (50827/28)
- Optically isolated DMX ports
- Record and playback function



W-DMX™ MicroBox F-1 G5 Transceiver

50175 **2.4 GHz**

WIRELESS SOLUTIONS

Specifications:

Carr. Freq.:	2,4 GHz	Pwr. Conn. In.:	Micro USB
Gain (dB):	20 dB	DMX Conn. in:	XLR 5P
Gain (mW):	100 mW	DMX Conn. out:	XLR 5P
Batt. Type:	AAA	Length (mm):	265 mm
DMX Ch.:	512	Width (mm):	200 mm
Oprt. Modes:	Transceiver / Receiver	Height (mm):	65 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Weight:	0.35 kg
Pwr. Cons.:	2.5 W	IP Rate:	IP20(indoor use only)
		Housing:	Plastic
		Colour:	Black

FEATURES:

- High-Speed Frequency Hopping
- Mount in any location on set, scenery or truss
- Battery compartment for 8 hours reception
- Less Than 5 ms Latency
- 2.4 GHz radio – license free worldwide



W-DMX™ MicroBox R-512 G5 Receiver

50176 **2.4 GHz**

WIRELESS SOLUTIONS

Specifications:

		Pwr. Cons.:	2.5 W
		Pwr. Conn. In.:	Micro USB
Carr. Freq.:	2,4 GHz	DMX Conn. out:	XLR 5P
Gain (dB):	20 dB	Length (mm):	265 mm
Gain (mW):	100 mW	Width (mm):	200 mm
Reaction Time:	5 ms	Height (mm):	65 mm
Batt. Type:	AAA	Weight:	0.35 kg
DMX Ch.:	512	IP Rate:	IP20(indoor use only)
Oprt. Modes:	Receiver	Housing:	Plastic
Pwr. Supp.:	100-240 VAC 50-60 Hz	Colour:	Black

FEATURES:

- High-Speed Frequency Hopping
- Mount in any location on set, scenery or truss
- Battery compartment for 8 hours reception
- Less Than 5 ms Latency
- 2.4 GHz radio – license free worldwide

BlackBox F-2 G6 Transceiver

52002 Wireless DMX, Art-Net & Streaming ACN Sender & Receiver

WIRELESS SOLUTIONS



Specifications:

Carr. Freq.:	2,4 GHz	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Gain (mW):	100 mW	DMX Conn. out:	XLR 3P / XLR 5P
Reaction Time:	5 ms	Length (mm):	235 mm
DMX Ch.:	1024	Width (mm):	150 mm
Protocols:	Art-Net / DMX / Kling-Net / RDM / sACN	Height (mm):	45 mm
		Weight:	1 kg
		IP Rate:	IP42
Oprt. Modes:	Transceiver	Material:	Aluminium
Pwr. Supp.:	88-264 VAC	Housing:	Aluminum die-cast
Pwr. Cons.:	50 W	Colour:	Black

FEATURES:

- RDM & Wi-Fi transmitter, receiver & repeater
- Suitable for W-DMX, Art-Net & Streaming ACN
- Range up to 700 metres (2200 ft)
- 1024 DMX channels
- Bluetooth connectivity for updates and configuration
- Upgrade available for making LumenRadio CRMX compatible
- Reliable connectivity (Adaptive Frequency Hopping)

BlackBox F-1 G6 Transceiver

52001 Wireless DMX, Art-Net & Streaming ACN Sender & Receiver

WIRELESS SOLUTIONS



Specifications:

		(Male)	
		DMX Conn. out:	XLR 3P / XLR 5P
Carr. Freq.:	2,4 GHz	Length (mm):	260 mm
Gain (mW):	100 mW	Width (mm):	150 mm
Reaction Time:	5 ms	Height (mm):	45 mm
DMX Ch.:	512	Weight:	1 kg
Protocols:	Art-Net / DMX / RDM / sACN	IP Rate:	IP42
Oprt. Modes:	Transceiver	Material:	Aluminium
Pwr. Supp.:	88-264 VAC	Housing:	Aluminum die-cast
Pwr. Cons.:	50 W	Colour:	Black
Pwr. Conn. In.:	powerCON TRUE1 TOP In		

FEATURES:

- RDM & Wi-Fi transmitter & receiver
- Suitable for W-DMX, Art-Net & Streaming ACN
- Range up to 700 metres (2200 ft)
- 512 DMX channels
- Bluetooth connectivity for updates and configuration
- Upgrade available for making LumenRadio CRMX receivers compatible
- Reliable connectivity (Adaptive Frequency Hopping)

BlackBox R-512 G6 Receiver

52000 Wireless DMX, Art-Net & Streaming ACN Receiver

WIRELESS SOLUTIONS



Specifications:

		(Male)	
		DMX Conn. out:	XLR 3P / XLR 5P
Carr. Freq.:	2,4 GHz	Length (mm):	235 mm
Gain (mW):	100 mW	Width (mm):	150 mm
Reaction Time:	5 ms	Height (mm):	45 mm
DMX Ch.:	512	Weight:	1 kg
Protocols:	DMX / RDM	IP Rate:	IP42
Oprt. Modes:	Receiver	Material:	Aluminium
Pwr. Supp.:	88-264 VAC	Housing:	Aluminum die-cast
Pwr. Cons.:	50 W	Colour:	Black
Pwr. Conn. In.:	powerCON TRUE1 TOP In		

FEATURES:

- RDM & Wi-Fi receiver
- Suitable for W-DMX, Art-Net & Streaming ACN
- Range up to 700 metres (2200 ft)
- 512 DMX channels
- Bluetooth connectivity for updates and configuration
- Upgrade available for making LumenRadio CRMX senders compatible
- Reliable connectivity (Adaptive Frequency Hopping)



W-DMX™ ProBox F-2500 G5 Transceiver

50183 **2.4/5.8 GHz**

WIRELESS SOLUTIONS

Specifications:

		DMX Conn. in:	XLR 5P
		DMX Conn. out:	XLR 5P
Carr. Freq.:	2,4 / 5 GHz	Data Conn. In:	etherCON
Reaction Time:	5 ms	Data Conn. Out:	etherCON
DMX Ch.:	1024	Length (mm):	483 mm
Protocols:	ANSI E1.20 / Art-Net / DMX / RDM / sACN / USITT	Width (mm):	145 mm
		Height (mm):	44.5 mm
Oprt. Modes:	Transceiver	Weight:	1.5 kg
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP41
Pwr. Conn. In.:	Phoenix / powerCON Blue	Colour:	Black

FEATURES:

- Full RDM support
- 19" Rack Unit
- High-Speed Frequency Hopping
- Less Than 5 ms Latency
- Supporting the 2.4 and 5.8 GHz frequency bands.



W-DMX™ WhiteBox F-1 G5 Transceiver

50181 **2.4/5.8 GHz**

WIRELESS SOLUTIONS

Specifications:

		DMX Conn. in:	Terminal
		DMX Conn. out:	Terminal
Carr. Freq.:	2,4 / 5,2 / 5,8 GHz	Data Conn. In:	RJ45
Reaction Time:	5 ms	Length (mm):	245 mm
DMX Ch.:	512	Width (mm):	160 mm
Protocols:	ANSI E1.20 / Art-Net / DMX / RDM / sACN	Height (mm):	45 mm
		Weight:	1.2 kg
Oprt. Modes:	Transceiver	IP Rate:	IP66
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Plastic
Pwr. Conn. In.:	Terminal	Colour:	White

FEATURES:

- Full RDM support
- IP66, tough plastic box
- High-Speed Frequency Hopping
- Less Than 5 ms Latency
- Supporting the 2.4 and 5.8 GHz frequency bands.



W-DMX™ WhiteBox F-2 G5 Transceiver

50182 **2.4/5.8 GHz**

WIRELESS SOLUTIONS

Specifications:

		DMX Conn. in:	Terminal
		DMX Conn. out:	Terminal
Carr. Freq.:	2,4 / 5,2 / 5,8 GHz	Data Conn. In:	RJ45
Reaction Time:	5 ms	Length (mm):	245 mm
DMX Ch.:	1024	Width (mm):	160 mm
Protocols:	ANSI E1.20 / Art-Net / DMX / RDM / sACN	Height (mm):	45 mm
		Weight:	1.2 kg
Oprt. Modes:	Transceiver	IP Rate:	IP66
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Plastic
Pwr. Conn. In.:	Phoenix / Terminal	Colour:	White

FEATURES:

- Full RDM support
- IP66, tough plastic box
- High-Speed Frequency Hopping
- Less Than 5 ms Latency
- Supporting the 2.4 and 5.8 GHz frequency bands.

W-DMX™ Indoor Mini Antenna

WIRELESS SOLUTIONS

50149 **2.4 GHz, 2 dBi**

Carr. Freq.:	2,4 GHz
Length (mm):	74 mm
Width (mm):	8.8 mm
Weight:	0.015 kg
IP Rate:	IP45
Colour:	Black



W-DMX™ Indoor Omni Antenna

WIRELESS SOLUTIONS

50154 **2.4 GHz, 2 dBi**

Carr. Freq.:	2,4 GHz
Length (mm):	108 mm
Width (mm):	10 mm
Weight:	0.008 kg
IP Rate:	IP45
Colour:	Black



W-DMX™ Indoor Omni Antenna

WIRELESS SOLUTIONS

50155 **2.4 GHz, 5 dBi**

Carr. Freq.:	2,4 GHz
Length (mm):	194 mm
Width (mm):	8.8 mm
Weight:	0.016 kg
IP Rate:	IP45
Colour:	Black



W-DMX™ Indoor Omni Antenna

WIRELESS SOLUTIONS

50157 **2.4 GHz, 7 dBi**

Carr. Freq.:	2,4 GHz
Length (mm):	294 mm
Width (mm):	13 mm
Weight:	0.016 kg
IP Rate:	IP45
Colour:	Black

W-DMX™ Indoor Omni Antenna

WIRELESS SOLUTIONS

50156 **2.4/5.8 GHz, 2/4 dBi**

Carr. Freq.:	2,4 / 5 / 5,8 GHz
Length (mm):	160 mm
Width (mm):	13 mm
Weight:	0.02 kg
IP Rate:	IP45
Colour:	Black



W-DMX™ Outdoor Omni Antenna

WIRELESS SOLUTIONS

50166 **2.4/5.8 GHz, 3 dBi**

Carr. Freq.:	2,4 / 5,8 GHz
Length (mm):	192.3 mm
Width (mm):	21.5 mm
Weight:	0.15 kg
IP Rate:	IP65
Colour:	White



W-DMX™ Outdoor Omni Antenna

WIRELESS SOLUTIONS

50184 **2.4/5.8 GHz, 6/8 dBi**

Carr. Freq.:	2,4 / 5,8 GHz
Length (mm):	285 mm
Width (mm):	20 mm
Weight:	0.095 kg
IP Rate:	IP65
Colour:	White



W-DMX™ Outdoor Directional Antenna

WIRELESS SOLUTIONS

50165 **2.4/5.8 GHz, 8/10 dBi**

Carr. Freq.:	2,4 / 5,8 GHz
Length (mm):	113 mm
Width (mm):	113 mm
Weight:	0.2 kg
IP Rate:	IP65
Colour:	White



Ugly Box G5

WIRELESS SOLUTIONS

50145

Carr. Freq.:	2,4 GHz
DMX Ch.:	512
Protocols:	DMX
Pwr. Conn. In.:	Micro USB
Length (mm):	180 mm
Width (mm):	100 mm
Height (mm):	45 mm
Weight:	0.8 kg
IP Rate:	IP41
Colour:	Black



W-DMX™ USB Dongle

WIRELESS SOLUTIONS

50174

Carr. Freq.:	2,4 / 5 / 5,8 GHz
DMX Conn. out:	XLR 5P
Length (mm):	78 mm
Width (mm):	40 mm
Height (mm):	35 mm
Weight:	0.107 kg
IP Rate:	IP20(indoor use only)
Colour:	Black





Single 3

50395 1-Channel DMX Dimmer

SHOWTEC

Specifications:

Ctrl. Mode:	DMX / Static Dimmer	DMX Conn. in:	XLR 3P
DMX Ch.:	1	DMX Conn. out:	XLR 3P
Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	237 mm
Out. /Ch. (A):	10 A	Width (mm):	140 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	60 mm
Pwr. Conn. Out.:	Schuko Socket	Weight:	1.82 kg
		Housing:	Metal
		Colour:	Black

FEATURES:

- Can be mounted to the fixture directly
- 10 A output
- Manual dim function
- Max output function



Single DP-1

50396 1-Channel DMX Dimming / Switch Pack

SHOWTEC

Specifications:

Ctrl. Mode:	DMX / Manual	DMX Conn. in:	XLR 3P
DMX Ch.:	1	DMX Conn. out:	XLR 3P
Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	100 mm
Out. /Ch. (A):	10 A	Width (mm):	80 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	195 mm
Pwr. Conn. Out.:	Schuko Socket	Weight:	1.4 kg
		Housing:	Metal
		Colour:	Grey

FEATURES:

- 50 mm dimming slider
- Dim and switch function
- DMX control
- Capacitive load 10 A, Inductive load 3 A



Single WDP-1

50756 1-Channel Wireless Dimming Pack

SHOWTEC



Specifications:

Ctrl. Mode:	DMX / Manual	DMX Conn. in:	XLR 3P
DMX Ch.:	1	DMX Conn. out:	XLR 3P
WL:	WL DMX	Cable Length:	1 m
Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	100 mm
Out. /Ch. (A):	10 A	Width (mm):	95 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	273 mm
Pwr. Conn. Out.:	Schuko Socket	Weight:	1.4 kg
		Housing:	Metal
		Colour:	Grey

FEATURES:

- 50 mm dimming slider
- Wireless DMX receiver built-in
- Compact All-in-one housing
- Applicable as W-DMX receiver

Single WDP-1 Pro

50758 1-Channel Wireless Dimming Pack

SHOWTEC



Specifications:

Ctrl. Mode:	DMX / Manual	DMX Conn. in:	XLR 5P
DMX Ch.:	1	DMX Conn. out:	XLR 5P
WL:	WL DMX	Length (mm):	134 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Width (mm):	99 mm
Out. /Ch. (A):	10 A	Height (mm):	293 mm
Pwr. Conn. In.:	powerCON TRUE1 In (Male)	Weight:	1.4 kg
Pwr. Conn. Out.:	CEE3P 16 A	Housing:	Metal
		Colour:	Black / Grey

FEATURES:

- Wireless DMX receiver built-in
- Applicable as W-DMX receiver
- powerCON TRUE1Input
- 5-pin DMX connectors
- CEE 16 A 3-pin output (max 10 A output)





DIM-4

50442 4-Channel Dimmer Pack - 3 A per Channel

SHOWTEC

Specifications:

Ctrl. Mode:	Built-in Program / DMX / Sound	DMX Conn. in:	XLR 3P
		DMX Conn. out:	XLR 3P
DMX Ch.:	1 / 2 / 4	Cable Length:	1.5 m
Pwr. Supp.:	220V-240 VAC 50 Hz	Length (mm):	220 mm
Out. /Ch. (A):	3 A	Width (mm):	82 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	275 mm
Pwr. Conn. Out.:	Schuko Socket	Weight:	3.5 kg
		Housing:	Metal
		Colour:	Grey

FEATURES:

- Music controlled
- Schuko Outlets
- DMX512 4-Ch Dimmer pack
- 16 built-in programs
- Stand-alone function



DIM-4LC

50443 4-Channel Dimmer Pack with local Control - 3 A per Channel

SHOWTEC

Specifications:

Ctrl. Mode:	Built-in Program / DMX / Manual / Sound	DMX Conn. in:	XLR 3P
		DMX Conn. out:	XLR 3P
		Cable Length:	1.5 m
DMX Ch.:	1 / 2 / 4	Length (mm):	220 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	Width (mm):	82 mm
Out. /Ch. (A):	3 A	Height (mm):	275 mm
Pwr. Conn. In.:	Schuko Plug	Weight:	3.5 kg
Pwr. Conn. Out.:	Schuko Socket	Housing:	Metal
		Colour:	Grey

FEATURES:

- Music controlled
- Schuko Outlets
- DMX512 4-Ch Dimmer pack
- Local Control Faders
- Stand-alone function



TED Pack Single

50444 1-Channel Dimmer Pack

SHOWTEC

Specifications:

Ctrl. Mode:	DMX / Local Control / Manual	Pwr. Conn. Out.:	ProPower Grey
		DMX Conn. in:	XLR 3P / XLR 5P
		DMX Conn. out:	XLR 3P / XLR 5P
Protocols:	DMX / RDM	Length (mm):	221 mm
DMX Ch.:	1 / 2	Width (mm):	105 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	Height (mm):	80 mm
Out. /Ch. (A):	2 A	Weight:	1.3 kg
Pwr. Conn. In.:	Pro Power Blue	Housing:	Metal
		Colour:	Black

FEATURES:

- Leading and trailing edge dimming
- 4 dimmer curves for conventional and LED lights
- Special Effects mode with safety channel
- Mounting holes on top and backside

TED Pack

50446 4-Channel Dimmer Pack

SHOWTEC



Specifications:

Ctrl. Mode:	DMX / Local Control / Manual	Pwr. Conn. Out.:	ProPower Grey
		DMX Conn. in:	XLR 3P / XLR 5P
		DMX Conn. out:	XLR 3P / XLR 5P
		Length (mm):	240 mm
Protocols:	DMX / RDM	Width (mm):	230 mm
DMX Ch.:	1 / 2 / 3 / 4 / 5	Height (mm):	92 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	Weight:	2.7 kg
Out. /Ch. (A):	2 A	Housing:	Metal
Pwr. Conn. In.:	Pro Power Blue	Colour:	Black

FEATURES:

- Leading and trailing edge dimming
- 4 dimmer curves for conventional and LED lights
- Special Effects mode with safety channel
- Quick-Lock bracket attachable to top and backside

TED Pack LC

50447 4-Channel Dimmer Pack with local Control

SHOWTEC



Specifications:

Ctrl. Mode:	DMX / Local Control / Manual	Pwr. Conn. Out.:	ProPower Grey
		DMX Conn. in:	XLR 3P / XLR 5P
		DMX Conn. out:	XLR 3P / XLR 5P
		Length (mm):	240 mm
Protocols:	DMX / RDM	Width (mm):	230 mm
DMX Ch.:	1 / 2 / 3 / 4 / 5	Height (mm):	92 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	Weight:	2.8 kg
Out. /Ch. (A):	2 A	Housing:	Metal
Pwr. Conn. In.:	Pro Power Blue	Colour:	Black

FEATURES:

- Leading and trailing edge dimming
- 4 dimmer curves for conventional and LED lights
- Special Effects mode with safety channel
- Quick-Lock bracket attachable to top and backside

Lightbrick

50370 4-Channel Dimming Pack DMX

SHOWTEC



Specifications:

Ctrl. Mode:	Built-in Program / Manual / Sound / Static Dimmer	DMX Conn. in:	XLR 3P
		DMX Conn. out:	XLR 3P
		Cable Length:	1.3 m
		Length (mm):	325 mm
DMX Ch.:	4	Width (mm):	105 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	150 mm
Out. /Ch. (A):	5 A	Weight:	3 kg
Pwr. Conn. In.:	Schuko Plug	Housing:	Metal / Plastic
Pwr. Conn. Out.:	Schuko Socket	Colour:	Black

FEATURES:

- Each channel can be patched
- Built-in chaser with 16 programs
- Preheat function
- Manual dimmer



DDP-610 MKII

50754 **6 Ch DigiDimming Pack, 10 A Fuse, 16-pin Multipin**

SHOWTEC

Specifications:

Ctrl. Mode:	Built-in Program / DMX	DMX Conn. out:	XLR 3P
DMX Ch.:	6	Cable Length:	2 m
Pwr. Supp.:	400 VAC 3 Phase	Length (mm):	483 mm
Out. /Ch. (A):	10 A	Width (mm):	88 mm
Pwr. Conn. In.:	CEE5P 32 A	Height (mm):	380 mm
Pwr. Conn. Out.:	HAN16 Out	Weight:	12 kg
DMX Conn. in:	XLR 3P	Housing:	Metal
		Colour:	Grey

FEATURES:

- 6 channels
- Selectable Dimming Curves
- Built-in Circuit breakers
- Robust and reliable

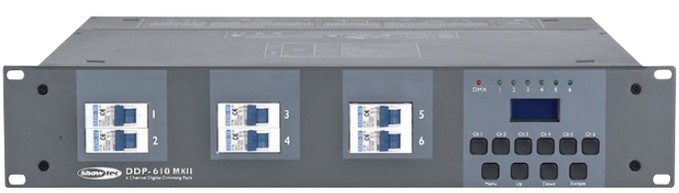

DDP-610 MKII

50755 **6 Ch DigiDimming Pack, 10 A Fuse, Schuko**

SHOWTEC

Specifications:

		DMX Conn. in:	XLR 3P
		DMX Conn. out:	XLR 3P
Ctrl. Mode:	0-10 VDC / Built-in Program / DMX / Manual	Cable Length:	1.5 m
		Length (mm):	483 mm
DMX Ch.:	6	Width (mm):	88 mm
Pwr. Supp.:	400 VAC 3 Phase	Height (mm):	380 mm
Out. /Ch. (A):	10 A	Weight:	12 kg
Pwr. Conn. In.:	CEE5P 32 A	Housing:	Metal
Pwr. Conn. Out.:	Schuko Socket	Colour:	Grey

FEATURES:

- 6 channels
- Selectable Dimming Curves
- Built-in Circuit breakers
- Robust and reliable

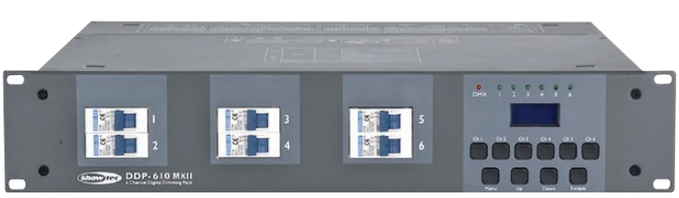

DDP-610 MKII

50757 **6 Ch DigiDimming Pack, 10 A Fuse, Terminal**

SHOWTEC

Specifications:

		DMX Conn. in:	XLR 3P
		DMX Conn. out:	XLR 3P
Ctrl. Mode:	0-10 VDC / Built-in Program / DMX / Manual	Length (mm):	483 mm
		Width (mm):	380 mm
DMX Ch.:	6	Height (mm):	88 mm
Pwr. Supp.:	400 VAC 3 Phase	Weight:	12 kg
Out. /Ch. (A):	10 A	Housing:	Metal
Pwr. Conn. In.:	Terminal	Colour:	Grey
Pwr. Conn. Out.:	Terminal		

FEATURES:

- 6 channels
- Selectable Dimming Curves
- Built-in Circuit breakers
- Robust and reliable

LED Dim-8 Install

50413 **DIN Rail**

SHOWTEC



Specifications:

Ctrl. Mode:	DMX / IR / Manual / Remote	DMX Conn. in:	Phoenix
DMX Ch.:	8	DMX Conn. out:	Phoenix
Pwr. Supp.:	12-24 VDC	Length (mm):	106 mm
Out. Volt.:	12-24 VDC	Width (mm):	87 mm
Pwr. Cons.:	5 W	Height (mm):	58 mm
Output Current (mA):	25000 mA	Weight:	0.18 kg
Pwr. Conn. In.:	Phoenix	Housing:	Plastic
		Colour:	Grey
		DIN Rail Spacing:	35 mm

FEATURES:

- Wide range input voltage
- 2 PWM Groups (RGBW)
- Selectable PWM frequency
- IR Remote control (50547)
- DIN EN43880 form factor
- DIN EN60715 rail system

SPI-2 Install

50412 **DIN Rail**

SHOWTEC



Specifications:

Ctrl. Mode:	Art-Net / DMX / TCP IPv4	DMX Conn. out:	Phoenix
DMX Ch.:	512	Data Conn. In:	RJ45
Pwr. Supp.:	12-36 VDC	Length (mm):	106 mm
Out. Volt.:	12-36 VDC	Width (mm):	87 mm
Pwr. Cons.:	6 W	Height (mm):	58 mm
Pwr. Conn. In.:	Phoenix	Weight:	0.185 kg
DMX Conn. in:	Phoenix	Housing:	Plastic
		Colour:	Grey
		DIN Rail Spacing:	35 mm

FEATURES:

- Wide range input voltage
- 2 x 960 pixel outputs
- Remote setup interface
- Art-Net, sACN and DMX 512 control
- DIN EN43880 form factor
- DIN EN60715 rail system

Kling-Force

102300 **Compact Plug and Play King-Net controller**

ARKAOS



Specifications:

Ctrl. Mode:	Kling-Net	Data Conn. In:	RJ45
Pwr. Supp.:	5-12 VDC	Data Conn. Out:	RJ45
Pwr. Cons.:	480 W	Length (mm):	190 mm
Out. Curr. (A):	40 A	Width (mm):	130 mm
Pwr. Conn. In.:	Terminal	Height (mm):	39 mm
Pwr. Conn. Out.:	Terminal	Weight:	0.48 kg
		Housing:	Metal
		Colour:	Black

FEATURES:

- 8-output LED Strip controller
- Suitable for all popular models
- 5 VDC up to 200 W (1600 LEDs) or 12 VDC up to 480 W (4800 LEDs)
- 2 ethernet ports
- Electrical safety



LP-416

50750 Channel Chaser

SHOWTEC

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Length (mm):	483 mm
Out. /Ch. (A):	5 A	Width (mm):	125 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	132 mm
Pwr. Conn. Out.:	Schuko Socket	Weight:	5.5 kg
DMX Conn. out:	XLR 3P	R.U.:	3 U
Out. Ctrl Protocol:	0-10 V / DMX 512	Housing:	Metal
		Colour:	Grey

FEATURES:

- 4-channel Chaser with 16 A max. load
- Background function
- 9 Built-in programs
- Multiple modes: Hold dim, Hold sound, Program speed
- Master and channel dim faders



RP-405 MKII Relay Pack

50753 **Relay Pack**

SHOWTEC

Specifications:

Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Sound	DMX Conn. in:	XLR 3P
		DMX Conn. out:	XLR 3P
		Cable Length:	1.3 m
DMX Ch.:	1 / 2 / 4	Length (mm):	210 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Width (mm):	73 mm
Out. /Ch. (A):	5 A	Height (mm):	260 mm
Pwr. Conn. In.:	Schuko Plug	Weight:	2.8 kg
Pwr. Conn. Out.:	Schuko Socket	Housing:	Metal
		Colour:	Grey

FEATURES:

- 4 relays
- Patchable per channel
- Built-in programs
- DMX control
-



MultiSwitch

50357 **DMX512 4-CH Switch Pack**

SHOWTEC

Specifications:

		DMX Conn. out:	XLR 3P
		Cable Length:	1.3 m
Ctrl. Mode:	Built-in Program / DMX	Length (mm):	210 mm
DMX Ch.:	4	Width (mm):	73 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	260 mm
Out. /Ch. (A):	5 A	Weight:	2.8 kg
Pwr. Conn. In.:	Schuko Plug	Housing:	Metal
Pwr. Conn. Out.:	Schuko Socket	Colour:	Grey
DMX Conn. in:	XLR 3P		

FEATURES:

- 4 channels output
- 16 built-in programs
- DMX control
- Master/Slave function





DJ-Switch 8

50309

SHOWGEAR

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Length (mm):	484 mm
Out. /Ch. (A):	10 A	Width (mm):	185 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	45 mm
Pwr. Conn. Out.:	IEC C14 male	Weight:	1.1 kg
Cable Length:	1 m	R.U.:	1 U
		Housing:	Metal
		Colour:	Dark Grey

FEATURES:

- Engaged switches are lit
- Fuse on front panel
- 8 IEC sockets
- Maximum 10 A per channel



DJ-Switch 6

50363

SHOWGEAR

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Length (mm):	484 mm
Out. /Ch. (A):	10 A	Width (mm):	90 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	80 mm
Pwr. Conn. Out.:	Schuko Socket	Weight:	1.62 kg
Cable Length:	1 m	R.U.:	2 U
		Housing:	Metal
		Colour:	Dark Grey

FEATURES:

- Engaged switches are lit
- Fuses per channel on front panel
- 6 Schuko sockets
- Maximum 10 A per channel



DJ-Switch 10

50364

SHOWGEAR

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Length (mm):	484 mm
Out. /Ch. (A):	10 A	Width (mm):	135 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	120 mm
Pwr. Conn. Out.:	Schuko Socket	Weight:	2.4 kg
Cable Length:	1 m	R.U.:	3 U
		Housing:	Metal
		Colour:	Dark Grey

FEATURES:

- Engaged switches are lit
- Fuses per channel on front panel
- 10 Schuko sockets
- Maximum 10 A per channel



DJ-Switch 10F

50365

SHOWGEAR

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Length (mm):	484 mm
Out. /Ch. (A):	10 A	Width (mm):	135 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	120 mm
Pwr. Conn. Out.:	Schuko Socket	Weight:	2.65 kg
Cable Length:	1 m	R.U.:	3 U
		Housing:	Metal
		Colour:	Dark Grey

FEATURES:

- Engaged switches are lit
- Flash buttons to quickly flash an output
- Fuses per channel on front panel
- 10 Schuko sockets
- Maximum 10 A per channel

Dust Cover for Chimp 100

INFINITY

55001



Dustcover for Chimp 300

INFINITY

55011



Dustcover for Banana Wing

INFINITY

55021



Dust Cover for Lampy 20

SHOWTEC

50738 Fabric - black



Dust Cover for Lampy 40

SHOWTEC

50739 Fabric - black



Quick DMX IR Remote

SHOWTEC

50053 Optional Remote for 512 plus





iS-100 set INFINITY

41500SET01 **2pcs with Premium flightcase**

Flightcase measurements including 2 units of iS-100:

Dimensions:	721 x 535 x 911mm
Wheels:	4x 100m swivel with brake
Weight:	71,1kg



Case for 2x iS-100

D7234 **Premium Line**

iS-100

41500 **100 W LED Spot**

INFINITY

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	100 W
Lumen Total:	5000 lm
Zoom:	Motorised
Focus:	Motorised
Iris:	Motorised
Ctrl. Mode:	Built-in Program / DMX / Manual
DMX Ch.:	16 / 19
Protocols:	DMX
WL:	Optional
Display:	Batt. / Gravity Sensor / LCD
Dimmer:	0-100 %
Strobe:	0-20 Hz
Prism 1:	3-facet
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	8 + Open
Gobo Sys.:	Glass + Metal
Gobo Wheel Ind. & Rot.:	Yes
Gobo Wheel 1:	7 + Open
Gobo Wheel 2:	8 + Open
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	220 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	306 mm
Width (mm):	303 mm
Height (mm):	485 mm
Weight:	16.5 kg
IP Rate:	IP20 (indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- Motorised Iris & Focus
- Covers with quick lock screws
- Fast colour & gobo changes
- Fast movement through high torque motors
- Battery powered menu











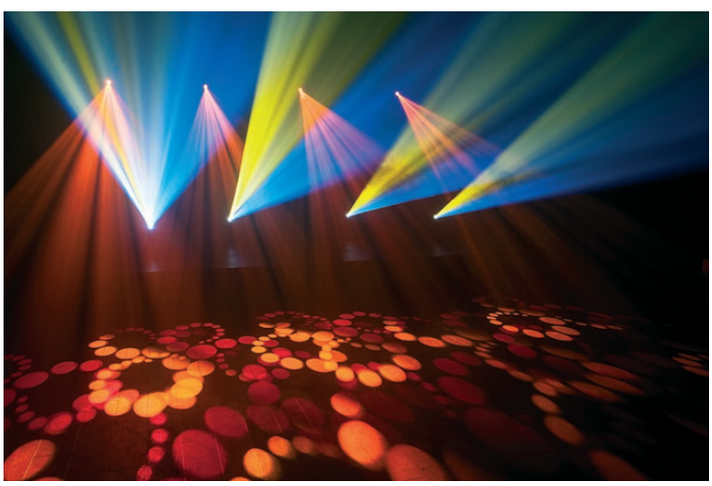











Case for 2x iS-250

D7258 **Premium Line**

iS-250 set INFINITY

41502SET01 **2pcs with Premium flightcase**

Flightcase measurements including 2 units of iS-250:

Dimensions:	790 x 580 x 790mm
Wheels:	4x 100m swivel with brake
Weight:	106,1kg











iS-250

41502 **250 W LED Spot**

INFINITY

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	250 W
Lumen Total:	9635 lm
CCT:	7000 K
Zoom:	Motorised
Zoom Min.:	12 °
Zoom Max.:	27 °
Frost:	Yes
Focus:	Motorised
Iris:	Motorised
Ctrl. Mode:	Built-in Program / DMX / Manual
DMX Ch.:	21 / 27
Protocols:	DMX
WL:	Optional
Display:	Gravity Sensor / LCD
Dimmer:	0-100 %
Strobe:	0-20 Hz
Prism 1:	3-facet
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	7 + Open
Dichroic Colour Wheel 2:	7 + Open
Gobo Sys.:	Glass + Metal
Gobo Wheel Ind. & Rot.:	Yes
Gobo Wheel 1:	7 + Open
Gobo Wheel 2:	8 + Open
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	420 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	420 mm
Width (mm):	346 mm
Height (mm):	582 mm
Weight:	25.5 kg
IP Rate:	IP20 (indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- Zoom range 12°–27°
- Motorised Iris & Focus
- Frost filter
- Fast movement through high torque motors
- Battery powered menu



Case for 2x Furion S201
D7265 **Premium Line**

S201 Spot
41505 **Furion Series**
INFINITY

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	150 W
Refresh Rate (min):	600 Hz
Refresh Rate (max):	15 kHz
Lumen Total:	9500 lm
CCT:	7500 K
Zoom:	Motorised
Zoom Min.:	12 °
Zoom Max.:	30 °
Focus:	Motorised
Ctrl. Mode:	Built-in Program / DMX / Manual
DMX Ch.:	17 / 23
Protocols:	Art-Net / DMX / RDM / sACN
WL:	WL DMX
Display:	Batt. / Gravity Sensor / LCD / Touch
Dimmer:	0-100 %
Prism 1:	3-facet
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	7 + Open
Dichroic Colour Wheel 2:	8 + Open
Gobo Sys.:	Glass + Metal
Gobo Wheel 1:	6 + Open
Gobo Wheel 2:	7 + Open
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	330 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
DMX Conn.:	XLR 5P In/Out
Length (mm):	390 mm
Width (mm):	285 mm
Height (mm):	570 mm
Weight:	20.3 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:
- 1:2.5 Zoom range 12 – 30°
- 3-facet rotating prism
- Fixture orientated auto pan invert
- Onboard W-DMX by Wireless Solutions Sweden






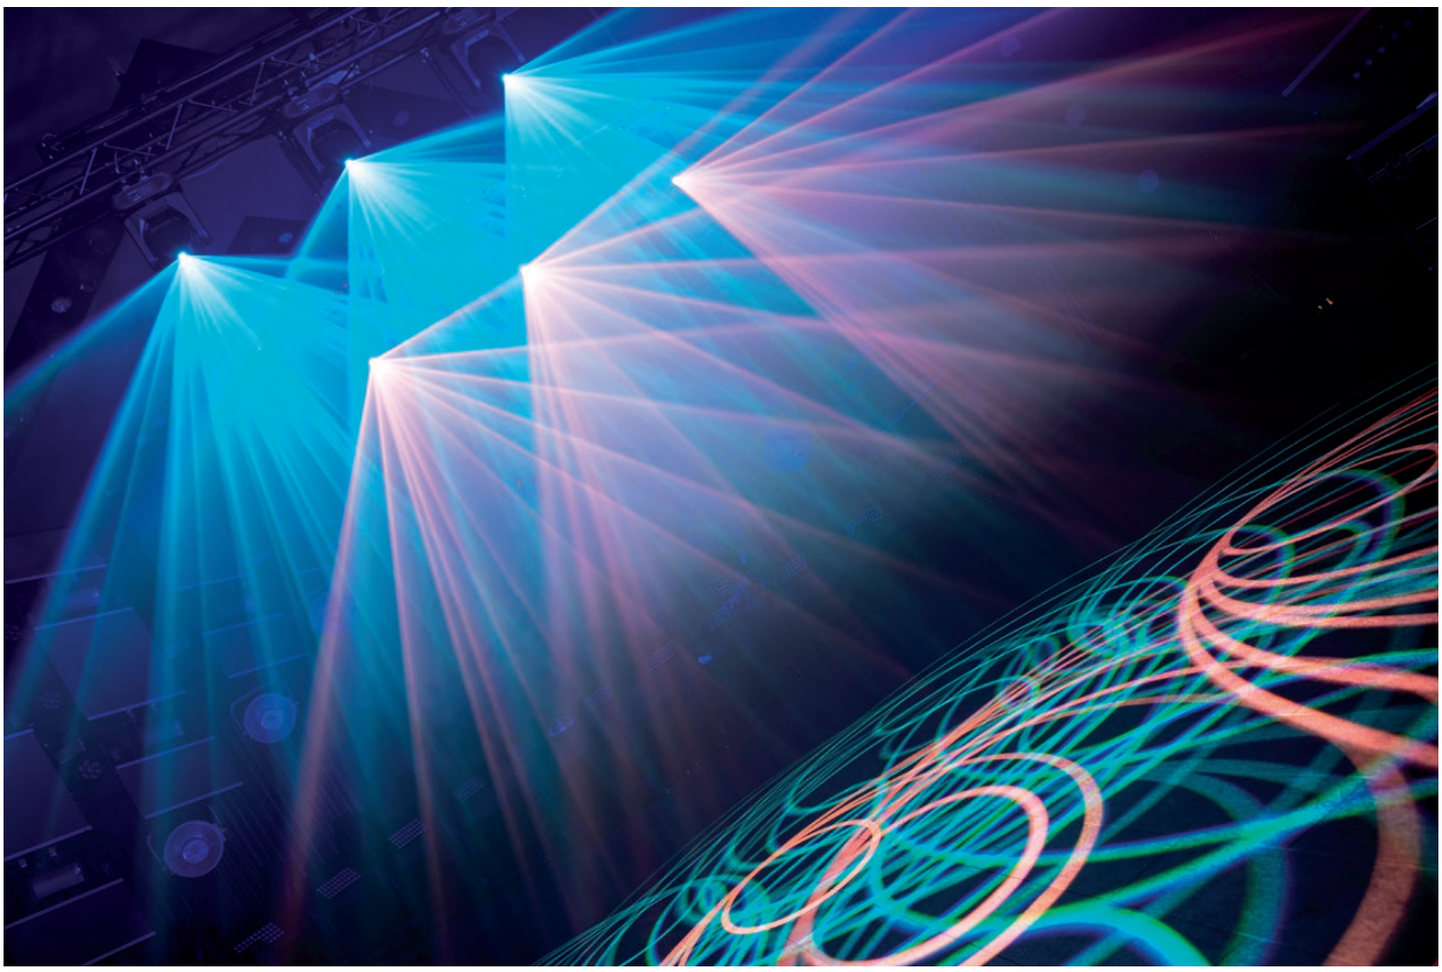

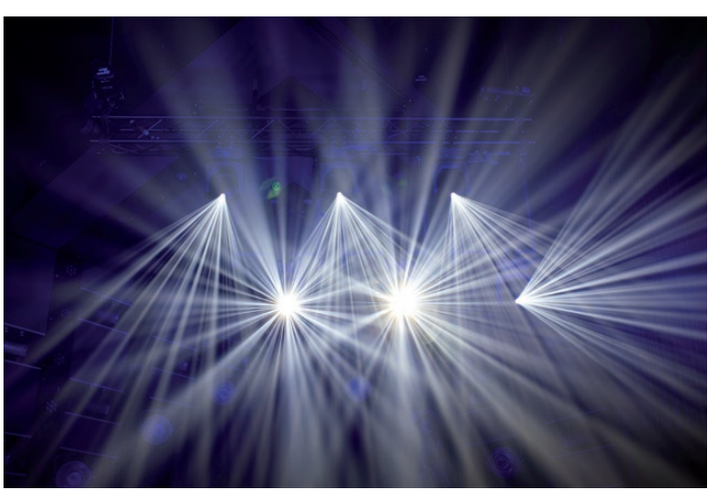





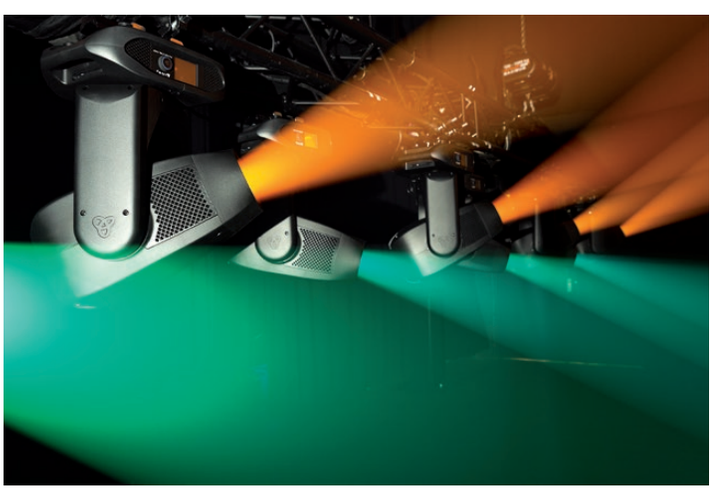

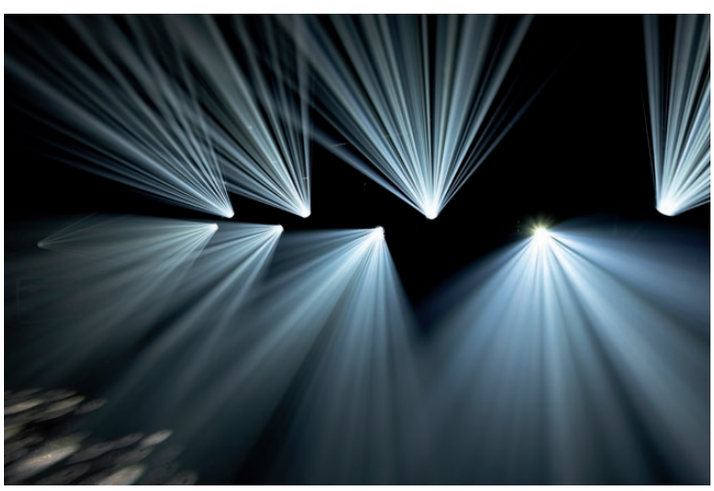



Case for 2x Furion S401
D7266 **Premium Line**









S401 Spot

41506 **Furion Series**

INFINITY

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	350 W
Refresh Rate (min):	600 Hz
Refresh Rate (max):	15 kHz
Lumen Total:	11096 lm
CRI:	80
CCT:	7500 K
Zoom:	Motorised
Zoom Min.:	6 °
Zoom Max.:	30 °
Frost:	Yes
Focus:	Motorised
Iris:	Motorised
Ctrl. Mode:	Built-in Program / DMX / Manual
DMX Ch.:	26 / 37
Protocols:	Art-Net / DMX / RDM / sACN
WL:	WL DMX
Display:	Batt. / Gravity Sensor / LCD / Touch
Dimmer:	0-100 %
Strobe:	0-20 Hz
Prism 1:	3-facet
Prism 2:	5-facet
Anim. Wheel:	Yes + Digital Motion FX
Colour Sys.:	Colour Wheel CMY+CTO
Dichroic Colour Wheel 1:	7 + Open
Gobo Sys.:	Glass + Metal
Gobo Wheel Ind. & Rot.:	Yes
Gobo Wheel 1:	6 + Open
Gobo Wheel 2:	7 + Open
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	610 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
DMX Conn.:	XLR 5P In/Out
Length (mm):	390 mm
Width (mm):	285 mm
Height (mm):	674 mm
Weight:	29 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- 1:5 Zoom range 6 – 30°
- 16-bit prism & gobo index
- CMY + CTO Colour mix system
- Continuous Bi-rotating Animation Wheel
- Onboard W-DMX by Wireless Solutions Sweden



Case for 2x Furion S601

D7267 **Premium Line**

S601 Profile

41507 **Furion Series**

INFINITY

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	500 W
Refresh Rate (min):	600 Hz
Refresh Rate (max):	15 kHz
Lumen Total:	13500 lm
CRI:	80
CCT:	6500 K
Zoom:	Motorised
Zoom Min.:	6.5 °
Zoom Max.:	45 °
Frost:	Yes
Focus:	Motorised
Iris:	Motorised
Ctrl. Mode:	DMX / Manual / Stand Alone
DMX Ch.:	37 / 56 / 57
Protocols:	Art-Net / DMX / RDM / sACN
WL:	WL DMX
Display:	Batt. / Gravity Sensor / LCD / Touch
Dimmer:	0-100 %
Strobe:	0-20 Hz
Shutter:	Yes
Prism 1:	3-facet
Prism 2:	5-facet
Anim. Wheel:	Yes + Digital Motion FX
Framing Shut.:	Motorised
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	6 + Open
Gobo Sys.:	Glass + Metal
Gobo Wheel Ind. & Rot.:	Yes
Gobo Wheel 1:	6 + Open
Gobo Wheel 2:	5 + Open
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	730 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
DMX Conn.:	XLR 5P In/Out
Length (mm):	284 mm
Width (mm):	420 mm
Height (mm):	748 mm
Weight:	35.6 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- 1:7 Zoom range 6.5 – 45°
- 500 W LED Source
- CMY + CTO Colour mix system
- Continuous Bi-rotating Animation Wheel
- 4 dual axis moving blade system









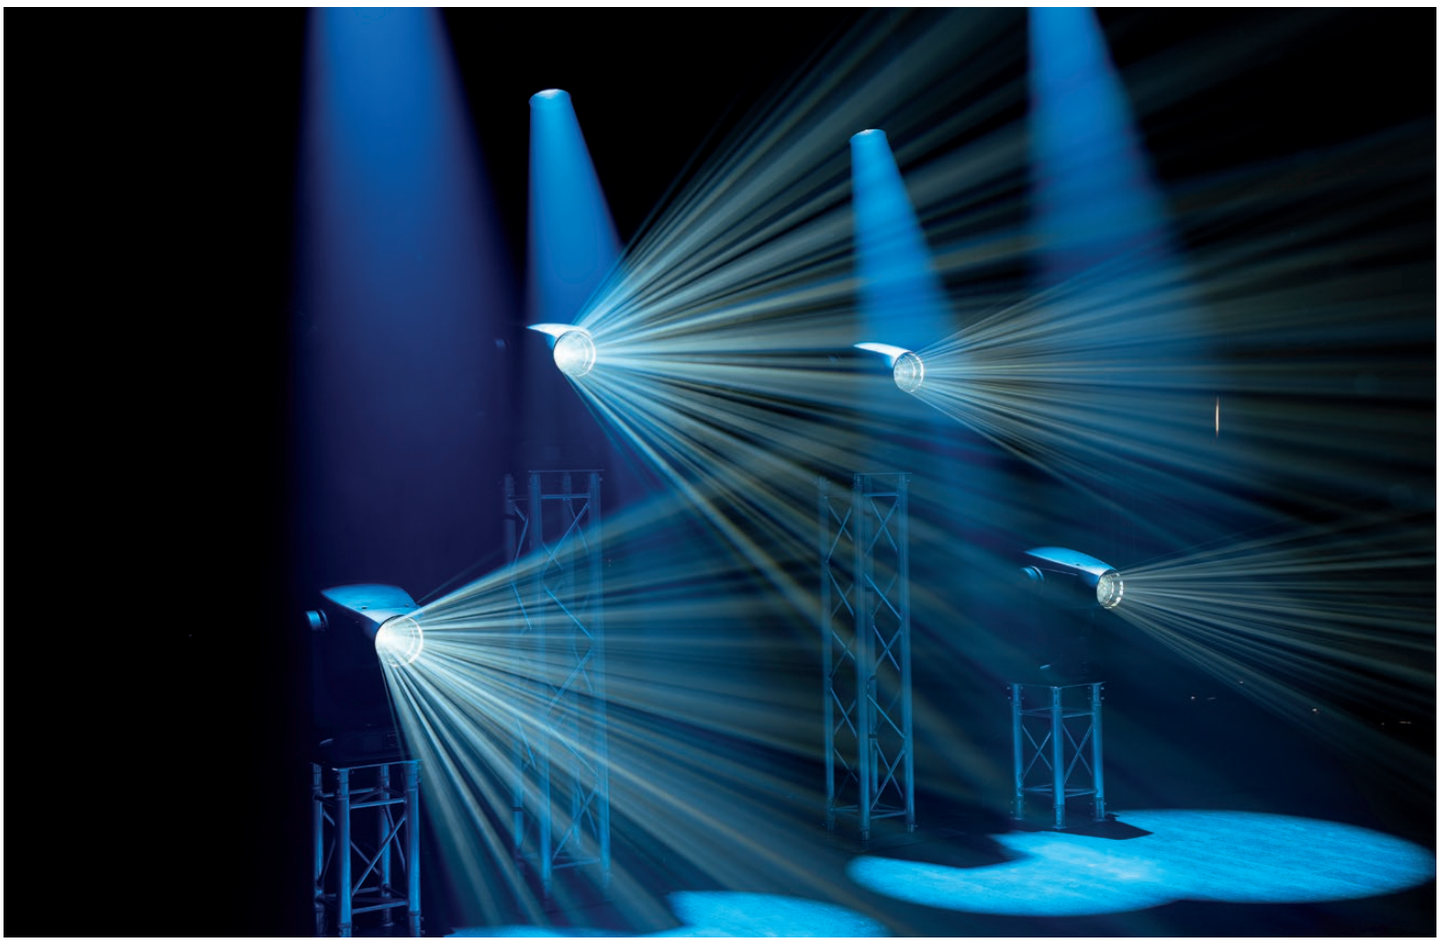



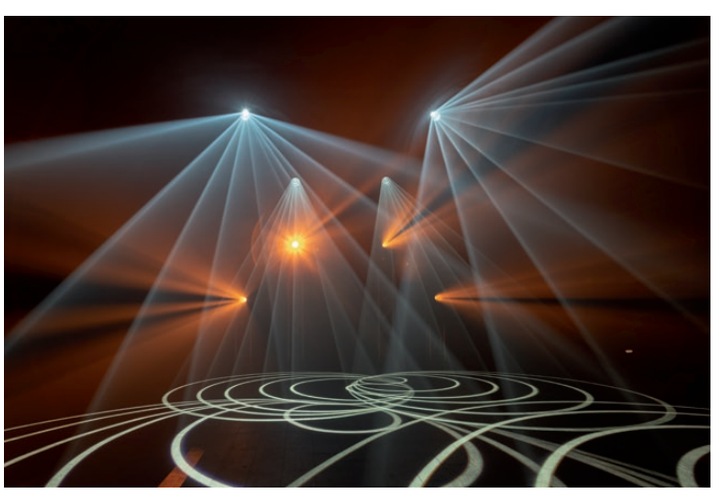

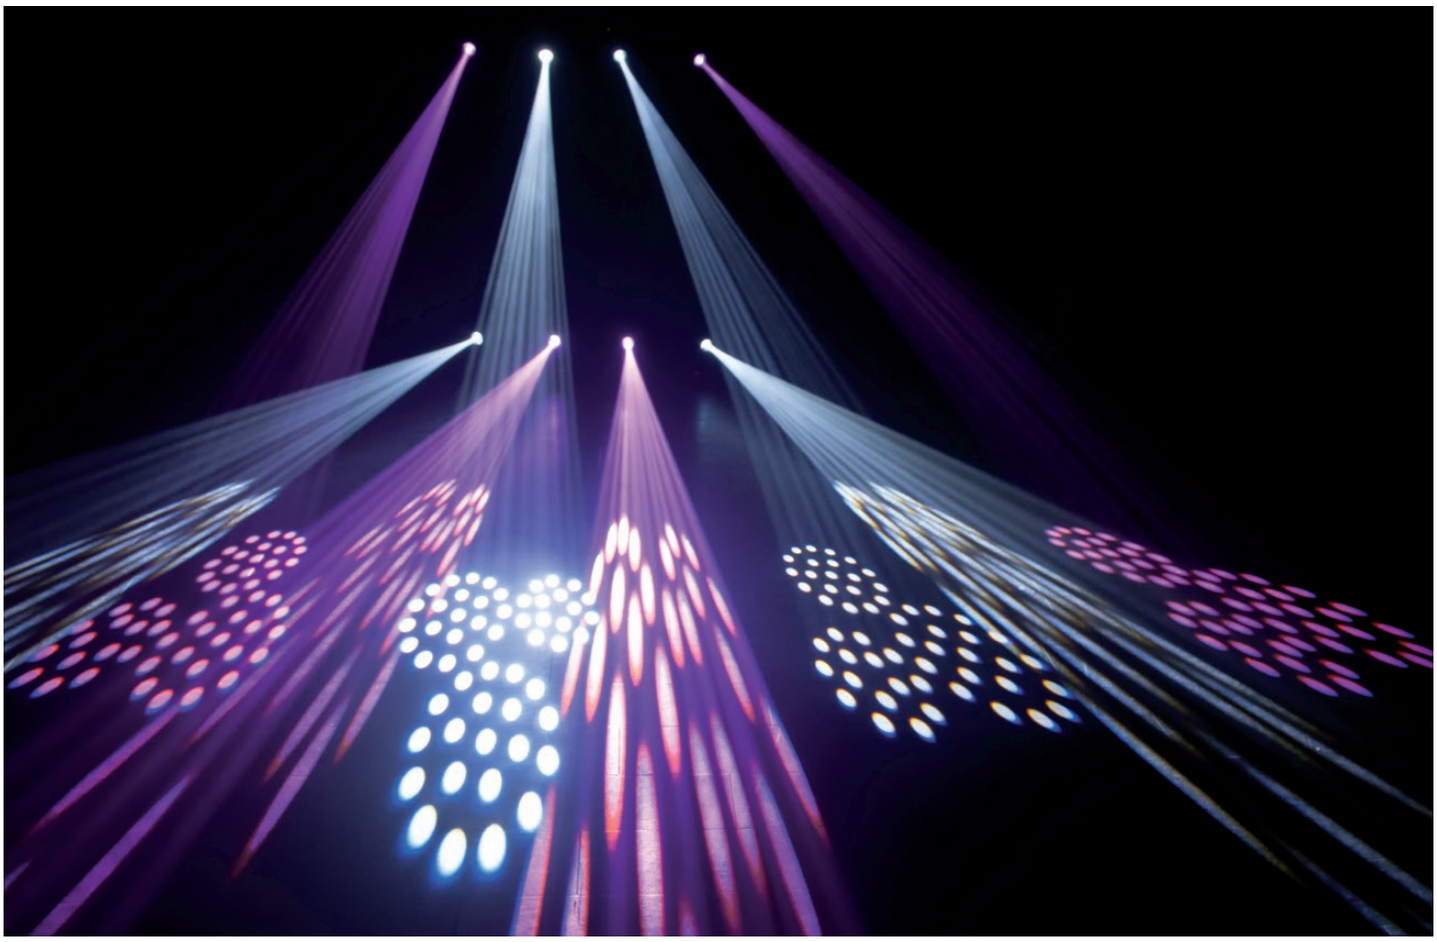







Case for 4 x Kanjo 10 / 60
D7033 **Value Line Flight Case**









Kanjo Spot 10

45010 **10 W LED Spot Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	10 W
Lumen Total:	4500 lm
CCT:	7000 K
Focus:	Manual
Ctrl. Mode:	DMX
DMX Ch.:	8 / 10
Protocols:	DMX
Display:	7-segment
Dimmer:	0-100 %
Strobe:	0-20 Hz
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	7 + Open
Gobo Sys.:	Metal
Gobo Wheel Ind. & Rot.:	Yes
Gobo Wheel 1:	7 + Open
Pan:	540 °
Tilt:	230 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	26 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Length (mm):	145 mm
Width (mm):	160 mm
Height (mm):	270 mm
Weight:	3 kg
IP Rate:	IP20(indoor use only)
Housing:	Plastic
Colour:	Black

FEATURES:

- 10 W LED Moving Head
- 7 fixed gobos + open
- 7 colours + white
- Dimmer and strobe function
- DMX and Master/Slave control
- Manual focus for sharp-outlined projections
- Compact, one-clamp-mount design



Case for 4 x Kanjo 10 / 60
D7033 **Value Line Flight Case**

Kanjo Spot 60

45011 **60 W LED Spot Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED	Dichroic Colour Wheel 1:	7 + Open
Light Src. Quant. :	1	Gobo Sys.:	Metal
Light Src. Pwr.:	60 W	Gobo Wheel Ind. & Rot.:	Yes
Lumen Total:	16400 lm	Gobo Wheel 1:	7 + Open
CCT:	7500 K	Pan:	540 °
Zoom:	Manual	Tilt:	270 °
Focus:	Manual	Pwr. Supp.:	100-240 VAC 50-60 Hz
Ctrl. Mode:	Auto / DMX / Master Slave / Sound	Pwr. Cons.:	100 W
		Pwr. Conn. In.:	IEC C13 female
		DMX Conn.:	XLR 3P In/Out
DMX Ch.:	8 / 10	Length (mm):	145 mm
Protocols:	DMX	Width (mm):	160 mm
Display:	7-segment	Height (mm):	265 mm
Dimmer:	0-100 %	Weight:	3 kg
Strobe:	0-20 Hz	IP Rate:	IP20(indoor use only)
Colour Sys.:	Colour Wheel	Housing:	Plastic
		Colour:	Black

FEATURES:
- 60 W LED Moving Head
- 7 fixed gobos + open
- 7 colours + white
- Dimmer and strobe function
- DMX and Master/Slave control
- Manual focus
- Compact, one-clamp-mount design






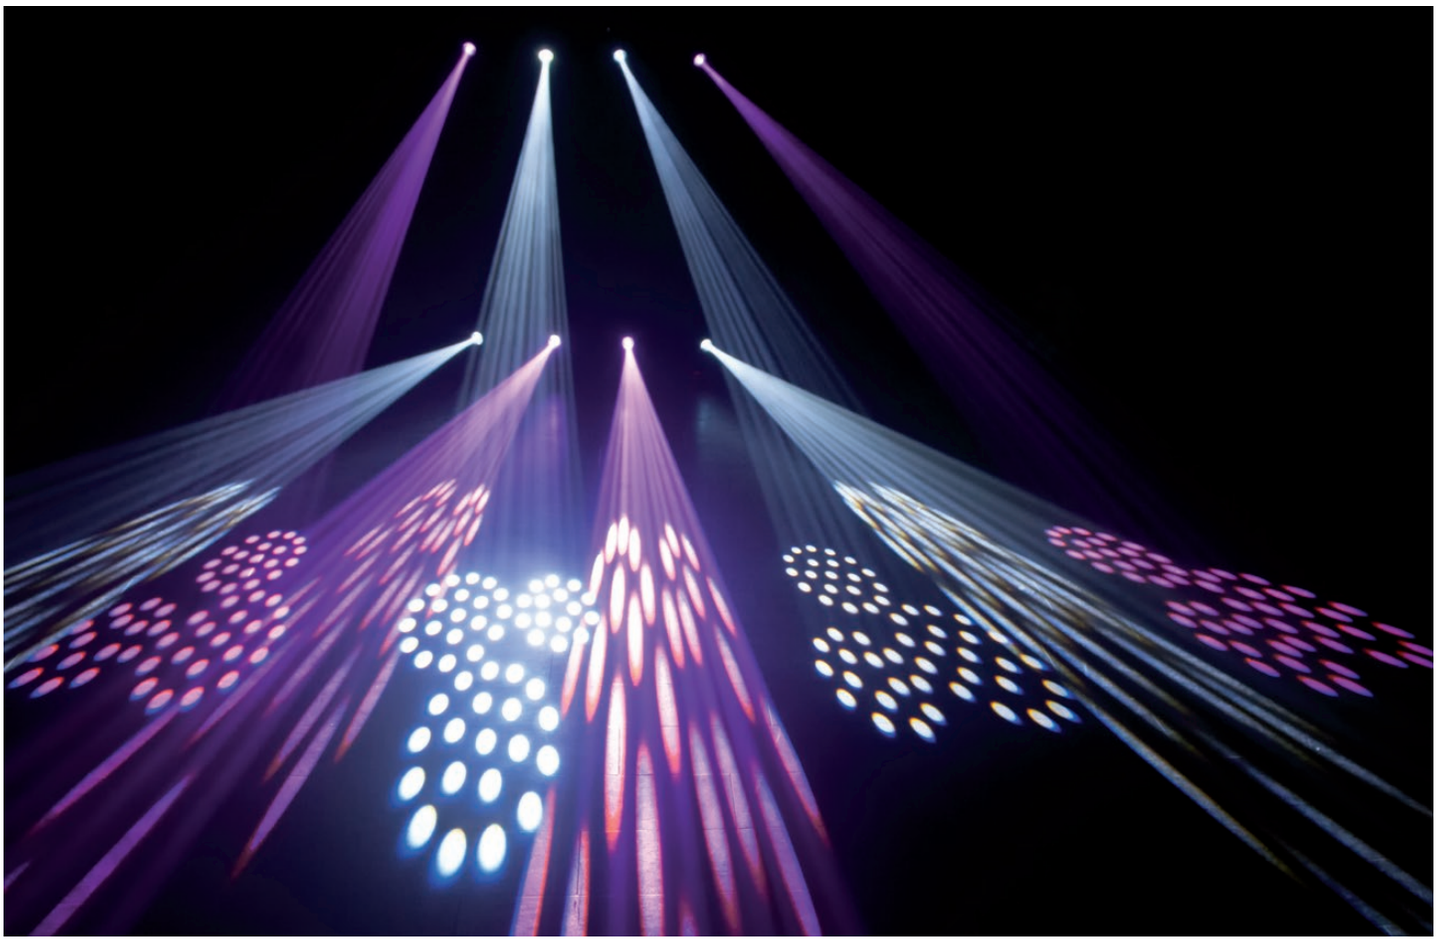













Case for 2x Shark Spot / Wash / Zoom / Combi
D7048 **Value Line Flight Case**









Shark Spot One

45023 **Compact 60 W LED Spot Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	60 W
Lumen Total:	800 lm
CCT:	8000 K
Zoom:	Motorised
Focus:	Motorised
Ctrl. Mode:	Auto / DMX / Master Slave / Remote / Sound
DMX Ch.:	8 / 14
Protocols:	DMX
Display:	OLED
Dimmer:	0-100 %
Strobe:	0-20 Hz
Prism 1:	3-facet
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	7 + Open
Gobo Sys.:	Glass + Metal
Gobo Wheel Ind. & Rot.:	Yes
Gobo Wheel 1:	5 + Open
Pan:	540 °
Tilt:	200 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	110 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Length (mm):	214 mm
Width (mm):	144 mm
Height (mm):	335 mm
Weight:	4.6 kg
IP Rate:	IP20 (indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- 60 W Spot Moving Head with 15° fixed beam angle
- 5 gobos + open & 7 colours + white
- 3-facet prism & motorised focus
- Infrared remote included
- Compact, one-clamp-mount design
- DMX and Master/Slave control
- Suitable for 2-unit DAP D7048 and 4-unit DAP D7049 case



Case for 2x Shark Spot / Wash / Zoom / Combi
D7048 **Value Line Flight Case**

Shark Combi Spot One

45022 **6 x 8 W RGBW LED Wash and Spot Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED	Dichroic Colour Wheel 1:	7 + Open
Light Src. Type Spot:	LED	Gobo Sys.:	Metal
Light Src. Quant. :	6	Gobo Wheel Ind. & Rot.:	Yes
Light Src. Pwr.:	8 W	Gobo Wheel 1:	7 + Open
Light Src. Pwr. Spot:	60 W	Pan:	540 °
Lumen Total:	30 lm	Tilt:	230 °
Focus:	Motorised	Pwr. Supp.:	100-240 VAC 50-60 Hz
Ctrl. Mode:	Auto / DMX / Master Slave / Remote / Sound	Pwr. Cons.:	110 W
		Pwr. Conn. In.:	IEC C13 female
		DMX Conn.:	XLR 3P In/Out
		Length (mm):	205 mm
DMX Ch.:	8 / 15 / 20	Width (mm):	145 mm
Protocols:	DMX	Height (mm):	330 mm
Display:	OLED	Weight:	4.2 kg
Dimmer:	0-100 %	IP Rate:	IP20(indoor use only)
Strobe:	0-20 Hz	Housing:	Plastic
Colour Sys.:	Colour Wheel	Colour:	Black

FEATURES:
- 30 W 13° Spot and 6 x 8 W 25° Wash Moving Head
- 7 gobos + open
- 7 colours + white
- Motorised focus
- Infrared remote included
- Compact, one-clamp-mound design
- DMX and Master/Slave control
- Suitable for 2-unit DAP D7048 and 4-unit DAP D7049 case





















Case for 4x Phantom 65
D7051 **Flight Case**









Phantom 65 Spot

40070 **Compact 65 W LED Spot Moving Head - black**
40071 **Compact 65 W LED Spot Moving Head - white**

SHOWTEC

Specifications:

Light Src. Type:	LED	Gobo Sys.:	Glass + Metal
Light Src. Quant. :	1	Gobo Wheel 1:	7 + Open
Light Src. Pwr.:	65 W	Pan:	540 °
Lumen Total:	2095 lm	Tilt:	270 °
Focus:	Manual	Cont. Movement:	No
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound	Pwr. Supp.:	100-240 VAC 50-60 Hz
		Pwr. Cons.:	130 W
		Pwr. Conn. In.:	Pro Power Blue
		Pwr. Conn. Out.:	ProPower Grey
DMX Ch.:	8 / 13	DMX Conn.:	XLR 3P In/Out
Protocols:	DMX	Length (mm):	238 mm
Display:	LCD	Width (mm):	202 mm
Dimmer:	0-100 %	Height (mm):	357 mm
Strobe:	0-20 Hz	Weight:	6.2 kg
Prism 1:	3-facet	IP Rate:	IP20(indoor use only)
Colour Sys.:	Colour Wheel	Housing:	Metal / Plastic
Dichroic Colour Wheel 1:	8 + Open	Colour:	Black

FEATURES:
- Compact 65 W LED Spot Moving Head
- 7 bi-rotating gobos + open
- 8 colours + white
- 3-facet prism
- Manually adjustable zoom
- Compact, lightweight design and one-clamp mount
- High performance / value ratio









Case for 4x Phantom 100 / 130 / 3R
D7052 **Flight Case**









Phantom 100 Spot

40077 **Compact 100 W LED Spot Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	100 W
Lumen Total:	5500 lm
Zoom:	Manual
Zoom Min.:	12 °
Zoom Max.:	17 °
Focus:	Motorised
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound
DMX Ch.:	10 / 14
Protocols:	DMX
WL:	Optional
Display:	LCD
Dimmer:	0-100 %
Strobe:	0-20 Hz
Prism 1:	Circular
Prism 2:	5-facet
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	8 + Open
Gobo Sys.:	Glass + Metal
Gobo Wheel Ind. & Rot.:	Yes
Gobo Wheel 1:	8 + Open
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	200 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	Pro Power Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	325 mm
Width (mm):	210 mm
Height (mm):	420 mm
Weight:	11.3 kg
IP Rate:	IP20 (indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:
- Compact 100 W LED Spot Moving Head
- 7 bi-rotating gobos + open
- 8 colours + white
- Dual rotating 3-facet circular and 5-facet linear prism
- Manually adjustable zoom
- Motorised focus
- Compact design and Quick-Lock brackets



Case for 4x Phantom 100 / 130 / 3R
D7052 **Flight Case**

Phantom 130 Spot

40072 **130 W LED Spot Moving Head - black**
40073 **130 W LED Spot Moving Head - white**

SHOWTEC

Specifications:

Light Src. Type:	LED	Colour Sys.:	Colour Wheel
Light Src. Quant. :	1	Dichroic Colour Wheel 1:	7 + Open
Light Src. Pwr.:	130 W	Gobo Sys.:	Glass + Metal
Lumen Total:	5200 lm	Gobo Wheel Ind. & Rot.:	Yes
Zoom:	Motorised	Gobo Wheel 1:	7 + Open
Zoom Min.:	12 °	Gobo Wheel 2:	7 + Open
Zoom Max.:	21 °	Pan:	540 °
Focus:	Motorised	Tilt:	270 °
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound	Pwr. Supp.:	100-240 VAC 50-60 Hz
		Pwr. Cons.:	245 W
		Pwr. Conn. In.:	Pro Power Blue
		Pwr. Conn. Out.:	Pro Power Grey
DMX Ch.:	12 / 16	DMX Conn.:	XLR 3P In/Out
Protocols:	DMX	Length (mm):	321 mm
WL:	Optional	Width (mm):	211 mm
Display:	LCD	Height (mm):	462 mm
Dimmer:	0-100 %	Weight:	13 kg
Strobe:	0-20 Hz	IP Rate:	IP20 (indoor use only)
Prism 1:	6-facet	Housing:	Metal / Plastic
Prism 2:	5-facet	Colour:	Black

FEATURES:
- 130 W LED Spot Moving Head
- 6-facet circular & 5-facet linear rotating prism
- 7 fixed and 7 bi-rotating gobos + open
- 7 colours + white
- Motorised zoom and focus
- Optional W-DMX for wireless communications
- Compact design with Quick-Lock brackets



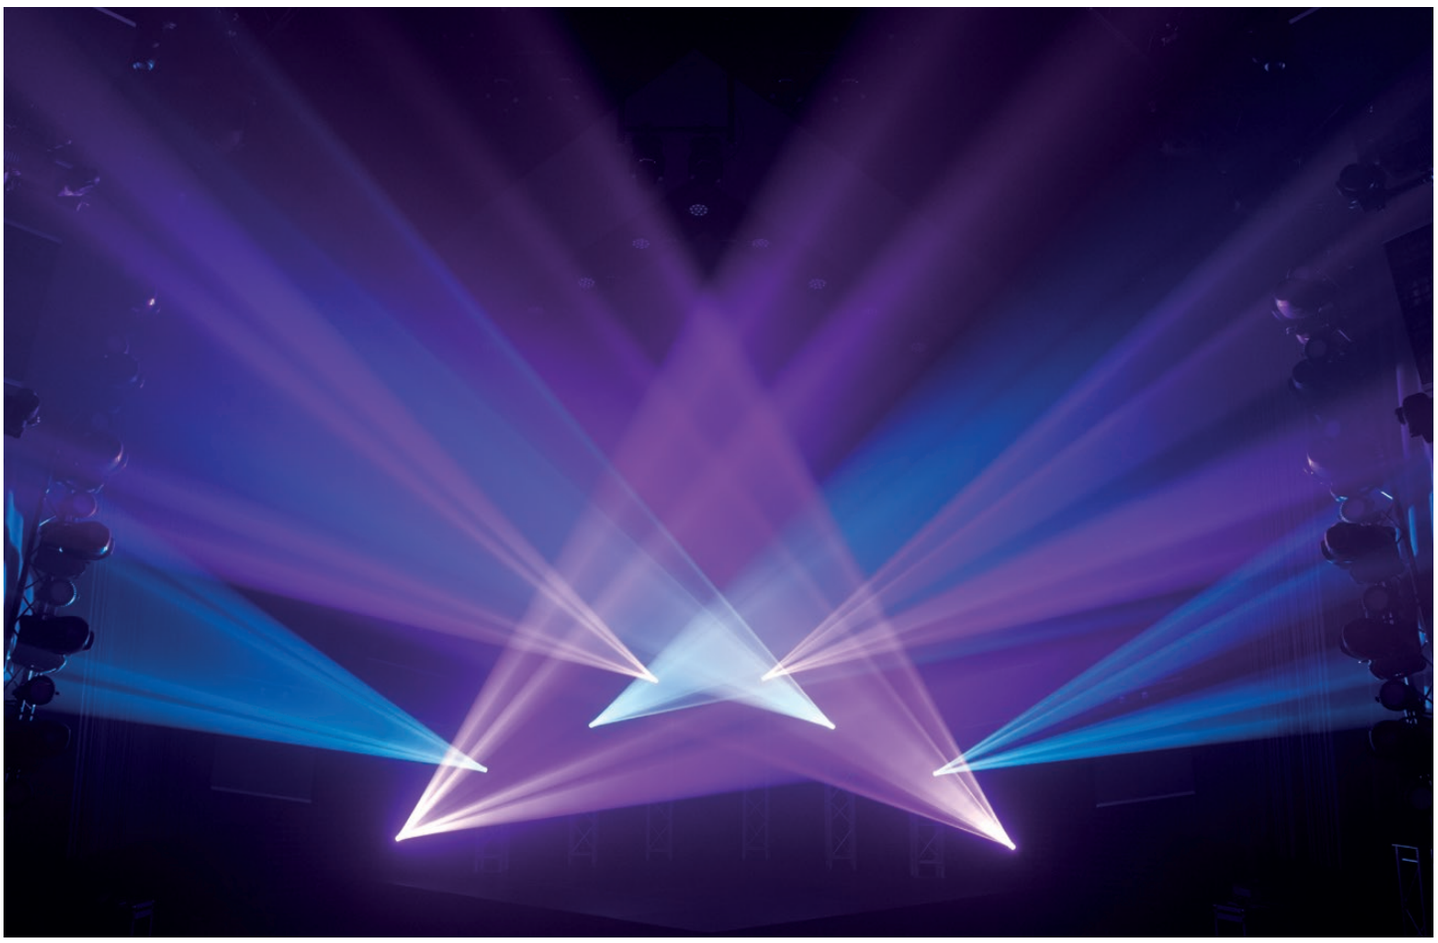

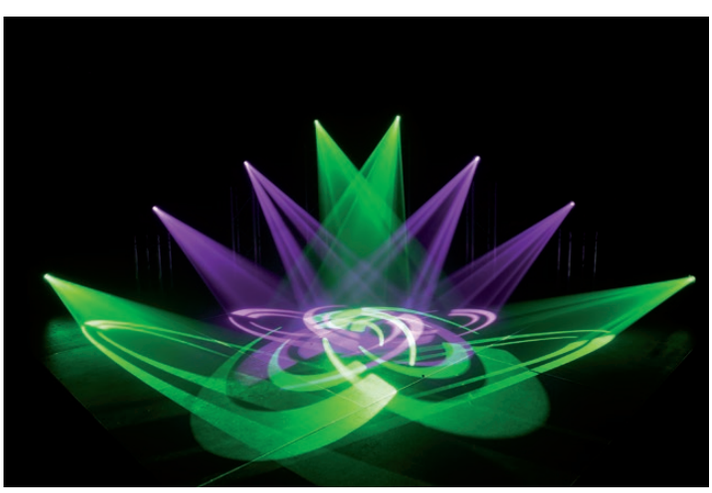

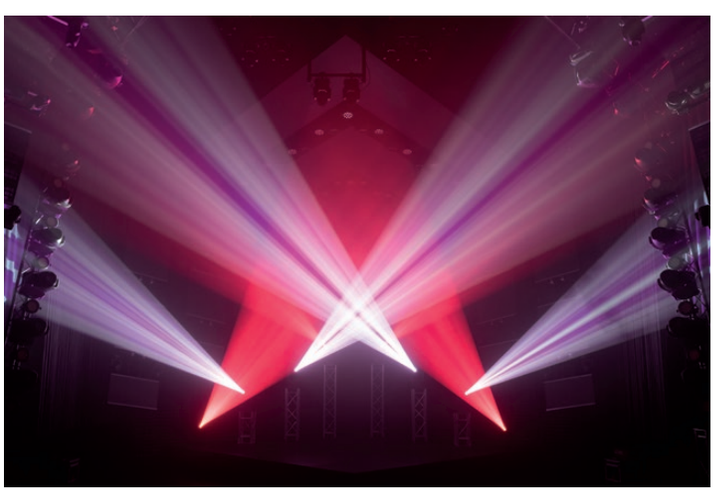



Case for 2 x Phantom 280 Hybrid/12R Hybrid

D7063 Flight case

Phantom 250 Spot

40081 250 W Spot Moving Head

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Type Spot:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	250 W
Lumen Total:	9932 lm
CRI:	76
CCT:	10000 K
Zoom:	Motorised
Zoom Min.:	13 °
Zoom Max.:	28 °
Frost:	Yes
Focus:	Motorised
Iris:	No
Ctrl. Mode:	Built-in Program / DMX / Manual
DMX Ch.:	12 / 16
Protocols:	DMX
WL:	Optional
Display:	LCD
Dimmer:	0-100 %
Strobe:	0-20 Hz
Shutter:	Yes
Prism 1:	6-facet
Prism 2:	5-facet
Colour Sys.:	Double Colour Wheel
Dichroic Colour Wheel 1:	7 + Open
Dichroic Colour Wheel 2:	7 + Open
Gobo Sys.:	Glass + Metal
Gobo Wheel Ind. & Rot.:	Yes
Gobo Wheel 1:	7 + Open
Pan:	540 °
Tilt:	270 °
Cont. Movement:	No
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	375 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	351 mm
Width (mm):	220 mm
Height (mm):	514 mm
Weight:	18 kg
IP Rate:	IP20 Rear
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- Bright 250 watt Spot Moving Head
- Motorised zoom, focus & 2 frost filters
- 2 colour wheels with 7 colours + white
- 3 correction filters (CTB, ½ CTO & CTO)
- 7 bi-rotating gobos (6 metal, 1 glass) + open
- Optional W-DMX
- Circular & linear prism













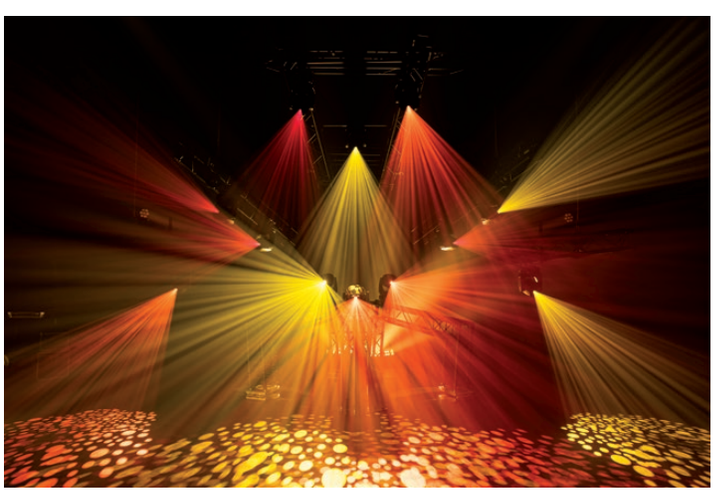



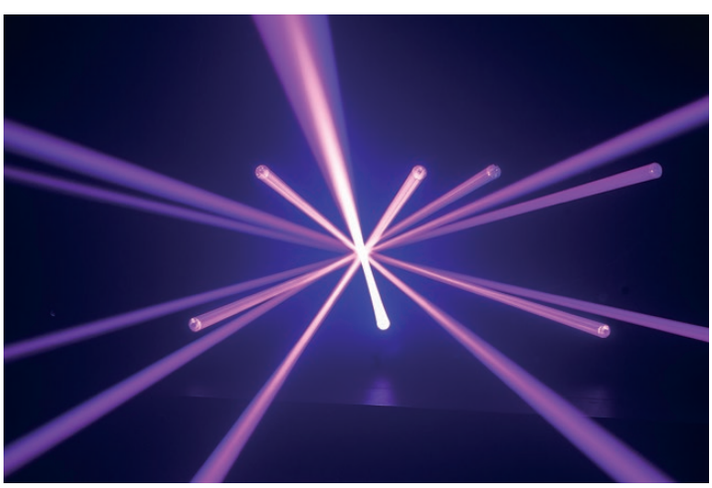

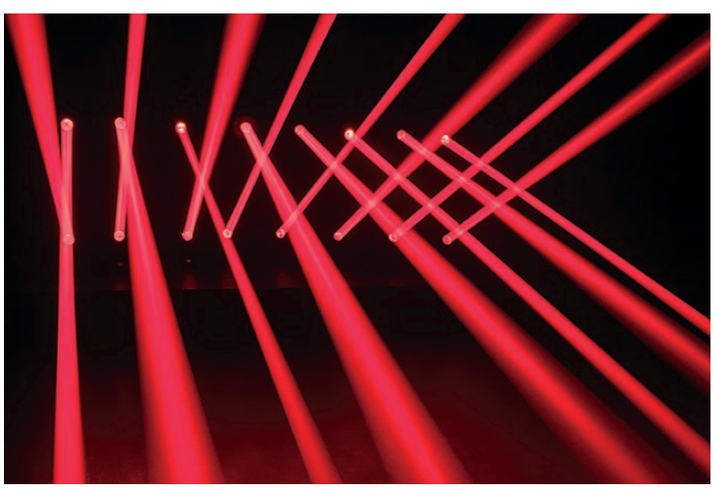



Case for 2 x Phantom 280 Hybrid/12R Hybrid
D7063 **Flight case**









Phantom 280 Hybrid

40078 **280 W COB LED Hybrid Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	280 W
Lumen Total:	2500 lm
CCT:	7200 K
Zoom:	Motorised
Zoom Min.:	3 °
Zoom Max.:	25.4 °
Focus:	Motorised
Ctrl. Mode:	Built-in Program / DMX / Manual
DMX Ch.:	13 / 18
Protocols:	DMX
WL:	Optional
Display:	LCD
Dimmer:	0-100 %
Strobe:	0-20 Hz
Prism 1:	3-facet
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	7 + Open
Gobo Sys.:	Glass + Metal
Gobo Wheel Ind. & Rot.:	Yes
Gobo Wheel 1:	12 + Open
Gobo Wheel 2:	7 + Open
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	395 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	Pro Power Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	211 mm
Width (mm):	367 mm
Height (mm):	610 mm
Weight:	19.4 kg
IP Rate:	IP20 (indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:
- 280 W COB LED Hybrid Moving Head
- For both Spot, Wash and Beam effects
- Motorised zoom with autofocus
- Optional W-DMX (wireless)
- 12 fixed and 7 rotating gobos + open
- 3-facet circular prism
- 7 colours + white



Polar 300 Hybrid

40102 **IP65 300 W LED Hybrid Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	300 W
Refresh Rate (min):	1200 Hz
Refresh Rate (max):	25000 kHz
Lumen Total:	71250 lm
Zoom:	Motorised
Zoom Min.:	3 °
Zoom Max.:	30 °
Frost:	Yes
Focus:	Motorised
Ctrl. Mode:	Built-in Program / DMX
DMX Ch.:	20 / 24 / 28
Protocols:	Art-Net / DMX / RDM / sACN
WL:	WL DMX
Display:	OLED / Touch
Dimmer:	0-100 %
Strobe:	0-25 Hz
Prism 1:	5-facet
Colour Sys.:	CMY Colour Wheel+CMY
Dichroic Colour Wheel 1:	8 + Open
Gobo Sys.:	Metal
Gobo Wheel Ind. & Rot.:	Yes
Gobo Wheel 1:	8 + Open
Gobo Wheel 2:	12 + Open
Pan:	540 °
Tilt:	220 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	400 W
Pwr. Conn. In.:	Pro Power TRUE1 In (Male)
Pwr. Conn. Out.:	ProPower TRUE1 Out (Female)
DMX Conn.:	XLR 5P In/Out
Length (mm):	416 mm
Width (mm):	356 mm
Height (mm):	670 mm
Weight:	34.6 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 300 W Hybrid Moving Head
- Wide motorised zoom (beam to wash)
- IP65 (dust and water resistant, fit for outdoor use)
- Motorised linear focus
- 8 bi-rotational and 12 static gobos + open
- 8 colours + white
- 5-facet circular rotating prism
- DMX control, Art-Net, RDM, sACN and W-DMX (wireless)

















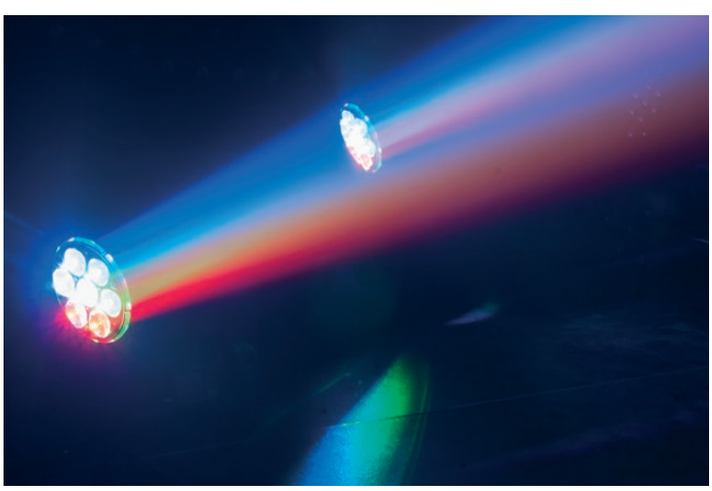





iW-720 set INFINITY

41524SET01 **6pcs with Premium flightcase**

Flightcase measurements including 6 units of iW-720:

Dimensions:	627 x 571 x 1163mm
Wheels:	4x 100m swivel with brake
Weight:	93,56kg



Case for 6x iW-720

D7237 **Premium Line**









iW-720 RDM

41524 **RGBW Wash, Electronic Zoom**

INFINITY

Specifications:

Light Src. Type:	LED	Strobe:	0-20 Hz
Light Src. Quant. :	7	Pan:	540 °
Light Src. Pwr.:	20 W	Tilt:	270 °
Lumen Total:	1767 lm	Pwr. Supp.:	100-240 VAC 50-60 Hz
Zoom:	Motorised	Pwr. Cons.:	190 W
Zoom Min.:	7 °	Pwr. Conn. In.:	powerCON Blue
Zoom Max.:	50 °	Pwr. Conn. Out.:	powerCON Grey
Ctrl. Mode:	Auto / DMX / Master Slave	DMX Conn.:	XLR 3P In/Out
DMX Ch.:	14 / 16 / 29	Length (mm):	390 mm
Protocols:	DMX / RDM	Width (mm):	285 mm
Display:	LCD	Height (mm):	197 mm
Zone Sect. Control:	4 sections	Weight:	8 kg
Dimmer:	0-100 %	IP Rate:	IP20(indoor use only)
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Motorised Zoom
- 4-section control
- Ultra fast movement through high torque motors
- Battery-powered menu



Case for 2x iW-1915

D7028 **Flight Case**

iW-1915 set INFINITY

41523SET01 **2pcs with Premium flightcase**

Flightcase measurements including 2 units of iW-1915:

Dimensions:	780 x 595 x 695mm
Wheels:	4x 100m swivel with brake
Weight:	64,4kg



iW-1915 Pixel

41523 **RGBW Wash, Zoom, Pixel Control**

INFINITY

Specifications:

Light Src. Type:	LED	Display:	LCD
Light Src. Quant. :	19	Zone Sect. Control:	19 sections
Light Src. Pwr.:	15 W	Dimmer:	0-100 %
Refresh Rate (min):	600 Hz	Strobe:	0-20 Hz
Refresh Rate (max):	15 kHz	Pan:	540 °
Lumen Total:	5381 lm	Tilt:	270 °
CRI:	80	Pwr. Supp.:	100-240 VAC 50-60 Hz
CCT:	7000 K	Pwr. Cons.:	415 W
Zoom:	Motorised	Pwr. Conn. In.:	powerCON Blue
Zoom Min.:	7 °	Pwr. Conn. Out.:	powerCON Grey
Zoom Max.:	50 °	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Ctrl. Mode:	Built-in Program / DMX / Master Slave	Length (mm):	355 mm
DMX Ch.:	21 / 97 / 76 Art-Net + 14 DMX	Width (mm):	300 mm
Protocols:	Art-Net / DMX	Height (mm):	455 mm
WL:	Optional	Weight:	14.28 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Motorised Zoom
- Full Pixel Control
- Clear lens with background colour effect
- Fast movement through high torque motors
- Selectable RGBW or CMY colour mixing
- Art-Net control











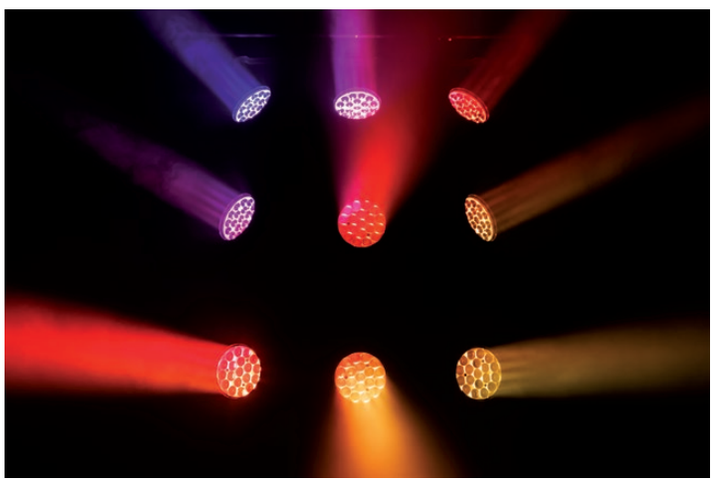

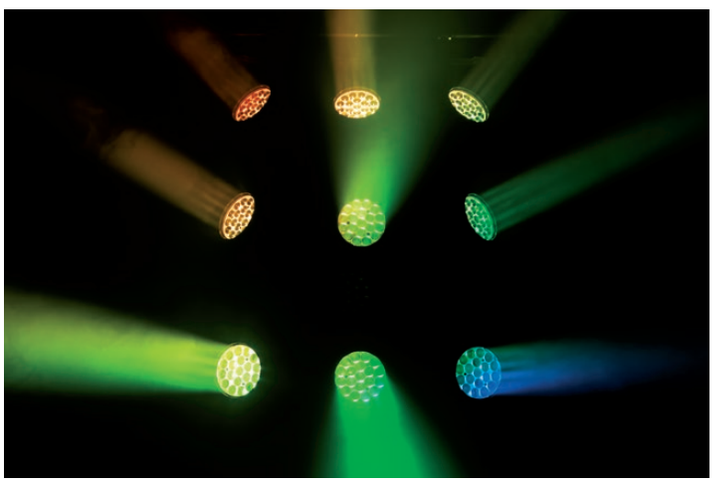



Case for 4x iW-741

D7272 **Premium Line**

iW-1915 set INFINITY

41523SET01 **2pcs with Premium flightcase**

Flightcase measurements including 2 units of iW-1915:

Dimensions:	780 x 595 x 695mm
Wheels:	4x 100m swivel with brake
Weight:	64,4kg



iW-741 RDM

41528 **RGBW Wash, Electronic Zoom, 3P DMX**

INFINITY

Specifications:

Light Src. Type:	LED	Dimmer:	0-100 %
Light Src. Quant. :	7	Strobe:	0-20 Hz
Light Src. Pwr.:	40 W	Pan:	540 °
Refresh Rate:	6000 Hz	Tilt:	270 °
Refresh Rate (min):	600 Hz	Pwr. Supp.:	100-240 VAC 50-60 Hz
Refresh Rate (max):	15 kHz	Pwr. Cons.:	295 W
Lumen Total:	3208 lm	Pwr. Conn. In.:	powerCON Blue
CRI:	78	Pwr. Conn. Out.:	powerCON Grey
Zoom Min.:	3.6 °	DMX Conn.:	XLR 3P In/Out
Zoom Max.:	60 °	Length (mm):	290 mm
Ctrl. Mode:	Auto / DMX / Master Slave	Width (mm):	204 mm
DMX Ch.:	15 / 20	Height (mm):	418 mm
Protocols:	DMX / RDM	Weight:	9.36 kg
WL:	Optional	IP Rate:	IP20(indoor use only)
Display:	LCD	Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Ultrafast movements
- Zoom 3.6° to 60°
- Selectable PWM rate by DMX
- Battery powered display
- White Output Mode
- RDM
- 3P DMX

iW-741 RDM

415285P **RGBW Wash, Electronic Zoom, 5P DMX**

INFINITY

Specifications:

Light Src. Type:	LED	Dimmer:	0-100 %
Light Src. Quant. :	7	Strobe:	0-20 Hz
Light Src. Pwr.:	40 W	Pan:	540 °
Refresh Rate (min):	600 Hz	Tilt:	230 °
Refresh Rate (max):	15 kHz	Pwr. Supp.:	100-240 VAC 50-60 Hz
Lumen Total:	3208 lm	Pwr. Cons.:	295 W
CRI:	78	Pwr. Conn. In.:	powerCON Blue
Zoom:	Motorised	Pwr. Conn. Out.:	powerCON Grey
Zoom Min.:	3.6 °	DMX Conn.:	XLR 5P In/Out
Zoom Max.:	60 °	Length (mm):	290 mm
Ctrl. Mode:	Auto / DMX / Master Slave	Width (mm):	204 mm
DMX Ch.:	15 / 20	Height (mm):	418 mm
Protocols:	DMX / RDM	Weight:	9.36 kg
WL:	Optional	IP Rate:	IP20(indoor use only)
Display:	Touch	Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Ultrafast movements
- Zoom 3.6° to 60°
- Selectable PWM rate by DMX
- Battery powered display
- White Output Mode
- RDM
- 5P DMX

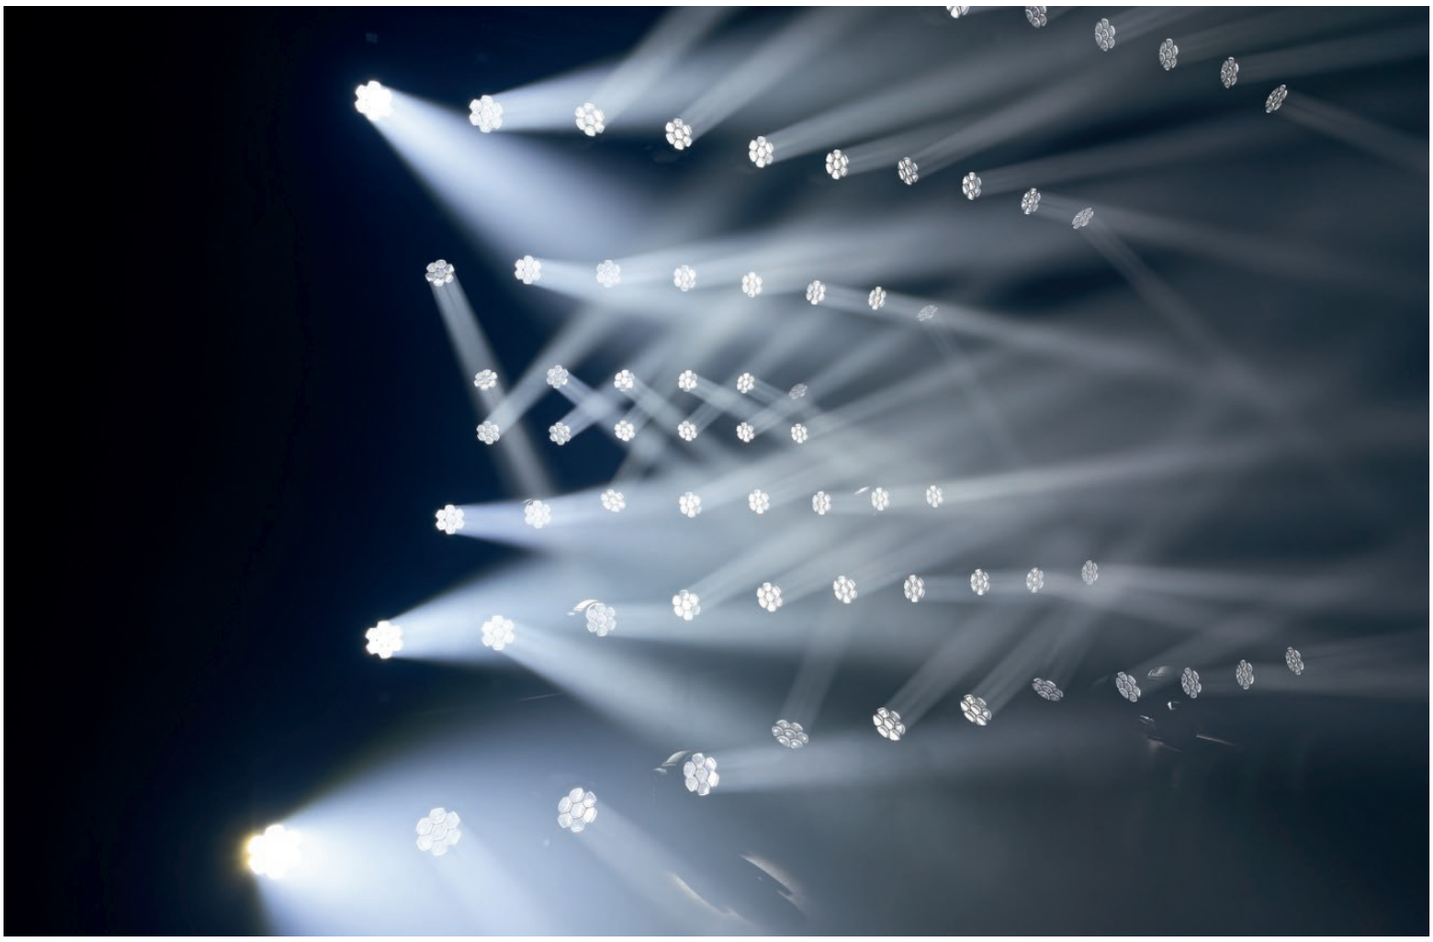





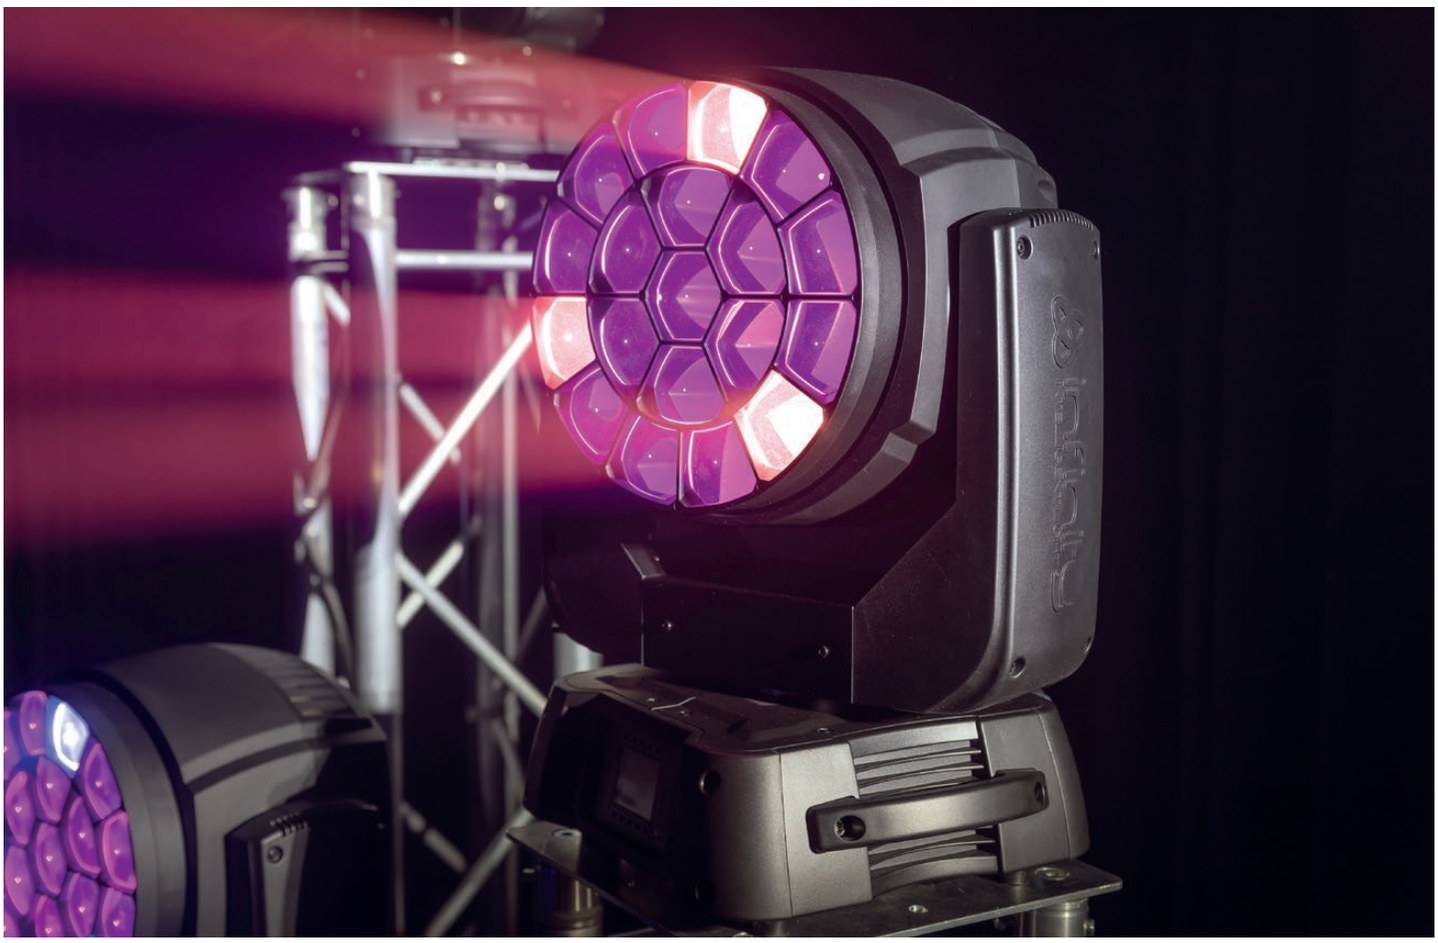

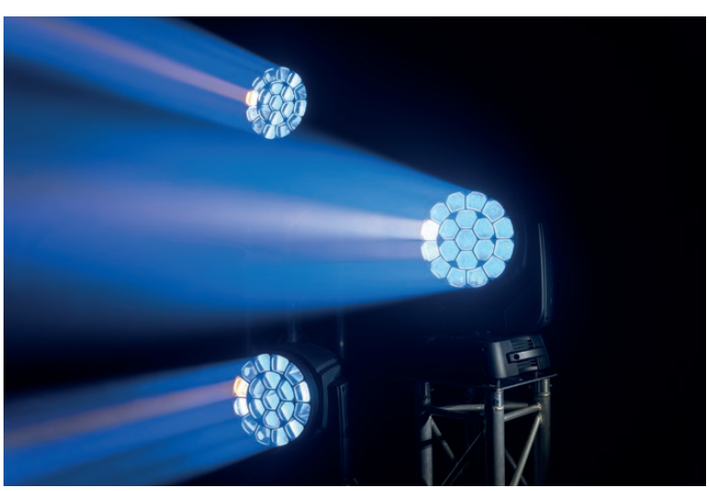

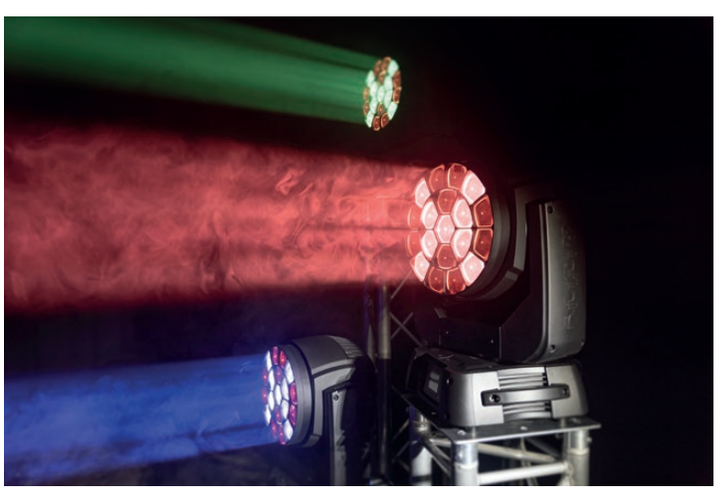



Case for 2x iW-1941
D7273 **Premium Line**









iW-1941 RDM

41529 **RGBW Wash, Electronic Zoom**

INFINITY

Specifications:

Light Src. Type:	LED	Zone Sect. Control:	19 sections
Light Src. Quant. :	19	Dimmer:	0-100 %
Light Src. Pwr.:	40 W	Strobe:	0-20 Hz
Refresh Rate (min):	600 Hz	Pan:	540 °
Refresh Rate (max):	15 kHz	Tilt:	270 °
Lumen Total:	8742 lm	Pwr. Supp.:	100-240 VAC 50-60 Hz
CRI:	78	Pwr. Cons.:	625 W
Zoom:	Motorised	Pwr. Conn. In.:	powerCON Blue
Zoom Min.:	3.6 °	Pwr. Conn. Out.:	powerCON Grey
Zoom Max.:	60 °	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Ctrl. Mode:	Auto / DMX / Master Slave	Length (mm):	365 mm
DMX Ch.:	20 / 177 / 76 Art-Net + 13 DMX	Width (mm):	304 mm
Protocols:	Art-Net / DMX / RDM	Height (mm):	468 mm
WL:	Optional	Weight:	19.26 kg
Display:	Touch	IP Rate:	IP20 (indoor use only)
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Pixel control
- Zoom 3.6° to 60°
- Selectable PWM rate by DMX
- Battery powered display
- White Output Mode
- RDM



Case for 2x IFX-640
41553 **Premium Line**

iFX-640

41552 **6 x 40 W RGBW Effect Moving Head**

INFINITY

Specifications:

Light Src. Type:	LED	Dimmer:	0-100 %
Light Src. Quant. :	6	Strobe:	0-20 Hz
Light Src. Pwr.:	40 W	Pan:	540 °
Refresh Rate (min):	600 Hz	Tilt:	270 °
Refresh Rate (max):	15 kHz	Cont. Movement:	Rotating Optics
Lumen Total:	1800 lm	Pwr. Supp.:	100-240 VAC 50-60 Hz
CRI:	80	Pwr. Cons.:	360 W
Zoom:	Motorised	Pwr. Conn. In.:	powerCON Blue
Frost:	Yes	Pwr. Conn. Out.:	powerCON Grey
Ctrl. Mode:	Auto / DMX / Manual	DMX Conn.:	XLR 5P In/Out
DMX Ch.:	24	Length (mm):	304 mm
Protocols:	DMX / RDM	Width (mm):	364 mm
WL:	Optional	Height (mm):	540 mm
Display:	Batt. / Gravity Sensor / LCD	Weight:	14.3 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Metal / Plastic
		Colour:	Black
Zone Sect. Control:	6 sections		

FEATURES:

- 6x 0-star RGBW LED Moving Head
- Continuously bi-rotating front lens
- Beam diffraction blades
- Individual Pixel Control (6 sections)
- Flower effect











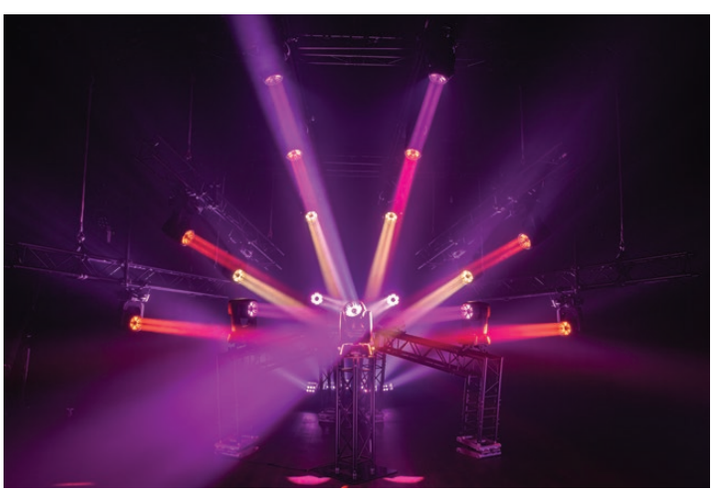



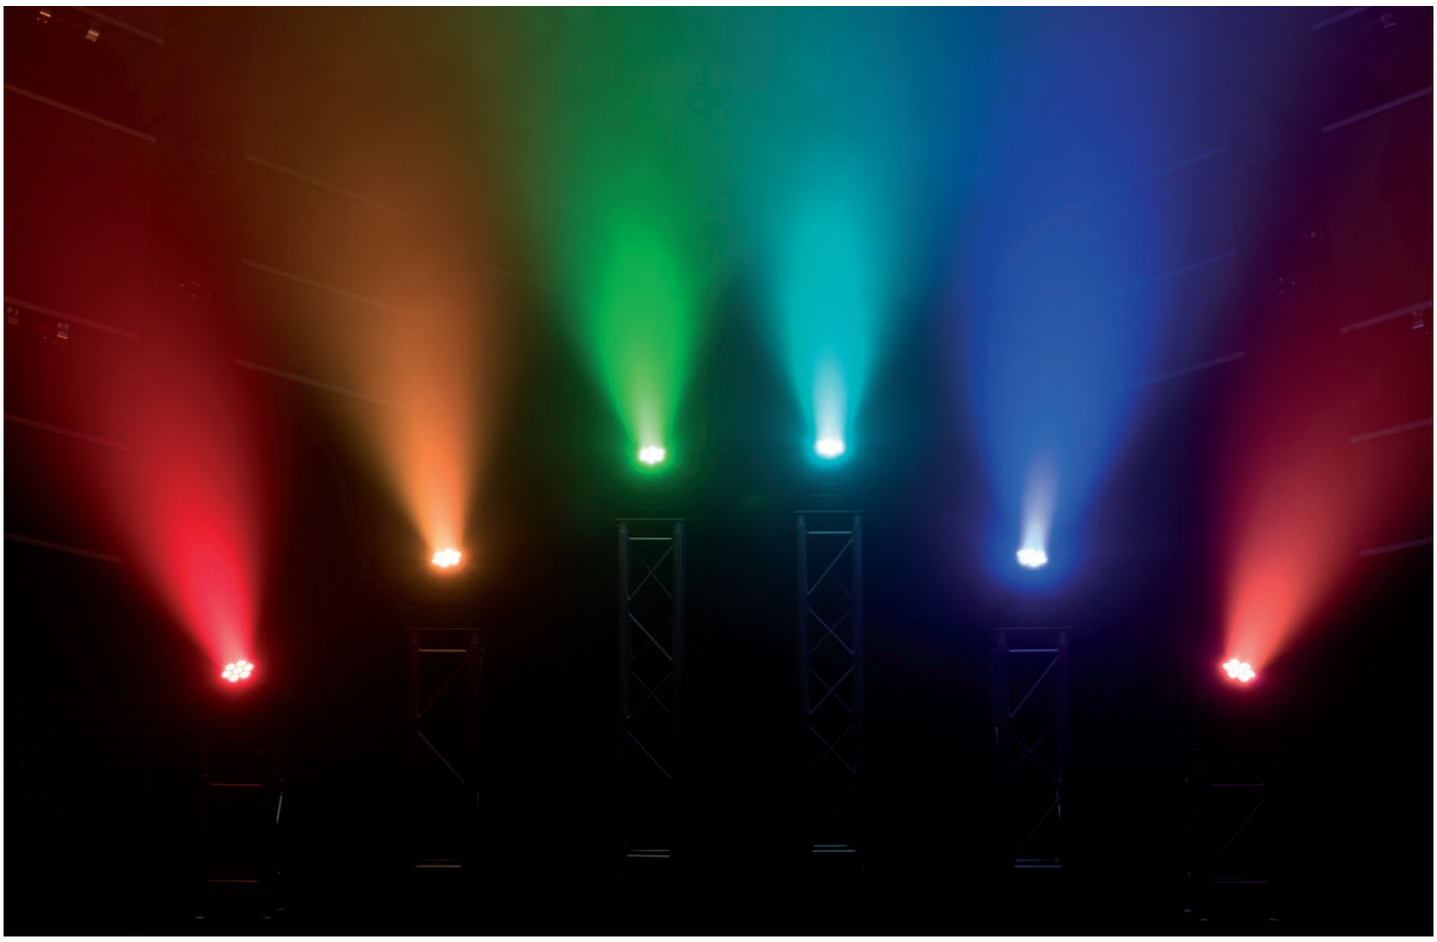



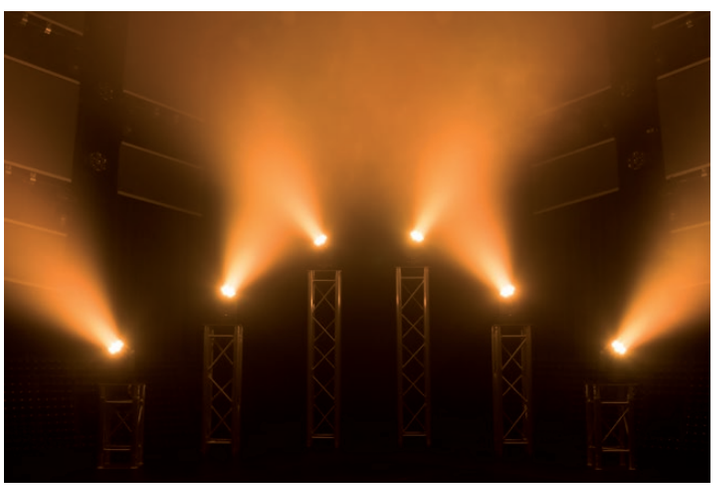



Case for 2x Shark Spot / Wash / Zoom / Combi
D7048 **Value Line Flight Case**









Shark Wash One

45020 **7 x 12 W RGBWA-UV LED Wash Moving Head**

SHOWTEC

Specifications:

		Pan:	540 °
		Tilt:	230 °
Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	12	Pwr. Cons.:	120 W
Light Src. Pwr.:	12 W	Pwr. Conn. In.:	IEC C13 female
Lumen Total:	979 lm	DMX Conn.:	XLR 3P In/Out
Ctrl. Mode:	Auto / DMX / Master Slave / Remote / Sound	Length (mm):	215 mm
		Width (mm):	145 mm
DMX Ch.:	7 / 16	Height (mm):	300 mm
Protocols:	DMX	Weight:	3.8 kg
Display:	OLED	IP Rate:	IP20(indoor use only)
Dimmer:	0-100 %	Housing:	Metal / Plastic
Strobe:	0-20 Hz	Colour:	Black

FEATURES:
- 7 x 12 W RGBWA+UV LED Wash Moving Head
- 25° fixed beam angle suitable for low ceiling venues
- Compact, one-clamp-mount design
- Dimmer and strobe function
- DMX, IR and Master/Slave control
- Infrared remote included
- Suitable for 2-unit DAP D7048 and 4-unit DAP D7049 case



Case for 2x Shark Spot / Wash / Zoom / Combi
D7048 **Value Line Flight Case**

Shark Zoom Wash One

45021 **7 x 15 W RGBW LED Wash Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED	Dimmer:	0-100 %
Light Src. Quant. :	7	Strobe:	0-20 Hz
Light Src. Pwr.:	15 W	Pan:	540 °
Lumen Total:	1081 lm	Tilt:	230 °
CRI:	70	Pwr. Supp.:	100-240 VAC 50-60 Hz
CCT:	7200 K	Pwr. Cons.:	80 W
Zoom:	Motorised	Pwr. Conn. In.:	IEC C13 female
Zoom Min.:	6 °	DMX Conn.:	XLR 3P In/Out
Zoom Max.:	36 °	Length (mm):	215 mm
Ctrl. Mode:	Auto / DMX / Master Slave / Remote / Sound	Width (mm):	145 mm
		Height (mm):	300 mm
		Weight:	4.3 kg
		IP Rate:	IP20(indoor use only)
DMX Ch.:	8 / 15	Housing:	Metal / Plastic
Protocols:	DMX	Colour:	Black
Display:	OLED		

FEATURES:

- 7 x 15 W RGBW LED Wash Moving Head
- Wide motorised zoom
- Compact, one-clamp-mount design
- Dimmer and strobe function
- DMX, IR and Master/Slave control
- Infrared remote included
- Suitable for 2-unit DAP D7048 and 4-unit DAP D7049 case











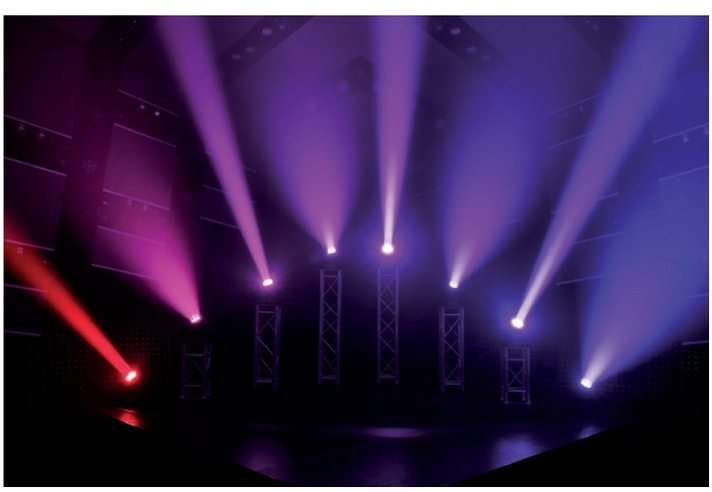

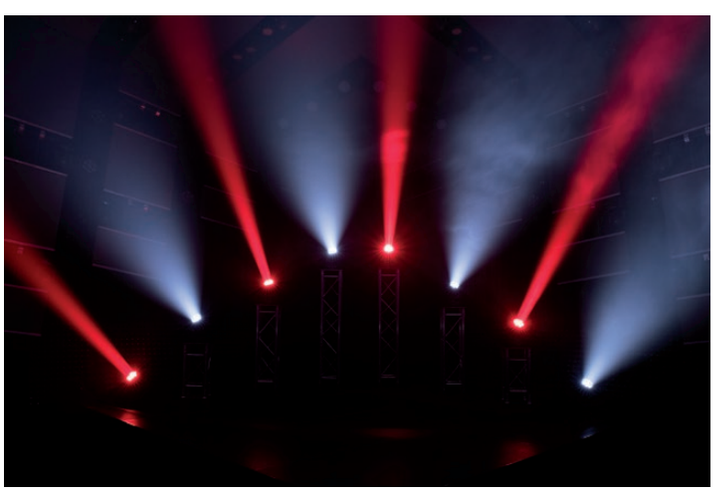









Case for 4x Phantom 100 / 180

D7062 **Flight Case**



Phantom 180 Wash

40031 **180 W RGBW LED Wash Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	12
Light Src. Pwr.:	15 W
Lumen Total:	3920 lm
CRI:	75
CCT:	7200 K
Zoom:	Motorised
Zoom Min.:	7 °
Zoom Max.:	50 °
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound
DMX Ch.:	14 / 29
Protocols:	DMX
Display:	OLED
Zone Sect. Control:	4 sections
Dimmer:	0-100 %
Strobe:	0-20 Hz
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	220 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	290 mm
Width (mm):	205 mm
Height (mm):	366 mm
Weight:	8.5 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- Powerful 12x 15 W RGBW LED Wash Moving Head
- Four separate controllable sections
- Wide DMX controllable zoom range
- 16-bit pan & tilt for fast and precise movements
- Quick-Lock brackets



Polar 340 WashFX

40101 **IP65 7 x 40 W and 1 x 60 W RGBW LED Wash Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Type Spot:	LED
Light Src. Quant. :	7
Light Src. Quant. Spot:	1
Light Src. Pwr.:	40 W
Light Src. Pwr. Spot:	60 W
Refresh Rate (min):	1200 Hz
Refresh Rate (max):	25 kHz
Lumen Total:	3760 lm
CRI:	70
CCT:	8115 K
Zoom:	Motorised
Zoom Min.:	4.5 °
Zoom Max.:	35 °
Ctrl. Mode:	Built-in Program / DMX / Manual
DMX Ch.:	25 / 27 / 31 / 37 / 52
Protocols:	Art-Net / DMX / RDM / sACN
WL:	WL DMX
Display:	OLED / Touch
Zone Sect. Control:	7 sections
Dimmer:	0-100 %
Strobe:	0-25 Hz
Pan:	540 °
Tilt:	220 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	350 W
Pwr. Conn. In.:	Pro Power TRUE1 In (Male)
DMX Conn.:	Dedicated 5P IP65 In/Out
Length (mm):	489 mm
Width (mm):	416 mm
Height (mm):	356 mm
Weight:	23.24 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 7 x 40 W & 1 x 60 W RGBW LED Flower Wash Moving Head
- Wide motorised zoom (beam to wash)
- IP65 (dust and water resistant, fit for outdoor use)
- Individual Pixel Control
- RGB LED FX Ring
- Bi-directional 8-facet prism
- DMX control, Art-Net, RDM, sACN and W-DMX (wireless)
- Compact, lightweight design

















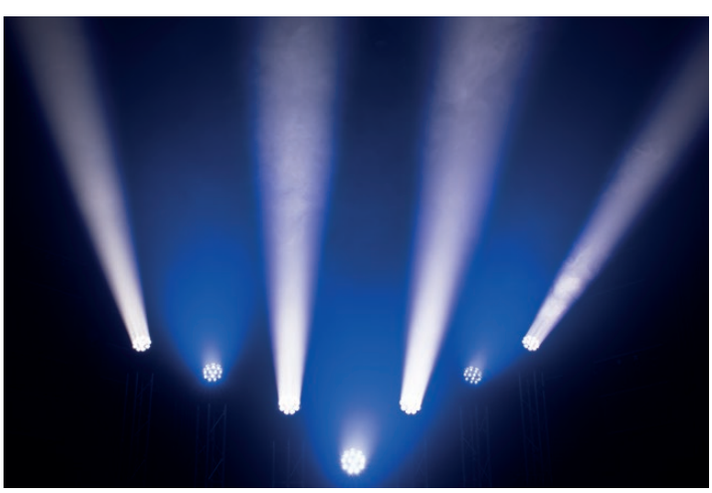













Polar 1920 Wash

40104 **IP65 19 x 20 W RGBW LED Wash Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED	WL:	WL DMX
Light Src. Quant. :	19	Display:	Batt. / Gravity Sensor / OLED / Touch
Light Src. Pwr.:	20 W	Dimmer:	0-100 %
Refresh Rate (min):	1200 Hz	Pan:	540 °
Refresh Rate (max):	25 kHz	Tilt:	220 °
Lumen Total:	2017 lm	Pwr. Supp.:	100-240 VAC 50-60 Hz
CRI:	90	Pwr. Cons.:	400 W
Zoom:	Motorised	Pwr. Conn. In.:	Pro Power TRUE1 In (Male)
Zoom Min.:	6 °	DMX Conn.:	Dedicated 5P IP65 In/Out
Zoom Max.:	35 °	Length (mm):	489 mm
Ctrl. Mode:	Built-in Program / DMX / Manual	Width (mm):	416 mm
		Height (mm):	356 mm
DMX Ch.:	18 / 20 / 22 / 23 / 28 / 29	Weight:	23.9 kg
Protocols:	Art-Net / DMX / RDM / sACN	IP Rate:	IP65
		Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- 19 x 20 W Osram RGBW Wash Moving Head
- Wide motorised zoom range (beam to wash)
- IP65 (dust and water resistant, fit for outdoor use)
- RGB LED FX Ring
- DMX control, Art-Net, RDM, sACN and W-DMX (wireless)
- Compact and lightweight design



Case for 2x iB-2R

D7031 **Flight Case**

iB-2R set INFINITY

41531SET01 **2pcs with Premium flightcase**

Flightcase measurements including 2 units of iB-2R:

Dimensions:	780 x 595 x 695mm
Wheels:	4x 100m swivel with brake
Weight:	76,8kg



iB-2R

41531 **2R Beam, Incl. Osram Lamp**

INFINITY

Specifications:

Light Src. Type:	Discharge	Colour Sys.:	Colour Wheel
Light Src. Quant. :	1	Gobo Sys.:	Metal
Light Src. Pwr.:	132 W	Gobo Wheel 1:	17 + Open
Lumen Total:	7780 lm	Pan:	540 °
CCT:	9200 K	Tilt:	270 °
Frost:	Yes	Pwr. Supp.:	100-240 VAC 50-60 Hz
Focus:	Motorised	Pwr. Cons.:	265 W
Ctrl. Mode:	Auto / DMX / Master Slave	Pwr. Conn. In.:	powerCON Blue
DMX Ch.:	15 / 19	Pwr. Conn. Out.:	powerCON Grey
Protocols:	DMX	DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out
WL:	Optional	Length (mm):	303 mm
Display:	Batt. / Gravity Sensor / LCD	Width (mm):	366 mm
Dimmer:	0-100 %	Height (mm):	475 mm
Strobe:	0-20 Hz	Weight:	17.5 kg
Prism 1:	5-facet / Linear	IP Rate:	IP20(indoor use only)
Prism 2:	8 -facet / Circular	Housing:	Metal / Plastic
Prism Overlay:	Yes	Colour:	Black

FEATURES:

- 8-facet & linear prism
- Colour bump capabilities
- Fast movement through high torque motors
- Battery-powered menu















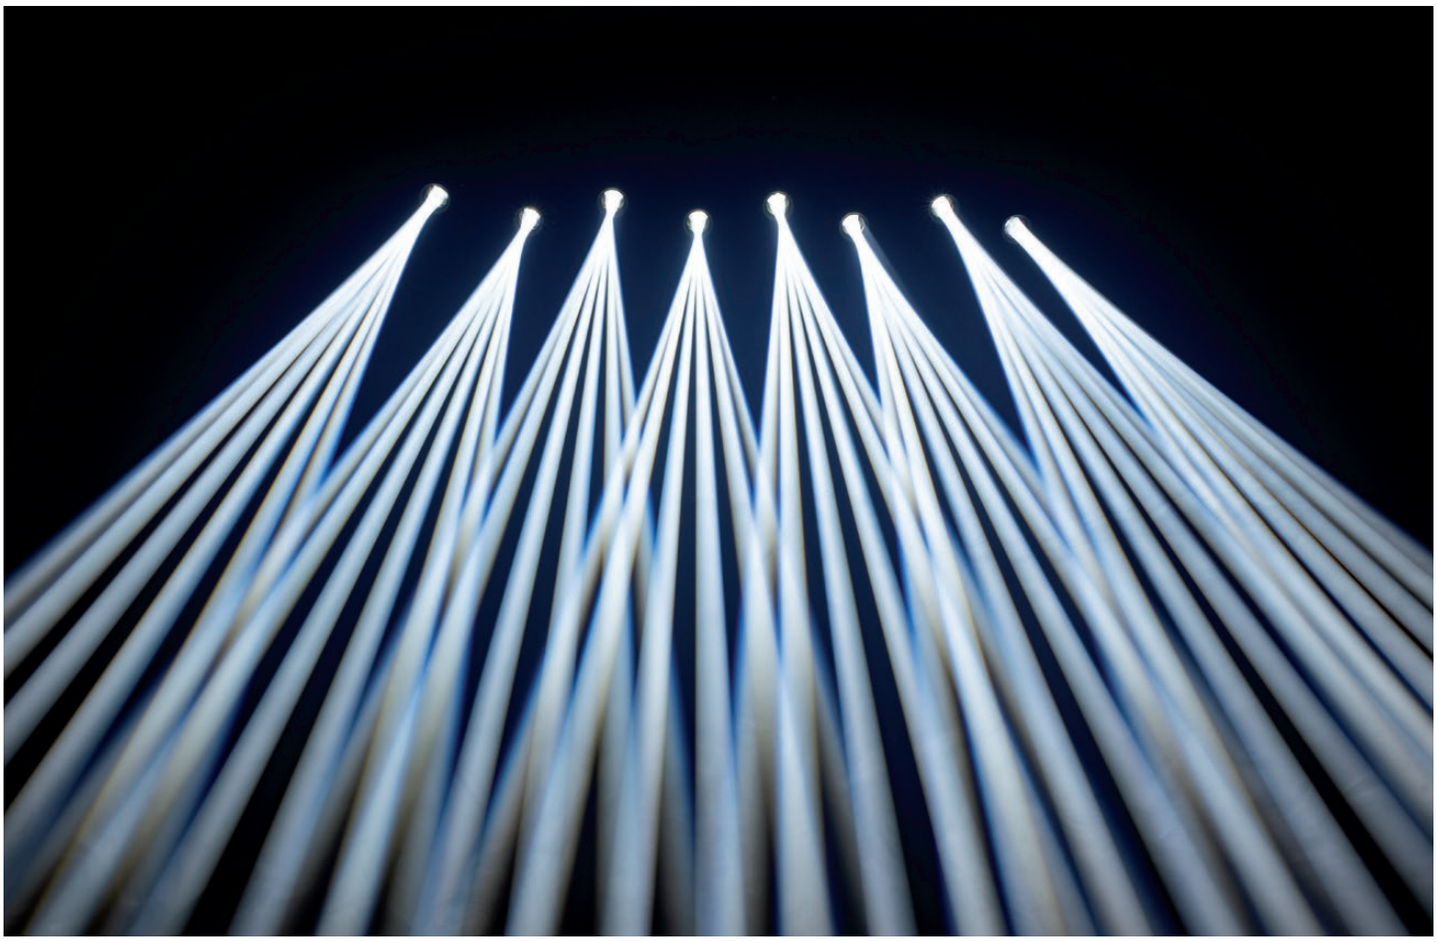

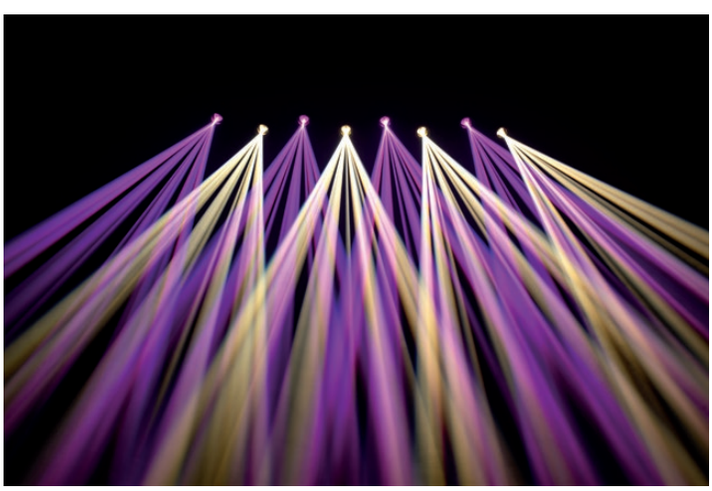

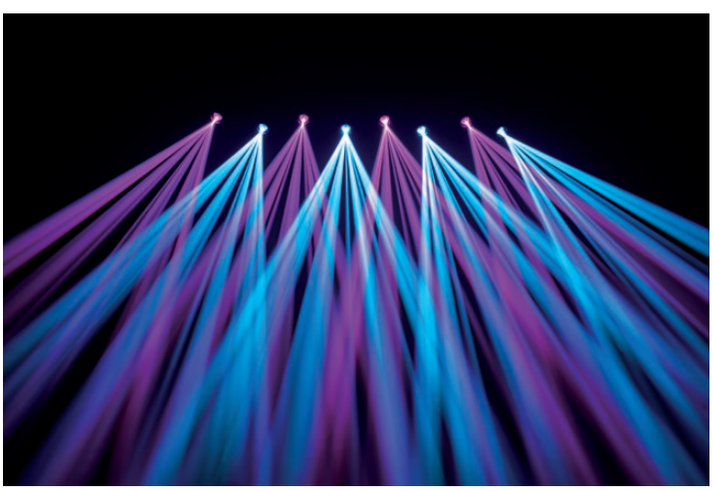



Case for 2x Furion B401
D7268 **Premium Line**









B401 Beam

41533 **Furion Series**

INFINITY

Specifications:

Light Src. Type:	Discharge
Light Src. Quant. :	1
Light Src. Pwr.:	230 W
Lumen Total:	18200 lm
CCT:	7600 K
Frost:	Yes
Focus:	Motorised
Ctrl. Mode:	Auto / DMX / Master Slave
DMX Ch.:	16 / 18 / 23
Protocols:	Art-Net / DMX / RDM / sACN
WL:	WL DMX
Display:	Batt. / Gravity Sensor / LCD / Touch
Dimmer:	0-100 %
Strobe:	0-20 Hz
Shutter:	Yes
Prism 1:	5-facet / Linear
Prism 2:	16-facet / Circular
Prism Overlay:	Yes
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	14 + Open
Dichroic Colour Wheel 2:	14 + Open
Gobo Sys.:	Metal
Gobo Wheel 1:	17 + Open
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	402 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
DMX Conn.:	XLR 5P In/Out
Length (mm):	519 mm
Width (mm):	380 mm
Height (mm):	284 mm
Weight:	21 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- Multiple Colour-bump possibility
- Prism Overlay
- Frost filter
- Fast movement through high torque motors
- Onboard W-DMX



Case for 4x Shark Beam FX
D7050 **Flight Case**

Shark Beam FX One

45024 **3 x 40 W RGBW 3-in-1 LED Beam Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED	Strobe:	0-20 Hz
Light Src. Quant. :	3	Pan:	540 °
Light Src. Pwr.:	40 W	Tilt:	230 °
LED Colour Type:	RGBW	Cont. Movement:	Rotating Optics
Lumen Total:	5 lm	Pwr. Supp.:	100-240 VAC 50-60 Hz
Zoom:	Motorised	Pwr. Cons.:	135 W
Zoom Min.:	4 °	Pwr. Conn. In.:	IEC C13 female
Zoom Max.:	60 °	Pwr. Conn. Out.:	IEC C14 male
Ctrl. Mode:	Auto / DMX / Master Slave / Remote / Sound	DMX Conn.:	XLR 3P In/Out
		Length (mm):	255 mm
		Width (mm):	175 mm
DMX Ch.:	8 / 16	Height (mm):	355 mm
Protocols:	DMX	Weight:	6 kg
Display:	OLED	IP Rate:	IP20 (indoor use only)
Dimmer:	0-100 %	Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- 3 x 40 W RGBW LED Beam, Wash and FX Moving Head
- Continuously bi-rotating front lens for true retro disco feeling
- Wide motorised zoom
- Built-in eye catching aerial effects
- Infrared remote included
- DMX and Master/Slave control
- Suitable for 2-unit DAP D7048 and 4-unit DAP D7049 case











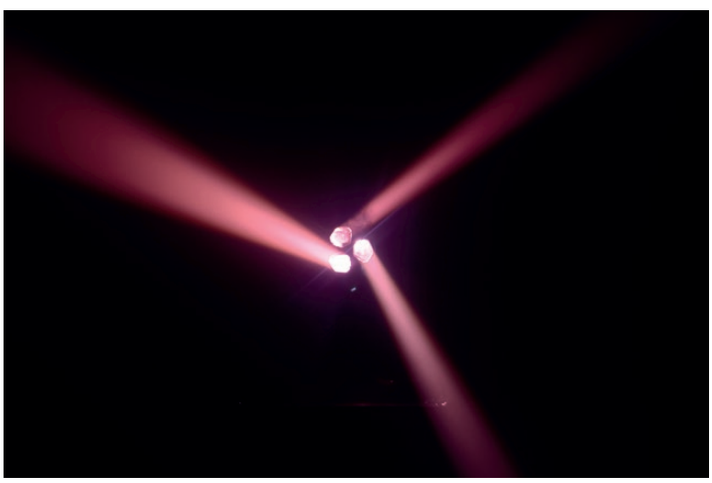

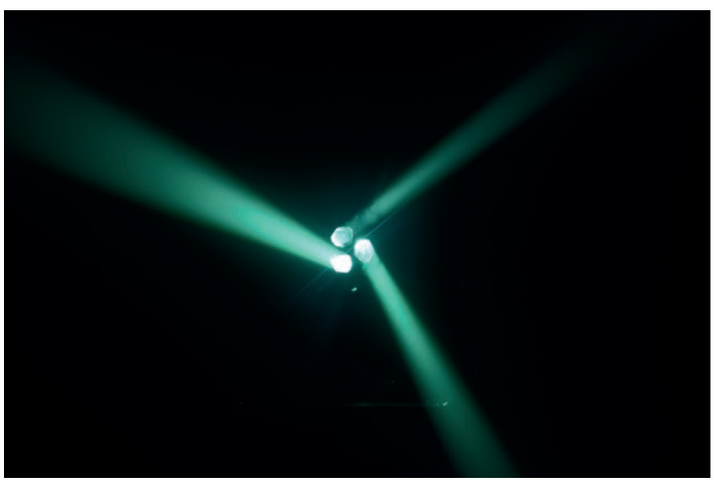



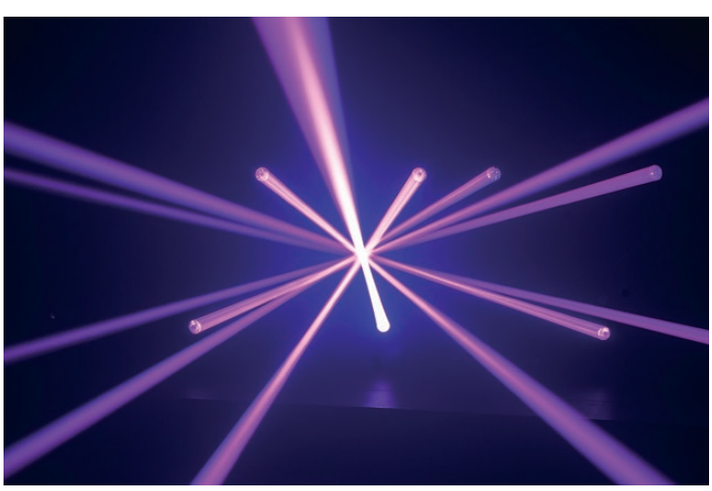

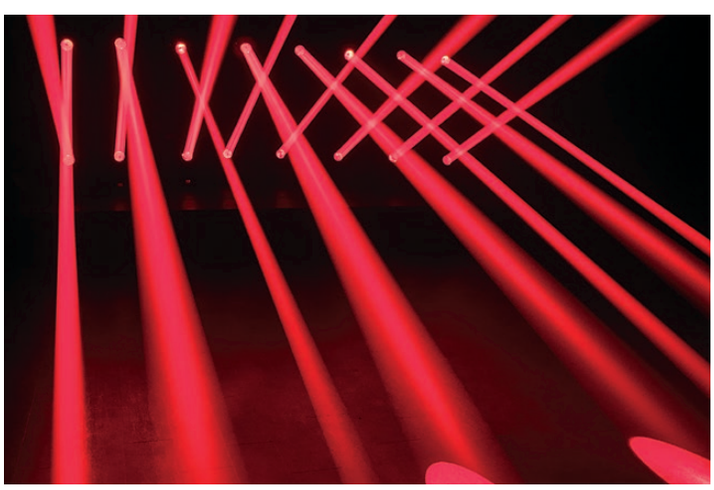



Case for 4x Phantom 100 / 130 / 3R
D7052 **Flight Case**









Phantom 3R Hybrid

40075 **All-in-one Hybrid Moving Head Including 140 W Osram R3 bulb**

SHOWTEC

Specifications:

Light Src. Type:	Discharge
Light Src. Quant. :	1
Light Src. Pwr.:	150 W
Lumen Total:	9200 lm
CRI:	70
CCT:	8600 K
Zoom:	Motorised
Zoom Min.:	3 °
Zoom Max.:	20 °
Frost:	Yes
Focus:	Motorised
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound
DMX Ch.:	14 / 19
Protocols:	DMX
WL:	Optional
Display:	LCD
Dimmer:	0-100 %
Strobe:	0-20 Hz
Shutter:	Yes
Prism 1:	Circular
Prism 2:	Linear
Prism Overlay:	Yes
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	12 + Open
Gobo Sys.:	Glass + Metal
Gobo Wheel 1:	16 + Open
Gobo Wheel 2:	8 + Open
Pan:	540 °
Tilt:	260 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	270 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	325 mm
Width (mm):	210 mm
Height (mm):	505 mm
Weight:	16.7 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- 140 W Moving Head for both Spot, Wash and Beam effects
- Motorised zoom, focus and frost
- 16-facet linear & 8-facet circular overlapping prisms
- Motorised zoom
- 12 colours + white
- Optional W-DMX (wireless)
- Osram R3 discharge bulb included



Case for 4x Phantom 100 / 130 / 3R
D7052 **Flight Case**

Phantom 3R Beam

40079 **Compact 140 W Beam Moving Head Including Osram R3 bulb**

SHOWTEC

Specifications:

Light Src. Type:	Discharge	Colour Sys.:	Colour Wheel
Light Src. Quant. :	1	Dichroic Colour Wheel 1:	14 + Open
Light Src. Pwr.:	150 W	Gobo Sys.:	Metal
Lumen Total:	9200 lm	Gobo Wheel 1:	17 + Open
CCT:	8600 K	Pan:	540 °
Frost:	Yes	Tilt:	270 °
Focus:	Motorised	Pwr. Supp.:	100-240 VAC 50-60 Hz
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound	Pwr. Cons.:	255 W
		Pwr. Conn. In.:	Pro Power Blue
		Pwr. Conn. Out.:	ProPower Grey
DMX Ch.:	10 / 14	DMX Conn.:	XLR 3P In/Out
Protocols:	DMX	Length (mm):	325 mm
WL:	Optional	Width (mm):	210 mm
Display:	LCD	Height (mm):	420 mm
Dimmer:	0-100 %	Weight:	13 kg
Strobe:	0-20 Hz	IP Rate:	IP20(indoor use only)
Shutter:	Yes	Housing:	Metal / Plastic
Prism 1:	8-facet	Colour:	Black

FEATURES:

- Compact, powerful 140 W Beam Moving Head
- Motorised frost filter and focus
- 8-facet circular rotating prism
- 17 fixed gobos + open
- 14 colours + white
- 16-bit pan & tilt for fast and precise movements
- Optional wireless DMX (W-DMX)
- Osram 140 W R3 discharge light engine included



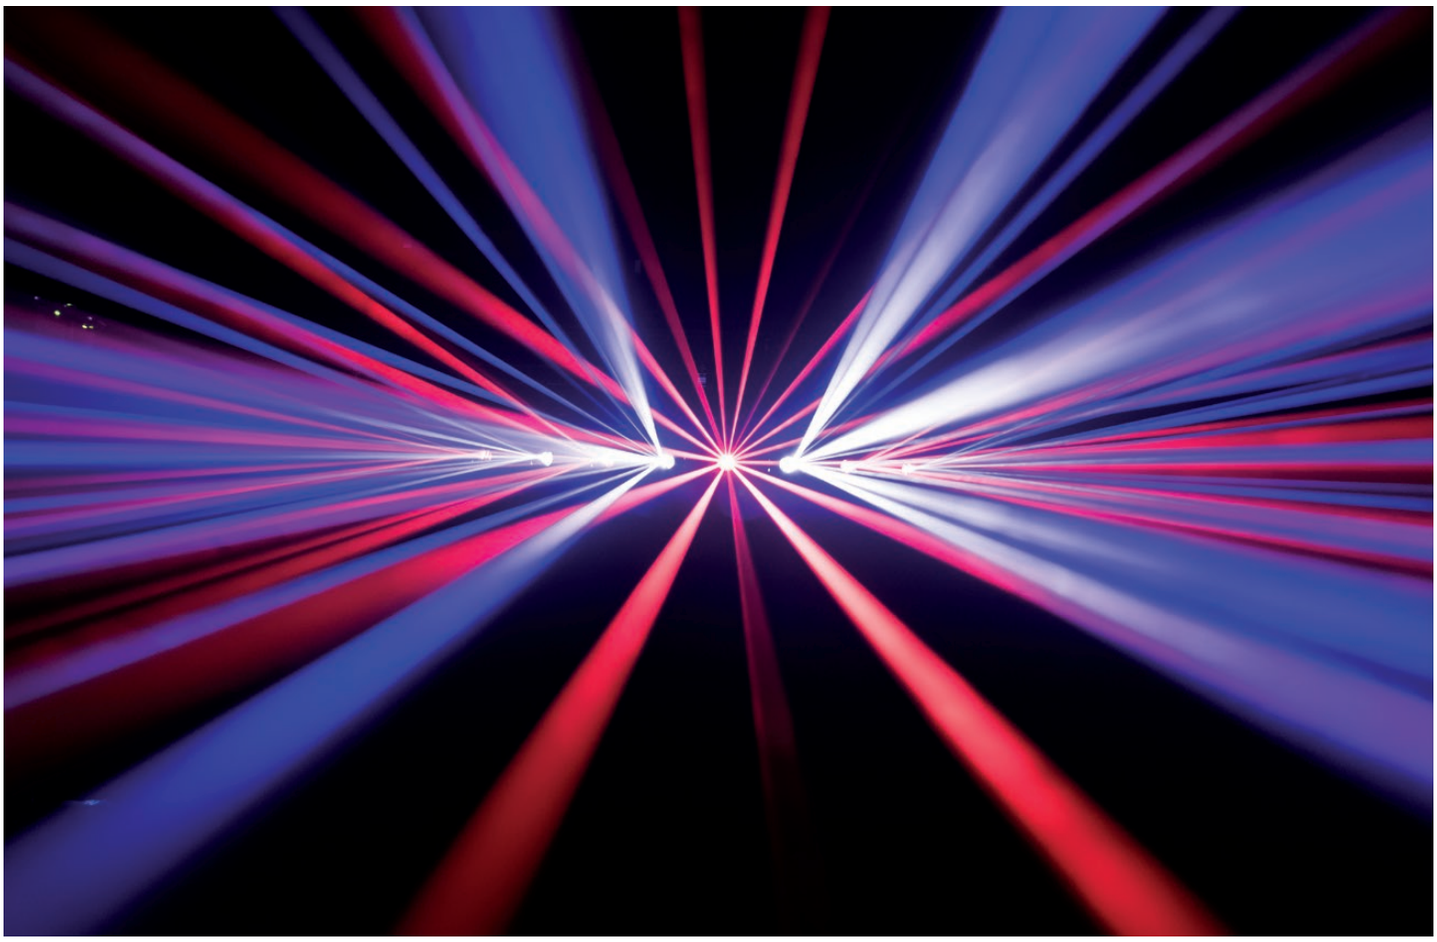



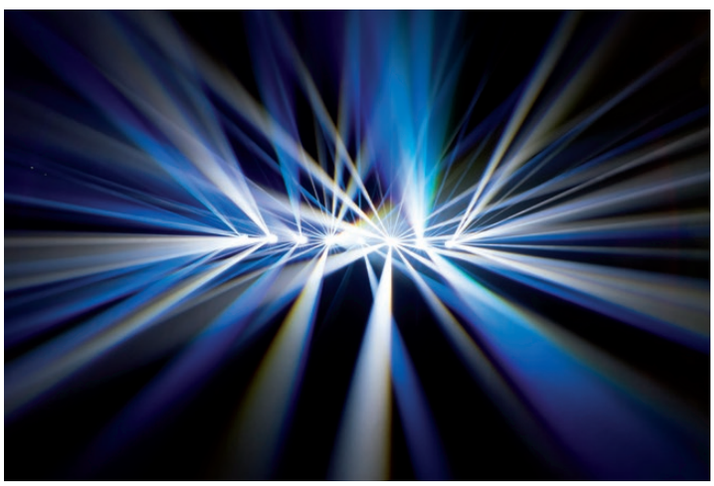

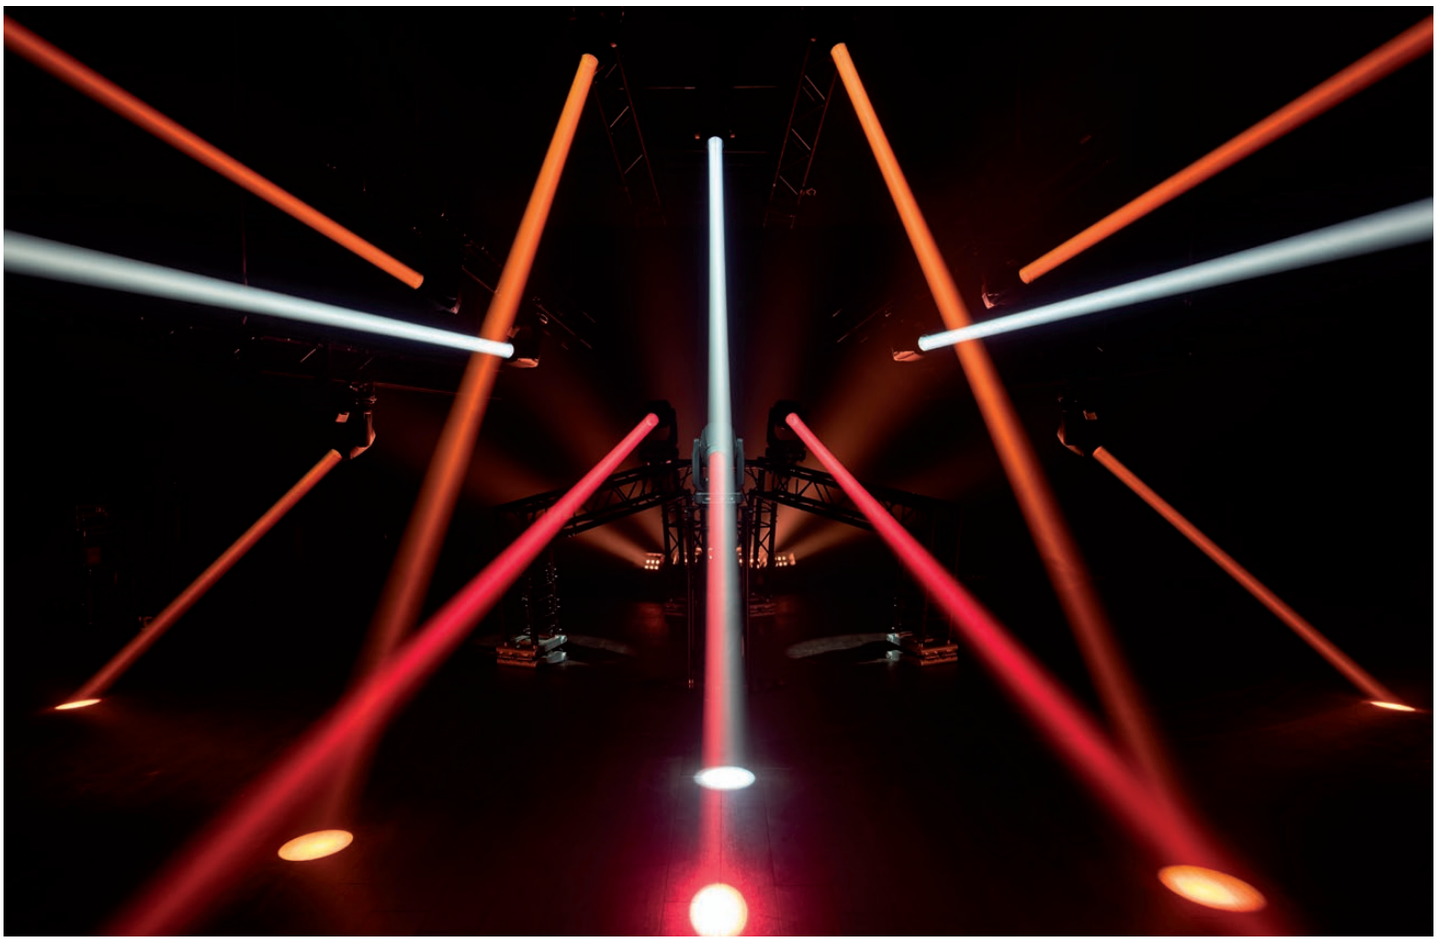



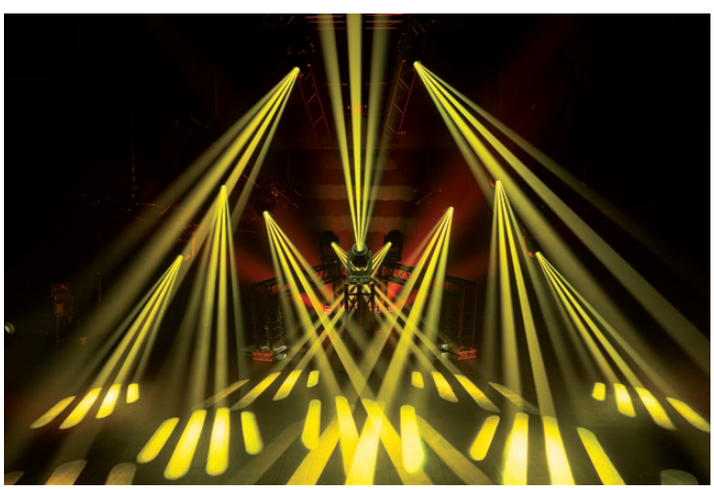



Case for 2 x Phantom 280 Hybrid/12R Hybrid
D7063 **Flight case**



Phantom 12R Hybrid

40080 **300 W Hybrid Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	Discharge
Light Src. Quant. :	1
Light Src. Pwr.:	300 W
Lumen Total:	8600 lm
CRI:	80
CCT:	7200 K
Zoom:	Motorised
Frost:	Yes
Focus:	Motorised
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound
DMX Ch.:	14 / 18
Protocols:	DMX
WL:	Optional
Display:	LCD
Dimmer:	0-100 %
Strobe:	0-15 Hz
Shutter:	Yes
Prism 1:	8-facet
Prism 2:	24-facet
Prism Overlay:	Yes
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	12 + Open
Gobo Wheel 1:	17 + Open
Gobo Wheel 2:	8 + Open
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	400 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	323 mm
Width (mm):	220 mm
Height (mm):	550 mm
Weight:	16 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- Bright 300 watt Hybrid Moving Head
- Wide motorised zoom with focus & frost
- 17 static & 8 exchangeable rotating gobos + open
- 12 dichroic colours + white
- Circular 8 & 24-facet prisms with overlay function
- Including Quick-Lock brackets
- W-DMX (wireless) optional



Polar 100 Beam

40100 IP65 100 W LED Beam Moving Head

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	100 W
Refresh Rate (min):	1200 Hz
Refresh Rate (max):	25 kHz
Lumen Total:	4337 lm
CRI:	75
CCT:	8500 K
Focus:	Motorised
Ctrl. Mode:	Built-in Program / DMX / Manual
DMX Ch.:	13 / 16 / 19
Protocols:	Art-Net / DMX / RDM / sACN
WL:	WL DMX
Display:	OLED / Touch
Dimmer:	0-100 %
Strobe:	0-25 Hz
Prism 1:	24-facet / Circular
Prism 2:	5-facet / Linear
Prism Overlay:	Yes
Colour Sys.:	Colour Wheel
Dichroic Colour Wheel 1:	9 + Open
Gobo Wheel 1:	8 + Open
Pan:	540 °
Tilt:	220 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	180 W
Pwr. Conn. In.:	Pro Power TRUE1 In (Male)
Pwr. Conn. Out.:	ProPower TRUE1 Out (Female)
DMX Conn.:	XLR 5P In/Out
Length (mm):	482 mm
Width (mm):	410 mm
Height (mm):	295 mm
Weight:	19.52 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- Powerful 100 W LED Beam Moving Head
- Highly focused 1.7° beam angle
- 8 bi-rotating gobos + open & 9 colours + white
- IP65 (dust and water resistant, fit for outdoor use)
- Motorised focus
- 5-facet circular and 24-facet linear prisms
- Controllable via DMX, Art-Net, RDM, sACN and W-DMX (wireless)









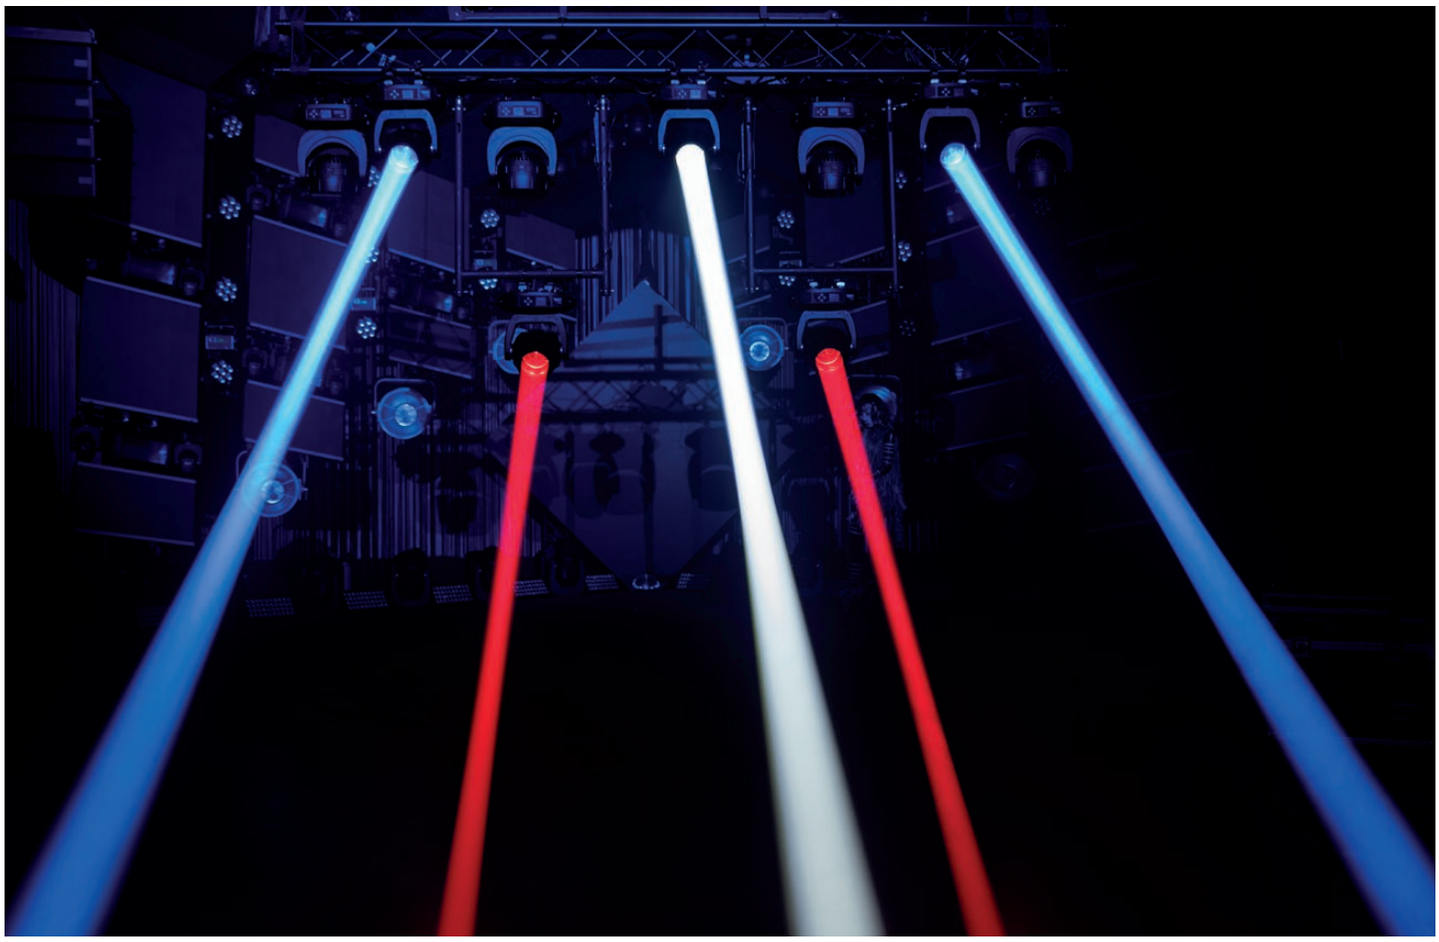



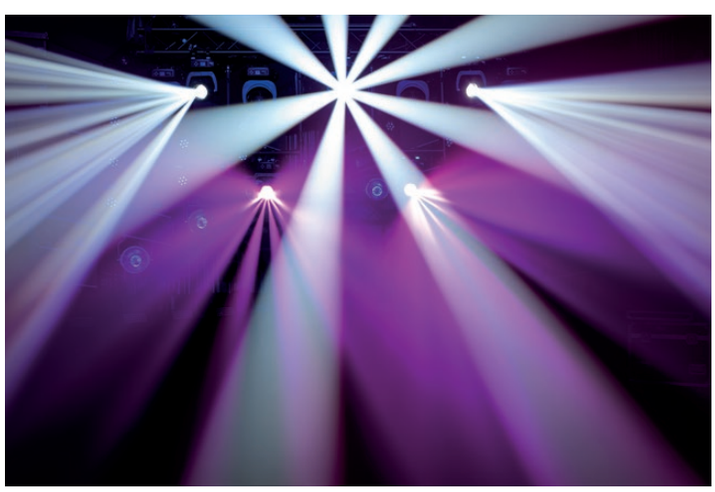

















iFX-615

41551 Continuous rotating RGBW Bar

INFINITY

Specifications:

Light Src. Type:	LED	Strobe:	0-20 Hz
Light Src. Quant. :	6	Pan:	540 °
Light Src. Pwr.:	15 W	Tilt:	270 °
LED Colour Type:	RGBW	Cont. Movement:	Yes
Lumen Total:	2640 lm	Pwr. Supp.:	100-240 VAC 50-60 Hz
Beam °:	4.5 °	Pwr. Cons.:	160 W
Ctrl. Mode:	Auto / DMX / Master Slave	Pwr. Conn. In.:	powerCON Blue
DMX Ch.:	25 / 49	Pwr. Conn. Out.:	powerCON Grey
Protocols:	DMX	DMX Conn.:	XLR 3P In/Out
WL:	Optional	Length (mm):	590 mm
Display:	Batt. / Gravity Sensor / LCD	Height (mm):	320 mm
Zone Sect. Control:	6 sections	Weight:	10.7 kg
Dimmer:	0-100 %	IP Rate:	IP20(indoor use only)
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Continuous Pan & Tilt movement
- Additional double Y-Axis movements
- Fast movement through high torque motors
- Pixel control
- RGBW & CMY Colour mode



Case for 2x iM-2515

D7243 **Premium Line**

iM-2515 set INFINITY

41560SET01 **2pcs with Premium flightcase**

Flightcase measurements including 2 units of iM-2515:

Dimensions:	860 x 570 x 816mm
Wheels:	4x 100m swivel with brake
Weight:	80kg



iM-2515

41560 **RGBW Matrix**

INFINITY

Specifications:

Light Src. Type:	LED	Strobe:	0-20 Hz
Light Src. Quant. :	25	Pan:	540 °
Light Src. Pwr.:	15 W	Tilt:	270 °
LED Colour Type:	RGBW	Cont. Movement:	Yes
Lumen Total:	11700 lm	Pwr. Supp.:	100-240 VAC 50-60 Hz
CCT:	19000 K	Pwr. Cons.:	510 W
Beam °:	4.5 °	Pwr. Conn. In.:	powerCON Blue
Ctrl. Mode:	Auto / DMX / Master Slave	Pwr. Conn. Out.:	powerCON Grey
DMX Ch.:	23 / 123 / 100 Art-Net + 15 DMX	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Protocols:	Art-Net / DMX	Length (mm):	470 mm
WL:	Optional	Width (mm):	295 mm
Display:	Batt. / Gravity Sensor / LCD	Height (mm):	580 mm
Zone Sect. Control:	25 sections	Weight:	22 kg
Dimmer:	0-100 %	IP Rate:	IP20(indoor use only)
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- 4.5° high grade optics
- Full Pixel control
- Continuous Pan & Tilt rotating
- 5 x 5 RGBW Matrix
- Selectable RGBW or CMY colour mixing
- Combined Art-Net & DMX control









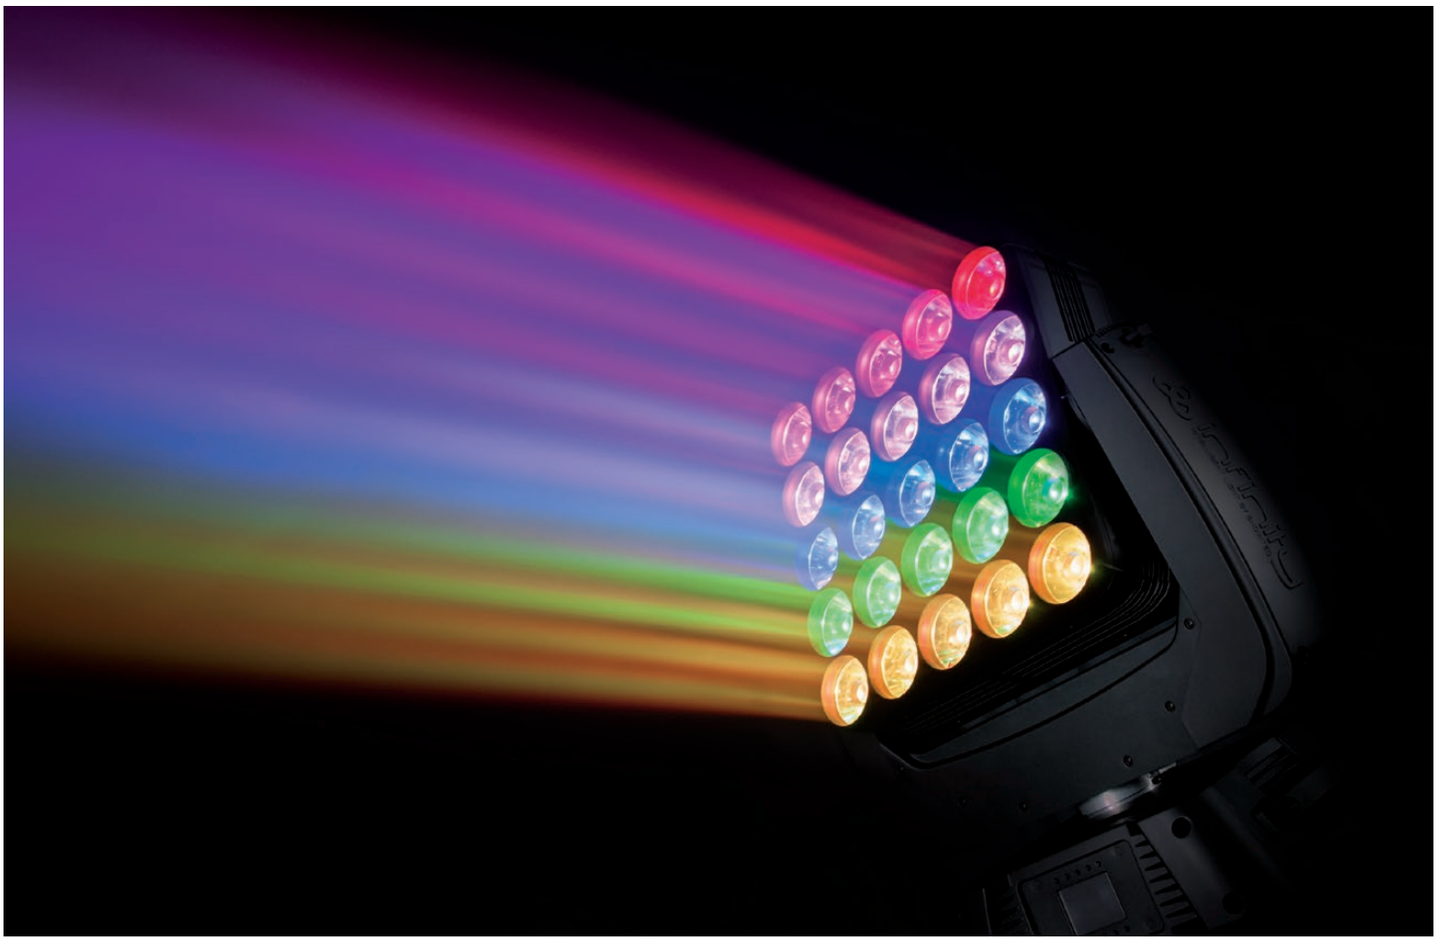

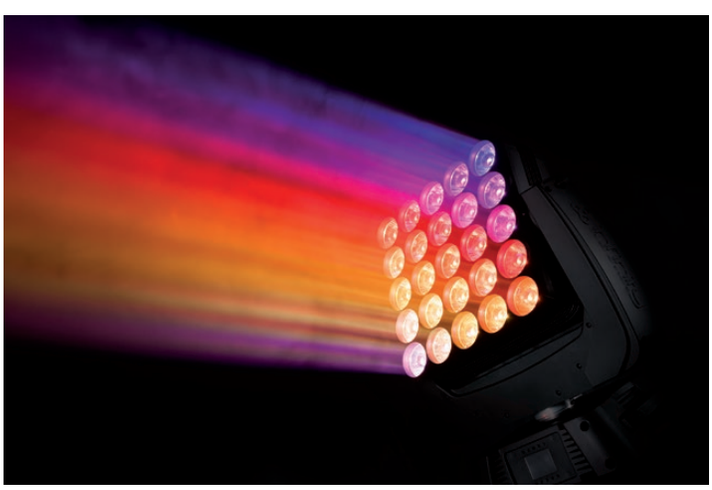























Phantom Matrix FX

40062 **100 W RGBW LED Matrix Moving Head**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	25
Light Src. Pwr.:	4 W
LED Colour Type:	R / G / B / W
Lumen Total:	3459 lm
Beam °:	45 °
Ctrl. Mode:	Auto / DMX / Master Slave / Sound
DMX Ch.:	10 / 18 / 118
Protocols:	DMX
Display:	LCD
Zone Sect. Control:	24 sections
Dimmer:	0-100 %
Strobe:	0-20 Hz
Pan:	540 °
Tilt:	270 °
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	125 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	445 mm
Width (mm):	200 mm
Height (mm):	530 mm
Weight:	13 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- 25 x 4 W RGBW LED 5 x 5 Matrix Moving Head
- Square optics with fixed 45° beam angle
- Full pixel control for advanced light designers
- Character & alphabet presets
- Diffuser screen included
- IFS technology



Case for 4x Phantom Zoombar 1220

40022 **Flight Case**

Phantom 1220 Zoombar

40090 **240 W RGBW Moving LED Bar**

SHOWTEC

Specifications:

Light Src. Type:	LED	Display:	LCD
Light Src. Quant. :	12	Zone Sect. Control:	12 sections
Light Src. Pwr.:	20 W	Dimmer:	0-100 %
LED Colour Type:	RGBW	Strobe:	0-20 Hz
Refresh Rate (min):	600 Hz	Pan:	0 °
Refresh Rate (max):	15 kHz	Tilt:	210 °
Lumen Total:	45000 lm	Pwr. Supp.:	100-240 VAC 50-60 Hz
Beam °:	50 °	Pwr. Cons.:	240 W
Zoom:	Motorised	Pwr. Conn. In.:	powerCON Blue
Zoom Min.:	5 °	Pwr. Conn. Out.:	powerCON Grey
Zoom Max.:	50 °	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Ctrl. Mode:	Auto / DMX / Manual / Master Slave	Length (mm):	1000 mm
DMX Ch.:	19 / 24 / 72 / 84 / 129	Height (mm):	233 mm
Protocols:	DMX	Weight:	13.2 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Metal / Plastic





FEATURES:

- 12 x 20 W RGBW Moving LED Bar
- Motorised zoom
- Fast motorised tilt
- Full Pixel control for advanced light designers
- Quick-Lock brackets





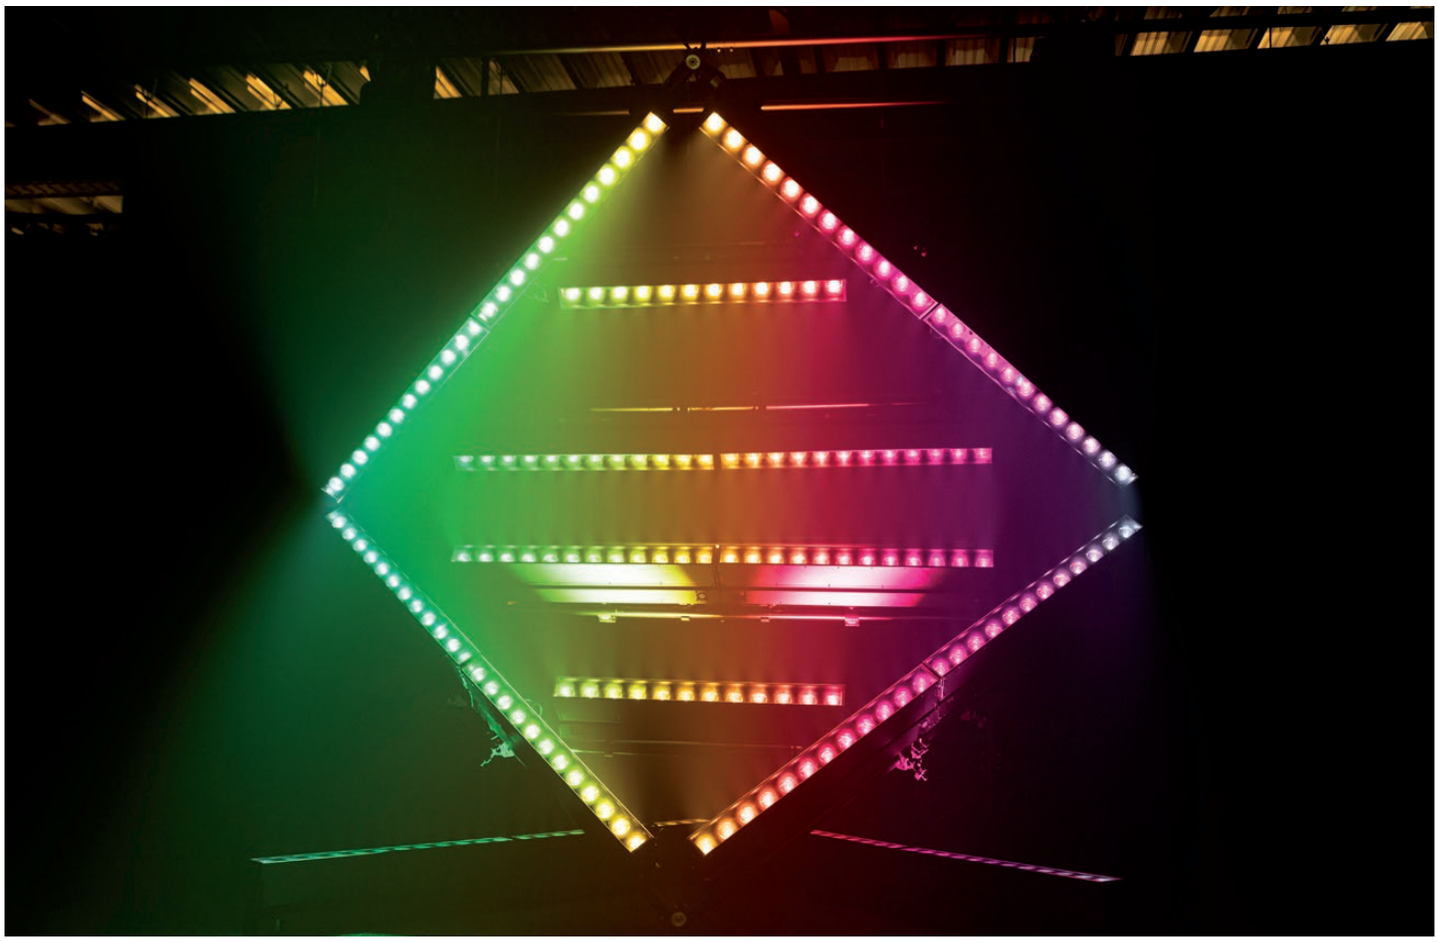



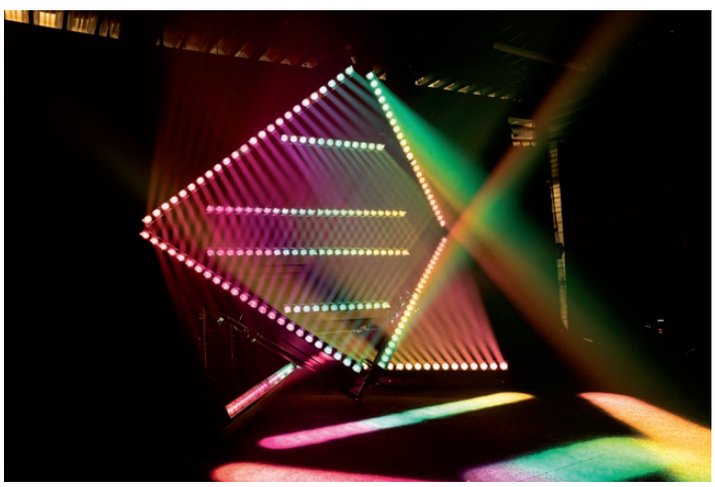



TF-300 Fresnel

200202 **3200 K Fresnel 300 W LED**

INFINITY

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	300 W
LED Colour Type:	WW
Refresh Rate (min):	1100 Hz
Refresh Rate (max):	1.6 kHz
Lumen Total:	13566 lm
CRI:	96
CCT Max.:	3200 K
Zoom:	Motorised
Ctrl. Mode:	DMX / Manual
DMX Ch.:	1 / 3 / 5
Protocols:	DMX / RDM
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	509 mm
Width (mm):	322 mm
Height (mm):	450 mm
Weight:	8.2 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Black

FEATURES:

- Delivers the performance of 1 kW Tungsten halogen unit
- 300 W custom designed Lumiled Engine
- Manual and motorised 15° -50° zoom control
- CRI > 95 consistently and silent operations
- Consistent colour temperature regardless of intensity
- 16-bit Intelligent high resolution virtual dimming
- Available in 3200 K and 5700 K



TF-300 Fresnel

200201 **5700 K Fresnel 300 W LED**

INFINITY

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	300 W
LED Colour Type:	NW
Refresh Rate (min):	1100 Hz
Refresh Rate (max):	1.6 kHz
Lumen Total:	4000 lm
CRI:	96
CCT Max.:	5700 K
Zoom:	Motorised
Ctrl. Mode:	DMX / Manual
DMX Ch.:	1 / 3 / 5
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	509 mm
Width (mm):	322 mm
Height (mm):	450 mm
Weight:	8.3 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Black

FEATURES:

- Delivers the performance of 1 kW Tungsten halogen unit
- 300 W custom designed Lumiled Engine
- Manual and motorised 15° -50° zoom control
- CRI > 95 consistently and silent operations
- Consistent colour temperature regardless of intensity
- 16-bit Intelligent high resolution virtual dimming
- Available in 3200 K and 5700 K

TF-260C7 Fresnel

200203 **7 Colour Fresnel 260W LED**

INFINITY



Specifications:

Light Src. Type:	LED	Protocols:	DMX / RDM
Light Src. Quant. :	7	Colour Sys.:	Colour Wheel CMY+CTO
Light Src. Pwr.:	260 W	Pwr. Supp.:	100-240 VAC 50-60 Hz
LED Colour Type:	RGBCALDB	Pwr. Cons.:	280 W
Refresh Rate (min):	1100 Hz	Pwr. Conn. In.:	powerCON Blue
Refresh Rate (max):	1.6 kHz	Pwr. Conn. Out.:	powerCON Grey
Lumen Total:	3500 lm	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
CRI:	96	Length (mm):	474 mm
CCT Min.:	2000 K	Width (mm):	322 mm
CCT Max.:	8000 K	Height (mm):	457 mm
Zoom:	Motorised	Weight:	8.3 kg
Ctrl. Mode:	DMX / Manual	IP Rate:	IP20(indoor use only)
DMX Ch.:	1 / 6 / 7 / 11 / 21	Housing:	Aluminium
		Colour:	Black

FEATURES:

- 280 W RGBCALDB LED Fresnel
- Manual and motorised zoom
- Zoom range 15°–50°
- Perfectly calibrated colours
- RGB-, CMY- and HSI-colour scheme
- DMX and manual control
- Filter Frame included





StageBeam 300/500W

30530 **Fresnel**
30531 **PC**
SHOWTEC

Specifications:

Light Src. Type:	Halogen	Pwr. Cons.:	500 W
Light Src. Quant. :	1	Pwr. Conn. In.:	Internal Powerlink with custom power connector
Light Src. Pwr.:	500 W	Length (mm):	365 mm
Refresh Rate:	50 Hz	Width (mm):	230 mm
Lumen Total:	0 lm	Height (mm):	180 mm
CCT Max.:	3200 K	Weight:	3.38 kg
Zoom:	Manual	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Aluminium
		Colour:	Black

FEATURES:
- Economical theatre light
- For use with 300 W or 500 W Tungsten lamps
- Barndoor optional available
- Manual Zoom 10°–40°
- Including silicon cable and power plug



StageBeam 650/1000W

30532 **Fresnel**
30533 **PC**
SHOWTEC

Specifications:

		Pwr. Conn. In.:	Internal Powerlink with custom power connector
Light Src. Type:	Halogen	Length (mm):	370 mm
Light Src. Quant. :	1	Width (mm):	250 mm
Light Src. Pwr.:	1000 W	Height (mm):	325 mm
Lumen Total:	0 lm	Weight:	4.28 kg
CCT Max.:	3200 K	IP Rate:	IP20(indoor use only)
Zoom:	Manual	Housing:	Metal
Pwr. Supp.:	220V-240 VAC 50 Hz	Colour:	Black
Pwr. Cons.:	1000 W		

FEATURES:
- Economical theatre light
- For use with 650 W or 1000 W Tungsten lamps
- Barndoor optional available
- Manual Zoom 10°–40°
- Including silicon cable and power plug



ACT Fresnel 20 WW

34010 Compact 20 W Warm White Theatre LED Fresnel

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	21 W
Light Src. Pwr.:	20 W	Pwr. Conn. In.:	Pro Power Blue
LED Colour Type:	WW	Length (mm):	333 mm
Lumen Total:	1230 lm	Width (mm):	176 mm
CRI:	98	Height (mm):	246 mm
CCT Max.:	3200 K	Weight:	2.1 kg
Zoom:	Manual	IP Rate:	IP20(indoor use only)
Ctrl. Mode:	Manual	Housing:	Aluminium
		Colour:	Black

FEATURES:

- 20 W Warm White COB LED Fresnel
- Suitable for theatrical applications
- High CRI for precise colour rendering
- Silent, fanless operations
- Manual dimmer
- Compact design
- Soft field of light
- Barndoor included

ACT Fresnel 50 WW

34011 Compact 50 W Warm White Theatre LED Fresnel

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	57 W
Light Src. Pwr.:	50 W	Pwr. Conn. In.:	powerCON Blue
LED Colour Type:	WW	Pwr. Conn. Out.:	powerCON Grey
Refresh Rate:	1100 Hz	DMX Conn.:	XLR 3P In/Out
Lumen Total:	1841 lm	Length (mm):	245 mm
CRI:	98	Width (mm):	165 mm
CCT Max.:	3200 K	Height (mm):	239 mm
Zoom:	Manual	Weight:	2.4 kg
Ctrl. Mode:	DMX / Manual	IP Rate:	IP20(indoor use only)
DMX Ch.:	1 / 2	Housing:	Aluminium
		Colour:	Black

FEATURES:

- 50 W Warm White COB LED Fresnel
- Suitable for theatrical applications
- High CRI for precise colour rendering
- Manually adjustable zoom
- DMX and manual dimmer function
- Compact design
- Barndoor included

ACT PC 60 RGBW

34020 60 W RGBW Theatre Quad LED ellipsoidal

SHOWTEC



Specifications:

Light Src. Type:	LED	Protocols:	DMX
Light Src. Quant. :	1	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	60 W	Pwr. Cons.:	70 W
LED Colour Type:	RGBW	Pwr. Conn. In.:	Pro Power Blue
Refresh Rate:	1100 Hz	Pwr. Conn. Out.:	powerCON Grey
Lumen Total:	460 lm	DMX Conn.:	XLR 3P In/Out
CRI:	80	Length (mm):	312.3 mm
CCT Min.:	2700 K	Width (mm):	160.6 mm
CCT Max.:	8000 K	Height (mm):	267 mm
Zoom:	Motorised	Weight:	2.4 kg
Ctrl. Mode:	DMX / Manual	IP Rate:	IP20(indoor use only)
DMX Ch.:	5 / 7 / 11	Housing:	Aluminium
		Colour:	Black

FEATURES:

- 60 W RGBW LED PC Spot
- Suitable for theatrical applications
- Tunable colour temperature (3000 K - 7200 K)
- High CRI for precise colour temperatures
- Wide motorised zoom function
- Compact design



Performer Fresnel Mini DDT

33053 **30W, 3100K, DDT**

SHOWTEC

Specifications:

Light Src. Type:	LED	Ctrl. Mode:	Manual
Light Src. Quant. :	1	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	30 W	Pwr. Cons.:	23 W
Lumen Total:	1350 lm	Pwr. Conn. In.:	Schuko Plug
CRI:	92	Length (mm):	210 mm
CCT Max.:	3100 K	Width (mm):	188 mm
Zoom:	Manual	Height (mm):	175 mm
Zoom Min.:	12 °	Weight:	2.86 kg
Zoom Max.:	40 °	IP Rate:	IP20(indoor use only)
		Housing:	Aluminium
		Colour:	Black

FEATURES:

- Classic Compact Fresnel design
- High efficiency 30W LED source
- Fanless convection cooling
- Direct triac dimming technology (DDT)



Performer Fresnel Mini DMX

33054 **Compact 30 W Warm White DMX Theatre LED Fresnel**

SHOWTEC

Specifications:

Light Src. Type:	LED	Protocols:	DMX / RDM
Light Src. Quant. :	1	Pwr. Supp.:	240 VAC 50-60 Hz
Light Src. Pwr.:	30 W	Pwr. Cons.:	23 W
Lumen Total:	1650 lm	Pwr. Conn. In.:	Internal Powerlink with custom power connector
CRI:	92	DMX Conn.:	XLR 3P In/Out
CCT Max.:	3100 K	Length (mm):	275 mm
Zoom:	Manual	Width (mm):	175 mm
Zoom Min.:	12 °	Height (mm):	188 mm
Zoom Max.:	40 °	Weight:	2.3 kg
Ctrl. Mode:	DMX	IP Rate:	IP20(indoor use only)
DMX Ch.:	1	Housing:	Aluminium
		Colour:	Black

FEATURES:

- Compact 30 W Warm White LED Fresnel
- Suitable for theatrical and studio applications
- DMX-model
- Silent, fanless operations
- Wide manually adjustable zoom range



Performer Fresnel Mini Battery

33055 **Compact 30 W Warm White battery Powered Theatre LED Fresnel**

SHOWTEC

Specifications:

Light Src. Type:	LED	Ctrl. Mode:	Manual
Light Src. Quant. :	1	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	30 W	Pwr. Cons.:	40 W
Lumen Total:	1410 lm	Pwr. Conn. In.:	Internal Powerlink with custom power connector
CRI:	92	Length (mm):	275 mm
CCT Max.:	3100 K	Width (mm):	175 mm
Zoom:	Manual	Height (mm):	188 mm
Zoom Min.:	12 °	Weight:	2.3 kg
Zoom Max.:	40 °	IP Rate:	IP20(indoor use only)
Runtime @Full:	6 h	Housing:	Aluminium
		Colour:	Black

FEATURES:

- Compact 30 W Warm White LED Fresnel
- Suitable for theatrical and studio applications
- Battery Powered (6 hour battery lifespan)
- Silent, fanless operation
- Wide manually adjustable zoom range
- Manual dimmer function

Performer 1500 Fresnel Q6

33130 **100 W RGBALC-colour Theatre & Studio LED Fresnel**

SHOWTEC



Specifications:

Light Src. Type:	LED	Protocols:	DMX / RDM
Light Src. Quant. :	1	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	100 W	Pwr. Cons.:	120 W
LED Colour Type:	RGBALC	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Refresh Rate (min):	600 Hz	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Refresh Rate (max):	25 kHz	DMX Conn.:	XLR 5P In/Out
Lumen Total:	3111 lm	Length (mm):	450 mm
CRI:	90	Width (mm):	322 mm
CCT Min.:	1800 K	Height (mm):	370 mm
CCT Max.:	8000 K	Weight:	5.3 kg
Zoom:	Manual	IP Rate:	IP20(indoor use only)
Ctrl. Mode:	DMX / Master Slave / Stand Alone	Housing:	Aluminum die-cast
DMX Ch.:	3 / 6 / 7 / 9 / 10 / 13 / 20	Colour:	Black

FEATURES:

- 100 W RGBALC LED Fresnel
- Suitable for theatrical and studio applications
- CCT colour temperature range of 1800 K - 8000 K
- Wide manually adjustable zoom range
- 16 preset colours
- Silent operation
- Soft field of light

Performer 1500 Fresnel

33131 **100 W tunable Warm White Theatre LED Fresnel - Tungsten**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	120 W
Light Src. Pwr.:	100 W	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Refresh Rate (min):	600 Hz	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Refresh Rate (max):	25 kHz	DMX Conn.:	XLR 5P In/Out
Lumen Total:	4781 lm	Length (mm):	450 mm
CRI:	95	Width (mm):	322 mm
CCT Min.:	2700 K	Height (mm):	370 mm
CCT Max.:	4500 K	Weight:	5.5 kg
Zoom:	Manual	IP Rate:	IP20(indoor use only)
Ctrl. Mode:	DMX	Housing:	Aluminum die-cast
DMX Ch.:	1 / 2 / 3 / 6 / 8	Colour:	Black
Protocols:	DMX / RDM		

FEATURES:

- 100 W Warm White LED Spot
- Suitable for theatrical applications
- CCT colour temperature range of 2700 K–4500 K
- Wide manually adjustable zoom range
- High CRI for precise colour renderings
- Silent operation
- Soft field of light

Performer 1500 Fresnel

33132 **100 W tunable Daylight White Studio LED Fresnel - Daylight**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	120 W
Light Src. Pwr.:	100 W	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Refresh Rate:	1000 Hz	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Lumen Total:	5016 lm	DMX Conn.:	XLR 5P In/Out
CRI:	95	Length (mm):	450 mm
CCT Min.:	4000 K	Width (mm):	322 mm
CCT Max.:	6500 K	Height (mm):	370 mm
Zoom:	Manual	Weight:	5.3 kg
Ctrl. Mode:	DMX	IP Rate:	IP20(indoor use only)
DMX Ch.:	1 / 2 / 3 / 6 / 8	Housing:	Aluminum die-cast
Protocols:	DMX / RDM	Colour:	Black

FEATURES:

- 100 W Daylight White LED Fresnel
- Suitable for theatre and studio applications
- 8 step CCT colour temperature range of 4000 K - 6500 K
- Wide manually adjustable zoom range
- High CRI for precise colour rendering
- Silent operation
- Soft field of light



Performer 2500 Fresnel Q6

33140 **250 W RGBALC-colour Theatre & Studio LED Fresnel**

SHOWTEC

Specifications:

Light Src. Type:	LED	Protocols:	DMX
Light Src. Quant. :	1	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	250 W	Pwr. Cons.:	250 W
LED Colour Type:	RGBALC	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Refresh Rate (min):	600 Hz	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Refresh Rate (max):	25 kHz	DMX Conn.:	XLR 5P In/Out
Lumen Total:	7661 lm	Length (mm):	470 mm
CRI:	90	Width (mm):	380 mm
CCT Min.:	1800 K	Height (mm):	450 mm
CCT Max.:	8000 K	Weight:	10 kg
Zoom:	Manual	IP Rate:	IP20(indoor use only)
Ctrl. Mode:	DMX	Housing:	Aluminum die-cast
DMX Ch.:	3 / 6 / 7 / 9 / 10 / 13 / 20	Colour:	Black

FEATURES:

- 250 W RGBALC LED Fresnel
- For theatrical and studio applications
- 16 preset colours
- Colour temperature range of 1800 K - 8000 K
- Wide manually adjustable zoom range
- Silent operation
- Soft field of light



Performer 2500 Fresnel

33141 **250 W tunable Warm White Theatre LED Fresnel - Tungsten**

SHOWTEC

Specifications:

		Pwr. Supp.:	100-240 VAC 50-60 Hz
		Pwr. Cons.:	265 W
Light Src. Type:	LED	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Light Src. Quant. :	1		
Light Src. Pwr.:	250 W	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Refresh Rate (min):	600 Hz		
Refresh Rate (max):	25 kHz	DMX Conn.:	XLR 5P In/Out
Lumen Total:	6959 lm	Length (mm):	470 mm
CRI:	95	Width (mm):	380 mm
CCT Min.:	2700 K	Height (mm):	450 mm
CCT Max.:	4500 K	Weight:	8.8 kg
Zoom:	Manual	IP Rate:	IP20(indoor use only)
Ctrl. Mode:	DMX	Housing:	Aluminum die-cast
DMX Ch.:	1 / 2 / 3 / 6 / 8	Colour:	Black
Protocols:	DMX / RDM		

FEATURES:

- 250 W Warm White LED Spot
- Suitable for theatrical applications
- 14 step CCT colour temperature range of 2700 K–4500 K
- Wide manually adjustable zoom range
- High CRI for precise colour rendering
- Silent operation
- Soft field of light



Performer 2500 Fresnel

33142 **250 W tunable Daylight White Studio LED Fresnel - Daylight**

SHOWTEC

Specifications:

		Pwr. Supp.:	100-240 VAC 50-60 Hz
		Pwr. Cons.:	250 W
Light Src. Type:	LED	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Light Src. Quant. :	1		
Light Src. Pwr.:	250 W	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Refresh Rate (min):	600 Hz		
Refresh Rate (max):	25 kHz	DMX Conn.:	XLR 5P In/Out
Lumen Total:	8410 lm	Length (mm):	470 mm
CRI:	95	Width (mm):	380 mm
CCT Min.:	4000 K	Height (mm):	450 mm
CCT Max.:	6500 K	Weight:	8.8 kg
Zoom:	Manual	IP Rate:	IP20(indoor use only)
Ctrl. Mode:	DMX	Housing:	Aluminum die-cast
DMX Ch.:	1 / 2 / 3 / 6 / 8	Colour:	Black
Protocols:	DMX / RDM		

FEATURES:

- 250 W Daylight White LED Fresnel
- Suitable for theatre and studio applications
- 14 step CCT colour temperature range of 4000 K - 6500 K
- High CRI for precise colour rendering
- Wide manually adjustable zoom range
- Silent operation
- Soft field of light

Performer 1000 LED MKII

33034 **Compact 90 W Warm White Theatre LED Fresnel - 3100 K**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	9	Pwr. Cons.:	105 W
Light Src. Pwr.:	90 W	Pwr. Conn. In.:	powerCON Blue
Refresh Rate:	600 Hz	Pwr. Conn. Out.:	powerCON Grey
Lumen Total:	3090 lm	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
CCT Max.:	3100 K	Length (mm):	324 mm
Zoom:	Manual	Width (mm):	285 mm
Zoom Min.:	10 °	Height (mm):	390 mm
Zoom Max.:	60 °	Weight:	6.2 kg
Ctrl. Mode:	DMX / Manual	IP Rate:	IP20(indoor use only)
DMX Ch.:	1 / 2 / 3	Housing:	Aluminium
		Colour:	Black

FEATURES:

- 90 W Warm White COB LED Spot
- Suitable for theatre and studio applications
- High CRI for accurate 3100 K colour rendering
- Wide manual zoom range
- DMX controllable dimmer function
- Silent operation
- Compact design

Performer 1000 LED MKII

33035 **Compact 90 W Daylight White Studio LED Fresnel - 5600 K**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	105 W
Light Src. Pwr.:	90 W	Pwr. Conn. In.:	powerCON Blue
Refresh Rate:	600 Hz	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Lumen Total:	4000 lm	Length (mm):	325 mm
CCT Max.:	5600 K	Width (mm):	290 mm
Zoom:	Manual	Height (mm):	270 mm
Zoom Min.:	10 °	Weight:	6 kg
Zoom Max.:	60 °	IP Rate:	IP20(indoor use only)
Ctrl. Mode:	DMX / Manual	Housing:	Aluminium
DMX Ch.:	1 / 2 / 3	Colour:	Black

FEATURES:

- 90 W Daylight White LED Spot
- Suitable for theatre and studio applications
- High CRI for accurate 5600 K colour rendering
- Wide manual zoom range
- DMX dimmer function
- Silent operation
- Compact design



Performer Fresnel 2000 DDT MKII

33037 **Compact 250 W Warm White Theatre LED Fresnel - 3100 K**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	250 W
Refresh Rate (min):	600 Hz
Refresh Rate (max):	25 kHz
Lumen Total:	11655 lm
CRI:	92
CCT Max.:	3100 K
Zoom:	Motorised
Zoom Min.:	13 °
Zoom Max.:	41 °
Ctrl. Mode:	DMX / Manual
DMX Ch.:	1 / 2 / 5
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	175 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	380 mm
Width (mm):	392 mm
Height (mm):	286 mm
Weight:	6.6 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Black

FEATURES:

- 250 W Warm White LED Spot
- Suitable for theatrical applications
- DDT-model compatible with a halogen infrastructure
- High CRI for accurate 3100 K colour rendering
- Wide motorised zoom range
- Dimmer with smooth, even dimming curve
- Silent operation



Performer Fresnel 2000 DDT MKII

33036 **Compact 250 W Daylight White Studio LED Fresnel - 5600 K**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	250 W
Refresh Rate (min):	600 Hz
Refresh Rate (max):	25 kHz
Lumen Total:	6400 lm
CCT Max.:	5600 K
Zoom:	Motorised
Zoom Min.:	13 °
Zoom Max.:	41 °
Ctrl. Mode:	DMX / Manual
DMX Ch.:	1 / 2 / 5
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	195 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	380 mm
Width (mm):	392 mm
Height (mm):	286 mm
Weight:	6.6 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Black

FEATURES:

- 250 W Daylight White LED Spot
- Suitable for theatre and studio applications
- DDT-model compatible with a halogen infrastructure
- High CRI for accurate 5600 K colour rendering
- Wide motorised zoom range
- Dimmer with smooth, even dimming curve
- Silent operation

Performer 2000 RGBAL

33038 Compact 240 W RGBAL Theatre LED Fresnel

SHOWTEC



Specifications:

Light Src. Type:	LED	DMX Ch.:	8 / 10 / 13 / 19
Light Src. Quant. :	1	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	240 W	Pwr. Cons.:	230 W
Refresh Rate (min):	600 Hz	Pwr. Conn. In.:	powerCON Blue
Refresh Rate (max):	25 kHz	Pwr. Conn. Out.:	powerCON Grey
Lumen Total:	5500 lm	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
CCT Min.:	2700 K	Length (mm):	455 mm
CCT Max.:	8000 K	Width (mm):	435 mm
Zoom:	Motorised	Height (mm):	285 mm
Zoom Min.:	15 °	Weight:	7.6 kg
Zoom Max.:	45 °	IP Rate:	IP20(indoor use only)
Ctrl. Mode:	DMX	Housing:	Aluminium
		Colour:	Black

FEATURES:

- 240 W RGBAL LED Spot
- Suitable for theatrical and studio applications
- Colour engine with 16 preset colours
- High CRI for accurate colour rendering
- DMX dimmer function with 4 preset curves
- Motorised zoom range
- Silent operation





TS-260C7 Profile Engine

200010 Body without Lens

INFINITY

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	7
Light Src. Pwr.:	260 W
LED Colour Type:	RGBCALDB
Refresh Rate (min):	1100 Hz
Refresh Rate (max):	1.6 kHz
Lumen Total:	4500 lm
CRI:	96
CCT Min.:	2000 K
CCT Max.:	8000 K
Ctrl. Mode:	DMX / Manual
DMX Ch.:	1 / 5 / 6 / 10 / 20
Protocols:	DMX / RDM
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	260 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	468 mm
Width (mm):	323 mm
Height (mm):	457 mm
Weight:	8.5 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Black

FEATURES:

- Delivers the performance of a 750 W Tungsten Halogen unit
- 260 W Lumiled 7 colour LED engine using custom designed array
- CRI > 96 Consistently on full CCT range
- LED Colour Linearity Compensation
- LED Colour Temperature Drift Compensation (on all LEDs)
- Optics Colour Shift compensation
- Colour wheel with 64 spectrum matching Filter gels
- 2000 – 8000 K Seamless CCT channel
- RGB, CMY and HSI Colour control
- 16-bit Intelligent high resolution virtual dimming
- Tungsten mode with natural colour drift & timing simulations
- Flicker-Free with selectable PWM by DMX
- RDM allowing for remote setting and recall of information
- Custom design silent cooling system
- 1-Ch DMX mode for conventional replacement



TS-300 Profile Engine

200001 3200 K Body without Lens

INFINITY

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	300 W
LED Colour Type:	WW
Refresh Rate (min):	1100 Hz
Refresh Rate (max):	1.6 kHz
Lumen Total:	8300 lm
CRI:	96
CCT Max.:	3200 K
Ctrl. Mode:	DMX / Manual
DMX Ch.:	1 / 2 / 4
Protocols:	DMX / RDM
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	468 mm
Width (mm):	323 mm
Height (mm):	457 mm
Weight:	8.4 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Black

FEATURES:

- Delivers the performance of 750 W Tungsten halogen unit
- 300 W, 3200 K or 5700 K Custom designed Lumiled Engine
- CRI > 95 Consistently
- Consistent colour temperature regardless of intensity
- 16-bit intelligent high resolution virtual dimming
- Factory calibrated
- RDM allowing for remote setting and recall of information
- Custom design silent cooling system
- Neutrik connections

TS-300 Profile Engine

200002 **5700 K Body without Lens**

INFINITY



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	300 W
Light Src. Pwr.:	300 W	Pwr. Conn. In.:	powerCON Blue
LED Colour Type:	NW	Pwr. Conn. Out.:	powerCON Grey
Refresh Rate (min):	1100 Hz	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Refresh Rate (max):	1.6 kHz	Length (mm):	468 mm
Lumen Total:	6600 lm	Width (mm):	323 mm
CRI:	95	Height (mm):	457 mm
CCT Max.:	5700 K	Weight:	8.4 kg
Ctrl. Mode:	DMX / Manual	IP Rate:	IP20(indoor use only)
DMX Ch.:	1 / 2 / 4	Housing:	Aluminium
Protocols:	DMX / RDM	Colour:	Black

FEATURES:

- Delivers the performance of 750 W Tungsten halogen unit
- 300 W, 3200 K or 5700 K Custom designed Lumiled Engine
- CRI > 95 Consistently
- Consistent colour temperature regardless of intensity
- 16-bit intelligent high resolution virtual dimming
- Factory calibrated
- RDM allowing for remote setting and recall of information
- Custom design silent cooling system
- Neutrik connections





ACT Profile 50 WW

34030 **50 W Warm White Theatre LED ellipsoidal.**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	50 W
LED Colour Type:	WW
Refresh Rate:	1100 Hz
Lumen Total:	1315 lm
CRI:	97
CCT Max.:	3200 K
Zoom:	Manual
Ctrl. Mode:	DMX / Manual
DMX Ch.:	1 / 2
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	57 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	411 mm
Width (mm):	170 mm
Height (mm):	263 mm
Weight:	2.6 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Black

FEATURES:

- 50 W Warm White COB LED ellipsoidal
- Suitable for theatrical applications
- High CRI for precise colour rendering
- DMX dimmer function and manually controllable zoom
- Five design gobos and 4-blade barndoor included
- Hard edge, precisely focused field of light



Performer Profile Mini

33090 **30 W Warm White Theatre LED ellipsoidal - 3200 K**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	30 W
LED Colour Type:	WW
Lumen Total:	1500 lm
CCT Max.:	3200 K
Ctrl. Mode:	DMX
DMX Ch.:	1
Protocols:	DMX / RDM
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	25 W
Pwr. Conn. In.:	Internal Powerlink with custom power connector
DMX Conn.:	XLR 3P In/Out
Length (mm):	345 mm
Width (mm):	130 mm
Height (mm):	231 mm
Weight:	1.3 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 30 W Warm White COB LED ellipsoidal
- Suitable for theatrical applications
- High CRI for precise colour rendering
- DMX dimmer function
- Silent operation
- Hard edge, precisely focused field of light



Performer Profile Mini

33091 **30 W Daylight White Studio LED ellipsoidal - 5600 K**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	30 W
LED Colour Type:	CW
Lumen Total:	1600 lm
CCT Max.:	5600 K
Ctrl. Mode:	DMX
DMX Ch.:	1
Protocols:	DMX / RDM
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	25 W
Pwr. Conn. In.:	Internal Powerlink with custom power connector
DMX Conn.:	XLR 3P In/Out
Length (mm):	345 mm
Width (mm):	130 mm
Height (mm):	231 mm
Weight:	1.3 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 30 W Daylight White COB LED ellipsoidal
- Suitable for theatre and studio applications
- High CRI for precise colour rendering
- DMX dimmer function
- Silent operation
- Hard edge, precisely focused field of light

Performer Profile 600 MKIII

33065 **260 W Warm White Theatre LED ellipsoidal**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	250 W
Light Src. Pwr.:	260 W	Pwr. Conn. In.:	powerCON Blue
LED Colour Type:	WW	Pwr. Conn. Out.:	powerCON Grey
Refresh Rate (min):	600 Hz	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Refresh Rate (max):	25 kHz	Length (mm):	485 mm
Lumen Total:	10665 lm	Width (mm):	305 mm
CCT Max.:	3200 K	Height (mm):	460 mm
Ctrl. Mode:	DMX	Weight:	8.2 kg
DMX Ch.:	3	IP Rate:	IP20(indoor use only)
Protocols:	DMX	Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- 260 W Warm White COB LED ellipsoidal
- Suitable for theatrical applications
- High CRI for accurate 3200 K colour rendering
- DMX dimmer function with 4 preset curves
- Silent operation
- Optional fixed and zoom lenses and gobo holders

Performer Profile 600 DDT

33063 **250 W Warm White DDT Theatre LED ellipsoidal**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	270 W
Light Src. Pwr.:	250 W	Pwr. Conn. In.:	powerCON Blue
LED Colour Type:	WW	Pwr. Conn. Out.:	powerCON Grey
Refresh Rate (min):	600 Hz	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Refresh Rate (max):	25 kHz	Length (mm):	720 mm
Lumen Total:	10000 lm	Width (mm):	380 mm
CCT Max.:	3200 K	Height (mm):	340 mm
Ctrl. Mode:	DMX	Weight:	9.6 kg
DMX Ch.:	1 / 2 / 3	IP Rate:	IP20(indoor use only)
Protocols:	DMX	Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- 250 W Warm White COB LED ellipsoidal
- Suitable for theatrical applications
- DDT-model compatible with a halogen infrastructure
- High CRI for accurate 3100 K colour rendering
- DMX dimmer function with 4 preset curves
- Silent operation
- Hard edge, precisely focused field of light
- Optional fixed and zoom lenses and gobo holders

Performer Profile 650 Q5

33064 **240 W RGBAL Theatre & Studio LED ellipsoidal**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	300 W
Light Src. Pwr.:	240 W	Pwr. Conn. In.:	powerCON Blue
LED Colour Type:	A / B / G / L / R	Pwr. Conn. Out.:	powerCON Grey
Light Src.:	5in1	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Refresh Rate:	2500 Hz	Length (mm):	700 mm
Lumen Total:	6800 lm	Width (mm):	301 mm
CCT Min.:	2700 K	Height (mm):	233 mm
CCT Max.:	8000 K	Weight:	10.3 kg
Ctrl. Mode:	DMX	IP Rate:	IP20(indoor use only)
DMX Ch.:	6 / 7 / 8 / 11 / 17	Housing:	Metal
Protocols:	DMX	Colour:	Black

FEATURES:

- 240 W RGBAL LED Array ellipsoidal
- Suitable for theatrical and studio applications
- High CRI for accurate colour rendering
- Colour engine with 16 preset colours
- DMX dimmer function with 4 preset curves
- Silent operation
- Optional fixed and zoom lenses and gobo holders



Performer Profile IP 3200 K

33110 **260 W Warm White IP65-rated Theatre COB LED ellipsoidal**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	250 W
Light Src. Quant. :	1	Pwr. Conn. In.:	Internal Powerlink with custom power connector
Light Src. Pwr.:	260 W	DMX Conn.:	XLR 3P In/Out
LED Colour Type:	WW	Length (mm):	650 mm
Lumen Total:	23600 lm	Width (mm):	340 mm
CCT Max.:	3200 K	Height (mm):	575 mm
Ctrl. Mode:	DMX / Manual	Weight:	13.9 kg
DMX Ch.:	5 / 7	IP Rate:	IP65
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- 260 W Warm White COB LED ellipsoidal
- Suitable for theatrical applications
- IP65 (dust and water resistant, fit for outdoor use)
- High CRI for precise colour rendering
- Motorised zoom and focus
- Silent operation
- Rotational gobo holder included



Performer Profile IP Q4

33111 **250 W IP65-rated RGBW Theatre LED-Array ellipsoidal**

SHOWTEC

Specifications:

		Pwr. Supp.:	100-240 VAC 50-60 Hz
		Pwr. Cons.:	300 W
Light Src. Type:	LED	Pwr. Conn. In.:	Internal Powerlink with custom power connector
Light Src. Quant. :	1		
Light Src. Pwr.:	250 W	DMX Conn.:	XLR 3P In/Out
LED Colour Type:	RGBW	Length (mm):	650 mm
Lumen Total:	9975 lm	Width (mm):	340 mm
CCT Min.:	2700 K	Height (mm):	575 mm
CCT Max.:	8000 K	Weight:	13.74 kg
Zoom:	Motorised	IP Rate:	IP65
Ctrl. Mode:	DMX / Manual	Housing:	Aluminum die-cast
DMX Ch.:	8 / 9 / 12	Colour:	Black
Protocols:	DMX		

FEATURES:

- 250 W RGBW COB LED ellipsoidal
- Suitable for theatrical applications
- IP65 (dust and water resistant, fit for outdoor use)
- High CRI for precise colour renderings
- DMX dimmer function
- Motorised zoom and focus
- Hard edge, precisely focused field of light

Lens for Performer Profile Mini

SHOWTEC

33082 19° Lens
33083 26° Lens
33084 36° Lens



Zoom Lens for Performer Profile Mini 19°–36°

SHOWTEC

33087 Manually Controllable Zoom Lens



Lens for Performer Profile

SHOWTEC

33072 19° Lens
33075 26° Lens
33073 36° Lens
33074 50° Lens



Zoom Lens for Performer Profile

SHOWTEC

33070 Manually Controllable Zoom Lens - 15°–30°
33071 Manually Controllable Zoom Lens - 25°–50°



Lens for Infinity Profile

INFINITY

200100 TLT-5 5° Lens Tube
200101 TLT-10 10° Lens Tube



TLT-19 19° lens tube

INFINITY

200115 TLT-19 19° lens tube
200116 TLT-26 26° lens tube
200117 TLT-36 36° lens tube
200118 TLT-50 50° lens tube



Zoom Lens for Infinity Profile

INFINITY

200140 TLT-1230 15–35° zoom
200141 TLT-2350 25-50° zoom





ACT Flood 80 RGBW

34040 **80 W RGBW Theatre Quad LED Flood**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	80 W
LED Colour Type:	RGBW
Lumen Total:	2429 lm
CCT Min.:	2700 K
CCT Max.:	8000 K
Ctrl. Mode:	DMX / Manual
DMX Ch.:	4 / 7 / 11
Protocols:	DMX

Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	85 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	422 mm
Width (mm):	285 mm
Height (mm):	373 mm
Weight:	5.5 kg
Housing:	Aluminium
Colour:	Black

FEATURES:

- 80 W RGBW LED Flood
- Suitable for theatrical applications
- Adjustable colour temperature of 2800 K - 10,000 K
- Dimmer and preset colour knobs for easy handling
- Bright, soft field of coloured light
- Included barndoor



TFLD-7 Floodlight

200400

INFINITY

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	7
Light Src. Pwr.:	150 W
LED Colour Type:	RGBCALDB
Lumen Total:	3000 lm
CRI:	96
CCT Min.:	2000 K
CCT Max.:	8000 K
Ctrl. Mode:	DMX / Manual
DMX Ch.:	1 / 5 / 6 / 10 / 20
Protocols:	DMX / RDM

Colour Sys.:	Colour Wheel CMY+CTO
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	160 W
Pwr. Conn. In.:	powerCON Blue
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	318 mm
Width (mm):	136 mm
Height (mm):	239 mm
Weight:	5.34 kg
Housing:	Aluminium
Colour:	Black

FEATURES:

- 150 W Lumiled 7 colour LED engine using custom designed array
- CRI > 96 Consistently on full CCT range
- LED colour linearity and temperature drift compensation
- Optics Colour Shift compensation
- Colour wheel with 64 spectrum matching Filter gels
- 2000 – 8000 K Seamless CCT channel
- RGB, CMY and HSI Colour control
- 16-bit Intelligent high resolution virtual dimming
- Tungsten mode with natural colour drift & timing simulations
- Flicker-Free with selectable PWM by DMX
- RDM allowing for remote setting and recall of information
- 1-Ch DMX mode for conventional replacement

TCYC-7 Cyclorama

200300 Horizon

INFINITY

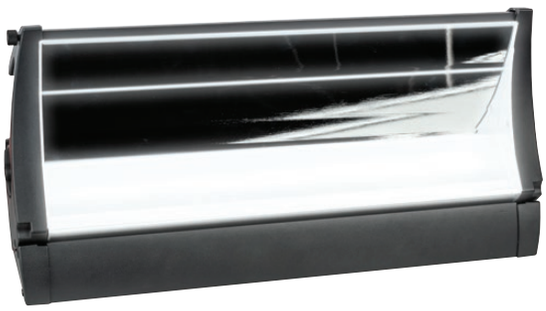

Specifications:

Light Src. Type:	LED	DMX Ch.:	1 / 6 / 7 / 11 / 21
Light Src. Quant. :	7	Protocols:	DMX / RDM
Light Src. Pwr.:	300 W	Pwr. Supp.:	100-240 VAC 50-60 Hz
LED Colour Type:	RGBCALDB	Pwr. Cons.:	310 W
Lumen Total:	6000 lm	Pwr. Conn. In.:	powerCON Blue
CRI:	96	Pwr. Conn. Out.:	powerCON Grey
CCT Min.:	2000 K	DMX Conn.:	XLR 5P In/Out
CCT Max.:	8000 K	Length (mm):	566 mm
Beam ° Horz.:	75 °	Width (mm):	195 mm
Beam ° Vert.:	140 °	Height (mm):	285 mm
Ctrl. Mode:	DMX / Manual	Weight:	11.2 kg
		Housing:	Aluminium
		Colour:	Black

FEATURES:

- 300 W Lumiled 7 colour LED engine using custom designed array
- CRI > 96 Consistently on full CCT range
- LED colour linearity and temperature drift compensation
- Optics Colour Shift compensation
- Colour wheel with 64 spectrum matching Filter gels
- 2000 – 8000 K Seamless CCT channel
- RGB, CMY and HSI Colour control
- 16-bit Intelligent high resolution virtual dimming
- Tungsten mode with natural colour drift & timing simulations
- Flicker-Free with selectable PWM by DMX
- RDM allowing for remote setting and recall of information
- Motorised 30° focusing
- 1-Ch DMX mode for conventional replacement





Followspot LED 75W

30628 **Follow Spot**

SHOWTEC

Specifications:

Light Src. Type:	LED	Iris:	Manual
Light Src. Quant. :	1	Ctrl. Mode:	DMX / Manual
Light Src. Pwr.:	75 W	Pwr. Supp.:	100-240 VAC 50-60 Hz
LED Colour Type:	CW	Pwr. Cons.:	121 W
Lumen Total:	1600 lm	Pwr. Conn. In.:	IEC C13 female
CRI:	80	DMX Conn.:	XLR 3P In/Out
CCT:	15000 K	Length (mm):	630 mm
Zoom:	Manual	Width (mm):	340 mm
Zoom Min.:	16 °	Height (mm):	300 mm
Zoom Max.:	22 °	Weight:	6 kg
		Housing:	Aluminium
		Colour:	Black

FEATURES:

- 75 W Cool white LED
- DMX and Manual control
- Stand included
- 400Hz refresh rate



Followspot LED 120 W

40120 **Stand included**

SHOWTEC

Specifications:

Light Src. Type:	LED	Iris:	Manual
Light Src. Quant. :	1	Ctrl. Mode:	Manual
Light Src. Pwr.:	120 W	Pwr. Supp.:	100-240 VAC 50-60 Hz
LED Colour Type:	CW	Pwr. Cons.:	200 W
Lumen Total:	4000 lm	Pwr. Conn. In.:	Pro Power Blue
CRI:	100	Length (mm):	550 mm
CCT:	10000 K	Width (mm):	225 mm
Zoom:	Manual	Height (mm):	245 mm
Zoom Min.:	8 °	Weight:	10.2 kg
Zoom Max.:	15 °	Housing:	Steel
		Colour:	Black

FEATURES:

- 120 W Cool white LED
- Built-in CTC Colours
- 0 – 100% natural dimmer
- Including stand

Case for Followspot 120 W

D7059 **Flight case**

Performer Pendant Q6

33150 **150 W RGBALC-colour house Light LED Fresnel**

SHOWTEC

Specifications:

Light Src. Type:	LED	DMX Ch.:	8 / 13 / 20
Light Src. Quant. :	1	Protocols:	DMX / RDM
Light Src. Pwr.:	150 W	Pwr. Supp.:	100-240 VAC 50-60 Hz
LED Colour Type:	RGBALC	Pwr. Cons.:	150 W
Lumen Total:	5853 lm	Pwr. Conn. In.:	Open End
CRI:	92	DMX Conn.:	XLR 5P In/Out
CCT Min.:	1800 K	Length (mm):	435 mm
CCT Max.:	10000 K	Width (mm):	247 mm
Beam °:	30 °	Height (mm):	348 mm
Ctrl. Mode:	DMX / Master Slave / Stand Alone	Weight:	8.5 kg
		Housing:	Aluminium
		Colour:	Black



FEATURES:

- 150 W RGBALC LED house light
- Suitable for fixed installations
- 16 preset colours
- CCT colour temperature range of 1800 K - 10000 K
- Silent operation
- Mounting bracket suitable for a certified safety cable
- Including 2.4 m power cable, bare cable and cable gland



Filter Frame for Infinity Lens Tube

200120 Only for 5° Lens Tube



INFINITY

Filter Frame for Infinity Lens Tube

200121 Only for 10° Lens Tube



INFINITY

Filter Frame for Infinity Lens Tube

200122 Only for 14°, 19°, 26°, 36°, 50° Lens Tube



INFINITY

Filter Frame for Infinity Zoom Lens

200123



INFINITY

Filter Frame for Infinity Fresnel

200250



INFINITY

Barndoor for Infinity Fresnel

200251



INFINITY



Iris for Infinity Profile

200130 Infinity Signature Series



INFINITY

Gobo Holder for Infinity Profile

200131 Infinity Signature Series



INFINITY

Pole Operation Yoke for Fresnel

200135 Made by Doughty



INFINITY

Barndoor for StageBeam 350/500W

30540 Spots Accessories



SHOWTEC

Lens Adapter for Selecon Optics

200132 Infinity Signature Series



INFINITY

Barndoor for StageBeam 650/1000W

30541 Spots Accessories



SHOWTEC

Season Gobo Set for ACT Profile 50 WW

34050 5 season Gobos (Birthday, Christmas, Halloween, Carnival and Love)



SHOWTEC

Barndoor for ACT Series

34051 Black Four-Leaves metal Barndoor



SHOWTEC

Barndoor for Performer Fresnel Mini

33056 Black Four-Leaves metal Barndoor



SHOWTEC

Filter Frame for Performer 1000 Fresnel

33033 Steel Colour Filter Frame



SHOWTEC

Filter Frame for Performer 1500 Series

33162



SHOWTEC

Filter Frame for Performer 2000

33042 Steel Colour Filter Frame



SHOWTEC

Filter Frame for Performer 2500 Series

33163



SHOWTEC

Barndoor for Performer 1000 Fresnel

33032 Black Four-Leaves metal Barndoor



SHOWTEC

Barndoor for Performer 1500 Fresnel

33160 Black Eight-Leaves Metal Barndoor



SHOWTEC

Barndoor for Performer 2000

33041 Black Four-Leaves metal Barndoor



SHOWTEC

50° Lens set for Performer Pendant

33155 Plastic lens for 50° beam angle



SHOWTEC

Barndoor for Performer 2500 Fresnel

33161 Black Eight-Leaves Metal Barndoor



SHOWTEC

Barndoor for Performer 3000 LED

33044 Black Eight-Leaves metal Barndoor



SHOWTEC

18° Lens set for Performer Pendant

33156 Plastic lens for 18° beam angle



SHOWTEC

Glare Shield for Performer Fresnel Mini

33085 Black plastic Glare Shield



SHOWTEC

Metal Gobo Holder for Performer Profile Mini

33086 Gobo Holder for ø 38 mm metal Gobos



SHOWTEC

Shutter Barrel for Performer Profile Mini

33088 Black aluminium Shutter Barrel with 4 manually adjustable Shapers



SHOWTEC

Iris for Performer

33076 18-leaf Iris for Performer Fixtures



SHOWTEC

Gobo Holder with Soft Edge for Performer Profile

33077 Gobo Holder with Soft Edge



SHOWTEC

Metal Gobo Holder for Performer Profile

33078 Gobo Holder for ø 69.9 mm metal Gobos



SHOWTEC

Glass Gobo Holder for Performer Profile

33079 Metal gobo Holder for ø 69.9 mm glass Gobos



SHOWTEC







Cameleon Flood 7 RGB

42689 7 x 3 W RGB LED Flood

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	7
Light Src. Pwr.:	3 W
LED Colour Type:	RGB
Refresh Rate:	400 Hz
Lumen Total:	961 lm
Beam ° Horz.:	40 °
Beam ° Vert.:	40 °
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Remote / Stand Alone
DMX Ch.:	3
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	21 W
Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
DMX Conn.:	Dedicated 3P IP65 In/Out
Cable Length:	1.5 m
Length (mm):	170 mm
Width (mm):	70 mm
Height (mm):	128 mm
Weight:	1.1 kg
IP Rate:	IP65
Housing:	Aluminium
Colour:	Black

FEATURES:

- Compact, yet powerful 7 x 3 W RGB LED Flood
- Double bracket for easy floor positioning
- IP65 (dust and water resistant, fit for outdoor use)
- 40° fixed beam angle
- Dimmer and strobe function
- Manual, DMX, IR and Master/Slave control
- IP65 power connector included

Cameleon Flood 18/3 RGB

42690 IP65

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	18
Light Src. Pwr.:	3 W
LED Colour Type:	RGB
Refresh Rate:	400 Hz
Lumen Total:	2553 lm
Beam ° Horz.:	40 °
Beam ° Vert.:	40 °
Ctrl. Mode:	Auto / DMX / Master Slave
DMX Ch.:	1 / 3 / 4 / 6
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	70 W
Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
DMX Conn.:	Dedicated 3P IP65 In/Out
Length (mm):	320 mm
Width (mm):	212 mm
Height (mm):	195 mm
Weight:	4.4 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- IP65 protection grade
- Multivoltage power supply
- Excellent colour mixing
- Compact design

Cameleon Flood 6 Q4

42672 6 x 5 W RGBW LED Flood

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	6
Light Src. Pwr.:	5 W
LED Colour Type:	RGBW
Refresh Rate:	1200 Hz
Lumen Total:	1337 lm
Beam ° Horz.:	40 °
Beam ° Vert.:	40 °
Ctrl. Mode:	Auto / DMX / Manual / Master Slave
DMX Ch.:	4 / 6 / 10
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	35 W
Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
DMX Conn.:	Dedicated 3P IP65 In/Out
Cable Length:	1.5 m
Length (mm):	220 mm
Width (mm):	90 mm
Height (mm):	150 mm
Weight:	3.5 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 6 x 5 W RGBW LED Flood
- Suitable for colour mixing on stage
- IP65 (dust and water resistant, fit for outdoor use)
- 40° fixed beam angle
- Dimmer and strobe effects
- Manual, DMX, IR and Master/Slave control
- Clamp and IP65 power connector included







Cameleon Flood 15 Q4

42671 **15 x 5 W RGBW LED Flood**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	15
Light Src. Pwr.:	5 W
LED Colour Type:	RGBW
Refresh Rate:	4000 Hz
Lumen Total:	3434 lm
Beam ° Horz.:	40 °
Beam ° Vert.:	40 °
Ctrl. Mode:	Auto / DMX / Manual / Master Slave
DMX Ch.:	4 / 6 / 10
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	115 W
Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
DMX Conn.:	Dedicated 3P IP65 In/Out
Cable Length:	1.5 m
Length (mm):	330 mm
Width (mm):	100 mm
Height (mm):	210 mm
Weight:	5.2 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 15 x 5 W RGBW LED Flood
- Suitable for colour mixing on stage
- IP65 (dust and water resistant, fit for outdoor use)
- 40° fixed beam angle
- Dimmer and strobe function
- Manual, DMX, IR and Master/Slave control
- Clamp and IP65 power connector included

Cameleon Flood 6 WW

42676 **6x 5 W Warm White LED Flood**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	6
Light Src. Pwr.:	8 W
LED Colour Type:	WW
Refresh Rate:	4200 Hz
Lumen Total:	1140 lm
Beam ° Horz.:	40 °
Beam ° Vert.:	40 °
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Remote
DMX Ch.:	1 / 2
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	20 W
Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
DMX Conn.:	Dedicated 3P IP65 In/Out
Cable Length:	1.5 m
Length (mm):	220 mm
Width (mm):	90 mm
Height (mm):	150 mm
Weight:	2.6 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 6 x 5 W WW LED Flood
- 3000 K colour rendering
- IP65 (dust and water resistant, fit for outdoor use)
- 40° fixed beam angle
- Dimmer and strobe function
- Manual, DMX, IR and Master/Slave control
- IP65 power connector and clamp included

Cameleon Flood 15 WW

42674 **15x 5 W Warm White LED Flood**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	15
Light Src. Pwr.:	8 W
LED Colour Type:	WW
Refresh Rate:	4200 Hz
Lumen Total:	4367 lm
CRI:	80
Beam ° Horz.:	40 °
Beam ° Vert.:	40 °
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Remote
DMX Ch.:	1 / 2
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	75 W
Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
DMX Conn.:	Dedicated 3P IP65 In/Out
Cable Length:	1.5 m
Length (mm):	330 mm
Width (mm):	100 mm
Height (mm):	210 mm
Weight:	5.2 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 15 x 5 W WW LED Flood
- 3000 K colour rendering
- IP65 (dust and water resistant, fit for outdoor use)
- 40° fixed beam angle
- Dimmer and strobe function
- Manual, DMX, IR and Master/Slave control
- IP65 power connector and clamp included



Case for 4x Helix 4000/S5000

D7249 **Premium Line**

Helix S5000 Q4

43725 **40 x 10 W RGBW Outdoor LED Wash**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	40
Light Src. Pwr.:	10 W
LED Colour Type:	RGBW
Refresh Rate:	3000 Hz
Lumen Total:	54000 lm
Beam ° Horz.:	10 °
Beam ° Vert.:	10 °
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave
DMX Ch.:	4 / 6 / 8 / 20 / 24
Protocols:	DMX
WL:	WL DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	415 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
DMX Conn.:	Dedicated 5P IP65 In/Out
Cable Length:	1.5 m
Length (mm):	530 mm
Width (mm):	125 mm
Height (mm):	318 mm
Weight:	9.5 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 40 x 10 W RGBW LED Wash
- IP65 rated, suitable for outdoor applications
- 10° beam angle
- Optional beam shapers for widening beam angle
- 5-section control
- 180° flippable
- W-DMX (wireless)

Helix S5000 Q4 Set

43725SET01 **4 x Helix S5000, Flight Case and Accessories**

SHOWTEC



Specifications:

Light Src. Type:	LED
Light Src. Quant. :	40
Light Src. Pwr.:	10 W
LED Colour Type:	RGBW
Refresh Rate:	3000 Hz
Lumen Total:	54000 lm
Beam ° Horz.:	10 °
Beam ° Vert.:	10 °
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave
DMX Ch.:	4 / 6 / 8 / 20 / 24
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	415 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
DMX Conn.:	XLR 5P In/Out
Length (mm):	1200 mm
Width (mm):	898 mm
Height (mm):	700 mm
Weight:	9.5 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 4 x Helix S5000 Q4 + flight case and accessories
- 40 x 10 W outdoor RGBW Wash
- Top hats, barndoors and 20° and 40° beam shapers
- 5-section control
- IP65 rated, suitable for outdoor use
- W-DMX (wireless)



Case for 4x Helix M1000

D7229 **Premium Line**

Helix M1000 Q4 Mobile

43740 **8 x 10 W RGBW LED Wash**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	8
Light Src. Pwr.:	10 W
LED Colour Type:	RGBW
Refresh Rate:	12000 Hz
Lumen Total:	8000 lm
Beam ° Horz.:	10 °
Beam ° Vert.:	10 °
Batt. Type:	Lithium ion
Runtime @Full:	15 h
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual / Master Slave
DMX Ch.:	4 / 6 / 10
Protocols:	DMX
WL:	WL DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	75 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
DMX Conn.:	XLR 5P In/Out
Cable Length:	1.5 m
Length (mm):	367 mm
Width (mm):	126 mm
Height (mm):	307 mm
Weight:	7.5 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- Mobile 8 x 10 W RGBW LED Wash
- Up to 15 hours without charging
- IP65 rated, suitable for outdoor applications
- 10° beam angle
- Optional beam shapers for widening beam angle
- 180° flippable
- W-DMX (wireless)



Barndoor for Helix S5000 Q4

43726 Black Four-Leaves Barndoor



SHOWTEC

Top Hat for Helix S5000

43730 Black, steel Top Hat



SHOWTEC

Beam Shaper for Helix S5000 Q4

SHOWTEC

43727 20°
43728 40°
43729 60° x 15°
43731 90°



Top Hat for Helix M1000 Q4 Mobile

43741 Black, steel Top Hat



SHOWTEC

Barndoor for Helix M1000 Q4 Mobile

43742 Black Four-Leaves Barndoor



SHOWTEC

Beam Shaper for Helix M1000 Q4 Mobile

SHOWTEC

43745 20°
43746 40°
43747 60° x 15°
43748 90°



Power Extension Cable for Cameleon Series

SHOWTEC

42705 Dedicated 3P IP65 Power Extension - 3 m
427056 Dedicated 3P IP65 Power Extension - 6 m



Power Connection Cable for Cameleon

42706 Schuko



SHOWTEC

Power Extension End Cap for Cameleon

42698 Male and female Power End Cap Set



SHOWTEC

DMX Extension Cable for Cameleon Series

SHOWTEC

42707 Dedicated 3P IP65 DMX Extension Cable - 3 m
427076 Dedicated 3P IP65 DMX Extension Cable - 6 m



DMX Input Cable for Cameleon

42708 3P DMX Input Cable



SHOWTEC

DMX Extension End Cap for Cameleon

42699 Male and female DMX End Cap Set



SHOWTEC

Infra Red Controller for Cameleon

42704 Remote Controller



SHOWTEC





Spectral 300 MKIII Q4

43561 **20 W RGBW LED Spot**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	21 W
Light Src. Pwr.:	20 W	Pwr. Conn. In.:	Internal Powerlink with custom power connector
LED Colour Type:	RGBW	DMX Conn.:	XLR 3P In/Out
Refresh Rate:	1200 Hz	Length (mm):	210 mm
Lumen Total:	800 lm	Width (mm):	125 mm
Beam °:	12 °	Height (mm):	176 mm
Ctrl. Mode:	Auto / DMX / Manual / Master Slave	Weight:	1.1 kg
		IP Rate:	IP20(indoor use only)
DMX Ch.:	3 / 4 / 5 / 6 / 9	Housing:	Aluminum die-cast
Protocols:	DMX	Colour:	Black
		Cooling:	Convection

FEATURES:

- Compact 20 W RGBW LED Spot
- 12° fixed beam angle
- Dimmer and strobe function
- DMX and Master/Slave control
- Silent, fanless operations
- Compact design



Club Par 12/4 RGBW

42650 **12 x 8 W RGBW LED Par**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	12	Pwr. Cons.:	78 W
Light Src. Pwr.:	8 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGBW	Pwr. Conn. Out.:	IEC C14 male
Refresh Rate:	1.2 Hz	DMX Conn.:	XLR 3P In/Out
Lumen Total:	3200 lm	Length (mm):	290 mm
Beam °:	25 °	Width (mm):	270 mm
Ctrl. Mode:	DMX / Manual / Sound / Stand Alone	Height (mm):	110 mm
		Weight:	2.2 kg
		IP Rate:	IP20(indoor use only)
DMX Ch.:	4 / 9	Housing:	Plastic
Protocols:	DMX	Colour:	Black
		Cooling:	Axial fan

FEATURES:

- 12x 8 W RGBW LED Par
- Double bracket for easy floor positioning
- 25° fixed beam angle
- Dimmer and strobe function
- Manual and DMX control
- Manual, Auto run and Sound-controlled mode

Case for 4x Club par

D7032 **Value Line**



Club Par 12/6 RGBWAUV

42651 **12 x 10 W RGBWAUV LED Par**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	12	Pwr. Cons.:	95 W
Light Src. Pwr.:	10 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGBWAUV	Pwr. Conn. Out.:	IEC C14 male
Refresh Rate:	1.2 Hz	DMX Conn.:	XLR 3P In/Out
Lumen Total:	3250 lm	Length (mm):	290 mm
Beam °:	25 °	Width (mm):	270 mm
Ctrl. Mode:	Auto / DMX / Master Slave / Sound / Stand Alone	Height (mm):	110 mm
		Weight:	2.3 kg
		IP Rate:	IP20(indoor use only)
DMX Ch.:	6 / 11	Housing:	Plastic
Protocols:	DMX	Colour:	Black
		Cooling:	Axial fan

FEATURES:

- 12x 10 W RGBWAUV LED Par
- Double bracket for easy floor positioning
- 25° fixed beam angle
- Dimmer and strobe function
- Manual and DMX control
- Manual, Auto run and Sound-controlLED mode

Case for 4x Club par

D7032 **Value Line**

Compact Par 7 Tri

42579 **7x 3 W RGB LED Par**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	7	Pwr. Cons.:	28 W
Light Src. Pwr.:	3 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGB	DMX Conn.:	XLR 3P In/Out
Refresh Rate:	3.9 Hz	Length (mm):	275 mm
Lumen Total:	2685 lm	Width (mm):	95 mm
Beam °:	40 °	Height (mm):	256 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Sound	Weight:	2.2 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Aluminium
		Colour:	Black
DMX Ch.:	3 / 4 / 8	Cooling:	Convection
Protocols:	DMX		

FEATURES:

- Compact 7x 3 W RGB LED Par
- Double bracket for easy floor positioning
- 40° fixed beam angle
- Dimmer and strobe function
- Manual, DMX and Master/Slave control
- Auto run and Sound-controlLED mode
- Available in either black or grey housing

Compact Par 7 Tri

42580 **RGB**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	7	Pwr. Cons.:	28 W
Light Src. Pwr.:	3 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGB	DMX Conn.:	XLR 3P In/Out
Refresh Rate:	3900 Hz	Length (mm):	275 mm
Lumen Total:	2685 lm	Width (mm):	95 mm
Beam °:	40 °	Height (mm):	256 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Sound	Weight:	2.2 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Aluminium
		Colour:	Grey
DMX Ch.:	3 / 4 / 8	Cooling:	Convection
Protocols:	DMX		

FEATURES:

- Flat Par Housing
- Stylish design
- 3-in-1 LED Technology
- Double bracket





Compact Par 7x CW/WW

42581 **7 x 4 W Cool White to Warm White LED Par**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	7
Light Src. Pwr.:	4 W
LED Colour Type:	CW / WW
Refresh Rate:	3900 Hz
Lumen Total:	365 lm
Beam °:	40 °
Ctrl. Mode:	DMX
DMX Ch.:	2 / 4
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	33 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Length (mm):	275 mm
Width (mm):	95 mm
Height (mm):	256 mm
Weight:	2.2 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Grey
Cooling:	Convection

FEATURES:

- Compact 7 x 4 W Cool White to Warm White LED Par
- Double bracket for easy floor positioning
- 40° fixed beam angle
- Dimmer and strobe function
- Manual, DMX and Master/Slave control
- Stand alone function



Compact Par 7 Q4

42582 **7 x 4 W RGBW LED Par - grey**

42584 **7 x 4 W RGBW LED Par - black**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	7
Light Src. Pwr.:	4 W
LED Colour Type:	RGBW
Refresh Rate:	7800 Hz
Lumen Total:	1100 lm
Beam °:	15 °
Ctrl. Mode:	Auto / DMX / Master Slave / Sound / Stand Alone
DMX Ch.:	4 / 6 / 11
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	32 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Length (mm):	275 mm
Width (mm):	95 mm
Height (mm):	256 mm
Weight:	2.2 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Grey
Cooling:	Convection

FEATURES:

- Compact 7x 4 W RGBW LED Par
- Double bracket for easy floor positioning
- Narrow 15° fixed beam angle
- Dimmer and strobe function
- Manual, DMX and Master/Slave control
- Auto run and Sound-controlLED mode
- Available in either black and grey housing



Compact Par 7/15 Q4

42599 **7 x 15 W RGBW LED Par**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	7
Light Src. Pwr.:	15 W
LED Colour Type:	RGBW
Refresh Rate:	1200 Hz
Lumen Total:	2598 lm
Beam °:	15 °
Ctrl. Mode:	Built-in Program / DMX / Manual
DMX Ch.:	4 / 6 / 10
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	160 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	260 mm
Width (mm):	105 mm
Height (mm):	300 mm
Weight:	3.8 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminum die-cast
Colour:	Black
Cooling:	Convection

FEATURES:

- Compact 7 x 15 W RGBW LED Par
- 15° fixed beam angle
- Double bracket for easy floor positioning
- Easily link up to 15 units
- Dimmer and strobe function
- Available in either black and white housing
- Manual, DMX and Master/Slave control





Compact Par 18 MKII

42592 **18 x 3 W RGB LED Par - black**
42592W **18 x 3 W RGB LED Par - white**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	18
Light Src. Pwr.:	3 W
LED Colour Type:	RGB
Refresh Rate:	7800 Hz
Lumen Total:	2323 lm
Beam °:	28 °
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Sound
DMX Ch.:	1 / 3 / 4 / 6
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	60 W
Pwr. Conn. In.:	IEC C13 female
Pwr. Conn. Out.:	IEC C14 male
DMX Conn.:	XLR 3P In/Out
Length (mm):	250 mm
Width (mm):	290 mm
Height (mm):	96 mm
Weight:	3 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal
Colour:	Black
Cooling:	Convection

FEATURES:

- Compact 18 x 3 W RGB LED Par
- Suitable for studio applications
- Silent operation
- Flicker free
- Easy link up to 15 units
- Available in either black and white housing
- Manual, DMX and Master/Slave control



Compact Par 18 Q4

42589 **18 x 7 W RGBW LED Par**
42588 **White Body**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	18
Light Src. Pwr.:	7 W
LED Colour Type:	RGBW
Refresh Rate:	12000 Hz
Lumen Total:	4997 lm
Beam °:	15 °
Ctrl. Mode:	Auto / DMX / Manual
DMX Ch.:	4 / 6 / 10
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	132 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	300 mm
Width (mm):	131 mm
Height (mm):	313 mm
Weight:	5.2 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminum die-cast
Colour:	Black
Cooling:	Convection

FEATURES:

- Compact 18 x 7 W RGBW LED Par
- Double bracket for easy floor positioning
- Narrow 15° fixed beam angle
- Dimmer and strobe function
- Manual, DMX and Master/Slave control
- Auto run and Sound-controlLED mode
- Available in either black and white housing

Luna Par 60 Q4

43321 **60 W RGBW COB LED Spot**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	65 W
Light Src. Pwr.:	60 W	Pwr. Conn. In.:	Pro Power Blue
LED Colour Type:	RGBW	Pwr. Conn. Out.:	ProPower Grey
Refresh Rate:	1000 Hz	DMX Conn.:	XLR 3P In/Out
Lumen Total:	3700 lm	Length (mm):	1254 mm
Beam °:	90 °	Width (mm):	229 mm
Ctrl. Mode:	DMX / Manual / Sound / Stand Alone	Height (mm):	152 mm
		Weight:	2.1 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Aluminium
DMX Ch.:	4 / 6 / 11	Colour:	Black
Protocols:	DMX	Cooling:	Axial fan



FEATURES:

- 60 W RGBW COB LED Spot
- Stylish design with flat backside for uplighting position
- 90° beam angle and included 25° diffuser
- Dimmer and strobe function
- Manual, DMX and Master/Slave controllable
- Manual, Auto run and Sound-controlLED mode
- Perfect for lighting objects or colour mixing on stage

Luna Par 120 Q4

43322 **120 W RGBW COB LED Spot**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	125 W
Light Src. Pwr.:	120 W	Pwr. Conn. In.:	Pro Power Blue
LED Colour Type:	RGBW	Pwr. Conn. Out.:	ProPower Grey
Refresh Rate:	1000 Hz	DMX Conn.:	XLR 3P In/Out
Lumen Total:	4950 lm	Length (mm):	256 mm
Beam °:	90 °	Width (mm):	250 mm
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound	Height (mm):	190 mm
		Weight:	2.74 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Aluminium
DMX Ch.:	4 / 6 / 11	Colour:	Black
Protocols:	DMX	Cooling:	Axial fan



FEATURES:

- Bright 120 W RGBW COB LED Spot
- Stylish design with flat backside for uplighting position
- 90° beam angle and included 25° diffuser
- Dimmer and strobe function
- Manual, DMX and Master/Slave controllable
- Manual, Auto run and Sound-controlLED mode
- Perfect for lighting objects or colour mixing on stage



Power Spot 3 Q5

42573 **3 x 10 W RGBWA LED Spot**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	3	Pwr. Cons.:	32 W
Light Src. Pwr.:	10 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGBWA	Pwr. Conn. Out.:	IEC C14 male
Refresh Rate:	7800 Hz	DMX Conn.:	XLR 3P In/Out
Lumen Total:	781 lm	Length (mm):	200 mm
Beam °:	25 °	Width (mm):	90 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Static Dimmer	Height (mm):	224 mm
		Weight:	1.6 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Aluminum die-cast
		Colour:	Black
DMX Ch.:	5 / 7 / 9	Cooling:	Convection
Protocols:	DMX		

FEATURES:

- 3x 10 W RGBWA LED Spot
- Silent, fanless operations
- Double bracket
- Flicker free
- Dimmer and strobe function
- Controllable via DMX and Master/Slave
- Manual, Auto run and Sound-controlLED mode



Power Spot 6 Q5

42574 **6 x 10 W RGBWA LED Spot**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	6	Pwr. Cons.:	45 W
Light Src. Pwr.:	10 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGBWA	Pwr. Conn. Out.:	IEC C14 male
Refresh Rate:	7800 Hz	DMX Conn.:	XLR 3P In/Out
Lumen Total:	1303 lm	Length (mm):	245 mm
Beam °:	25 °	Width (mm):	105 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Static Dimmer	Height (mm):	255 mm
		Weight:	2.5 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Aluminum die-cast
		Colour:	Black
DMX Ch.:	5 / 7 / 9	Cooling:	Convection
Protocols:	DMX		

FEATURES:

- 6x 10 W RGBWA LED Spot
- Silent, fanless operations
- Double bracket
- Flicker free
- Dimmer and strobe function
- Controllable via DMX and Master/Slave
- Manual, Auto run and Sound-controlLED mode

Power Spot 9 Q5

42575 **9 x 10 W RGBWA LED Spot**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	9	Pwr. Cons.:	65 W
Light Src. Pwr.:	10 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGBWA	Pwr. Conn. Out.:	IEC C14 male
Refresh Rate:	7800 Hz	DMX Conn.:	XLR 3P In/Out
Lumen Total:	2346 lm	Length (mm):	270 mm
Beam °:	25 °	Width (mm):	90 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Static Dimmer	Height (mm):	300 mm
		Weight:	2.9 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Aluminum die-cast
		Colour:	Black
DMX Ch.:	5 / 7 / 9	Cooling:	Convection
Protocols:	DMX		

FEATURES:

- 9x 10 W RGBWA LED Spot
- Silent, fanless operations
- Double bracket
- Flicker free
- Dimmer and strobe function
- Controllable via DMX and Master/Slave
- Manual, Auto run and Sound-controlLED mode

Power Spot 9 Q6 Tour

42576 **9 x 10 W RGBWA-UV LED Spot**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	9	Pwr. Cons.:	122 W
Light Src. Pwr.:	12 W	Pwr. Conn. In.:	powerCON Blue
LED Colour Type:	RGBWAUV	Pwr. Conn. Out.:	powerCON Grey
Refresh Rate:	7800 Hz	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Lumen Total:	2346 lm	Length (mm):	264 mm
Beam °:	18 °	Width (mm):	113 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Static Dimmer	Height (mm):	294 mm
		Weight:	2.84 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Aluminum die-cast
DMX Ch.:	6 / 8 / 10	Colour:	Black
Protocols:	DMX	Cooling:	Convection

FEATURES:

- 9x 10 W RGBWA-UV LED Spot
- Silent, fanless operation
- Double bracket
- Flicker-free
- Dimmer and strobe function
- Controllable via DMX and Master/Slave
- Manual, Auto run, and Sound-controlLED mode

Spectral M800 Q4 Tour

43570 **14 x 5 W RGBW LED Spot**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	14	Pwr. Cons.:	65 W
Light Src. Pwr.:	5 W	Pwr. Conn. In.:	powerCON Blue
LED Colour Type:	RGBW	Pwr. Conn. Out.:	powerCON Grey
Refresh Rate (min):	600 Hz	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Refresh Rate (max):	25 kHz	Length (mm):	180 mm
Lumen Total:	1452 lm	Width (mm):	235 mm
Beam °:	16 °	Height (mm):	323 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual	Weight:	4.3 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Aluminum die-cast
DMX Ch.:	4 / 5 / 6 / 7 / 9 / 10 / 13 / 15	Colour:	Black
Protocols:	DMX / RDM	Cooling:	Convection

FEATURES:

- 14 x 5 W RGBW LED Spot
- 16° fixed beam angle
- Dimmer and strobe function
- DMX and Master/Slave control
- Silent, fanless operation



Cameleon Spot Q4

42673 **15 W RGBW LED Spot**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Light Src. Quant. :	1	Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
Light Src. Pwr.:	15 W	DMX Conn.:	Dedicated 3P IP65 In/Out
LED Colour Type:	RGBW	Length (mm):	155 mm
Refresh Rate (min):	3000 Hz	Width (mm):	235 mm
Refresh Rate (max):	12 kHz	Height (mm):	195 mm
Lumen Total:	570 lm	Weight:	2 kg
Ctrl. Mode:	Auto / DMX / Master Slave	IP Rate:	IP65
DMX Ch.:	4 / 6 / 10	Housing:	Aluminium
Protocols:	DMX	Colour:	Black
Pwr. Supp.:	100-240 VAC 50-60 Hz	Cooling:	Convection
Pwr. Cons.:	20 W		

FEATURES:

- 15 W RGBW LED Spot
- Suitable for colour mixing on stage
- IP65 (dust and water resistant, fit for outdoor use)
- 16° fixed beam angle
- Dimmer and strobe function
- Manual, DMX, IR and Master/Slave control
- Clamp and IP65 power connector included



Spectral M800 Q4 IP65

43571 **IP65 14 x 5 W RGBW LED Spot**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	65 W
Light Src. Quant. :	14	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Light Src. Pwr.:	5 W	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
LED Colour Type:	RGBW	DMX Conn.:	Dedicated 3P IP65 In/Out
Refresh Rate (min):	600 Hz	Length (mm):	180 mm
Refresh Rate (max):	25 kHz	Width (mm):	235 mm
Lumen Total:	1452 lm	Height (mm):	320 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual / Master Slave	Weight:	5.2 kg
		IP Rate:	IP65
DMX Ch.:	4 / 5 / 6 / 7 / 9 / 10 / 13 / 15	Housing:	Aluminum die-cast
Protocols:	DMX / RDM	Colour:	Black
Pwr. Supp.:	100-240 VAC 50-60 Hz	Cooling:	Convection

FEATURES:

- Solid and reliable 14 x 5 W RGBW LED Spot
- 16° fixed beam angle
- IP65 (dust and water resistant, fit for outdoor use)
- Dimmer and strobe function
- DMX and Master/Slave control
- Silent, fanless operations

Spectral M1500 Zoom Q4 MKIII

43549 **IP66 7 x 20 W RGBW Osram LED Spot**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	7	Pwr. Cons.:	128 W
Light Src. Pwr.:	20 W	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
LED Colour Type:	RGBW	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Refresh Rate:	1200 Hz	DMX Conn.:	Dedicated 3P IP65 In/Out
Lumen Total:	2300 lm	Length (mm):	255 mm
Zoom Min.:	8 °	Width (mm):	225 mm
Zoom Max.:	40 °	Height (mm):	360 mm
Ctrl. Mode:	Auto / DMX / Manual / Master Slave	Weight:	7.08 kg
		IP Rate:	IP65
		Housing:	Aluminum die-cast
DMX Ch.:	3 / 4 / 5 / 6 / 7 / 12 / 17	Colour:	Black
Protocols:	DMX	Cooling:	Convection

FEATURES:

- 7 x 20 W RGBW Osram LED Spot
- Wide motorised zoom range (pin spot to wash)
- 2 controllable sections (centre and surrounding spots)
- IP65 (dust and water resistant, fit for outdoor use)
- Dimmer and strobe function
- DMX and Master/Slave control
- High CRI
- Silent, fanless operations

Spectral M3000 Zoom Q4 MKII

43548 **IP65 14 x 12 W RGBW Osram LED Spot**

SHOWTEC



Specifications:

		Pwr. Cons.:	200 W
		Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Light Src. Type:	LED	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Light Src. Quant. :	14		
Light Src. Pwr.:	12 W	DMX Conn.:	Dedicated 3P IP65 In/Out / Dedicated 5P IP65 In/Out
LED Colour Type:	RGBW		
Refresh Rate:	900 Hz	Length (mm):	250 mm
Lumen Total:	3900 lm	Width (mm):	275 mm
Zoom Min.:	8 °	Height (mm):	375 mm
Zoom Max.:	40 °	Weight:	8.4 kg
Ctrl. Mode:	Auto / DMX / Manual / Master Slave	IP Rate:	IP65
		Housing:	Aluminum die-cast
DMX Ch.:	3 / 4 / 5 / 6 / 7 / 12 / 17	Colour:	Black
Protocols:	DMX	Cooling:	Convection
Pwr. Supp.:	100-240 VAC 50-60 Hz		

FEATURES:

- 14 x 12 W RGBW Osram LED Spot
- Wide motorised zoom range (pin spot to wash)
- IP65 (dust and water resistant, fit for outdoor use)
- Dimmer and strobe function
- DMX and Master/Slave control
- Silent, fanless operations



Spectral PC 400Z

43554 **IP65 45 W PC RGBW LED Spot**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	45 W
LED Colour Type:	RGBW
Refresh Rate (min):	600 Hz
Refresh Rate (max):	25000 kHz
Lumen Total:	368 lm
Zoom Min.:	3 °
Zoom Max.:	18 °
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual
DMX Ch.:	9 / 12 / 17
Protocols:	DMX / RDM
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	45 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
DMX Conn.:	Dedicated 5P IP65 In/Out
Length (mm):	230 mm
Width (mm):	135 mm
Height (mm):	330 mm
Weight:	3.5 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black
Cooling:	Convection

FEATURES:

- 45 W RGBW LED Par
- Motorised zoom
- IP65 (dust and water resistant, fit for outdoor use)
- PC Lens optics for a homogeneous output
- Dimmer and strobe function
- DMX and Master/Slave control
- Silent, fanless operations



Spectral PC 600Z

43551 **IP65 60 W PC RGBW LED Spot**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	60 W
LED Colour Type:	RGBW
Refresh Rate (min):	600 Hz
Refresh Rate (max):	25000 kHz
Lumen Total:	753 lm
Zoom Min.:	4 °
Zoom Max.:	45 °
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual
DMX Ch.:	9 / 12 / 17
Protocols:	DMX / RDM
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	85 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
DMX Conn.:	Dedicated 3P IP65 In/Out
Length (mm):	243 mm
Width (mm):	240 mm
Height (mm):	300 mm
Weight:	5.8 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black
Cooling:	Convection

FEATURES:

- 60 W RGBW LED Par
- Wide and fast motorised zoom (pin spot to wash)
- IP65 (dust and water resistant, fit for outdoor use)
- PC Lens optics for a homogeneous output
- Dimmer and strobe function
- DMX and Master/Slave control
- Silent, fanless operations

Spectral PC 1200Z

43552 **IP65 120 W PC RGBW LED Array Spot**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	130 W
Light Src. Pwr.:	120 W	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
LED Colour Type:	RGBW	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Refresh Rate (min):	600 Hz	DMX Conn.:	Dedicated 3P IP65 In/Out / Dedicated 5P IP65 In/Out
Refresh Rate (max):	25000 kHz	Length (mm):	265 mm
Lumen Total:	1693 lm	Width (mm):	200 mm
Zoom Min.:	4 °	Height (mm):	385 mm
Zoom Max.:	45 °	Weight:	7.3 kg
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual	IP Rate:	IP65
		Housing:	Aluminum die-cast
DMX Ch.:	9 / 12 / 17	Colour:	Black
Protocols:	DMX / RDM	Cooling:	Convection

FEATURES:

- 120 W RGBW LED Array Par
- Wide and fast motorised zoom range (pin spot to wash)
- IP65 (dust and water resistant, fit for outdoor use)
- PC Lens optics for a homogeneous output
- Dimmer and strobe function
- DMX and Master/Slave control
- Silent, fanless operations

Spectral PC 1800Z

43553 **IP65 180 W PC RGBW LED Array Spot**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	185 W
Light Src. Pwr.:	180 W	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
LED Colour Type:	RGBW	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Refresh Rate (min):	600 Hz	DMX Conn.:	Dedicated 3P IP65 In/Out / Dedicated 5P IP65 In/Out
Refresh Rate (max):	25000 kHz	Length (mm):	265 mm
Lumen Total:	2067 lm	Width (mm):	240 mm
Zoom Min.:	4 °	Height (mm):	405 mm
Zoom Max.:	45 °	Weight:	9.3 kg
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual	IP Rate:	IP65
		Housing:	Aluminum die-cast
DMX Ch.:	9 / 12 / 17	Colour:	Black
Protocols:	DMX / RDM	Cooling:	Convection

FEATURES:

- 180 W RGBW LED Array Par
- Wide and fast motorised zoom range (pin spot to wash)
- IP65 (dust and water resistant, fit for outdoor use)
- PC Lens optics for a homogeneous white and coloured output
- Dimmer and strobe function
- DMX and Master/Slave control



Spectral Revo 6

43640 IP65 125 W RGBALC LED Array Spot

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	125 W
LED Colour Type:	RGBALC
Lumen Total:	3051 lm
Ctrl. Mode:	Auto / Built-in Program /
DMX /	Manual
DMX Ch.:	3 / 6 / 7 / 9 / 13 / 20
Protocols:	DMX / RDM
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	145 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
DMX Conn.:	Dedicated 5P IP65 In/Out
Length (mm):	425 mm
Width (mm):	320 mm
Height (mm):	219 mm
Weight:	6.1 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black
Cooling:	Forced Convection

FEATURES:

- Strong 120 W RGBALC LED Array Parcan
- 17° fixed beam angle
- IP65 (dust and water resistant, fit for outdoor use)
- PC Lens optics for a homogeneous output
- 12 step CCT colour temperature range of 1800 K - 8000 K
- DMX and Master/Slave control
- Silent operation



Spectral Revo Tungsten

43642 IP65 140 W tunable Warm White LED Spot

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	140 W
LED Colour Type:	WW / NW
Lumen Total:	7842 lm
Ctrl. Mode:	Auto / Built-in Program /
	DMX / Manual
DMX Ch.:	1 / 2 / 3 / 6 / 8
Protocols:	DMX / RDM
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	145 W
Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
DMX Conn.:	Dedicated 5P IP65 In/Out
Length (mm):	425 mm
Width (mm):	320 mm
Height (mm):	219 mm
Weight:	6.5 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black
Cooling:	Forced Convection

FEATURES:

- Reliable 140 W Warm White LED Par
- 16° fixed beam angle
- IP65 (dust and water resistant, fit for outdoor use)
- High CRI for accurate colour rendering
- Tunable 2700 K–4500 K WW colour temperature
- Silent operation
- DMX and Master/Slave control

Spectral Revo Daylight

43643 **IP65 140 W tunable Daylight White LED Spot**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Light Src. Quant. :	1	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Light Src. Pwr.:	143 W	DMX Conn.:	Dedicated 5P IP65 In/Out
LED Colour Type:	CW / NW	Length (mm):	425 mm
Lumen Total:	8838 lm	Width (mm):	320 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual	Height (mm):	219 mm
		Weight:	6.5 kg
		IP Rate:	IP65
DMX Ch.:	1 / 2 / 3 / 6 / 8	Housing:	Aluminum die-cast
Protocols:	DMX / RDM	Colour:	Black
Pwr. Supp.:	100-240 VAC 50-60 Hz	Cooling:	Forced Convection
Pwr. Cons.:	145 W		

FEATURES:

- Reliable 140 W Daylight White LED Par
- 16° fixed beam angle
- IP65 (dust and water resistant, fit for outdoor use)
- High CRI for accurate colour rendering
- Tunable 4000 K–6500 K DW colour temperature
- Silent operation
- DMX and Master/Slave control

Spectral Revo UV

43641 **IP65 100 W PC UV LED Spot**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Light Src. Quant. :	1	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Light Src. Pwr.:	125 W	DMX Conn.:	Dedicated 5P IP65 In/Out
LED Colour Type:	UV	Length (mm):	425 mm
Lumen Total:	3051 lm	Width (mm):	320 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual	Height (mm):	219 mm
		Weight:	6.5 kg
		IP Rate:	IP65
DMX Ch.:	1 / 2 / 4	Housing:	Aluminum die-cast
Protocols:	DMX / RDM	Colour:	Black
Pwr. Supp.:	100-240 VAC 50-60 Hz	Cooling:	Forced Convection
Pwr. Cons.:	110 W		

FEATURES:

- 100 W UV LED Par
- Fixed 45° beam angle
- IP65 (dust and water resistant, fit for outdoor use)
- PC Lens optics for a homogeneous output
- Silent operation
- Dimmer and strobe function
- DMX and Master/Slave control

Accessory Holder for Spectral M800

43514 Accessory Holder



SHOWTEC

Barndoor for Spectral M800

43520 Black Four-Leaves metal Barndoor



SHOWTEC

Top Hat for Spectral M800

43521 Black, steel Top Hat



SHOWTEC

Filter Frame for Spectral M800

43522 Steel Colour Filter Frame



SHOWTEC

Accessory Holder for Spectral M1500

43543AH Accessory Holder



SHOWTEC

Barndoor for Spectral M1500

43543BD Black Four-Leaves metal Barndoor



SHOWTEC

Filter Frame for Special M1500

43543FF Steel Colour Filter Frame



SHOWTEC

Accessory Holder for Spectral M3000

43545AH Accessory Holder



SHOWTEC

Barndoor for Spectral M3000

43545BD Black Four-Leaves metal Barndoor



SHOWTEC

Filter Frame for Spectral M3000

43545FF Steel Colour Filter Frame



SHOWTEC

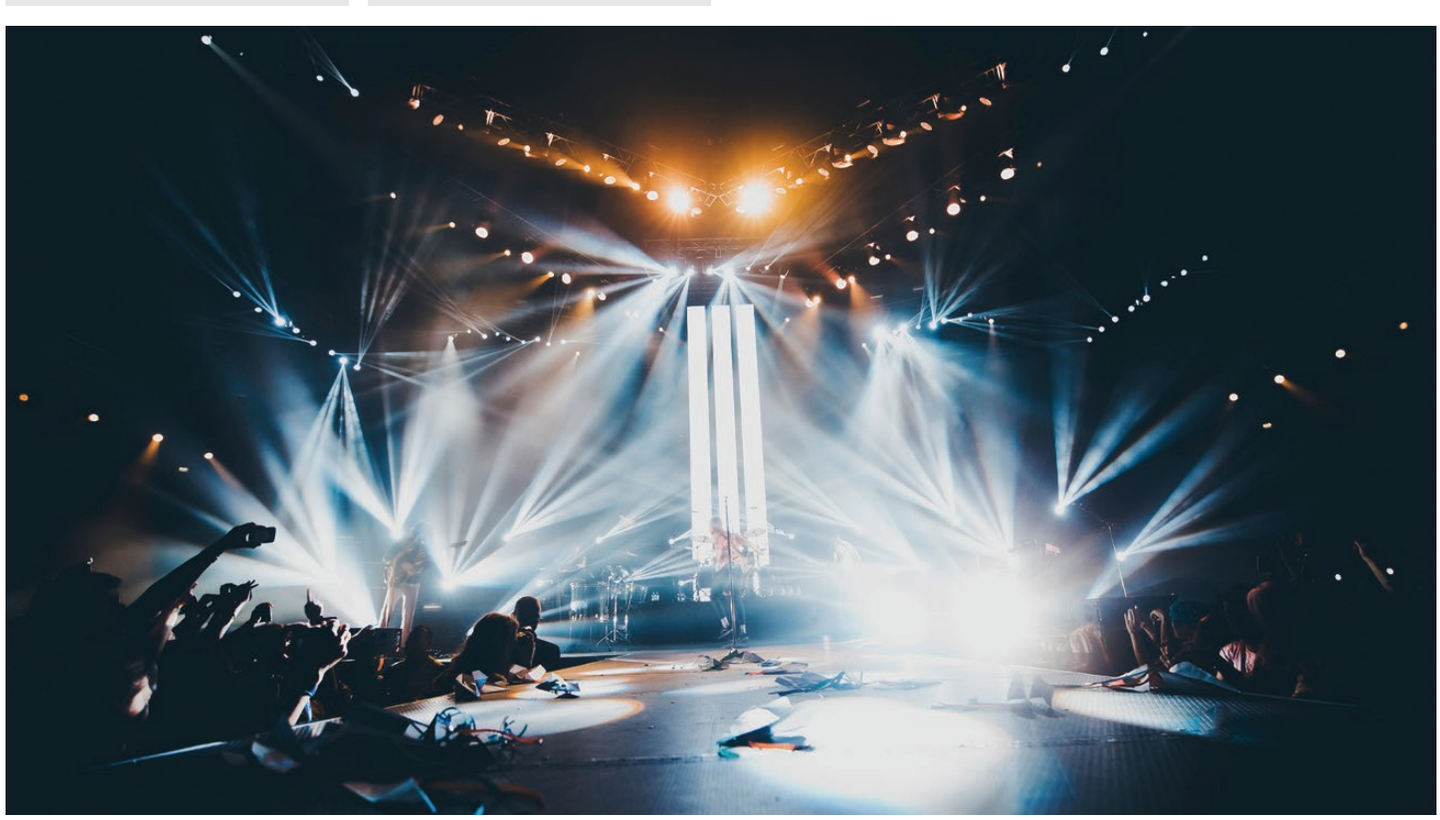

Maniac FX 7

41307 **Beam + Wash**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	14	Pwr. Cons.:	80 W
Light Src. Pwr.:	7 W	Pwr. Conn. In.:	powerCON Blue
LED Colour Type:	CW / RGB	Pwr. Conn. Out.:	powerCON Grey
Refresh Rate:	500 Hz	DMX Conn.:	XLR 3P In/Out
Lumen Total:	706 lm	Length (mm):	1006 mm
Beam ° Horz.:	6.2 °	Width (mm):	185 mm
Beam ° Vert.:	2.7 °	Height (mm):	50 mm
Ctrl. Mode:	Auto / DMX / Master Slave / Sound / Stand Alone	Weight:	3.8 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Aluminium
		Colour:	Black
DMX Ch.:	3 / 4 / 6 / 10 / 12 / 15	Cooling:	Axial fan
Protocols:	DMX		

FEATURES:

- Powerful Beam effects
- Pixel Control
- Built-in programs
- Power and Data daisy chain

LED Light Bar 8

42196 **Indoor Light bar**

SHOWTEC



Specifications:

		Protocols:	DMX
		Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Type:	LED	Pwr. Cons.:	23 W
Light Src. Quant. :	240	Pwr. Conn. In.:	IEC C13 female
Light Src. Pwr.:	5 W	Pwr. Conn. Out.:	IEC C14 male
LED Colour Type:	R / G / B	DMX Conn.:	XLR 3P In/Out
Refresh Rate:	11600 Hz	Length (mm):	1070 mm
Lumen Total:	800 lm	Width (mm):	65 mm
Beam ° Horz.:	30 °	Height (mm):	88 mm
Beam ° Vert.:	30 °	Weight:	1.58 kg
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Sound / Stand Alone	IP Rate:	IP20 (indoor use only)
		Housing:	Aluminium
		Colour:	Black
DMX Ch.:	2 / 3 / 4 / 14 / 24 / 26	Cooling:	Convection

FEATURES:

- Inexpensive batten effect
- 8 sections
- Power and data in- and output
- Compact size

LED Light Bar 12 Pixel

42197 **RGBW**

SHOWTEC



Specifications:

		Protocols:	DMX
		Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Type:	LED	Pwr. Cons.:	20 W
Light Src. Quant. :	12	Pwr. Conn. In.:	IEC C13 female
Light Src. Pwr.:	4 W	Pwr. Conn. Out.:	IEC C14 male
LED Colour Type:	RGBW	DMX Conn.:	XLR 3P In/Out
Refresh Rate:	2000 Hz	Length (mm):	1080 mm
Lumen Total:	500 lm	Width (mm):	65 mm
Beam ° Horz.:	30 °	Height (mm):	88 mm
Beam ° Vert.:	30 °	Weight:	21.4 kg
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Stand Alone	IP Rate:	IP20(indoor use only)
		Housing:	Aluminium
		Colour:	Black
DMX Ch.:	4 / 6 / 10 / 12 / 18 / 48	Cooling:	Convection

FEATURES:

- RGBW 4-in-1 Colours
- Pixel Control
- Power and Data daisy chain
- Compact size



Pulse Pixel Bar 16 Q4

41305 **Indoor Light bar**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	16
Light Src. Pwr.:	5 W
LED Colour Type:	RGBW
Refresh Rate:	2000 Hz
Lumen Total:	2405 lm
Beam ° Horz.:	20 °
Beam ° Vert.:	20 °
Ctrl. Mode:	Built-in Program / DMX / Master Slave / Stand Alone
DMX Ch.:	4 / 6 / 10 / 64
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	58 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	Pro Power Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	960 mm
Width (mm):	130 mm
Height (mm):	185 mm
Weight:	3.8 kg
IP Rate:	IP20 (indoor use only)
Housing:	Aluminium
Colour:	Black
Cooling:	Convection

FEATURES:

- RGBW Prolight Opto LEDs
- Pixel Control
- Versatile rigging possibilities
- Power and Data daisy chain

Case for 4x Pulse Pixel Bar 16

D7042 **Value Line**



Pixelbar 16Q6

41308 **RGBWA-UV**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	16
Light Src. Pwr.:	10 W
LED Colour Type:	RGBWAUV
Refresh Rate:	12000 Hz
Lumen Total:	4020 lm
Beam ° Horz.:	25 °
Beam ° Vert.:	25 °
Ctrl. Mode:	Art-Net / Auto / DMX / Manual / Master Slave / Stand Alone
DMX Ch.:	6 / 8 / 12 / 96 / 101
Protocols:	Art-Net / DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	170 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	1047 mm
Width (mm):	136 mm
Height (mm):	146.5 mm
Weight:	6.5 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Black
Cooling:	Convection

FEATURES:

- RGBWA-UV LED
- Pixel control
- DMX, Art-Net Control
- Brackets included.



Pixel Bar 8 COB

41266 **Indoor Light bar**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	8
Light Src. Pwr.:	15 W
LED Colour Type:	RGB
Refresh Rate:	7800 Hz
Lumen Total:	1050 lm
Beam ° Horz.:	60 °
Beam ° Vert.:	60 °
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Sound
DMX Ch.:	2 / 3 / 5 / 6 / 12 / 24
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	120 W
Pwr. Conn. In.:	IEC C13 female
Pwr. Conn. Out.:	IEC C14 male
DMX Conn.:	XLR 3P In/Out
Length (mm):	735 mm
Width (mm):	110 mm
Height (mm):	85 mm
Weight:	2.8 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Black
Cooling:	Axial fan

FEATURES:

- 3-in-1 COB LED Technology
- Linkable
- Multiple DMX modes for total pixel control
- Large Beam Angle

Cameleon Bar 24/3

42695 **24 x 3 W RGB LED Bar**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	80 W
Light Src. Quant. :	24	Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Light Src. Pwr.:	3 W	Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
LED Colour Type:	RGB	DMX Conn.:	Dedicated 3P IP65 In/Out
Refresh Rate:	7800 Hz	Length (mm):	1025 mm
Lumen Total:	3180 lm	Width (mm):	88 mm
Beam ° Horz.:	40 °	Height (mm):	77 mm
Beam ° Vert.:	40 °	Weight:	6.7 kg
Ctrl. Mode:	Auto / DMX / Master Slave	IP Rate:	IP65
DMX Ch.:	3 / 5	Housing:	Aluminum die-cast
Protocols:	DMX	Colour:	Black
Pwr. Supp.:	100-240 VAC 50-60 Hz	Cooling:	Convection



FEATURES:

- Powerful 24 x 3 W RGB LED Flood
- Silent, fanless operations
- IP65 (dust and water resistant, fit for outdoor use)
- Multivoltage power supply
- 40° fixed beam angle
- Dimmer and strobe effects
- Manual, DMX and Master/Slave control

Cameleon Bar 16

42670 **16 x 5 W RGBW LED Bar**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	75 W
Light Src. Quant. :	16	Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Light Src. Pwr.:	5 W	Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
LED Colour Type:	RGBW	DMX Conn.:	Dedicated 3P IP65 In/Out
Refresh Rate:	6000 Hz	Length (mm):	1002 mm
Lumen Total:	2966 lm	Width (mm):	72 mm
Beam ° Horz.:	39 °	Height (mm):	142 mm
Beam ° Vert.:	39 °	Weight:	6.2 kg
Ctrl. Mode:	Auto / DMX / Master Slave	IP Rate:	IP65
DMX Ch.:	4 / 5 / 6 / 9	Housing:	Aluminum die-cast
Protocols:	DMX	Colour:	Black
Pwr. Supp.:	100-240 VAC 50-60 Hz	Cooling:	Convection



FEATURES:

- 16 x 5 W RGBW LED Bar
- Suitable for colour mixing on stage
- IP65 (dust and water resistant, fit for outdoor use)
- 39° fixed beam angle
- Dimmer and strobe function
- Manual, DMX, IR and Master/Slave control
- Clamp and IP65 power connector included



Cameleon Bar 18/4

42696 **18 x 8 W RGBW LED Bar**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	18
Light Src. Pwr.:	8 W
LED Colour Type:	RGBW
Refresh Rate:	7800 Hz
Lumen Total:	3200 lm
Beam ° Horz.:	18 °
Beam ° Vert.:	18 °
Ctrl. Mode:	Auto / DMX / Master Slave / Static Dimmer
DMX Ch.:	3 / 6 / 24
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	125 W
Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
DMX Conn.:	Dedicated 3P IP65 In/Out
Length (mm):	1027 mm
Width (mm):	130 mm
Height (mm):	100 mm
Weight:	7.5 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black
Cooling:	Convection

FEATURES:

- Powerful 18 x 8 W RGBW LED Bar
- Silent, fanless operations
- IP65 (dust and water resistant, fit for outdoor use)
- Multivoltage power supply
- 18° fixed beam angle
- Dimmer and strobe effects
- Manual, DMX and Master/Slave control



Cameleon Bar 24/1 UV

42685 **24 x 2 W UV LED Bar**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	24
Light Src. Pwr.:	2 W
LED Colour Type:	UV
Refresh Rate:	7.8 Hz
Lumen Total:	24 lm
Beam ° Horz.:	25 °
Beam ° Vert.:	25 °
Ctrl. Mode:	Auto / DMX / Master Slave
DMX Ch.:	2 / 5
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	70 W
Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
DMX Conn.:	Dedicated 3P IP65 In/Out
Length (mm):	1058 mm
Width (mm):	80 mm
Height (mm):	87 mm
Weight:	6.1 kg
IP Rate:	IP65
Housing:	Aluminum die-cast
Colour:	Black
Cooling:	Convection

FEATURES:

- Powerful 24 x 2 W UV LED Flood
- Silent, fanless operations
- IP65 (dust and water resistant, fit for outdoor use)
- Multivoltage power supply
- 25° fixed beam angle
- Dimmer and strobe function
- Manual, DMX and Master/Slave control

Cameleon Bar 12/3

42694 **12 x 3 W RGB LED Bar**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	45 W
Light Src. Quant. :	12	Pwr. Conn. In.:	Dedicated IP65 Powerconnection
Light Src. Pwr.:	3 W	Pwr. Conn. Out.:	Dedicated IP65 Powerconnection
LED Colour Type:	RGB	DMX Conn.:	Dedicated 3P IP65 In/Out
Refresh Rate:	7800 Hz	Length (mm):	525 mm
Lumen Total:	1600 lm	Width (mm):	88 mm
Beam ° Horz.:	45 °	Height (mm):	80 mm
Beam ° Vert.:	45 °	Weight:	2.6 kg
Ctrl. Mode:	Auto / DMX / Master Slave	IP Rate:	IP65
DMX Ch.:	3 / 5	Housing:	Aluminum die-cast
Protocols:	DMX	Colour:	Black
Pwr. Supp.:	100-240 VAC 50-60 Hz	Cooling:	Convection



FEATURES:

- Compact, yet powerful 12 x 3 W RGB LED Bar
- IP65 (dust and water resistant, fit for outdoor use)
- Wide 45° fixed beam angle
- Dimmer and strobe function
- Manual, DMX and Master/Slave control
- IP65 power connector and clamp included

Candela Pix 50

41280 **IP65**

SHOWTEC

Specifications:

		Pwr. Supp.:	100-240 VAC 50-60 Hz
		Pwr. Cons.:	105 W
Light Src. Type:	LED	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
Light Src. Quant. :	7	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Light Src. Pwr.:	15 W		
LED Colour Type:	RGBW	DMX Conn.:	XLR 3P In/Out
Refresh Rate:	16000 Hz	Length (mm):	515 mm
Refresh Rate (min):	250 Hz	Width (mm):	150 mm
Refresh Rate (max):	16 kHz	Height (mm):	240 mm
Lumen Total:	15242 lm	Weight:	6.5 kg
Beam ° Horz.:	10 °	IP Rate:	IP65
Beam ° Vert.:	10 °	Housing:	Aluminium
Ctrl. Mode:	Auto / DMX / Master Slave	Colour:	Black
DMX Ch.:	4 / 6 / 9 / 28	Cooling:	Convection
Protocols:	DMX		



FEATURES:

- powerCON TRUE1 in & out
- IP65 Rating
- Exceptionally smooth RGBW Colour mixing
- Pixel control

Case for 8x Candela Pix 50

D7057 **Flight case**



Candela Pix 100

41281 **IP65**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	14	Pwr. Cons.:	212 W
Light Src. Pwr.:	15 W	Pwr. Conn. In.:	powerCON TRUE1 In (Male)
LED Colour Type:	RGBW	Pwr. Conn. Out.:	powerCON TRUE1 Out (Female)
Refresh Rate:	16000 Hz	DMX Conn.:	XLR 3P In/Out
Refresh Rate (min):	250 Hz	Length (mm):	1024 mm
Refresh Rate (max):	16 kHz	Width (mm):	150 mm
Lumen Total:	11000 lm	Height (mm):	235 mm
Beam ° Horz.:	8 °	Weight:	10.2 kg
Beam ° Vert.:	8 °	IP Rate:	IP65
Ctrl. Mode:	Auto / DMX / Master Slave	Housing:	Aluminium
DMX Ch.:	4 / 6 / 9 / 56	Colour:	Black
Protocols:	DMX	Cooling:	Convection

FEATURES:

- powerCON TRUE1 in & out
- IP65 Rating
- 15 W RGBW Prolight opto LEDs
- Pixel control

Case for 8x Candela Pix 100

D7058 **Flight case**



Showtec Candela Pix 100 Set

41281SET01 **8x Candela Pix + Case**

SHOWTEC

Specifications:

FEATURES:

- powerCON TRUE1 in & out
- IP65 Rating
- 15 W RGBW Prolight opto LEDs
- Pixel control

Diffusor for Candela Pix 100

SHOWTEC

41284 20°
41285 40°
41286 15° x 60°



Diffusor for Candela Pix 50

SHOWTEC

41282 20°
41283 40°
41287 15° x 60°



EventDOT 15 Q4

44011 **15 W RGBW**

SHOWTEC

Specifications:

Light Src. Type:	LED	DMX Ch.:	1 / 2 / 4 / 5 / 6 / 9
Light Src. Quant. :	1	Protocols:	Art-Net / sACN
Light Src. Pwr.:	15 W	WL:	Wifi
LED Colour Type:	RGBW	Pwr. Supp.:	220V-240 VAC 50 Hz
Refresh Rate:	1000 Hz	Pwr. Cons.:	20 W
Lumen Total:	118 lm	Pwr. Conn. In.:	Low Voltage DC plug
CCT:	6500 K	Length (mm):	143 mm
Beam °:	8 °	Width (mm):	101 mm
Runtime @Full:	6 h	Height (mm):	81 mm
Charging Time:	4.5 h	Weight:	0.8 kg
Batt. Life:	400 cycles	IP Rate:	IP20 Rear / IP54 Front
Ctrl. Mode:	Auto / Built-in Program / DMX / IR / Manual	Material:	Aluminium / Plastic
		Housing:	ABS
		Colour:	Black

FEATURES:

- Compact Size
- Multiple mounting possibilities
- Including 3 different diffusors
- Up to 16 hours battery life (colour mixing)







Case for 6 x Event Dot 16

44012 **Including Accessory Space**





EventLITE 4/10 Q4

44060 Incl. Wireless DMX, black

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	4
Light Src. Pwr.:	40 W
LED Colour Type:	RGBW
Refresh Rate:	1000 Hz
Lumen Total:	570 lm
Beam °:	15 °
Runtime @Full:	5 h
Charging Time:	10 h
Ctrl. Mode:	DMX / Manual / Master Slave / Stand Alone
DMX Ch.:	4 / 6 / 9
Protocols:	DMX
WL:	WL DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	45 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Length (mm):	140 mm
Width (mm):	140 mm
Height (mm):	205 mm
Weight:	3.2 kg
IP Rate:	IP20 Rear / IP54
Housing:	Metal
Colour:	Black

FEATURES:

- Long battery life (up to 6 hours of RGBW)
- RGBW 4-in-1 LEDs
- Wireless DMX by Wireless Solutions Sweden
- Eco mode for extended battery life
- Controllable by optional IR-remote



EventLITE 4/10 Q4 Set

44061 Flight Case Incl. 6 x EventLITE

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	4
Light Src. Pwr.:	10 W
LED Colour Type:	RGBW
Refresh Rate:	1000 Hz
Lumen Total:	570 lm
Beam °:	15 °
Runtime @Full:	5 h
Charging Time:	10 h
Ctrl. Mode:	DMX / Manual / Master Slave / Stand Alone
DMX Ch.:	4 / 6 / 9
Protocols:	DMX
WL:	WL DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	160 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	Pro Power Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	595 mm
Width (mm):	440 mm
Height (mm):	482 mm
Weight:	40.2 kg
IP Rate:	IP20 Rear / IP54
Housing:	Aluminium / Flightcase / Metal
Colour:	Black

FEATURES:

- Flight case + 6 x EventLITE + IR Remote
- Pre-wired for charging the fixtures inside the case
- Stacking recesses on top
- Including power cord

EventSpot 1600 Q4

44050 **4 x 12 W RGBW, black**

44051 **4 x 12 W RGBW, Brushed Aluminium**

SHOWTEC



Specifications:

Light Src. Type:	LED	Protocols:	DMX
Light Src. Quant. :	4	WL:	WL DMX
Light Src. Pwr.:	12 W	Pwr. Supp.:	18 VDC
LED Colour Type:	RGBW	Pwr. Cons.:	75 W
Refresh Rate:	12000 Hz	Pwr. Conn. In.:	Internal Powerlink with custom power connector
Lumen Total:	1580 lm	DMX Conn.:	XLR 3P In/Out
Beam °:	10 °	Length (mm):	195 mm
Runtime @Full:	15 h	Width (mm):	180 mm
Charging Time:	6 h	Height (mm):	280 mm
Ctrl. Mode:	DMX / Manual / Master Slave / Stand Alone	Weight:	5 kg
		IP Rate:	IP54
		Housing:	Aluminium
		Colour:	Black
DMX Ch.:	4 / 6 / 10		

FEATURES:

- 4 x 12 W RGBW colour mixing
- Long battery life (up to 15hrs RGBW)
- IP54 For outdoor use
- Wireless DMX by Wireless Solutions Sweden
- Capacity saving “Working time” feature

EventSpot 1600 Q4 Set

44056 **Charger Case with 6 pcs black**

44057 **Charger Case with 6 pcs Brushed Aluminium**

SHOWTEC



Specifications:

Light Src. Type:	LED	Protocols:	DMX
Light Src. Quant. :	4	WL:	WL DMX
Light Src. Pwr.:	12 W	Pwr. Supp.:	100-240 VAC 50-60 Hz
LED Colour Type:	RGBW	Pwr. Cons.:	403 W
Refresh Rate:	12000 Hz	Pwr. Conn. In.:	Pro Power Blue
Lumen Total:	1580 lm	DMX Conn.:	XLR 3P In/Out
Beam °:	10 °	Length (mm):	655 mm
Runtime @Full:	8 h	Width (mm):	580 mm
Charging Time:	6 h	Height (mm):	505 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual / Master Slave	Weight:	63 kg
		IP Rate:	IP20(indoor use only) / IP54
		Housing:	Aluminium / Flightcase / Metal
DMX Ch.:	4 / 6 / 10	Colour:	Black

FEATURES:

- Road proof design
- Built-in charger
- 4 x 12 W RGBW colour mixing
- Long battery life (up to 15hrs RGBW)
- Built-in safety switch to prevent overheating during loading



Eventlite Table WW

44016 **Compact 3.5 W IP54 battery lamp with touch dimmer**
44015 **Compact 3.5 W IP54 battery lamp with touch dimmer (white)**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Conn. In.:	Micro USB
Lumen Total:	200 lm	Length (mm):	100 mm
Runtime @Full:	12 h	Width (mm):	100 mm
Charging Time:	8 h	Height (mm):	356 mm
Batt. Life:	1000 cycles	Weight:	1.34 kg
Pwr. Supp.:	5 VDC	IP Rate:	IP54
Pwr. Cons.:	3.5 W	Housing:	Aluminium
		Colour:	Black

FEATURES:

- 3.5 watt WW LED light
- Suitable for illuminating a table or bar
- Touch dimmer
- Accu last up to 12 hours
- IP54 rating, suited for outdoor use
- USB-A - USB-C cable included
- Compact and stylish design



SafeLED Emergency Light

34000 **Including 3 Labels**

SHOWGEAR

Specifications:

Light Src. Type:	LED	Length (mm):	302 mm
Lumen Total:	400 lm	Width (mm):	150 mm
Runtime @Full:	1 h	Height (mm):	52 mm
Charging Time:	3 h	Weight:	1.03 kg
Pwr. Supp.:	240 VAC 50-60 Hz	IP Rate:	IP65
Pwr. Cons.:	9.3 W	Housing:	Plastic
		Colour:	White

FEATURES:

- LED technology
- Low power consumption
- Double function emergency light



Case for 6 x Event Dot 16

44012 Including Accessory Space



SHOWTEC

UR-5 Universal IR Remote

44002 Battery Spot Accessory



SHOWTEC

IR Remote for EventLITE 4/10 Q4

44062 Battery Spot Accessory



SHOWTEC

Carrying Bag for 4 x EventLITE 4/10 Q5

44063 With removable Velcro Compartments



SHOWTEC

Charger Case for 6 x EventLITE 4/10 Q4

44064 Compact Flight Case



SHOWTEC

Cover for the EventLITE 4/10 Q4 (44060)

44065 Chrome



SHOWTEC

Cover for the EventLITE 4/10 Q4 (44060)

44066 White



SHOWTEC

Charger for EventSpot 1600 Q4

44052 Desktop Model



SHOWTEC

Beam Shaper for EventSpot 1600 Q4

44053 40°



SHOWTEC

Beam Shaper for EventSpot 1600 Q4

44055 20°



SHOWTEC

Beam Shaper for EventSpot 1600 Q4

44054 15° x 60°



SHOWTEC





PAR 16 Warm-On-Dim

43311 LED Parcan 16

SHOWTEC

Specifications:

Light Src. Pwr.:	10 W	Pwr. Conn. In.:	Schuko Plug
Par Model:	16	Cable Length:	0.50 m
Lumen Total:	500 lm	Length (mm):	145 mm
CRI:	95	Width (mm):	104 mm
Beam ° (max):	36 °	Height (mm):	125 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	0.45 kg
Pwr. Cons.:	12 W	Housing:	Aluminium
		Colour:	Black

FEATURES:

- Warm on Dim technology
- Triac Dimming
- High CRI
- No UV radiation



Parcan 16 with GU5.3 Socket

30101 Black Parcan

30102 Polished Parcan

SHOWTEC

Specifications:

Light Src. Pwr.:	50 W	Cable Length:	0.20 m
Par Model:	16	Length (mm):	145 mm
Socket:	GU5.3 / GX5.3	Width (mm):	107 mm
Pwr. Supp.:	12-24 VDC	Height (mm):	120 mm
Pwr. Conn. In.:	Open End	Weight:	0.15 kg
		Housing:	Aluminium
		Colour:	Black

FEATURES:

- Parcan with GU5.3 socket
- Suitable for a light source up to 50 W
- Available in either black or polished housing
- Filter Frame and 20 cm power cable included
- A barndoor is optional



Parcan 16 with GU10D Socket

30115 Black Parcan

30116 Polished Parcan

SHOWTEC

Specifications:

Light Src. Pwr.:	50 W	Cable Length:	0.44 m
Par Model:	16	Length (mm):	145 mm
Socket:	GU10	Width (mm):	107 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	125 mm
Pwr. Cons.:	50 W	Weight:	0.26 kg
Pwr. Conn. In.:	Schuko Plug	Housing:	Aluminium
		Colour:	Black

FEATURES:

- Parcan with GU10D socket
- Suitable for a light source up to 50 W
- Suitable for indoor applications
- Available in either black or polished housing
- Filter Frame and 30 cm power cable included
- A barndoor is optional

PAR 20 Warm-On-Dim

43312 **15 W Warm White LED Par**

SHOWTEC



Specifications:

Light Src. Pwr.:	15 W	Pwr. Conn. In.:	Schuko Plug
Par Model:	20	Cable Length:	0.50 m
Lumen Total:	800 lm	Length (mm):	175 mm
CRI:	95	Width (mm):	117 mm
Beam ° (max):	45 °	Height (mm):	140 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	0.6 kg
Pwr. Cons.:	17 W	Housing:	Aluminium
		Colour:	Black

FEATURES:

- 15 W Warm White LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries

Parcan 20 Long

30151 **Long black Parcan with E27 Socket**

30152 **Long polished Parcan with E27 Socket**

SHOWTEC



Specifications:

		Length (mm):	180 mm
		Width (mm):	110 mm
Light Src. Pwr.:	50 W	Height (mm):	130 mm
Par Model:	20	Weight:	0.34 kg
Pwr. Supp.:	240 VAC 50-60 Hz	Housing:	Metal
Pwr. Conn. In.:	Schuko Plug	Colour:	Black
Cable Length:	0.30 m		

FEATURES:

- Parcan with E-27 socket
- Suitable for a light source up to 50 W
- Available in either black or polished housing
- Filter Frame and 30 cm power cable included
- A barndoor is optional





PAR 30 Warm-On-Dim

43313 20 W Warm White LED Par

SHOWTEC

Specifications:

Light Src. Pwr.:	20 W	Cable Length:	0.50 m
Par Model:	30	Length (mm):	230 mm
Lumen Total:	1100 lm	Width (mm):	150 mm
CRI:	95	Height (mm):	200 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	0.9 kg
Pwr. Conn. In.:	Schuko Plug	Housing:	Aluminium
		Colour:	Black

FEATURES:

- 20 W Warm White LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries



Parcan 30

30161 Long black Parcan with E27 Socket

30162 Long polished Parcan with E27 Socket

SHOWTEC

Specifications:

		Length (mm):	235 mm
		Width (mm):	148 mm
Light Src. Pwr.:	100 W	Height (mm):	200 mm
Par Model:	30	Weight:	0.52 kg
Pwr. Supp.:	240 VAC 50-60 Hz	Housing:	Aluminum die-cast
Pwr. Conn. In.:	Schuko Plug	Colour:	Black
Cable Length:	0.44 m		

FEATURES:

- Parcan with E27 socket
- Suitable for a light source up to 100 W
- Available in either black or polished housing
- Filter Frame and 30 cm power cable included
- A barndoor is optional

Parcan 36 Pinspot

30205 **Black Parcan Incl. built-in trafo**

30206 **Polished Parcan Incl. built-in trafo**

SHOWTEC



Specifications:

Light Src. Pwr.:	30 W	Length (mm):	155 mm
Par Model:	36	Width (mm):	145 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	160 mm
Pwr. Conn. In.:	Schuko Plug	Weight:	1.04 kg
Cable Length:	0.30 m	Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- Parcan Pinspot with screw socket
- Suitable for a light source up to 30 W
- Available in either black or polished housing
- Built-in transformer and 30 cm power cable included

LED Pinspot Pro

42404B **3 W Cool White LED Pin Spot - black**

42404S **3 W Cool White LED Pin Spot - polished**

SHOWTEC



Specifications:

Light Src. Pwr.:	3 W	Cable Length:	1.1 m
Par Model:	36	Length (mm):	135 mm
Beam °:	6 °	Width (mm):	106 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	125 mm
Pwr. Cons.:	5 W	Weight:	0.5 kg
Pwr. Conn. In.:	Schuko Plug	Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- 3 W Cool White LED Pinspot
- 6° fixed beam angle
- Suitable for illuminating a small surface
- Available in either black and silver housing
- Filter Frame and 110 cm power cable included



LED Pinspot Q4

42407 **15 W RGBW LED Pinspot**

SHOWTEC

Specifications:

		Display:	LED
		Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	15 W	Pwr. Cons.:	22 W
Par Model:	36	Pwr. Conn. In.:	Schuko Plug
Lumen Total:	235 lm	Cable Length:	1.5 m
Beam °:	3.2 °	Length (mm):	320 mm
Ctrl. Mode:	Built-in Program / DMX / Manual / Master Slave / Sound	Width (mm):	166 mm
		Height (mm):	222 mm
		Weight:	1.2 kg
DMX Ch.:	4 / 6 / 8	Housing:	ABS / Plastic
Protocols:	DMX	Colour:	Black

FEATURES:

- Compact and lightweight 15 W RGBW LED Pinspot
- 3.2° fixed beam angle
- Suitable for illuminating a mirror ball or small surface
- DMX control
- Built-in auto programs
- Plug & Play control for easy usage



Parcan 36 Short

30201 **Short black Parcan with Screw Socket**

30202 **Short polished Parcan with Screw Socket**

SHOWTEC

Specifications:

		Width (mm):	170 mm
		Height (mm):	240 mm
Light Src. Pwr.:	30 W	Weight:	0.76 kg
Par Model:	36	Housing:	Aluminium
Pwr. Supp.:	220V-240 VAC 50 Hz	Colour:	Black
Length (mm):	225 mm		

FEATURES:

- Parcan Pinspot with screw socket
- Available in either black or polished housing
- Filter Frame included
- A barndoor is optional

PAR 46 Warm-On-Dim

43314 **28 W Warm White LED Par**

SHOWTEC

Specifications:

Light Src. Pwr.:	28 W	Pwr. Conn. In.:	Schuko Plug
Par Model:	46	Cable Length:	0.50 m
CRI:	95	Length (mm):	330 mm
Beam °:	60 °	Width (mm):	210 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	260 mm
Pwr. Cons.:	29 W	Weight:	1.3 kg
		Housing:	Aluminium
		Colour:	Black



FEATURES:

- 28 W Warm White LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries

Parcan 46 Pro

30258 **Long black or polished Housing with E27 Socket**

30257 **Long polished Housing with E27 Socket**

SHOWTEC

Specifications:

Light Src. Pwr.:	90 W	Length (mm):	315 mm
Par Model:	46	Width (mm):	194 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	240 mm
Pwr. Conn. In.:	Schuko Plug	Weight:	1 kg
Cable Length:	0.80 m	Housing:	Metal
		Colour:	Black



FEATURES:

- Parcan with E27 socket
- Suitable for a light source up to 90 W
- Available in either black or polished housing
- Filter Frame and 30 cm power cable included
- A barndoor is optional



PAR 56 Warm-On-Dim

43315 **35 W Warm White LED Par**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	39.4 W
Light Src. Pwr.:	394 W	Pwr. Conn. In.:	Schuko Plug
Par Model:	56	Cable Length:	0.50 m
Lumen Total:	3380 lm	Length (mm):	365 mm
CRI:	95	Width (mm):	250 mm
Beam °:	60 °	Height (mm):	323 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	1.86 kg
		Housing:	Aluminium
		Colour:	Black

FEATURES:

- 35 W Warm White LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries



Par 56 90 W COB RGB

43300 **90 W RGB COB LED Par - black**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	90 W	Pwr. Cons.:	98 W
Par Model:	56	Pwr. Conn. In.:	Schuko Plug
Beam °:	70 °	Cable Length:	1.3 m
Ctrl. Mode:	Auto / Built-in Program / DMX / Sound	Length (mm):	250 mm
		Width (mm):	260 mm
		Height (mm):	345 mm
DMX Ch.:	3 / 6 / 7	Weight:	2.4 kg
Protocols:	DMX	Housing:	Aluminium
		Colour:	Black

FEATURES:

- 90 W RGB COB LED Par
- Wide 90° fixed beam angle
- Light output reaches up to 10 metres
- DMX and manual control in Auto run and Sound-controlled mode
- Dimmer and strobe function
- 130 cm power cable included
- Available in black and white



Parcan 56 Short

30319 **Short black Parcan with Gx16D Socket**

30320 **Short polished Parcan with Gx16D Socket**

SHOWTEC

Specifications:

		Length (mm):	240 mm
		Width (mm):	225 mm
Light Src. Type:	Halogen	Height (mm):	257 mm
Light Src. Pwr.:	500 W	Weight:	0.9 kg
Par Model:	56	Housing:	Aluminum die-cast
Pwr. Supp.:	240 VAC 50-60 Hz	Colour:	Black
Pwr. Conn. In.:	Schuko Plug		

FEATURES:

- Parcan with Gx16D socket
- Suitable for a light source up to 500 W
- Available in either black or polished housing
- Filter Frame and 70 cm power cable included

LED Par 56 Short Eco

42417 **15 W RGB LED Par - black**

42418 **15 W RGB LED Par - polished**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Cons.:	15 W
Light Src. Pwr.:	15 W	Pwr. Conn. In.:	Schuko Plug
Par Model:	56	Cable Length:	0.50 m
Ctrl. Mode:	Auto / DMX / Manual / Sound	Length (mm):	210 mm
DMX Ch.:	6	Width (mm):	200 mm
Protocols:	DMX	Height (mm):	260 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	2.3 kg
		Housing:	Aluminium
		Colour:	Black

FEATURES:

- 15 W RGB LED Parcan
- DMX and manual control in Auto run and Sound-controlled mode
- Dimmer and strobe function
- Not for continuous use (up to 2 hour with full RGB on)
- Available in either black or polished housing

Parcan 56 Long with Terminal and Socket

30317 **Long black Parcan with Gx16D Socket**

30318 **Long polished Parcan with Gx16D Socket**

SHOWTEC



Specifications:

Light Src. Type:	Halogen	Cable Length:	0.80 m
Light Src. Pwr.:	300 W	Length (mm):	360 mm
Par Model:	56	Width (mm):	238 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	325 mm
Pwr. Conn. In.:	Schuko Plug	Weight:	1.4 kg
		Housing:	Metal
		Colour:	Black

FEATURES:

- Long Parcan with Gx16D socket
- Suitable for a light source up to 300 W
- Available in either black or polished housing
- Filter Frame and 80 cm power cable included
- A barndoor is optional



Parcan 56 Long, incl. Parsafe

30301 **Long black Parcan with Gx16D Socket**

30302 **Long polished Parcan with Gx16D Socket**

SHOWTEC

Specifications:

		Cable Length:	0.75 m
		Length (mm):	350 mm
Light Src. Type:	Halogen	Width (mm):	245 mm
Light Src. Pwr.:	300 W	Height (mm):	325 mm
Par Model:	56	Weight:	1.32 kg
Pwr. Supp.:	240 VAC 50-60 Hz	Housing:	Metal
Pwr. Conn. In.:	Schuko Plug	Colour:	Black

FEATURES:

- Long Parcan with Gx16D socket
- Suitable for a light source up to 300 W
- Available in either black or polished housing
- Parsafe, filter frame and 1 m power cable included
- A barndoor is optional



PAR 64 LED-100Z-32

42530 **80 W Warm White LED Par**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	80 W	Pwr. Cons.:	110 W
Par Model:	64	Pwr. Conn. In.:	Pro Power Blue
Lumen Total:	4400 lm	Cable Length:	1.1 m
CRI:	80	Length (mm):	445 mm
Beam °:	15 °	Width (mm):	290 mm
Ctrl. Mode:	DMX / Manual	Height (mm):	400 mm
DMX Ch.:	1 / 2 / 3	Weight:	3.7 kg
Protocols:	DMX	Housing:	Aluminium
		Colour:	Black



FEATURES:

- Retro 80 W Warm White LED Par
- Wide 5 step manual zoom (beam to wash)
- Traditional halogen effects
- DMX and Master/Slave control
- Filter Frame included
- A barndoor is optional

PAR 64 LED-100Z-56

42531 **80 W Daylight White LED Par**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	80 W	Pwr. Cons.:	110 W
Par Model:	64	Pwr. Conn. In.:	Pro Power Blue
Lumen Total:	4330 lm	Cable Length:	1.1 m
CRI:	80	Length (mm):	445 mm
Beam °:	15 °	Width (mm):	290 mm
Ctrl. Mode:	DMX / Manual	Height (mm):	400 mm
DMX Ch.:	1 / 2 / 3	Weight:	3.7 kg
Protocols:	DMX	Housing:	Aluminium
		Colour:	Black



FEATURES:

- Retro 80 W Daylight White LED Par
- Wide 5 step manual zoom (Beam to Wash)
- Traditional halogen effects
- DMX and Master/Slave control
- Filter Frame included
- A barndoor is optional

PAR 64 LED-120Z-Q4

42540 **120 W RGBA LED Par**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	120 W	Pwr. Cons.:	142 W
Par Model:	64	Pwr. Conn. In.:	Pro Power Blue
Lumen Total:	17180 lm	DMX Conn.:	XLR 3P In/Out
Beam °:	12 °	Cable Length:	1.1 m
Ctrl. Mode:	Built-in Program / DMX / Manual	Length (mm):	445 mm
DMX Ch.:	4 / 7 / 11	Width (mm):	290 mm
Protocols:	DMX	Height (mm):	400 mm
		Weight:	3.8 kg
		Housing:	Aluminium
		Colour:	Black



FEATURES:

- 120 W RGBA LED Par
- Wide 6 step motorised zoom (beam to wash)
- Traditional halogen effects
- DMX and Master/Slave control
- Filter Frame included
- A barndoor is optional



LED Par 64 Short Q4-18

42468 **18 x 8 W RGBW LED Par - black**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	117 W	Pwr. Cons.:	120 W
Par Model:	64	Pwr. Conn. In.:	Schuko Plug
Beam °:	40 °	Cable Length:	1.5 m
Ctrl. Mode:	Auto / DMX / Master Slave / Sound	Length (mm):	290 mm
		Width (mm):	230 mm
DMX Ch.:	4 / 5 / 8	Height (mm):	230 mm
Protocols:	DMX	Weight:	3.3 kg
		Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- 18 x 8 W RGBW LED Par
- 40° fixed beam angle
- Double bracket for easy floor positioning
- DMX and manual control in Auto run and Sound-controlled mode
- RGBW colour mixing, dimmer and strobe function
- Available in either black or polished housing
- A barndoor is optional



Parcan 64 Floorspot with Terminal Set

30420 **Short black Parcan with Gx16D Socket**

30421 **Short polished Parcan with Gx16D Socket**

SHOWTEC

Specifications:

		Cable Length:	0.80 m
		Length (mm):	280 mm
Light Src. Type:	Halogen	Width (mm):	265 mm
Light Src. Pwr.:	1000 W	Height (mm):	360 mm
Par Model:	64	Weight:	1.6 kg
Pwr. Supp.:	240 VAC 50-60 Hz	Housing:	Aluminum die-cast
Pwr. Conn. In.:	Schuko Plug	Colour:	Black

FEATURES:

- Short, compact Parcan with Gx16D socket
- Double bracket for easy floor positioning
- Suitable for a light source up to 1000 W
- Available in either black or polished housing
- Parsafe, filter frame and 80 cm power cable included
- A barndoor is optional



Parcan 64 with Parsafe

30403 **Long black Parcan with Gx16D Socket**

30404 **Long polished Parcan with Gx16D Socket**

SHOWTEC

Specifications:

		Cable Length:	0.80 m
		Length (mm):	400 mm
Light Src. Type:	Halogen	Width (mm):	263 mm
Light Src. Pwr.:	1000 W	Height (mm):	355 mm
Par Model:	64	Weight:	1.6 kg
Pwr. Supp.:	240 VAC 50-60 Hz	Housing:	Metal
Pwr. Conn. In.:	Schuko Plug	Colour:	Black

FEATURES:

- Long Parcan with Gx16D socket
- Suitable for a light source up to 1000 W
- Available in either black or polished housing
- Parsafe, filter frame and 80 cm power cable included
- A barndoor is optional

Studio Beam CDM/HCI-150

30690 **Spot with 150 W G12 Socket, Ballast and 4 Lenses - black**

30691 **Spot with 150 W G12 Socket, Ballast and 4 Lenses - Polished**

SHOWTEC



Specifications:

		Length (mm):	285 mm
		Width (mm):	270 mm
Light Src. Type:	Discharge	Height (mm):	380 mm
Light Src. Pwr.:	150 W	Weight:	6.6 kg
Pwr. Supp.:	240 VAC 50-60 Hz	Housing:	Metal
Pwr. Conn. In.:	Schuko Plug	Colour:	Black
Cable Length:	1 m		

FEATURES:

- Compact Spot with G12 socket
- Suitable for a light source up to 150 W
- Ballast for use with CDM lamp
- Four different lenses included
- Filter Frame and 100 cm power cable included
- A barndoor is optional

Studio Beam MSR 575

30692 **Spot with 600 W G x 9.5 Socket, Ballast and 4 Lenses - black**

30693 **Spot with 600 W G x 9.5 Socket, Ballast and 4 Lenses - polished**

SHOWTEC



Specifications:

		Length (mm):	280 mm
		Width (mm):	255 mm
Light Src. Type:	Discharge	Height (mm):	440 mm
Light Src. Pwr.:	575 W	Weight:	12.92 kg
Pwr. Supp.:	240 VAC 50-60 Hz	Housing:	Metal
Pwr. Conn. In.:	Schuko Plug	Colour:	Black

FEATURES:

- Compact Spot with Gx 9.5 socket
- Suitable for a light source up to 600 W
- Ballast for use with MSR-575 lamps
- Four different lenses included
- Filter Frame and 30 cm power cable included
- A barndoor is optional

Studio Beam 575

30657 **Spot with 600 W G9.5 Socket and 4 Lenses**

SHOWTEC



Specifications:

		Length (mm):	260 mm
		Width (mm):	220 mm
Light Src. Type:	Halogen	Height (mm):	290 mm
Light Src. Pwr.:	600 W	Weight:	2.9 kg
Pwr. Supp.:	240 VAC 50-60 Hz	Housing:	Metal / Plastic
Pwr. Conn. In.:	Schuko Plug	Colour:	Black
Cable Length:	0.90 m		

FEATURES:

- Compact Spot with G9.5 socket
- Suitable for a light source up to 600 W
- Four different lenses included
- Filter Frame and 30 cm power cable included
- A barndoor is optional



Par 36 with Pinspot Colour Changer Set

30207 **Parcan Pinspot with 30 W bulb, Colour Wheel and Motor**

SHOWTEC

Specifications:

Light Src. Type:	Halogen	Cable Length:	1 m
Light Src. Pwr.:	30 W	Length (mm):	150 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	Width (mm):	140 mm
Pwr. Cons.:	30 W	Height (mm):	165 mm
Pwr. Conn. In.:	Schuko Plug	Weight:	1.7 kg
		Housing:	Metal
		Colour:	Black

FEATURES:

- Parcan Pinspot with 30 W bulb
- Motorised colour wheel for continuously changing colours
- Power cable included
- Suitable for illuminating a mirror ball

Barndoor for Parcan 16

SHOWTEC

30105 **Black Four-Leaves Aluminium Barndoor**



30106 **Polished Four-Leaves Aluminium Barndoor**



Filter Frame for Parcan 16

SHOWTEC

30103 **Black Colour/Diffusion Filter Frame**



30104 **Polished Colour/Diffusion Filter Frame**



Barndoor for Parcan 20

SHOWTEC

30153 **Black Four-Leaves aluminium Barndoor**



30154 **Polished Four-Leaves aluminium Barndoor**



Filter Frame for Parcan 20

SHOWTEC

30334 **Black Colour / Diffusion Filter Frame**



30335 **Polished Colour / Diffusion Filter Frame**



Barndoor for Parcan 30

SHOWTEC

30163 **Black Four-Leaves Aluminium Barndoor**



30164 **Polished Four-Leaves Aluminium Barndoor**



Filter Frame for Parcan 30

SHOWTEC

30336 **Black Colour/Diffusion Filter Frame**



30337 **Polished Colour/Diffusion Filter Frame**



Power Transformer for Parcan 36

30211 6 V / 30 W



SHOWTEC

Filter Frame for Parcan 36

SHOWTEC

30218 Black Colour / Diffusion Filter Frame



30219 Polished Colour / Diffusion Filter Frame



Barndoor for Parcan 36

SHOWTEC

30221 Black Four-Leaves aluminium Barndoor



30222 Polished Four-Leaves aluminium Barndoor



Barndoor for Parcan 46

SHOWTEC

30254 Black Four-Leaves Aluminium Barndoor



30253 Polished Four-Leaves Aluminium Barndoor



Barndoor for Parcan 56

SHOWTEC

30312 Black Four-Leaves Aluminium Barndoor



30316 Polished Four-Leaves Aluminium Barndoor



Filter Frame for Parcan 46

SHOWTEC

30256 Black Colour/Diffusion Filter Frame



30255 Polished Colour/Diffusion Filter Frame



Filter Frame for Parcan 56 Long

SHOWTEC

30308 Black Colour/Diffusion Filter Frame



30309 Polished Colour/Diffusion Filter Frame



Filter Frame for Parcan 56 Short

SHOWTEC

30310 Black Colour/Diffusion Filter Frame



30311 Polished Colour/Diffusion Filter Frame



LED Par 56 Diffuser Set

20P564 (4 sheets)



SHOWGEAR

Par 56 Colour Set 2

20P56 Red, green, yellow, blue



SHOWGEAR

Par 56 Colour Set 3

20P562 Pink, Peacock blue, orange, Mauve



SHOWGEAR

GX16D Socket

30410 Socket for Parcan 56 and Parcan 64



SHOWTEC

Barndoor for Parcan 64

SHOWTEC

30411 Black Four-Leaves Aluminium Barndoor



30415 Polished Four-Leaves Aluminium Barndoor



Filter Frame for Parcan 64

SHOWTEC

30406 Black Colour/Diffusion Filter Frame



30409 Polished Colour/Diffusion Filter Frame



Parsafe Cover for Parcan 56 and Parcan 64

30423 Rubber Casting



SHOWTEC

LED Par 64 Diffuser Set

SHOWGEAR

20P644 (4 sheets)



Par 64 Colour Set 2

20P64 Red, green, yellow, blue



SHOWGEAR

Par 64 Colour Set 3

20P642 Pink, Peacock blue, orange, Mauve



SHOWGEAR

Barndoor for Studio Beam

SHOWTEC

30698 Black Four-Leaves Aluminium Barndoor



30699 Polished Four-Leaves Aluminium Barndoor



Filter Frame for Studio Beam

SHOWTEC

30696 Black



30697 Polished



Barndoor for Compact Studio Beam

SHOWTEC

30687 Black



30694 Silver



Lens for Multi-Par & Studio Beam 575

30634WFL Wide Flood



SHOWTEC

Lens for Multi-Par & Studio Beam 575

30634VNSP Very Narrow Spot



SHOWTEC

Lens for Multi-Par & Studio Beam 575

30634NSP Narrow Spot



SHOWTEC

Lens for Multi-Par & Studio Beam 575

30634MFL Medium Flood



SHOWTEC

Colour Sheet 122 x 53 cm SHOWGEAR

20253S Light Frost, 75 Micron

Colour Sheet 122 x 53 cm SHOWGEAR

20129S Frost

Colour Sheet 122 x 53 cm SHOWGEAR

20110S 110-pink



Colour Sheet 122 x 53 cm SHOWGEAR

20118S 118 Light blue



Colour Sheet 122 x 53 cm SHOWGEAR

20119S 119 Dark blue



Colour Sheet 122 x 53 cm SHOWGEAR

20122S 122 Fern green



Colour Sheet 122 x 53 cm SHOWGEAR

20124S 124 Dark green



Colour Sheet 122 x 53 cm SHOWGEAR

20126S 126 Mauve



Colour Sheet 122 x 53 cm SHOWGEAR

20139S 139 Green



Colour Sheet 122 x 53 cm SHOWGEAR

20158S 158 Deep Orange



Colour Sheet 122 x 53 cm SHOWGEAR

20164S 164 Flame Red



Colour Sheet 122 x 53 cm SHOWGEAR

20165S 165 Daylight Blue



Colour Sheet 122 x 53 cm SHOWGEAR

20170S 170 Deep Lavender



Colour Sheet 122 x 53 cm SHOWGEAR

20181S 181 Congo Blue



Colour Sheet 122 x 53 cm SHOWGEAR

20101S 101 Yellow



Colour Sheet 122 x 53 cm SHOWGEAR

20105S 105 Orange



Colour Sheet 122 x 53 cm SHOWGEAR

20106S 106 Red



Colour Sheet 122 x 53 cm SHOWGEAR

20113S 113 Magenta



Colour Sheet 122 x 53 cm SHOWGEAR

20115S 115 Peacock blue



Colour Sheet 122 x 53 cm SHOWGEAR

20135S 135 Deep Golden Amber



Colour Sheet 122 x 53 cm

20151S 151 Gold Tint



SHOWGEAR

Colour Sheet 122 x 53 cm

20152S 152 Pale Gold



SHOWGEAR

Colour Sheet 122 x 53 cm

20180S 180 Dark Lavender



SHOWGEAR

Colour Sheet 122 x 53 cm

20128S 128 Bright Pink



SHOWGEAR

Colour Sheet High Temperature

20024HT 024 Scarlet



SHOWGEAR

Colour Sheet High Temperature

20101HT 101 Yellow



SHOWGEAR

Colour Sheet High Temperature

20106HT 106 Fire



SHOWGEAR

Colour Sheet High Temperature

20113HT 113 Dark Magenta



SHOWGEAR

Colour Sheet High Temperature

20119HT 119 Dark Blue



SHOWGEAR

Colour Sheet High Temperature

20124HT 124 Dark Green



SHOWGEAR

Colour Sheet High Temperature

20126HT 126 Mauve



SHOWGEAR

Colour Sheet High Temperature

20139HT 139 Green



SHOWGEAR

Colour Sheet High Temperature

20152HT 152 Pale Amber Gold



SHOWGEAR

Colour Sheet High Temperature

20164HT 164 Flame Red



SHOWGEAR

Colour Sheet High Temperature

20170HT 170 Deep Lavender



SHOWGEAR

Colour Roll 122 x 762 cm SHOWGEAR

20253R Light Frost, 75 Micron



Colour Roll 122 x 762 cm SHOWGEAR

20129R Heavy Frost, 75 Micron

Colour Roll 122 x 762 cm SHOWGEAR

20201R 201 Full C.T. Blue: converts tungsten 3200 K to photographic daylight 5700 K



Colour Roll 122 x 762 cm SHOWGEAR

20101R 101 Yellow

Colour Roll 122 x 762 cm SHOWGEAR

20106R 106 Red



Colour Roll 122 x 762 cm SHOWGEAR

20110R 110-pink



Colour Roll 122 x 762 cm SHOWGEAR

20118R 118 Light Blue



Colour Roll 122 x 762 cm SHOWGEAR

20119R 119 Dark Blue



Colour Roll 122 x 762 cm SHOWGEAR

20122R 122 Fern Green



Colour Roll 122 x 762 cm SHOWGEAR

20124R 124 Dark Green



Colour Roll 122 x 762 cm SHOWGEAR

20126R 126 Mauve



Colour Roll 122 x 762 cm SHOWGEAR

20158R 158 Deep Orange



Correction Roll 202 1/2 C.T. B SHOWGEAR

20202R



Correction Sheet 202 1/2 C.T. SHOWGEAR

20202S



C-Tube T8 1200 mm SHOWGEAR

20510 010 - Medium Yellow - Sunlight Effect



C-Tube T8 1200 mm SHOWGEAR

20521 021- Gold Amber - Fire Effect, sunset



C-Tube T8 1200 mm SHOWGEAR

20526 026 - Bright Red - Strong red, good for costume



C-Tube T8 1200 mm SHOWGEAR

20601 101C - Yellow - Colour fast Filter



C-Tube T8 1200 mm SHOWGEAR

20611 111C - Dark Pink - Colour fast Filter



C-Tube T8 1200 mm SHOWGEAR

20613 113C - Magenta - Colour fast Filter



C-Tube T8 1200 mm SHOWGEAR

20615 115C - Peacock - Colour fast Filter



C-Tube T8 1200 mm SHOWGEAR

20619 119C - Dark Blue - Colour fast Filter



C-Tube T8 1200 mm SHOWGEAR

20621 121C - Evergreen - Colour fast Filter



C-Tube T8 1200 mm SHOWGEAR

20626 126C - Mauve - Colour fast Filter



C-Tube T8 1200 mm SHOWGEAR

20628 128C - Bright pink - Colour fast Filter



C-Tube T8 1200 mm SHOWGEAR

20639 139C - Primary Green - Colour fast Filter



C-Tube T8 1200 mm SHOWGEAR

20658 158 - Deep Orange - Fire Effect



C-Tube T8 1200 mm SHOWGEAR

20681 181 - Congo Blue - dark mysterious night Effect



C-Tube T8 1200 mm SHOWGEAR

20726 UV-roll



DWE Audience Blinder Set

30742 **Analogue blinder**

SHOWTEC



Specifications:

Light Src. Type:	Halogen	Pwr. Conn. Out.:	CEE3P 16 A
Light Src. Quant. :	2	Length (mm):	210 mm
Light Src. Pwr.:	650 W	Width (mm):	175 mm
Lumen Total:	48000 lm	Height (mm):	140 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	1.289 kg
Pwr. Cons.:	1300 W	IP Rate:	IP20(indoor use only)
Pwr. Conn. In.:	Schuko Plug	Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- 120 V / 650 W Par 36 lamp
- Break-out box
- Lamps included

Sunstrip II

30659 **Analogue Blinder**

SHOWTEC



Specifications:

Light Src. Type:	Halogen	Length (mm):	1260 mm
Light Src. Quant. :	20	Width (mm):	59 mm
Light Src. Pwr.:	35 W	Height (mm):	55 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	7.5 kg
Pwr. Cons.:	700 W	IP Rate:	IP20(indoor use only)
Pwr. Conn. In.:	Internal Powerlink with custom power connector / Schuko Plug	Housing:	Aluminium
		Colour:	Black

FEATURES:

- Floor Stands included
- For use with 12 V MR11 bulbs (not included)
- Compact and slim design





Stage Blinder 2 DMX

30770 Black

SHOWTEC

Specifications:

Light Src. Type:	Halogen	Pwr. Conn. In.:	Schuko Plug
Light Src. Quant. :	2	DMX Conn.:	XLR 3P In/Out
Light Src. Pwr.:	650 W	Length (mm):	350 mm
Lumen Total:	48000 lm	Width (mm):	235 mm
Ctrl. Mode:	Auto / DMX / Manual	Height (mm):	150 mm
DMX Ch.:	1	Weight:	3 kg
Protocols:	DMX	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	240 VAC 50-60 Hz	Material:	Aluminium
Pwr. Cons.:	1300 W	Housing:	Aluminium
		Colour:	Black

FEATURES:

- Dimmer built-in
- DMX control
- Delivery including bulbs
- Ready to use
-



Stage Blinder 4 DMX

30772 Black

SHOWTEC

Specifications:

Light Src. Type:	Halogen	Pwr. Conn. In.:	Schuko Plug
Light Src. Quant. :	4	DMX Conn.:	XLR 3P In/Out
Light Src. Pwr.:	650 W	Length (mm):	470 mm
Lumen Total:	96000 lm	Width (mm):	110 mm
Ctrl. Mode:	Auto / DMX / Manual	Height (mm):	425 mm
DMX Ch.:	2	Weight:	7 kg
Protocols:	DMX	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	240 VAC 50-60 Hz	Material:	Aluminium
Pwr. Cons.:	2600 W	Housing:	Aluminium
		Colour:	Black

FEATURES:

- Dimmer built-in
- DMX control
- Delivery including bulbs
- Ready to use
-



Stage Blinder 8 DMX

30774 Black

SHOWTEC

Specifications:

Light Src. Type:	Halogen	Pwr. Conn. In.:	Schuko Plug
Light Src. Quant. :	8	DMX Conn.:	XLR 3P In/Out
Light Src. Pwr.:	650 W	Length (mm):	485 mm
Lumen Total:	192000 lm	Width (mm):	84 mm
Ctrl. Mode:	Auto / DMX / Manual	Height (mm):	810 mm
DMX Ch.:	2	Weight:	10.9 kg
Protocols:	DMX	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	240 VAC 50-60 Hz	Material:	Aluminium
Pwr. Cons.:	5400 W	Housing:	Aluminium
		Colour:	Black

FEATURES:

- Dimmer built-in
- DMX control
- Delivery including bulbs
- Ready to use
-

Stage Blinder 1 LED

30784 **80 W Dual White LED module**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	1	Pwr. Cons.:	85 W
Light Src. Pwr.:	80 W	Pwr. Conn. In.:	Pro Power Blue
LED Colour Type:	CW / WW	DMX Conn.:	XLR 3P In/Out
Refresh Rate:	3100 Hz	Length (mm):	233 mm
Lumen Total:	4190 lm	Width (mm):	170 mm
CCT:	2490 K	Height (mm):	87 mm
Ctrl. Mode:	Built-in Program / DMX	Weight:	2 kg
DMX Ch.:	1 / 2	IP Rate:	IP20(indoor use only)
Protocols:	DMX	Material:	Metal
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Very Punchy Single Blinder
- Tungsten Simulation
- Compact Design



Case for 6 x Stage Blinder 1

D7060 **Flight case**

Stage Blinder 4 LED

30783 **4 x 80 W Dual White LED modules**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	4	Pwr. Cons.:	320 W
Light Src. Pwr.:	80 W	Pwr. Conn. In.:	Pro Power Blue
LED Colour Type:	CW / WW	Pwr. Conn. Out.:	ProPower Grey
Refresh Rate:	3100 Hz	DMX Conn.:	XLR 3P In/Out
Lumen Total:	14000 lm	Length (mm):	385 mm
CCT:	2490 K	Width (mm):	385 mm
Ctrl. Mode:	Auto / DMX / Manual	Height (mm):	322 mm
DMX Ch.:	1 / 2 / 4 / 5	Weight:	8.75 kg
Protocols:	DMX	IP Rate:	IP20(indoor use only)
Zone Sect. Control:	4 sections	Material:	Metal
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Very Punchy 4-way LED Blinder
- Tungsten Simulation
- Compact Design



Case for 4x Stage Blinder 4

D7056 **Flight case**





Stage Blinder 2 Blaze

30782 **IP65-rated**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	2
Light Src. Pwr.:	100 W
LED Colour Type:	RGB / WW / CW
Refresh Rate:	4000 Hz
Lumen Total:	10183 lm
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual / Master Slave / Sound
DMX Ch.:	2 / 5 / 7 / 10 / 13 / 17
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	210 W
Pwr. Conn. In.:	Pro Power TRUE1 In (Male)
Pwr. Conn. Out.:	ProPower TRUE1 Out (Female)
DMX Conn.:	XLR 3P In/Out
Length (mm):	400 mm
Width (mm):	220 mm
Height (mm):	262 mm
Weight:	7.2 kg
IP Rate:	IP65
Material:	Metal
Housing:	Metal
Colour:	Black

FEATURES:

- Very Punchy 2 head Blinder
- RGB Blaze effect
- Manually Pan and Tilt adjustment of each head



Stage Blinder 4 Blaze

30781 **IP65-rated**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	4
Light Src. Pwr.:	100 W
LED Colour Type:	RGB / WW / CW
Refresh Rate:	4000 Hz
Lumen Total:	18500 lm
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual / Master Slave / Sound
DMX Ch.:	1 / 4 / 13 / 16
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	415 W
Pwr. Conn. In.:	Pro Power TRUE1 In (Male)
Pwr. Conn. Out.:	ProPower TRUE1 Out (Female)
DMX Conn.:	XLR 3P In/Out
Length (mm):	400 mm
Width (mm):	400 mm
Height (mm):	200 mm
Weight:	11.2 kg
IP Rate:	IP65
Material:	Metal
Housing:	Metal
Colour:	Black

FEATURES:

- Very Punchy 4 head Blinder
- RGB Blaze effect
- Manually Pan and Tilt adjustment of each head



Razor Blaze 12

44550 **4° Beam Angle**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	12
Light Src. Pwr.:	5 W
LED Colour Type:	WW / RGB
Refresh Rate:	1000 Hz
Lumen Total:	1800 lm
Ctrl. Mode:	Art-Net / Auto / DMX / Kling-Net / Master Slave / Sound
DMX Ch.:	4 / 9 / 48 / 300
Protocols:	Art-Net / DMX / Kling-Net
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	64 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	1000 mm
Width (mm):	74 mm
Height (mm):	158 mm
Weight:	2.95 kg
IP Rate:	IP20(indoor use only)
Material:	Metal
Housing:	Plastic
Colour:	Black

FEATURES:

- 12 x 5 W Warm White High power LEDs / 4° Beam Angle
- 96 x SMD5050 RGB LED
- DMX / Art-Net / Kling-Net
- Full Pixel control

LED Par 64 Aircraft DMX

30745 **4° Beam Angle**

SHOWTEC



Specifications:

Light Src. Type:	LED
Light Src. Quant. :	18
Light Src. Pwr.:	4 W
LED Colour Type:	WW
Refresh Rate:	400 Hz
Lumen Total:	1393 lm
Ctrl. Mode:	Auto / DMX / Manual
DMX Ch.:	1 / 2
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	85 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	430 mm
Width (mm):	275 mm
Height (mm):	280 mm
Weight:	3.5 kg
IP Rate:	IP20(indoor use only)
Material:	Metal
Housing:	Metal
Colour:	Black

FEATURES:
- 18 x 4 W WW LEDs
- powerCON in- & output
- Double Bracket

Sunstrip Active MKII

30714 **Incl. Lamps & powerCON-lead**

SHOWTEC



Specifications:

Light Src. Type:	Halogen
Light Src. Quant. :	10
Light Src. Pwr.:	50 W
CCT:	3000 K
Ctrl. Mode:	Built-in Program / DMX / Manual / Master Slave
DMX Ch.:	1 / 2 / 5 / 10
Protocols:	DMX
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	550 W
Pwr. Conn. In.:	powerCON Blue
Pwr. Conn. Out.:	powerCON Grey
DMX Conn.:	XLR 3P In/Out
Length (mm):	1000 mm
Width (mm):	130 mm
Height (mm):	160 mm
Weight:	6.2 kg
IP Rate:	IP20(indoor use only)
Material:	Steel
Housing:	Metal / Steel
Colour:	Black

FEATURES:
- Including Osram bulbs
- Lockable menu
- Invert function
- Programmable name in start screen

Case for 12x Sunstrip Active

D7039 **Flight case**

Sunstrip LED

30752 **With Tungsten Simulation**

SHOWTEC



Specifications:

Light Src. Type:	LED
Light Src. Quant. :	10
Light Src. Pwr.:	14 W
LED Colour Type:	CW / WW
Refresh Rate:	1525 Hz
Lumen Total:	2800 lm
Ctrl. Mode:	Auto / DMX / Manual / Master Slave
DMX Ch.:	1 / 2 / 3 / 10 / 20
Protocols:	DMX
Zone Sect. Control:	10 sections
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	120 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Length (mm):	1000 mm
Width (mm):	146 mm
Height (mm):	176 mm
Weight:	7 kg
IP Rate:	IP20(indoor use only)
Material:	Aluminium
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:
- 10x 14 W White Sunstrip LED
- 3 selectable dimmer modes: tungsten, warm white and cool white
- Smooth sungsten simulation
- 10 sections zone control
- Manual, DMX and Master/Slave control in manual, auto and sound mode
- Including floor brackets
- Multibracket and dedicated flight case are optional

Case for 12x Sunstrip Active

D7039 **Flight case**

Multibracket for Sunstrip SHOWTEC

30713 **For horizontal, vertical or diagonal Mounting**





Media Panel 50

33300 **50 watt Video LED Panel**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	24 VDC
Light Src. Quant. :	196	Pwr. Cons.:	50 W
Light Src. Pwr.:	5 W	Pwr. Conn. In.:	Low Voltage DC plug
LED Colour Type:	White	Length (mm):	377 mm
Lumen Total:	4000 lm	Width (mm):	55 mm
CCT:	5000 K	Height (mm):	273 mm
Beam °:	87 °	Weight:	1.8 kg
Ctrl. Mode:	Manual	IP Rate:	IP20(indoor use only)
		Housing:	Aluminium
		Colour:	Dark Grey

FEATURES:

- 50 W Daylight White Media Panel
- Suitable for short-distance media lighting
- 143° field angle
- High >98 CRI for accurate 5000 K colour rendering
- 4000 lumen output
- Easy dimmer function and quick mobile setup
- Bracket, barndoor and spigot adapter included



Media Panel 100

33301 **100 watt Video LED Panel**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	24 VDC
Light Src. Quant. :	392	Pwr. Cons.:	100 W
Light Src. Pwr.:	5 W	Pwr. Conn. In.:	Low Voltage DC plug
LED Colour Type:	White	Length (mm):	480 mm
Lumen Total:	7829 lm	Width (mm):	70 mm
CCT:	5000 K	Height (mm):	340 mm
Beam °:	87 °	Weight:	2.6 kg
Ctrl. Mode:	Manual	IP Rate:	IP20(indoor use only)
		Housing:	Aluminium
		Colour:	Dark Grey

FEATURES:

- 100 W Daylight White Media Panel
- Suitable for short-distance media lighting
- Wide 143° field angle
- High >98 CRI for accurate 5000 K colour rendering
- Bright 7800 lumen output
- Easy dimmer function and quick mobile setup
- Bracket, barndoor and spigot adapter included



Media Panel 100 CCT

33303 **100 watt Tunable White Video LED Panel**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	24 VDC
Light Src. Quant. :	392	Pwr. Cons.:	100 W
Light Src. Pwr.:	0.5 W	Pwr. Conn. In.:	Low Voltage DC plug
LED Colour Type:	WW / CW	DMX Conn.:	XLR 5P In/Out
Lumen Total:	8541 lm	Length (mm):	480 mm
CCT:	3200 K	Width (mm):	70 mm
Beam °:	87 °	Height (mm):	340 mm
Ctrl. Mode:	DMX / Manual	Weight:	2.6 kg
Protocols:	DMX / RDM	IP Rate:	IP20 (indoor use only)
		Housing:	Aluminium
		Colour:	Dark Grey

FEATURES:

- 100 W Tuneable White Media Panel
- 3000 K - 5600 K colour temperature
- Wide 143° field angle
- High >98 CRI for accurate colour rendering
- Manual & DMX control with dimmer function
- Barndoor included

Solar FL-550

46250 Floodlight

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	24	Pwr. Cons.:	550 W
Light Src. Pwr.:	20 W	Pwr. Conn. In.:	powerCON Blue
LED Colour Type:	White	Pwr. Conn. Out.:	powerCON Grey
Refresh Rate (max):	1200 kHz	DMX Conn.:	XLR 5P In/Out
Lumen Total:	38900 lm	Length (mm):	562 mm
CCT:	7400 K	Width (mm):	331 mm
Beam °:	13.4 °	Height (mm):	320 mm
Ctrl. Mode:	DMX / Manual / Stand Alone	Weight:	11.5 kg
DMX Ch.:	1 / 2 / 4	IP Rate:	IP20(indoor use only)
Protocols:	DMX / RDM	Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- High light output
- CRI 92
- Wide range of beam shapers available
- Stand alone function
- CREE LED

Solar FL-280

46200 Floodlight

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Cons.:	280 W
Light Src. Quant. :	14	Pwr. Conn. In.:	powerCON Blue
Light Src. Pwr.:	20 W	Pwr. Conn. Out.:	powerCON Grey
LED Colour Type:	White	DMX Conn.:	XLR 5P In/Out
Lumen Total:	18000 lm	Length (mm):	468 mm
CCT:	7500 K	Width (mm):	262 mm
Beam °:	13 °	Height (mm):	265 mm
Ctrl. Mode:	DMX / Manual / Stand Alone	Weight:	7 kg
DMX Ch.:	1 / 2 / 4	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Metal
		Colour:	Black

FEATURES:

- High Light output
- CRI 95
- Wide range of beam shapers
- Stand alone function
- CREE LED



V-Mount Battery Holder for Media Panel

33310 For two batteries



SHOWTEC

Barndoor for FL-280

46210 Floodlight Accessory



SHOWTEC

Diffusor for Solar FL-280

SHOWTEC

46211 90°



46212 30°



Diffusor for Solar FL-280

46213 30° x 60°



SHOWTEC

Barndoor for Solar FL-550

46260 Floodlight Accessory



SHOWTEC

Diffusor for Solar FL-550

SHOWTEC

46261 90°



46262 30°



Diffusor for Solar FL-550

46263 30° x 60°



SHOWTEC





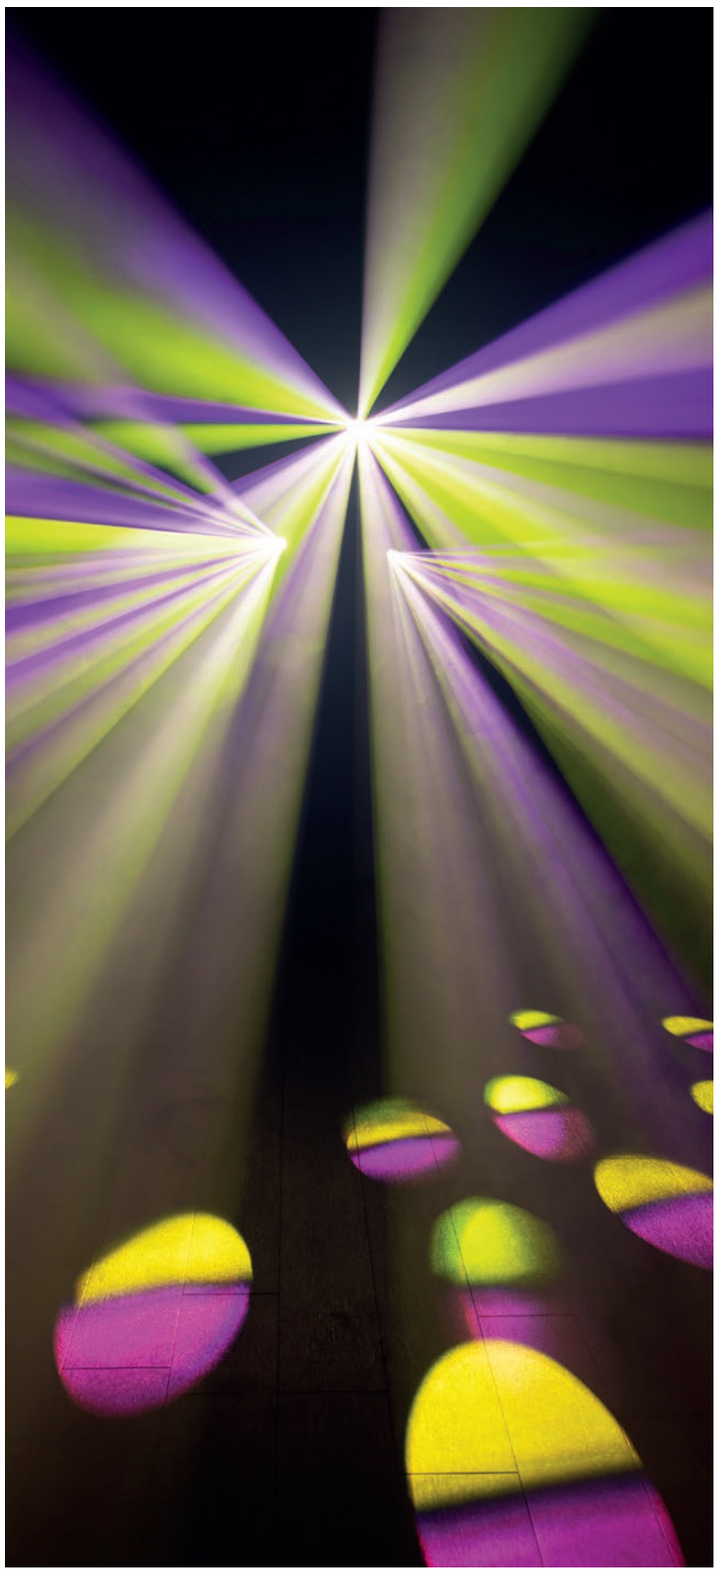

Kanjo Scan 60

45012 60 W LED Scanner

SHOWTEC

Specifications:

Light Src. Type:	LED	Colour Sys.:	Colour Wheel
Light Src. Quant. :	1	Gobo Sys.:	Metal
Light Src. Pwr.:	60 W	Gobo Wheel 1:	7 + Open
LED Colour Type:	White	Pan:	170 °
Lumen Total:	1200 lm	Tilt:	85 °
CRI:	75	Pwr. Supp.:	100-240 VAC 50-60 Hz
CCT:	10000 K	Pwr. Cons.:	85 W
Beam °:	18 °	Pwr. Conn. In.:	IEC C13 female
Focus:	Manual	Pwr. Conn. Out.:	IEC C14 male
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound	DMX Conn.:	XLR 3P In/Out
		Length (mm):	335 mm
		Width (mm):	204 mm
DMX Ch.:	8 / 10	Height (mm):	335 mm
Protocols:	DMX	Weight:	3.52 kg
Display:	7-segment / LED	IP Rate:	IP20(indoor use only)
Dimmer:	0-100 %	Housing:	Metal
Strobe:	0-15 Hz	Colour:	Black

FEATURES:

- 60 W LED Scanner
- 7 fixed gobos + open
- 7 colours + white
- Dimmer and strobe function
- DMX and Master/Slave control
- Manual focus
- Compact, one-clamp-mount design









Kanjo Barrel 60

45013 **60 W LED Barrel**

SHOWTEC

Specifications:

Light Src. Type:	LED	Gobo Sys.:	Metal
Light Src. Quant. :	1	Gobo Wheel 1:	7 + Open
Light Src. Pwr.:	60 W	Pan:	120 °
LED Colour Type:	White	Tilt:	85 °
Lumen Total:	1200 lm	Cont. Movement:	Barrel
CRI:	75	Pwr. Supp.:	100-240 VAC 50-60 Hz
CCT:	10000 K	Pwr. Cons.:	85 W
Beam °:	18 °	Pwr. Conn. In.:	IEC C13 female
Focus:	Manual	Pwr. Conn. Out.:	IEC C14 male
Ctrl. Mode:	DMX	DMX Conn.:	XLR 3P In/Out
DMX Ch.:	8 / 10	Length (mm):	335 mm
Protocols:	DMX	Width (mm):	165 mm
Display:	7-segment / LED	Height (mm):	335 mm
Dimmer:	0-100 %	Weight:	4 kg
Strobe:	0-15 Hz	IP Rate:	IP20(indoor use only)
Colour Sys.:	Colour Wheel	Housing:	Metal
		Colour:	Black

FEATURES:

- 60 W LED Barrel
- 7 fixed gobos + open
- 7 colours + white
- Dimmer and strobe function
- DMX and Master/Slave control
- Manual focus
- Compact, one-clamp-mount design



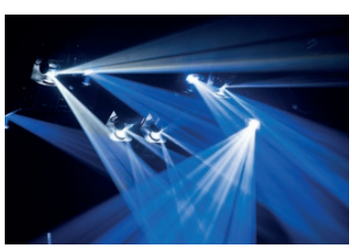



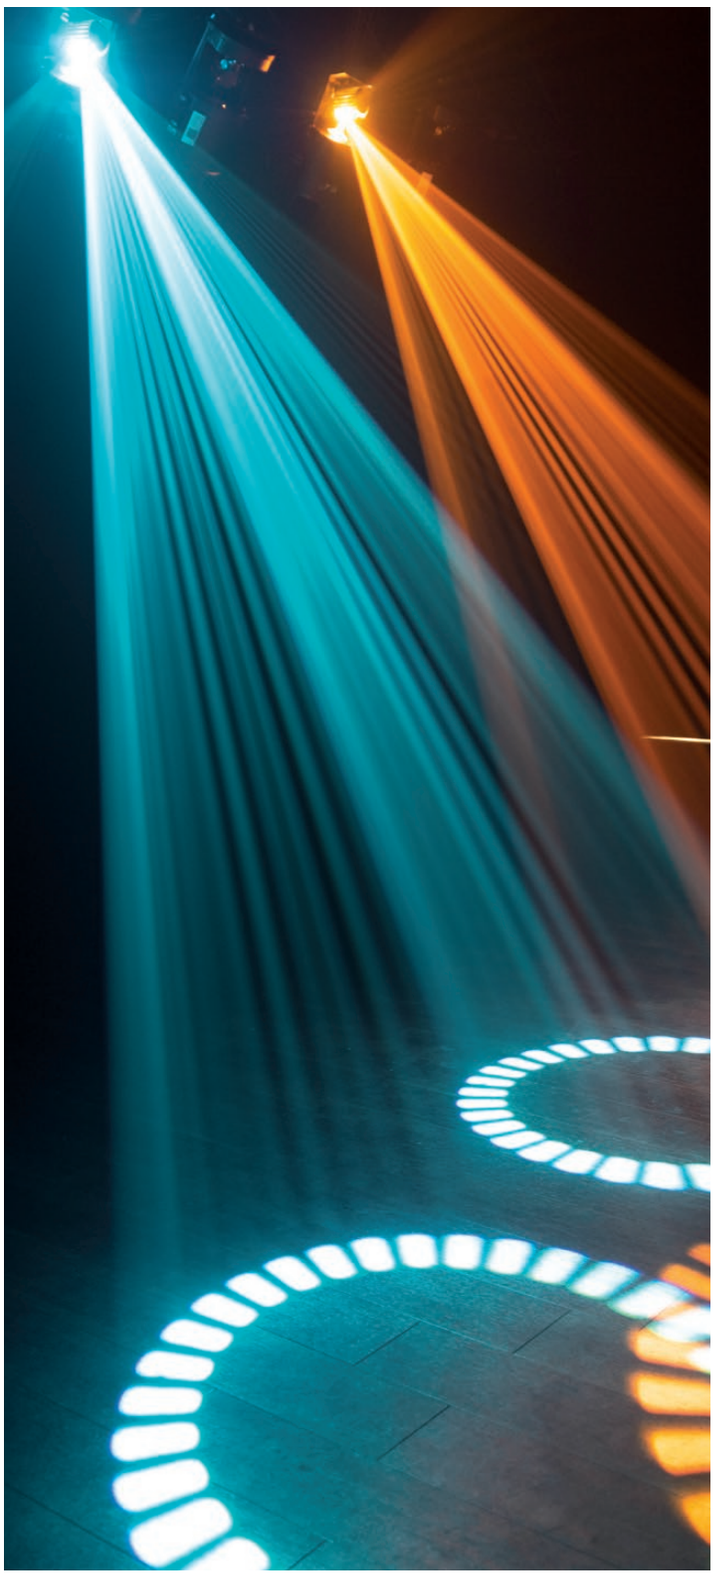

Shark Barrel One

45026 **Compact 100 W LED Barrel**

SHOWTEC

Specifications:

Light Src. Type:	LED	Colour Sys.:	Colour Wheel
Light Src. Quant. :	1	Gobo Sys.:	Glass + Metal
Light Src. Pwr.:	100 W	Gobo Wheel 1:	7 + Open
LED Colour Type:	White	Pan:	160 °
Lumen Total:	2245 lm	Tilt:	360 °
CRI:	80	Cont. Movement:	Barrel
CCT:	10000 K	Pwr. Supp.:	100-240 VAC 50-60 Hz
Beam °:	18 °	Pwr. Cons.:	137 W
Focus:	Motorised	Pwr. Conn. In.:	Pro Power Blue
Ctrl. Mode:	Auto / DMX / Master Slave/ Sound	Pwr. Conn. Out.:	ProPower Grey
		DMX Conn.:	XLR 3P In/Out
DMX Ch.:	8 / 14	Length (mm):	430 mm
Protocols:	DMX	Width (mm):	250 mm
Display:	OLED	Height (mm):	430 mm
Dimmer:	0-100 %	Weight:	6.6 kg
Strobe:	0-25 Hz	IP Rate:	IP20(indoor use only)
Prism 1:	3-facet	Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Compact 100 W LED Barrel
- 7 gobos + open
- 8 colours + white
- 3-facet prism
- Motorised focus
- DMX and Master/Slave control
- Suitable for 2-unit Showgear D7526 and 4-unit Showtec D7528 case





Case for 4x Shark Scan or Barrel

D7528 **Flight Case**



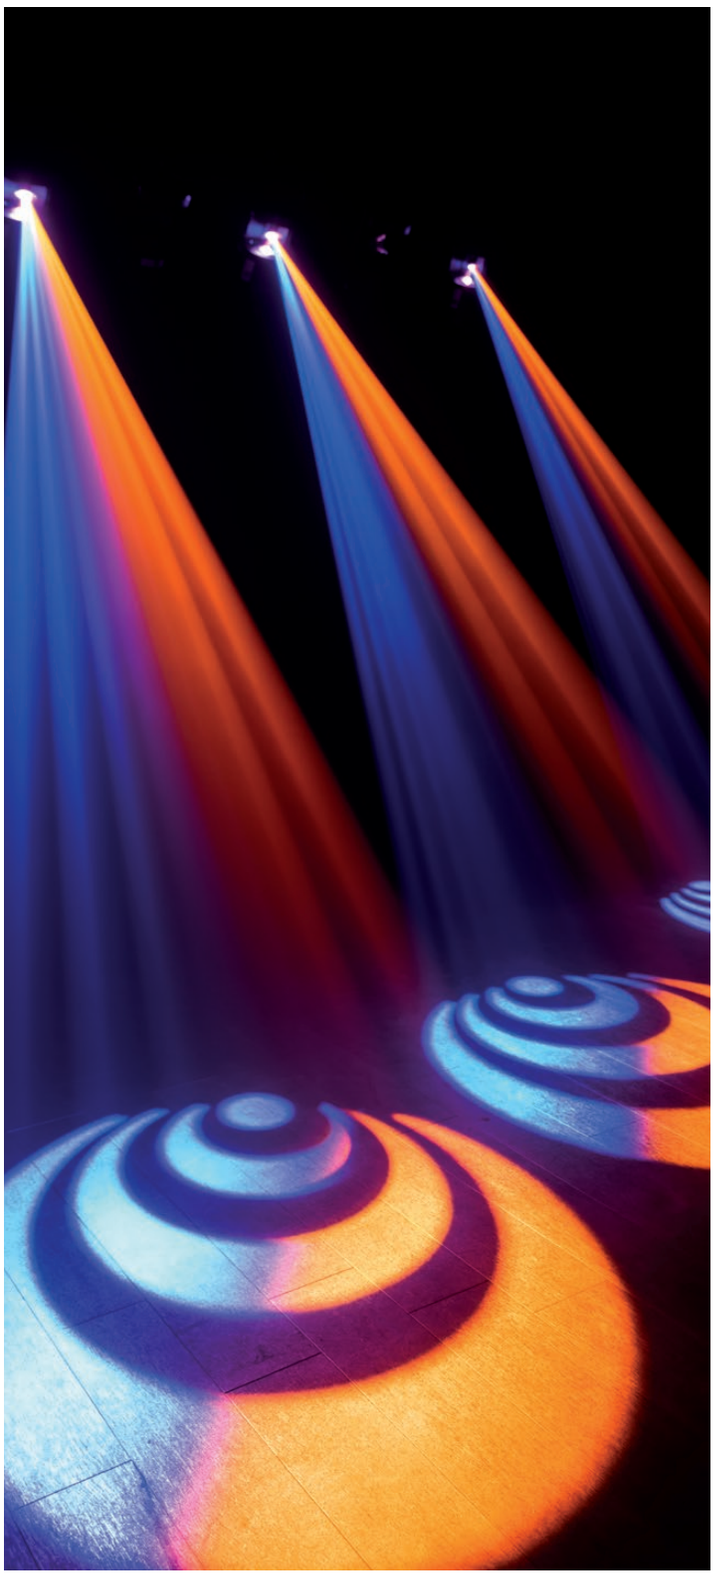

Shark Scan One

45025 **Compact 100 W LED Scanner**

SHOWTEC

Specifications:

Light Src. Type:	LED	Prism 1:	3-facet
Light Src. Quant. :	1	Colour Sys.:	Colour Wheel
Light Src. Pwr.:	100 W	Gobo Sys.:	Glass + Metal
LED Colour Type:	White	Gobo Wheel 1:	7 + Open
Lumen Total:	2245 lm	Pan:	160 °
CRI:	80	Tilt:	50 °
CCT:	10000 K	Pwr. Supp.:	100-240 VAC 50-60 Hz
Beam °:	18 °	Pwr. Cons.:	116 W
Focus:	Motorised	Pwr. Conn. In.:	Pro Power Blue
Ctrl. Mode:	Auto / DMX / Master Slave / Sound	Pwr. Conn. Out.:	ProPower Grey
		DMX Conn.:	XLR 3P In/Out
DMX Ch.:	8 / 14	Length (mm):	380 mm
Protocols:	DMX	Width (mm):	250 mm
Display:	OLED	Height (mm):	297 mm
Dimmer:	0-100 %	Weight:	6.2 kg
Strobe:	0-25 Hz	IP Rate:	IP20(indoor use only)
		Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Compact 100 W LED Scanner
- 7 rotating gobos + open
- 8 colours + white
- 3-facet prism
- Motorised focus
- DMX and Master/Slave control
- Suitable for 2-unit Showgear D7526 and 4-unit Showtec D7528 case

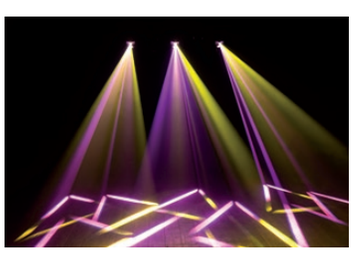

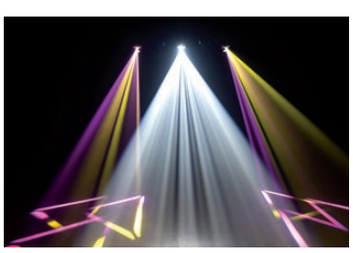

Case for 4x Shark Scan or Barrel

D7528 **Flight Case**



Sunraise LED

43078 **LED Effect Light**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	55	Pwr. Cons.:	32 W
Light Src. Pwr.:	3 W	Pwr. Conn. In.:	IEC C13 female
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Sound / Static Dimmer	DMX Conn.:	XLR 3P In/Out
		Height (mm):	260 mm
		Width (mm):	266 mm
		Depth (mm):	266 mm
		Weight:	2.8 kg
DMX Ch.:	4	IP Rate:	IP20(indoor use only)
Protocols:	DMX	Housing:	Metal / Plastic
Cont. Movement:	Rotating Optics	Colour:	Black

FEATURES:

- Multicolour LEDs
- DMX Control
- Sound to light function
- Very wide beam-spread



Booby Trap RG

43170 **5-in-1 light effect**

SHOWTEC

Specifications:

		Height (mm):	118 mm
		Width (mm):	245 mm
Light Src. Type:	LED	Depth (mm):	190 mm
Laser Col.:	Red / Green	Weight:	1.6 kg
Ctrl. Mode:	IR	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Metal
Pwr. Cons.:	20 W	Colour:	Black
Pwr. Conn. In.:	IEC C13 female		

FEATURES:

- Multi-effect light solution
- Water, UV, Strobe, Laser & Disco Star effects
- IR controllable
- Music Control
- Plug & Play









Airwolf

43164 **Effect Light**

SHOWTEC

Specifications:

Light Src. Type:	Diode / DPSS / LED
Light Src. Quant. :	6
Light Src. Pwr.:	8 W
LED Colour Type:	RGBW / White
LED Strobe:	Yes
LED Strobe Quantity:	24
LED Strobe Power:	0.5 W
Laser Col.:	Red / Green
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Remote / Sound
DMX Ch.:	3 / 16
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	52 W
Pwr. Conn. In.:	IEC C13 female
Pwr. Conn. Out.:	IEC C14 male
DMX Conn.:	XLR 3P In/Out
Height (mm):	230 mm
Width (mm):	250 mm
Depth (mm):	390 mm
Weight:	4 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- Continuous Rotation
- Including IR Remote
- RG Pattern Laser effects
- Manual adjustable RGBW beam heads



Dynamic LED

43056 **LED Effect Light**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	256
Light Src. Pwr.:	25 W
LED Colour Type:	R / G / B / W / Y
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Sound / Static Dimmer
DMX Ch.:	2 / 3
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	38 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Height (mm):	155 mm
Width (mm):	930 mm
Depth (mm):	150 mm
Weight:	4.4 kg
IP Rate:	IP20 (indoor use only)
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 42 LED matrix patterns
- 4-in-1 Light effect
- RGBWA Colours
- Wide beam angle



Dynamica

43162 **Effect Light**

SHOWTEC

Specifications:

Light Src. Type:	Diode / DPSS / LED
Light Src. Quant. :	192
Light Src. Quant. Effect:	2
Light Src. Pwr.:	12 W
Light Src. Pwr. Effect:	3 W
LED Colour Type:	R / G / B / W / A / UV / White
LED Strobe:	Yes
LED Strobe Quantity:	18
LED Strobe Power:	0.5 W
Laser Col.:	Red / Green
Ctrl. Mode:	Auto / DMX / Master Slave / Remote / Sound
DMX Ch.:	2 / 5 / 8 / 10
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	40 W
Pwr. Conn. In.:	IEC C13 female
Pwr. Conn. Out.:	IEC C14 male
DMX Conn.:	XLR 3P In/Out
Height (mm):	225 mm
Width (mm):	770 mm
Depth (mm):	175 mm
Weight:	5.5 kg
IP Rate:	IP20 (indoor use only)
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- 4-in-1 light effect
- Dual RG Laser Grating effects
- RGBWA LED Pattern beams
- Dual Strobe arrays
- Dual UV Wash effect

Swing 4

43085 **2-in-1 Light Effect**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	2
Light Src. Quant. Effect:	108
Light Src. Pwr.:	9 W
LED Colour Type:	RGB
Ctrl. Mode:	Auto / DMX / Master Slave / Sound
DMX Ch.:	6
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	62 W
Pwr. Conn. In.:	IEC C13 female
Pwr. Conn. Out.:	IEC C14 male
DMX Conn.:	XLR 3P In/Out
Height (mm):	265 mm
Width (mm):	255 mm
Depth (mm):	255 mm
Weight:	3.6 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- 2-in-1 Light effect
- 2 x 9 watt 3-in-1 LEDs for Derby
- 64 LEDs for moonflower
- 6 DMX channels



Colourburst

43163 **Effect Light**

SHOWTEC

Specifications:

Light Src. Type:	Diode / DPSS / LED
Light Src. Quant. :	5
Light Src. Pwr.:	8 W
LED Colour Type:	RGBW
Laser Pwr.:	135 mW
Laser Col.:	Red / Green
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Remote / Sound
DMX Ch.:	3 / 10 / 22
Protocols:	DMX
Cont. Movement:	Rotating Optics
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	63 W
Pwr. Conn. In.:	IEC C13 female
Pwr. Conn. Out.:	IEC C14 male
DMX Conn.:	XLR 3P In/Out
Height (mm):	400 mm
Width (mm):	255 mm
Depth (mm):	320 mm
Weight:	3.8 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminum die-cast
Colour:	Black

FEATURES:

- Powerful Mirror Ball simulation
- RG Laser Grating effects
- RGBW Colour control over 3 sections
- IR Remote included



Double3 Derby LED Q6

43160 **Effect Light**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	2
Light Src. Pwr.:	12 W
LED Colour Type:	RGBWAC
Ctrl. Mode:	Sound
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	32 W
Pwr. Conn. In.:	IEC C13 female
Pwr. Conn. Out.:	IEC C14 male
Height (mm):	270 mm
Width (mm):	315 mm
Depth (mm):	310 mm
Weight:	3 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal
Colour:	Black

FEATURES:

- Legendary Light FX
- 6-in-1 LED
- Adjustable Sound control
- Plug & Play
- Easy IEC daisy chaining

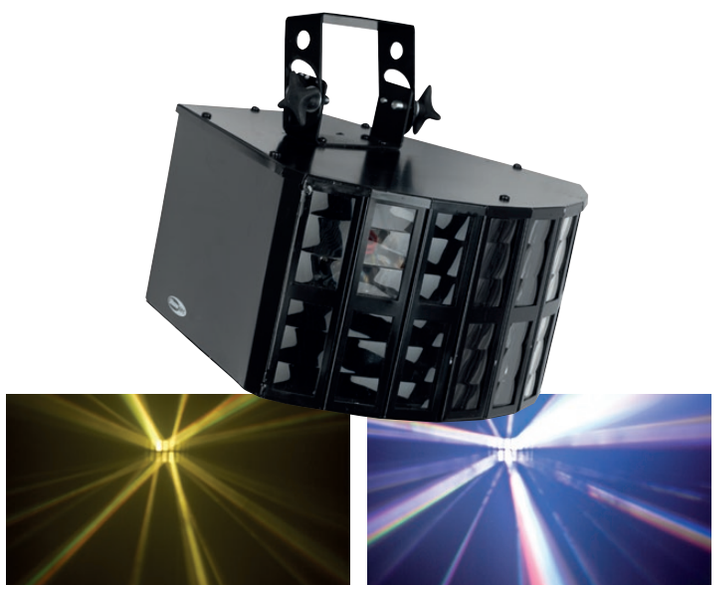



Small Mushroom LED Q6

43159 Effect Light

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Conn. In.:	IEC C13 female
Light Src. Quant. :	2	Pwr. Conn. Out.:	IEC C14 male
Light Src. Pwr.:	12 W	Height (mm):	285 mm
LED Colour Type:	RGBWAC	Width (mm):	175 mm
Ctrl. Mode:	Sound	Depth (mm):	345 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Weight:	2.75 kg
Pwr. Cons.:	32 W	IP Rate:	IP20 (indoor use only)
		Housing:	Metal
		Colour:	Black

FEATURES:

- Legendary Light FX
- 6-in-1 LED
- Adjustable Sound control
- Plug & Play





Techno Derby

43156 2-in-1 Light Effect

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	4	Pwr. Cons.:	30 W
Light Src. Pwr.:	3 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGBW / White	Pwr. Conn. Out.:	IEC C14 male
LED Strobe:	Yes	DMX Conn.:	XLR 3P In/Out
LED Strobe Quantity:	16	Height (mm):	190 mm
LED Strobe Power:	0.5 W	Width (mm):	265 mm
Ctrl. Mode:	Auto / DMX / Master Slave / Sound	Depth (mm):	190 mm
		Weight:	2 kg
DMX Ch.:	1 / 4	IP Rate:	IP20 (indoor use only)
		Housing:	Metal
		Colour:	Black



FEATURES:

- LED & Strobe Effect
- Bright Colourful beams
- RGBW Colours
- 16 power strobe LEDs





Energetic

43165 Effect Light

SHOWTEC

Specifications:

Light Src. Type:	Diode / DPSS / LED	DMX Ch.:	2 / 9
Light Src. Quant. :	4	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	3 W	Pwr. Cons.:	30 W
LED Colour Type:	R / G / B / W / White	Pwr. Conn. In.:	IEC C13 female
LED Strobe:	Yes	Pwr. Conn. Out.:	IEC C14 male
LED Strobe Quantity:	16	DMX Conn.:	XLR 3P In/Out
LED Strobe Power:	0.5 W	Height (mm):	188 mm
Laser Col.:	Red / Green	Width (mm):	260 mm
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Remote / Sound	Depth (mm):	190 mm
		Weight:	1.8 kg
		IP Rate:	IP20 (indoor use only)
		Housing:	Aluminum die-cast
		Colour:	Black



FEATURES:

- 16 x SMD LED Strobe
- IR Remote Included
- RG Pattern Laser effects
- Sharp RGBW Beams

Energetic XL

43169 **3-in-1 light effect**

SHOWTEC

Specifications:

Light Src. Type:	Diode / DPSS / LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	17	Pwr. Cons.:	80 W
Light Src. Pwr.:	30 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGBW	Height (mm):	150 mm
Laser Pwr.:	150 mW	Width (mm):	200 mm
Laser Col.:	Red / Green	Depth (mm):	255 mm
Ctrl. Mode:	Auto / DMX / IR / Master Slave / Sound	Weight:	1.9 kg
DMX Ch.:	13	IP Rate:	IP20 (indoor use only)
		Housing:	Metal
		Colour:	Black

FEATURES:

- Multi-effect light solution
- Beam, Matrix & Laser effects
- IR remote included
- Music control
- Plug & Play







Magician

43161 **Effect Light**

SHOWTEC

Specifications:

Light Src. Type:	Diode / DPSS / LED	DMX Ch.:	3 / 5 / 11 / 28
Light Src. Quant. :	9	Protocols:	DMX
Light Src. Quant. Effect:	3	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	4 W	Pwr. Cons.:	90 W
LED Colour Type:	R / G / B / W / A / RGBUV / White	Pwr. Conn. In.:	IEC C13 female
		Pwr. Conn. Out.:	IEC C14 male
LED Strobe:	Yes	DMX Conn.:	XLR 3P In/Out
LED Strobe Quantity:	12	Height (mm):	350 mm
LED Strobe Power:	0.5 W	Width (mm):	305 mm
Laser Pwr.:	130 mW	Depth (mm):	185 mm
Laser Col.:	Red / Green	Weight:	3.2 kg
Ctrl. Mode:	Auto / Manual / Master Slave / Remote / Sound	IP Rate:	IP20 (indoor use only)
		Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- Multifunctional Light and Laser FX
- IR remote and DMX control
- RGB-UV LED
- Strobe FX





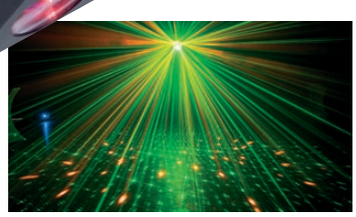

Dominator

43153 **3-in-1 Light Effect**

SHOWTEC

Specifications:

Light Src. Type:	LED	DMX Ch.:	9
Light Src. Quant. :	5	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Pwr.:	3 W	Pwr. Cons.:	66 W
LED Colour Type:	RGBWA / White	Pwr. Conn. In.:	IEC C13 female
LED Strobe:	Yes	Pwr. Conn. Out.:	IEC C14 male
LED Strobe Quantity:	8	DMX Conn.:	XLR 3P In/Out
LED Strobe Power:	1 W	Height (mm):	312 mm
Laser Pwr.:	200 mW	Width (mm):	307 mm
Laser Col.:	Red / Green	Depth (mm):	170 mm
Ctrl. Mode:	Auto / DMX / Master Slave / Sound	Weight:	3.95 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Metal
		Colour:	Black

FEATURES:

- led, Laser & Strobe Effect
- 200 mW RG Laser
- RGBWA Colours
- 8 Power strobe LEDs









X-Terminator

43157 **3-in-1 Light Effect**

SHOWTEC

Specifications:

Light Src. Type:	Diode / DPSS / LED
Light Src. Quant. :	6
Light Src. Pwr.:	3 W
LED Colour Type:	R / G / B / W / A / White
LED Strobe:	Yes
LED Strobe Quantity:	12
LED Strobe Power:	0.5 W
Laser Pwr.:	300 mW
Laser Col.:	Red / Green
Ctrl. Mode:	Auto / DMX / IR / Master Slave / Sound
DMX Ch.:	2 / 11
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	36 W
Pwr. Conn. In.:	IEC C13 female
Pwr. Conn. Out.:	IEC C14 male
DMX Conn.:	XLR 3P In/Out
Height (mm):	197 mm
Width (mm):	335 mm
Depth (mm):	215 mm
Weight:	2.4 kg
IP Rate:	IP20 (indoor use only)
Housing:	Metal
Colour:	Black

FEATURES:

- Moonflower, Laser & Strobe Effect
- 130 mW RG Laser
- RGBWA Colours
- 12 strobe LEDs



Cyclone 4

43087 **Compact dynamic LED Effect**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	1
Light Src. Pwr.:	10 W
LED Colour Type:	RGBW
Ctrl. Mode:	Auto / DMX / Master Slave / Sound
DMX Ch.:	4
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	110 W
Pwr. Conn. In.:	IEC C13 female
Pwr. Conn. Out.:	IEC C14 male
DMX Conn.:	XLR 3P In/Out
Height (mm):	245 mm
Width (mm):	270 mm
Depth (mm):	210 mm
Weight:	3.6 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- Intelligent Music Control
- 10 W RGBW 4-in1 LED
- IEC In- and output
- Auto and sound programs selectable by DMX



Club Par Dizzy 3/8

42653 **3 x 8 W RGBUV LED Par**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	3
Light Src. Quant. Effect:	45
Light Src. Pwr.:	8 W
Light Src. Pwr. Effect:	5 W
LED Colour Type:	RGBUV / White
Ctrl. Mode:	Auto / DMX / IR / Master Slave / Sound
DMX Ch.:	3 / 9
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	65 W
Pwr. Conn. In.:	IEC C13 female
Pwr. Conn. Out.:	IEC C14 male
DMX Conn.:	XLR 3P In/Out
Height (mm):	264 mm
Width (mm):	214 mm
Depth (mm):	77 mm
Weight:	1.1 kg
IP Rate:	IP20 (indoor use only)
Housing:	Plastic
Colour:	Black

FEATURES:

- 3x RGBUV + 27 x CW + 18 x RGB LED Par
- 10 section Strobe Ring
- 6 section RGB patterns
- Dimmer and strobe function
- IR, DMX and Master/Slave control
- Manual, Auto run and Sound-controlled mode
- Infrared remote included

DreamWave

43166 LED Effect Light

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	6	Pwr. Cons.:	70 W
Light Src. Pwr.:	15 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGBW	Pwr. Conn. Out.:	IEC C14 male
Ctrl. Mode:	Built-in Program / DMX / Manual / Master Slave / Sound	DMX Conn.:	XLR 3P In/Out
		Height (mm):	247 mm
		Width (mm):	246 mm
		Depth (mm):	185 mm
DMX Ch.:	10 / 34	Weight:	3.16 kg
Protocols:	DMX	IP Rate:	IP20(indoor use only)
Cont. Movement:	Rotating Optics	Housing:	Aluminum die-cast
		Colour:	Black



FEATURES:

- Colour & LED Control
- Stunning built-in light shows
- DMX Control
- Wide Beam angle
- Pixel control

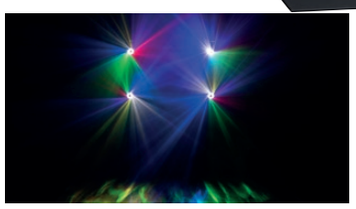



Dataflower

43168 LED Effect Light

SHOWTEC

Specifications:

		Pwr. Cons.:	117 W
		Pwr. Conn. In.:	IEC C13 female
Light Src. Type:	LED	Pwr. Conn. Out.:	IEC C14 male
Light Src. Quant. :	1	DMX Conn.:	XLR 3P In/Out
Light Src. Pwr.:	100 W	Height (mm):	202 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Sound	Width (mm):	265 mm
		Depth (mm):	308 mm
		Weight:	4 kg
DMX Ch.:	2 / 5 / 7	IP Rate:	IP20(indoor use only)
Protocols:	DMX	Housing:	Metal
Cont. Movement:	Mirror Disc Bi-directional	Colour:	Black
Pwr. Supp.:	100-240 VAC 50-60 Hz		



FEATURES:

- 100 W High Power LED
- Dynamic Sound to Light Control
- DMX Control
- Superb Aerial Effects



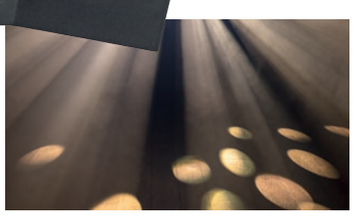

Hydrogen DMX MKII

43151 LED Effect Light

SHOWTEC

Specifications:

		Pwr. Conn. In.:	IEC C13 female
		Pwr. Conn. Out.:	IEC C14 male
Light Src. Type:	LED	DMX Conn.:	XLR 3P In/Out
Light Src. Quant. :	1	Height (mm):	135 mm
Light Src. Pwr.:	20 W	Width (mm):	275 mm
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound	Depth (mm):	250 mm
		Weight:	3.5 kg
DMX Ch.:	4	IP Rate:	IP20(indoor use only)
Protocols:	DMX	Housing:	Metal / Plastic
Pwr. Supp.:	100-240 VAC 50-60 Hz	Colour:	Black
Pwr. Cons.:	35 W		



FEATURES:

- 20 W LED Source
- Red, Green, Blue, Purple, Yellow and White
- 4 DMX channels
- Multi-voltage



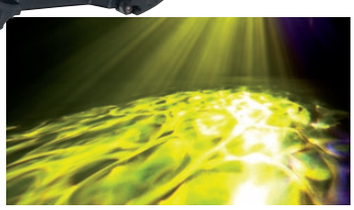





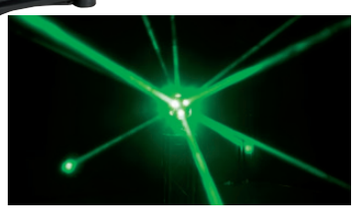

Galaxy 360

45054 **Retro LED Moving head**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	12
Light Src. Pwr.:	9 W
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual / Master Slave / Sound
DMX Ch.:	10 / 18 / 66
Protocols:	DMX
Pan:	540 °
Tilt:	360 °
Cont. Movement:	Yes
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	190 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Height (mm):	395 mm
Width (mm):	335 mm
Depth (mm):	145 mm
Weight:	7 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- Continuous pan & ball rotation
- 60 mm 4° Lenses
- 12 individual RGBW LEDs
- Built-in Colour chases



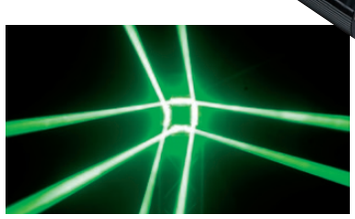



Airstrike

43158 **5R Quad Beam Effect**

SHOWTEC

Specifications:

Light Src. Type:	Discharge
Light Src. Quant. :	1
Light Src. Pwr.:	190 W
Ctrl. Mode:	Auto / DMX / Master Slave / Sound
DMX Ch.:	10
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	265 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Height (mm):	340 mm
Width (mm):	225 mm
Depth (mm):	300 mm
Weight:	10.9 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal
Colour:	Black

FEATURES:

- High Light output
- DMX Control
- Compact size
- Razor-sharp beams



Compact Power Light Set MKII

30268 **Incl. Bag, Footswitch, and Stand**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	28
Light Src. Pwr.:	3 W
LED Colour Type:	RGB
Ctrl. Mode:	Built-in Program / DMX / Footswitch / Manual / Master Slave
DMX Ch.:	2 / 3 / 4 / 7 / 8 / 14 / 15
Protocols:	DMX
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	90 W
Pwr. Conn. In.:	IEC C13 female
Height (mm):	235 mm
Width (mm):	1200 mm
Depth (mm):	60 mm
Weight:	16 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal
Colour:	Black

FEATURES:

- 4 high power LED spots with 7 x 3-in-1 RGB LEDs
- T-Bar with built-in controller
- Footswitch included (30267)
- Stand included
- Carrying bag included

Compact Power Light Set 4 RGBW

30277 **RGBW**

SHOWTEC



Specifications:

Light Src. Type:	LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. :	20	Pwr. Cons.:	90 W
Light Src. Pwr.:	4 W	Pwr. Conn. In.:	IEC C13 female
LED Colour Type:	RGBW	Pwr. Conn. Out.:	IEC C14 male
Ctrl. Mode:	DMX / Footswitch / Master Slave / Sound / Stand Alone	Height (mm):	70 mm
		Width (mm):	845 mm
		Depth (mm):	55 mm
		Weight:	7 kg
		IP Rate:	IP20(indoor use only)
DMX Ch.:	4 / 5 / 6 / 8 / 10 / 16 / 19	Housing:	Aluminium
Protocols:	DMX	Colour:	Black

FEATURES:

- 4-in-1 RGBW LEDs
- T-Bar with built-in controller
- Stand included
- Carrying bag included

QFX

30276 **Multi FX Compact Light Set**

SHOWTEC



Specifications:

		DMX Ch.:	3 / 5 / 9 / 27
		Protocols:	DMX
Light Src. Type:	Diode / DPSS / LED	Pwr. Supp.:	100-240 VAC 50-60 Hz
Light Src. Quant. Par:	6	Pwr. Cons.:	45 W
Light Src. Quant. Effect:	6	Pwr. Conn. In.:	IEC C13 female
Light Src. Pwr. Par:	3 W	Pwr. Conn. Out.:	IEC C14 male
Light Src. Pwr. Effect:	2 W	Height (mm):	378 mm
LED Colour Type:	RGB / White	Width (mm):	1185 mm
LED Strobe:	Yes	Depth (mm):	110 mm
LED Strobe Quantity:	4	Weight:	6.6 kg
LED Strobe Power:	4 W	IP Rate:	IP20(indoor use only)
Laser Col.:	Red / Green	Housing:	Metal
Ctrl. Mode:	Auto / DMX / IR / Master Slave / Sound	Colour:	Black

FEATURES:

- 4 FX on 1 Bar
- Incl. wireless foot controller & IR remote
- Incl. tripod + bag & Transport case
- Effects interchangeable on bar
- 130 mW RG Laser

Event Bar 2 CCT

44120 **50 W White Battery LED Bar**

SHOWTEC



Specifications:

		Pwr. Cons.:	50 W
		Pwr. Conn. In.:	Low Voltage DC plug
Light Src. Type:	LED	Height (mm):	150 mm
Light Src. Quant. :	2	Width (mm):	320 mm
Light Src. Quant. Spot:	2	Depth (mm):	95 mm
LED Colour Type:	WW / CW / NW	Weight:	1.4 kg
Lumen Total:	550 lm	IP Rate:	IP20 (indoor use only)
Ctrl. Mode:	Manual	Housing:	Aluminium
Pwr. Supp.:	120-250 VAC 50-60 Hz	Colour:	Black

FEATURES:

- 50 watt battery LED Bar
- Silent, fanless operations
- Manual 4-step 3000 K - 6000 K colour engine
- Battery powered (lasting 3 - 8 hours)
- 25° diffuser and carrying bag included
- Various mounting options (Velcro / Stand / Magnetic)



Lightset PRO 9/10 RGBM

30290 **RGBM**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	260 W
Light Src. Quant. :	36	Pwr. Conn. In.:	Pro Power Blue
Light Src. Pwr.:	10 W	Pwr. Conn. Out.:	ProPower Grey
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound	Height (mm):	364 mm
		Width (mm):	1287 mm
DMX Ch.:	4 / 5 / 6 / 8 / 10 / 16 / 19	Depth (mm):	13.5 mm
Protocols:	DMX / RDM	Weight:	12.6 kg
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP20(indoor use only)
		Housing:	Aluminium / Metal
		Colour:	Black

FEATURES:

- Professional T-bar
- 4-in-1, 10 watt RGBM LEDs
- Compact sturdy spots
- Multiple optional Beam Shapers
- Including 5 m Power Pro Cable

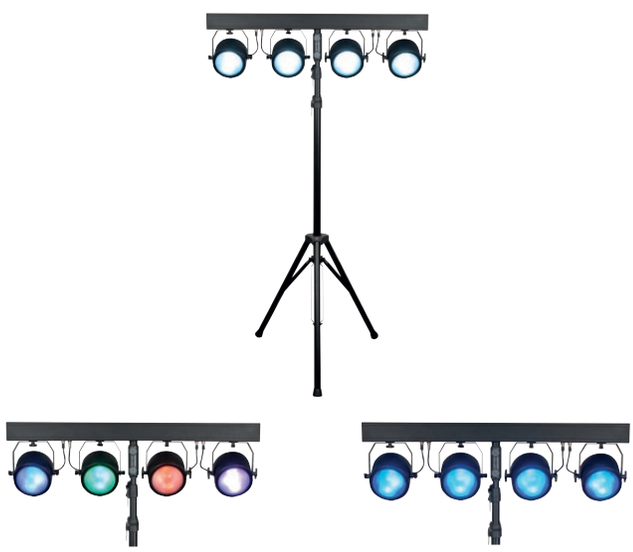

Luna Four Bar 60

30298 **T-bar - 4x 60 W RGBW COB LED Spot**

SHOWTEC

Specifications:

		Pwr. Conn. In.:	Pro Power Blue
		Pwr. Conn. Out.:	Pro Power Grey
Light Src. Type:	LED	DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Light Src. Quant. :	4		
Light Src. Pwr.:	60 W	Height (mm):	354 mm
LED Colour Type:	RGBW	Width (mm):	1287 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Manual	Depth (mm):	13.5 mm
		Weight:	10.5 kg
DMX Ch.:	4 / 5 / 6 / 8 / 10 / 16 / 19	IP Rate:	IP20 (indoor use only)
Protocols:	DMX	Housing:	Aluminium
Pwr. Supp.:	100-240 VAC 50-60 Hz	Colour:	Black
Pwr. Cons.:	254 W		

FEATURES:

- Professional T-bar
- Four RGBW COB 60 W LED spots
- Up to 3700 lumen per spot
- Including magnetically attached 25° beam shapers
- Including 5 m power cable

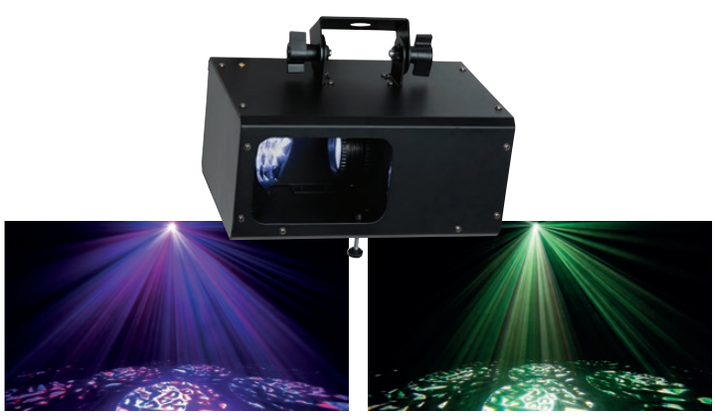

DreamMoon

43167 **LED Effect Light**

SHOWTEC

Specifications:

		Pwr. Cons.:	68 W
		Pwr. Conn. In.:	IEC C13 female
Light Src. Type:	LED	Pwr. Conn. Out.:	IEC C14 male
Light Src. Quant. :	1	DMX Conn.:	XLR 3P In/Out
Light Src. Pwr.:	60 W	Height (mm):	191 mm
LED Colour Type:	RGBW	Width (mm):	275 mm
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound	Depth (mm):	200 mm
		Weight:	3.6 kg
DMX Ch.:	5 / 9	IP Rate:	IP20 (indoor use only)
Protocols:	DMX	Housing:	Aluminum die-cast
Cont. Movement:	Mirror Disc Bi-directional	Colour:	Black
Pwr. Supp.:	100-240 VAC 50-60 Hz		

FEATURES:

- Wide Beam angle
- Excellent built-in light shows
- DMX Control
- Multipurpose effect
- 4 breakup gobos included

Pinspot Bar 4

30295 **RGBW**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	90 W
Light Src. Quant. :	4	Pwr. Conn. In.:	Pro Power Blue
Light Src. Pwr.:	20 W	Pwr. Conn. Out.:	ProPower Grey
LED Colour Type:	R / G / B / W	Height (mm):	278 mm
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound	Width (mm):	800 mm
		Depth (mm):	177 mm
DMX Ch.:	4 / 5 / 6 / 8 / 10 / 16 / 19	Weight:	6.5 kg
Protocols:	DMX / RDM	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- Independent control
- Super lightweight
- Including magnetic beamshapers
- Including 5 m Power Pro Cable



Pinspot Bar 4

30296 **WW**

SHOWTEC

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	75 W
Light Src. Quant. :	4	Pwr. Conn. In.:	Pro Power Blue
Light Src. Pwr.:	15 W	Pwr. Conn. Out.:	ProPower Grey
LED Colour Type:	WW	Height (mm):	278 mm
Ctrl. Mode:	Auto / DMX / Manual / Master Slave / Sound	Width (mm):	800 mm
		Depth (mm):	177 mm
DMX Ch.:	1 / 2 / 4 / 6 / 7 / 10	Weight:	6.5 kg
Protocols:	DMX	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- Independent control
- Super lightweight
- Including magnetic beamshapers
- Including 5 m Power Pro Cable



Footswitch SHOWTEC

30267 **For Compact Light Set**



Beam Shaper for Light Set Pro 9/10 RGBM

30291 **20°**



SHOWTEC

Beam Shaper for Light Set Pro 9/10 RGBM

30292 **40°**



SHOWTEC

Beam Shaper for Pinspot Bar 4 RGBW & WW (1 piece)

30297 **20°**



SHOWTEC



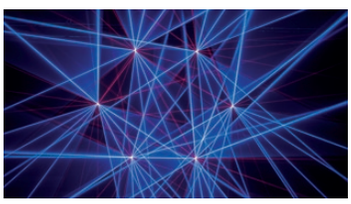

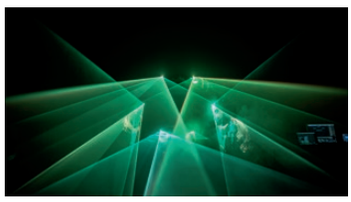

Galactic RGB-6-750

51347 Fat Beam Laser

SHOWTEC

Specifications:

Laser Pwr.:	750 mW	Pwr. Cons.:	108 W
Laser Src.:	Diode	Pwr. Conn. In.:	IEC C13 female
Laser Mod.:	TTL	DMX Conn.:	XLR 3P In/Out
Laser Class:	3B	Height (mm):	1000 mm
Laser Col.:	Red / Green / Blue	Width (mm):	201 mm
Ctrl. Mode:	Built-in Program / DMX / ILDA	Depth (mm):	123 mm
DMX Ch.:	7 / 9 / 12 / 36 / 48 / 54 / 66	Weight:	10 kg
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP20 (indoor use only)
		Housing:	Aluminium
		Colour:	Black
		Ref. Std.:	CE
		Laser Safety:	EN/IEC-60825-1

FEATURES:

- 6 x RGB Laser
- Fat beam
- DMX Controllable



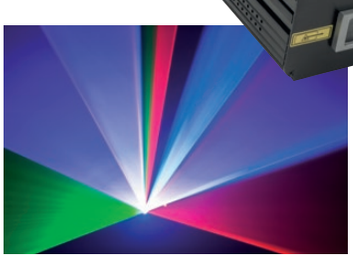



Galactic FX RGB-1500

51341 1500 mW RGB 3D Laser

SHOWTEC

Specifications:

Laser Pwr.:	1500 mW	Pwr. Conn. Out.:	IEC C14 male
Laser Src.:	Diode / DPSS	DMX Conn.:	XLR 3P In/Out
Laser Mod.:	TTL	Data Conn.:	ILDA DB25
Laser Class:	4	Height (mm):	205 mm
Laser Col.:	Red / Green / Blue / White / Yellow / Purple / Cyan	Width (mm):	290 mm
		Depth (mm):	260 mm
Ctrl. Mode:	DMX / ILDA / Manual / Stand Alone	Weight:	3.4 kg
		IP Rate:	IP20(indoor use only)
DMX Ch.:	19	Housing:	Aluminium
Laser Scanner Speed:	20 K	Colour:	Black
Pwr. Supp.:	100-240 VAC 50-60 Hz	Laser Scanner:	20 kpps
Pwr. Cons.:	45 W	Ref. Std.:	CE
Pwr. Conn. In.:	IEC C13 female	Laser Safety:	EN/IEC 60825-1 Ed 2:2007-03

FEATURES:

- 1500 mW RGB 3D laser
- 80 built-in patterns
- Colour, clipping, zooming, roll and move effects
- Supports ILDA software for creating laser show
- Smooth projections with little flickering
- DMX and Master/Slave control
- Manual, Auto-run and Sound controlled mode





Galactic RGB-2000

51346 2 W RGB Laser - 30 K scanning

SHOWTEC

Specifications:

Laser Pwr.:	2000 mW	Pwr. Conn. In.:	IEC C13 female
Laser Src.:	Diode	DMX Conn.:	XLR 3P In/Out
Laser Mod.:	TTL	Height (mm):	211 mm
Laser Class:	4	Width (mm):	296 mm
Laser Col.:	Red / Green / Blue	Depth (mm):	247 mm
Ctrl. Mode:	DMX / ILDA	Weight:	4.9 kg
DMX Ch.:	1 / 13	IP Rate:	IP20(indoor use only)
Laser Scanner Speed:	30 K	Housing:	Aluminium
Pwr. Supp.:	100-240 VAC 50-60 Hz	Colour:	Black
Pwr. Cons.:	50 W	Ref. Std.:	CE
		Laser Safety:	EN/IEC-60825-1

FEATURES:

- 2000 mW RGB laser
- 86 built-in patterns
- Colour, clipping, zooming, roll and move effects
- Supports ILDA software for creating laser show
- 30 K scanning for smooth projection
- Including interlock connector, power cord and KEYs

Galactic RGY-140 MKII

51335 **140 mW red green yellow Laser**

SHOWTEC

Specifications:

Laser Pwr.:	140 mW	Pwr. Conn. In.:	IEC C13 female
Laser Src.:	Diode / DPSS	DMX Conn.:	XLR 3P In/Out
Laser Mod.:	TTL	Height (mm):	155 mm
Laser Class:	3B	Width (mm):	160 mm
Laser Col.:	Red / Green / Yellow	Depth (mm):	145 mm
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Remote / Sound	Weight:	1.3 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Metal
		Colour:	Black
		Ref. Std.:	CE
DMX Ch.:	10	Laser Safety:	EN/IEC 60825-1 Ed 2:2007-03
Pwr. Supp.:	100-240 VAC 50-60 Hz		
Pwr. Cons.:	15 W		





FEATURES:

- 140 mW laser
- Red, Green and Yellow colour output
- 32 patterns and built-in programs
- Rotate and X/Y roll function
- 30° scan angle with manual zoom
- DMX, Master/Slave and IR control
- Infrared remote included

Galactic RBP-180

51337 **180 mW red blue purple Laser**

SHOWTEC

Specifications:

Laser Pwr.:	180 mW	Pwr. Conn. In.:	IEC C13 female
Laser Src.:	Diode	DMX Conn.:	XLR 3P In/Out
Laser Mod.:	TTL	Height (mm):	158 mm
Laser Class:	3B	Width (mm):	168 mm
Laser Col.:	Red / Blue / Purple	Depth (mm):	148 mm
Ctrl. Mode:	Auto / Built-in Program / Master Slave / Remote / Sound	Weight:	1.3 kg
		IP Rate:	IP20(indoor use only)
		Housing:	Metal
		Colour:	Black
		Ref. Std.:	CE
DMX Ch.:	10	Laser Safety:	EN/IEC 60825-1 Ed 2:2007-03
Pwr. Supp.:	100-240 VAC 50-60 Hz		
Pwr. Cons.:	16 W		





FEATURES:

- 180 mW laser
- Red, Blue and Purple colour output
- 32 patterns and built-in programs
- Rotate and X/Y roll function
- 30° scan angle with manual zoom
- DMX, Master/Slave and IR control
- Infrared remote included

Galactic RGB 300

51345 **300 mW RGB Laser**

SHOWTEC

Specifications:

Laser Pwr.:	300 mW	Pwr. Conn. In.:	IEC C13 female
Laser Src.:	Diode	DMX Conn.:	XLR 3P In/Out
Laser Mod.:	TTL	Height (mm):	158 mm
Laser Class:	3B	Width (mm):	168 mm
Laser Col.:	Red / Green / Blue	Depth (mm):	148 mm
Ctrl. Mode:	Auto / DMX / Master Slave / Remote / Sound	Weight:	1.7 kg
		IP Rate:	IP20 (indoor use only)
		Housing:	Metal
		Colour:	Black
		Ref. Std.:	CE
DMX Ch.:	10	Laser Safety:	EN/IEC 60825-1 Ed 2:2007-03
Pwr. Supp.:	100-240 VAC 50-60 Hz		
Pwr. Cons.:	23 W		





FEATURES:

- 300 mW RGB laser
- 32 individual aerial patterns
- Infrared remote included
- TTL modulations
- Stepper motor
- DMX, Master/Slave and IR control
- Manual, Auto-run and Sound controlled mode







Galactic TXT

51342 **300 mW RGB text Laser**

SHOWTEC

Specifications:

Laser Pwr.:	300 mW
Laser Src.:	Diode / DPSS
Laser Mod.:	TTL
Laser Class:	3B
Laser Col.:	Red / Green / Blue / White / Yellow / Purple / Cyan
Ctrl. Mode:	Auto / DMX / Master Slave / Sound
DMX Ch.:	17
Laser Scanner Speed:	10 K
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	25 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Height (mm):	185 mm
Width (mm):	225 mm
Depth (mm):	185 mm
Weight:	1.9 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black
Laser Scanner:	10 kpps
Ref. Std.:	CE
Laser Safety:	EN/IEC 60825-1 Ed 2:2007-03

FEATURES:

- 300 mW RGB text laser
- Custom and preset animations
- 128 preset animations & symbols
- Clock, countdown and date function
- Zoom, movement, wave, drawing and colour effects
- Wide 40° scan angle with manual zoom
- DMX, Master/Slave and IR control







Galactic 1K20 TXT

51344 **1000 mW full Colour Laser**

SHOWTEC

Specifications:

Laser Pwr.:	1000 mW
Laser Src.:	Diode
Laser Mod.:	TTL
Laser Class:	4
Laser Col.:	Red / Green / Blue / White / Yellow / Purple / Cyan
Ctrl. Mode:	Auto / Built-in Program / DMX / ILDA / Master Slave / Sound
DMX Ch.:	20
Laser Scanner Speed:	20 K
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	25 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Data Conn.:	ILDA DB25
Height (mm):	215 mm
Width (mm):	228 mm
Depth (mm):	200 mm
Weight:	11.5 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black
Laser Scanner:	20 kpps
Ref. Std.:	CE
Laser Safety:	EN/IEC 60825-1 Ed 2:2007-03

FEATURES:

- 1000 mW full colour laser
- Both aerial effects and custom text
- 128 preset animations & symbols
- Clock, countdown and date function
- Zoom, movement, wave, drawing and colour effects
- Supports ILDA software for creating laser show
- Wide 60° scan angle with manual zoom

Remote Interlock SHOWTEC

51316 **With 10 m Cable, small Connector**



Remote interlock SHOWTEC

51319 **With 10 m Cable, big Connector**



Bounce Mirror for Laser SHOWTEC

32090 **12 x 12 cm Mirror**







City Flash

40203 Strobe

SHOWTEC

Specifications:

Light Src. Type:	Discharge	Pwr. Conn. In.:	Dedicated connector
Socket:	E27	Height (mm):	113 mm
Light Src. Pwr.:	20 W	Width (mm):	90 mm
Ctrl. Mode:	Manual / Stand Alone	Depth (mm):	90 mm
Strobe:	1-11 Hz	Weight:	0.184 kg
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP40
Pwr. Cons.:	20 W	Housing:	Plastic
		Colour:	Black

FEATURES:

- Manual/Stand alone control
- E27 screw
- Up to 11 Hz
- IP40



Mini Strobe

40201 Strobe

SHOWTEC

Specifications:

Light Src. Type:	Discharge	Pwr. Conn. In.:	Schuko Plug
Light Src. Pwr.:	14 W	Height (mm):	52 mm
Ctrl. Mode:	Manual	Width (mm):	84 mm
Strobe:	1-10 Hz	Depth (mm):	125 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	0.225 kg
Pwr. Cons.:	15 W	IP Rate:	IP20(indoor use only)
		Housing:	Plastic
		Colour:	Black

FEATURES:

- Up to 10 flashes per second
- Passive cooling/silent operation
- Compact



Titan Strobe

40222 1500W

SHOWTEC

Specifications:

Light Src. Type:	Discharge	Pwr. Cons.:	1800 W
Light Src. Quant. :	1	Pwr. Conn. In.:	Schuko Plug
Light Src. Pwr.:	1200 W	Cable Length:	<0.50 m
Lumen Total:	120000 lm	Height (mm):	265 mm
Ctrl. Mode:	DMX / Manual	Width (mm):	495 mm
DMX Ch.:	2	Depth (mm):	160 mm
Dimmer:	0-100 %	Weight:	3.7 kg
Strobe:	1-15 Hz	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	240 VAC 50-60 Hz	Housing:	Aluminium
		Colour:	Black / Blue

FEATURES:

- 1500 W
- Up to 15 Hz
- 2-Channel DMX
- Dimmable

Titan Strobe BLAZE

40297 **1500 W + RGB**

SHOWTEC

Specifications:

Light Src. Type:	Discharge / LED
Light Src. Quant. :	1
Light Src. Pwr.:	1500 W
LED Colour Type:	RGB
Lumen Total:	120000 lm
Ctrl. Mode:	Auto / DMX / Manual / Master Slave
DMX Ch.:	3 / 5 / 9
Protocols:	DMX / RDM
Dimmer:	0-100 %
Strobe:	1-15 Hz
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1800 W
Pwr. Conn. In.:	Pro Power Blue
Height (mm):	265 mm
Width (mm):	440 mm
Depth (mm):	160 mm
Weight:	8 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal / Plastic
Colour:	Black

FEATURES:

- Extreme high brightness
- Blaze background effect
- Lightning, Blinder and Single-mode



Data Flash

40296 **LED Strobe**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Pwr.:	25 W
LED Colour Type:	White
Lumen Total:	3530 lm
Ctrl. Mode:	Auto / Built-in Program / DMX / Master Slave / Sound
DMX Ch.:	2 / 3 / 12
Protocols:	DMX
Dimmer:	0-100 %
Strobe:	0-20 Hz
Pwr. Supp.:	100-240 VAC 50-60 Hz
Pwr. Cons.:	138 W
Pwr. Conn. In.:	Pro Power Blue
Pwr. Conn. Out.:	ProPower Grey
Height (mm):	293 mm
Width (mm):	263 mm
Depth (mm):	83 mm
Weight:	2.6 kg
IP Rate:	IP20(indoor use only)
Housing:	Aluminium
Colour:	Black

FEATURES:

- 8 sections
- Power Pro Connections
- SMD LEDs
- Built-in Programs



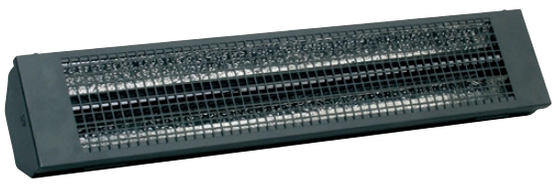

Professional Blacklight

80309 **60 cm Arm**

SHOWTEC

Specifications:

Light Src. Type:	Discharge	Height (mm):	125 mm
Light Src. Pwr.:	18 W	Width (mm):	660 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	Depth (mm):	110 mm
Pwr. Cons.:	36 W	Weight:	3.38 kg
Pwr. Conn. In.:	Schuko Plug	IP Rate:	IP20(indoor use only)
		Housing:	Metal
		Colour:	Black

FEATURES:

- Easy operating
- Including 60 cm blacklight tube
- Including 2 brackets



Professional Blacklight

80310 **120 cm Arm**

SHOWTEC

Specifications:

Light Src. Type:	Discharge	Height (mm):	130 mm
Light Src. Pwr.:	36 W	Width (mm):	1310 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Depth (mm):	100 mm
Pwr. Cons.:	36 W	Weight:	5.4 kg
Pwr. Conn. In.:	Schuko Plug	IP Rate:	IP20(indoor use only)
		Housing:	Metal
		Colour:	Black

FEATURES:

- Easy operating
- Including 120 cm blacklight tube
- Including 2 brackets



LED Blacklight

80323 **60 cm incl TL unit**

SHOWTEC

Specifications:

Light Src. Type:	LED	Height (mm):	99 mm
Light Src. Pwr.:	25 W	Width (mm):	612 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Depth (mm):	45 mm
Pwr. Cons.:	7 W	Weight:	0.555 kg
Pwr. Conn. In.:	Schuko Plug	IP Rate:	IP20 (indoor use only)
		Housing:	Plastic
		Colour:	Black

FEATURES:

- Complete 7 W LED blacklight
- Suitable for venues and home applications
- 60 cm
- UV tube and fixed cable included
- On-off switch

LED Blacklight

80322 **120 cm incl TL Unit**

SHOWTEC

Specifications:

		Height (mm):	99 mm
		Width (mm):	1222 mm
Light Src. Type:	LED	Depth (mm):	45 mm
Light Src. Pwr.:	25 W	Weight:	1.005 kg
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP20 (indoor use only)
Pwr. Cons.:	14 W	Housing:	Plastic
Pwr. Conn. In.:	Schuko Plug	Colour:	Black



FEATURES:

- Complete 14 W LED blacklight
- Suitable for venues and home applications
- 120 cm
- UV tube and fixed cable included
- On-off switch





Blacklight spot 400 W

80318 **Blacklight**

SHOWTEC

Specifications:

Light Src. Type:	Discharge	Width (mm):	370 mm
Light Src. Pwr.:	400 W	Depth (mm):	335 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	Weight:	10 kg
Pwr. Cons.:	400 W	IP Rate:	IP20 (indoor use only)
Height (mm):	383 mm	Housing:	Metal
		Colour:	Black

FEATURES:

- E40 socket for 400 W discharge blacklight bulb
- 120 ° Circular Beam Angle
- Including bracket and fixed cable
- Blacklight E40 optional



Par 64 COB UV

80332 **100 W UV COB LED Par**

SHOWTEC

Specifications:

Light Src. Type:	LED	Cable Length:	<0.50 m
Light Src. Quant. :	1	Height (mm):	330 mm
Light Src. Pwr.:	100 W	Width (mm):	175 mm
Par Model:	64	Depth (mm):	280 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Weight:	3.3 kg
Pwr. Cons.:	110 W	IP Rate:	IP20 (indoor use only)
Pwr. Conn. In.:	Schuko Plug	Housing:	Aluminum die-cast
		Colour:	Black

FEATURES:

- 100 W UV COB LED Parcan
- Wide fixed beam angle
- Light output reaches up to 15 m
- Compact, short design
- Double bracket for easy floor positioning



UV LED Bar 50 cm MKII

80327 **LED Blacklight**

SHOWTEC

Specifications:

Light Src. Type:	LED	Height (mm):	60 mm
Light Src. Quant. :	9	Width (mm):	500 mm
Light Src. Pwr.:	3 W	Depth (mm):	116 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Weight:	1.5 kg
Pwr. Cons.:	27 W	IP Rate:	IP20 (indoor use only)
Pwr. Conn. In.:	Schuko Plug	Housing:	Metal / Plastic
		Colour:	Black

FEATURES:

- Plug & Play
- 9x 3 W UV LEDs
- Retro Blacklight effect

UV LED Bar 100 cm MKII

80328 LED Blacklight

SHOWTEC

Specifications:

Light Src. Type:	LED	Height (mm):	60 mm
Light Src. Quant. :	18	Width (mm):	1000 mm
Light Src. Pwr.:	3 W	Depth (mm):	116 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Weight:	2.3 kg
Pwr. Cons.:	53 W	IP Rate:	IP20 (indoor use only)
Pwr. Conn. In.:	Schuko Plug	Housing:	Metal / Plastic
		Colour:	Black



FEATURES:

- Plug & Play
- 18x 3 W UV LEDs
- Retro Blacklight effect





Festoonlight Q4 String

41751 **20 Pixels, 15 m**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	20
Light Src. Pwr.:	25 W
LED Colour Type:	RGBW
Pwr. Cons.:	35 W
Height (mm):	160 mm
Width (mm):	1500 mm
Depth (mm):	80 mm
Weight:	0.39 kg
IP Rate:	IP54
Housing:	Plastic / Rubber
Colour:	Black / White

FEATURES:

- Full pixel control
- Easy to install
- Extend up to 6 strings per controller (including booster)
- Art-Net and DMX control
- Road proof

Festoonlight Q4 Controller

41750 **Including 10 m Connection Cable**



SHOWTEC

Festoonlight Q4 Booster

41752 **For 4 to 6 Festoon Strings**



SHOWTEC

Extension Cable for Festoonlight Q4

SHOWTEC

41753 **1 m**
41754 **2.5 m**
41755 **5 m**
41756 **10 m**





LED Octostrip Set MKII

42232 100 cm Section Control

42235 50 cm Section Control

SHOWTEC

Specifications:

Light Src. Type:	LED	Width (mm):	30 mm
Light Src. Pwr.:	25 W	Depth (mm):	50 mm
LED Colour Type:	RGB	Weight:	1.4 kg
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP20(indoor use only)
Pwr. Cons.:	90 W	Housing:	Aluminum die-cast
DMX Conn.:	XLR 3P In/Out	Colour:	Black
Data Conn.:	etherCON In/Out	DMX Ch.:	6 / 8 / 14 / 24 / 26 / 50 / 192 / 208
Height (mm):	500 / 1025 mm	Protocols:	Art-Net / DMX

FEATURES:

- 8 100 cm strips with 8 RGB Sections
- 5 m extension cables included
- DMX & Art-Net control

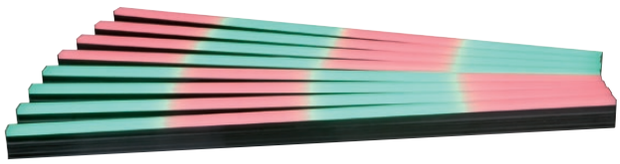

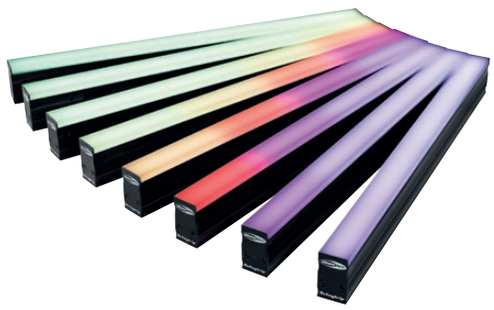

Controller for Octostrip MKII

42233 LED Shape Accessory



SHOWTEC

Octostrip Bracket

42234 Dedicated M10 Mounting Bracket



SHOWTEC

Case for 8 x Octostrip

D7486B for Octostrips set, controller + cables





Pixel Dot

44530 **50 mm (2") RGB LED Dot for fixed ceiling installations**

SHOWTEC

Specifications:

Light Src. Type:	LED	Width (mm):	120.5 mm
Light Src. Quant. :	6	Weight:	0.1 kg
Light Src. Pwr.:	3 W	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	24 VDC	Housing:	Aluminium
Height (mm):	54 mm	Colour:	Black / White
		DMX Ch.:	3
		Protocols:	Art-Net / DMX / Kling-Net

FEATURES:

- 50 mm (2") RGB LED Pixel Dot
- Suitable for a fixed ceiling installation
- Daisy-chainable to up to 40 units per Pixelcontroller output
- Controllable by the Pixelcontroller through DMX / Art-Net / Kling-Net
- Black housing and white frosted cover
- Spring clip mount

Pixel Controller SHOWTEC

44510 **For Pixelstrip 20/40, Pixeltube 16/32 and Pixel Dot 1**



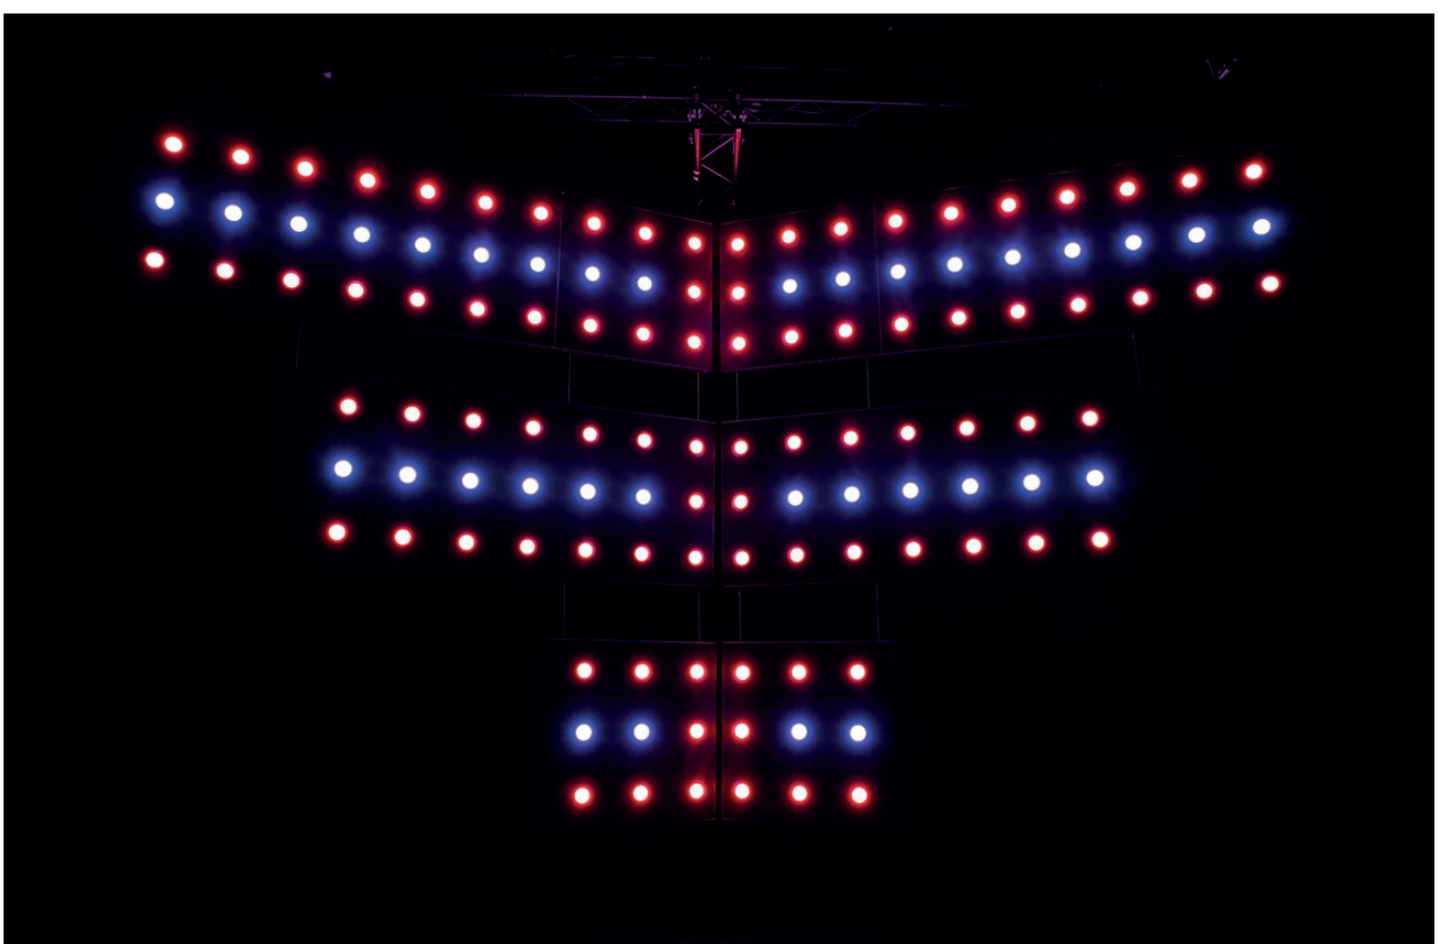

Pixeltube 16

44521 **16 individually controllable RGB pixels - 50 cm tube**

SHOWTEC

Specifications:

Light Src. Type:	LED	Length (mm):	504 mm
Light Src. Quant. :	16	Weight:	0.13 kg
Light Src. Pwr.:	1 W	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	24 VDC	Housing:	Plastic
Height (mm):	29 mm	Colour:	Black / Frost
Width (mm):	32 mm	DMX Ch.:	48
		Protocols:	Art-Net / DMX / Kling-Net

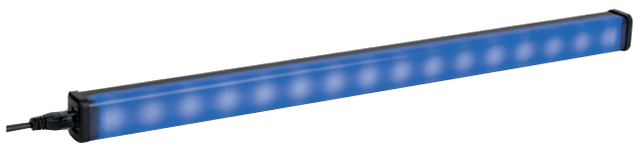

FEATURES:

- Pixel tube with 16 RGB pixels
- Daisy-chainable
- 50 cm (1.65 ft)
- Controllable by the Pixelcontroller through DMX / Art-Net / Kling-Net
- Black frosted cover
- Flexible rigging system





Pixeltube 32

44520 **32 individually controllable RGB pixels - 100 cm tube**

SHOWTEC

Specifications:

Light Src. Type:	LED	Length (mm):	1004 mm
Light Src. Quant. :	32	Weight:	0.22 kg
Light Src. Pwr.:	1 W	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	24 VDC	Housing:	Plastic
Height (mm):	29 mm	Colour:	Black / Frost
Width (mm):	32 mm	DMX Ch.:	96
		Protocols:	Art-Net / DMX / Kling-Net

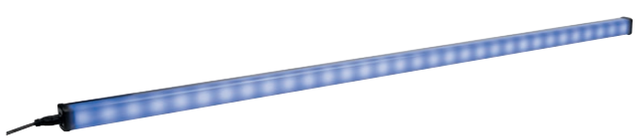

FEATURES:

- Pixel tube with 32 RGB pixels
- Daisy-chainable
- 100 cm (3.3 ft)
- Controllable by the Pixelcontroller through DMX / Art-Net / Kling-Net
- Black frosted cover
- Flexible rigging system







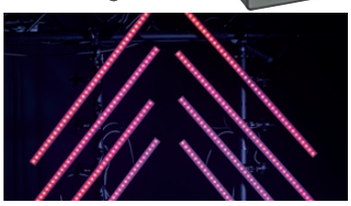



Pixelstrip 20

44501 **50 cm**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	20
Light Src. Pwr.:	3 W
LED Colour Type:	RGB
Pwr. Cons.:	6 W
Data Conn.:	RJ45 In/Out
Height (mm):	500 mm
Width (mm):	37 mm
Depth (mm):	100 mm
Weight:	0.88 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal
Colour:	Black
Protocols:	Art-Net / DMX / Kling-Net

FEATURES:

- 50 cm / 20 RGB pixels
- Flexible rigging system
- Various front covers available







Pixelstrip 40

44502 **100 cm**

SHOWTEC

Specifications:

Light Src. Type:	LED
Light Src. Quant. :	40
Light Src. Pwr.:	3 W
LED Colour Type:	RGB
Pwr. Cons.:	12 W
Data Conn.:	RJ45 In/Out
Height (mm):	1000 mm
Width (mm):	37 mm
Depth (mm):	100 mm
Weight:	1.3 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal
Colour:	Black
Protocols:	Art-Net / DMX / Kling-Net

FEATURES:

- 100 cm / 40 RGB pixels
- Flexible rigging system
- Various front covers available

Acrylic Flat Cover Milky

44503 **for Pixelstrip 40**

SHOWTEC

Acrylic Flat Cover Milky

44504 **for Pixelstrip 20**

SHOWTEC

Acrylic Dome Cover White

44505 **for Pixelstrip 40**

SHOWTEC

Acrylic Dome Cover White

44506 **for Pixelstrip 20**



SHOWTEC

Pixel Panel 1024

44560 **64x16 individually controllable RGB pixel matrix**

SHOWTEC

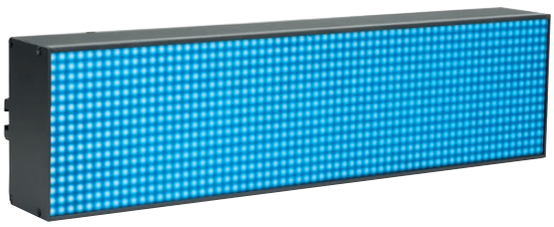

Specifications:

Light Src. Type:	LED	Width (mm):	136 mm
Light Src. Quant. :	1024	Length (mm):	516 mm
Light Src. Pwr.:	1 W	Weight:	2.82 kg
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP20(indoor use only)
Pwr. Cons.:	45 W	Housing:	Aluminium
Height (mm):	85 mm	Colour:	Black
		DMX Ch.:	8 / 3072
		Protocols:	Art-Net / DMX / Kling-Net

FEATURES:

- Pixel panel with 1024 RGB Pixels
- Full Pixel Control (Art-Net)
- DMX, Master/Slave, Art-Net & Kling-Net controllable
- Flexible rigging system
- Alignment plate & black frosted cover included





Pixel Bubble 75 set

44570 **Multi-colour LED Ball Matrix**

SHOWTEC

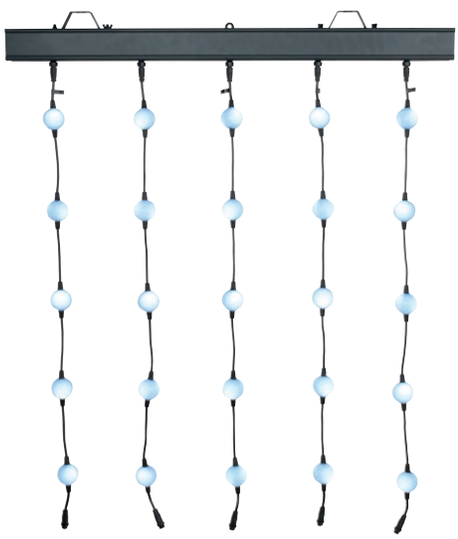

Specifications:

		Length (mm):	1003 mm
		Weight:	6.3 kg
Light Src. Type:	LED	IP Rate:	IP20(indoor use only)
Light Src. Quant. :	150	Housing:	Aluminium
Pwr. Supp.:	100-240 VAC 50-60 Hz	Colour:	Black
Pwr. Cons.:	121 W	DMX Ch.:	7 / 75 / 150 / 225 / 300 / 375 / 450
Height (mm):	6072 mm		
Width (mm):	71 mm	Protocols:	Art-Net / DMX / Kling-Net

FEATURES:

- Multi-colour LED matrix set
- Individual Pixel Control
- 15x 1 m (3.28 ft) daisy chainable strings
- PSU with 5 string outputs to up to 6 m (19.7 ft)
- 5x 50 mm (2") RGB balls per string
- Up to 15 additional strings suitable per set
- Stand-alone, DMX, Art-Net and Kling-Net controllable

Pixel Bubble Extension String

44571 **1 m (39") String with 5x 50 mm (2") white frosted LED Balls**

SHOWTEC



Specifications:

		Depth (mm):	50 mm
		Weight:	0.021 kg
Light Src. Type:	LED	IP Rate:	IP20(indoor use only)
Light Src. Quant. :	10	Housing:	Plastic
Height (mm):	50 mm	Colour:	Black / White
Width (mm):	1000 mm	DMX Ch.:	15

FEATURES:

- 1 m (3.28 ft) string with 5x 50 mm (2") white frosted RGB balls
- Extension / replacement string for Pixel Bubble 75 set
- Up to 15 additional strings possible per set



Illumilift RGBW

41165 **4 m Hoist / 25 cm LED sphere**

SHOWTEC

Specifications:

Light Src. Type:	LED	Cable Length:	1.5 m
Light Src. Pwr.:	18 W	Height (mm):	396 mm
LED Colour Type:	RGBW	Width (mm):	330 mm
Lift Height:	4 m	Depth (mm):	135 mm
Lift Speed:	0.25 m/s	Weight:	9 kg
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP20(indoor use only)
Pwr. Cons.:	60 W	Housing:	Metal / Plastic
DMX Conn.:	XLR 3P In/Out	Colour:	Black / White
		DMX Ch.:	6 / 10
		Protocols:	DMX

FEATURES:

- 16-bit position control
- Interchangeable LED spheres
- Lifting speed control
- Operation safety channel

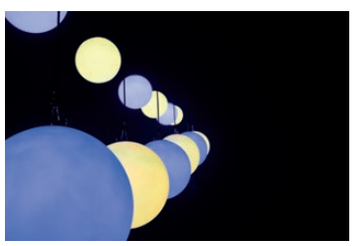

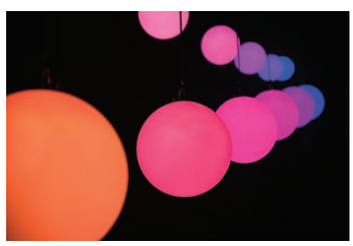



Illumilift RGBW Turbo

41166 **6 m High Speed Hoist / 35 cm LED sphere**

SHOWTEC

Specifications:

Light Src. Type:	LED	Height (mm):	498 mm
Light Src. Pwr.:	18 W	Width (mm):	370 mm
LED Colour Type:	RGBW	Depth (mm):	190 mm
Lift Height:	6 m	Weight:	14 kg
Lift Speed:	2.5 m/s	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Metal / Plastic
Pwr. Cons.:	80 W	Colour:	Black / White
DMX Conn.:	XLR 3P In/Out	DMX Ch.:	6 / 10
		Protocols:	DMX

FEATURES:

- 16-bit position control
- Interchangeable LED spheres
- Lifting speed control
- Operation safety channel

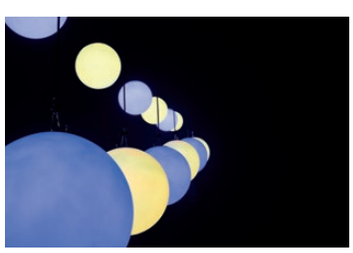

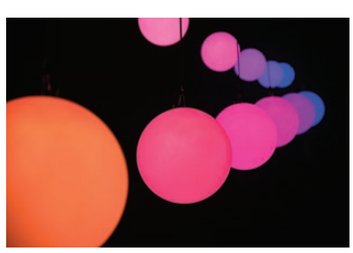

Illumisphere 30

41122 30 cm
41123 50 cm

SHOWTEC

Specifications:

Light Src. Type:	LED	Height (mm):	300 mm
Light Src. Quant. :	192	Width (mm):	300 mm
Light Src. Pwr.:	25 W	Depth (mm):	300 mm
LED Colour Type:	RGBW	Weight:	2.5 kg
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP20(indoor use only)
Pwr. Cons.:	40 W	Housing:	Metal / Plastic
Cable Length:	0.80 m	Colour:	Black / White
		DMX Ch.:	1 / 4 / 6 / 8
		Protocols:	DMX



FEATURES:
- High Output LED Sphere
- RGBW LED Source
- DMX Control
- OLED Display



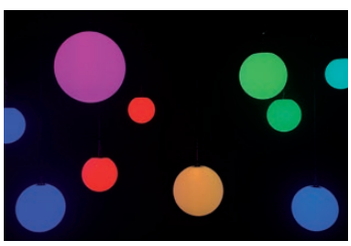

Illumilift RGBW LED Sphere

41167 25 cm
41168 35 cm

SHOWTEC

Specifications:

Pwr. Cons.:	18 W	Depth (mm):	250 mm
Pwr. Conn. In.:	Dedicated connector	Weight:	0.85 kg
Height (mm):	250 mm	IP Rate:	IP20 (indoor use only)
Width (mm):	250 mm	Material:	Metal / Plastic
		Colour:	Black / White



FEATURES:
- 18 W RGBW lifting LED Sphere
- Suitable for the Showtec Illumilift and Showtec Illumilift Turbo
- Dimmer & strobe function
- Ø 25 cm

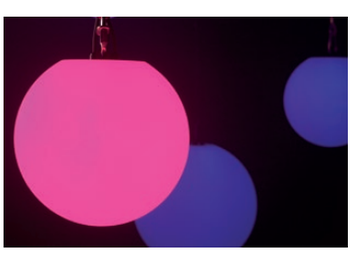





Aircone Q6 WDMX

40314 **LED Shape**

SHOWTEC

Specifications:

Light Src. Type:	LED	Height (mm):	2700 mm
Light Src. Quant. :	6	Width (mm):	470 mm
Light Src. Pwr.:	8 W	Depth (mm):	470 mm
LED Colour Type:	RGBWAUV	Weight:	11 kg
Lift Height:	0 m	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	100-240 VAC 50-60 Hz	Housing:	Aluminium
Pwr. Cons.:	150 W	Colour:	Black
DMX Conn.:	XLR 3P In/Out	DMX Ch.:	3 / 6 / 12
		Protocols:	DMX

FEATURES:

- RGBWA-UV Q6 LEDs
- W-DMX by W-DMX Sweden
- Adjustable Fan speed
- Cylinder shape included













Separate Cone for Aircone Q6 WDMX

40315 **LED Shape**

SHOWTEC

Separate Pyramid for Aircone Q6 WDMX

40316 **LED Shape**

SHOWTEC

Dance Floor Sparkle RGB

42330 **LED Shape**

SHOWTEC



Specifications:

Light Src. Type:	LED	Width (mm):	607 mm
LED Colour Type:	RGB	Depth (mm):	30 mm
Pwr. Supp.:	28 VDC	Weight:	8.5 kg
Pwr. Cons.:	8 W	IP Rate:	IP20 Rear / IP44 Top
Height (mm):	607 mm	Housing:	Metal
		Colour:	White
		DMX Ch.:	5

FEATURES:

- Slim Design
- Wireless Data Transmission

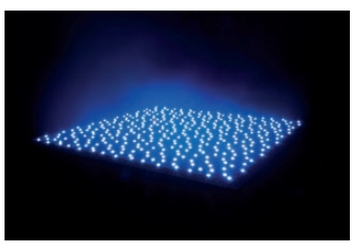

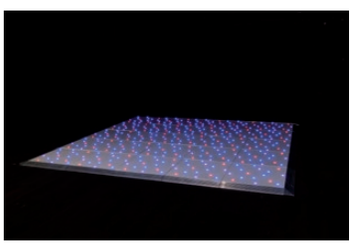

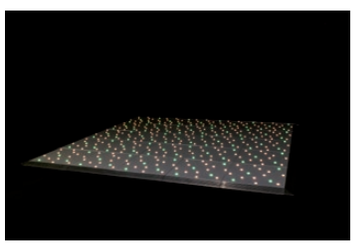

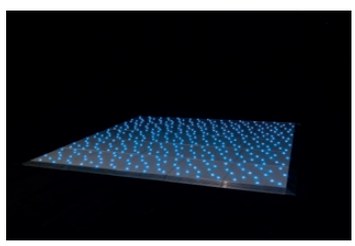

Dance Floor Sparkle PSU

42331 **LED Shape Accessory**



SHOWTEC

Dance Floor Sparkle DMX Box

42332 **LED Shape Accessory**



SHOWTEC

RF Remote Control for Dance Floor Sparkle

42333 **LED Shape Accessory**



SHOWTEC

Ramp for Dance Floor Sparkle

42335 **61 cm**



SHOWTEC

Ramp + Corner for Dance Floor Sparkle

42336 **61 cm with Corner**



SHOWTEC

Ramp for Dance Floor Sparkle

42337 **122 cm**



SHOWTEC

Ramp + Corner for Dance Floor Sparkle

42339 **61 cm with Corner and Feed-in Hole for Power Cable**



SHOWTEC

Connection Plate for Dance Floor Sparkle

42338 **LED Shape Accessory**



SHOWTEC



Edison Dot E1

30747 DMX LED dimmer with E27 Socket

SHOWTEC

Specifications:

Light Src. Quant. :	1	Pwr. Conn. In.:	Pro Power Blue
Socket:	E27	Pwr. Conn. Out.:	ProPower Grey
Socket Quant.:	1	DMX Conn.:	XLR 3P In/Out
Ctrl. Mode:	Built-in Program / DMX / Manual / Sound	Length (mm):	185 mm
		Height (mm):	168 mm
DMX Ch.:	1	Width (mm):	160 mm
Protocols:	DMX	Weight:	1.4 kg
Pwr. Supp.:	220V-240 VAC 50 Hz	IP Rate:	IP20(indoor use only)
Pwr. Cons.:	30 W	Material:	Metal / Plastic
		Housing:	Metal
		Colour:	Black

FEATURES:

- DMX LED dimmer with E27 socket
- Suitable for a LED light source up to 30 W
- Manual and DMX control
- Manual, Auto run and Sound-controlled mode
- Lockable menu
- Mounting bracket included
- Optional extension cable and design light bulbs



Edison Star E6

30748 DMX LED dimmer with 6 x E27 Socket

SHOWTEC

Specifications:

Light Src. Quant. :	6	Pwr. Conn. Out.:	ProPower Grey
Socket:	E27	DMX Conn.:	XLR 3P In/Out
Ctrl. Mode:	Built-in Program / DMX / Manual / Sound	Length (mm):	276 mm
		Height (mm):	141 mm
DMX Ch.:	1 / 6	Width (mm):	270 mm
Protocols:	DMX	Weight:	2.3 kg
Pwr. Supp.:	220V-240 VAC 50 Hz	IP Rate:	IP20(indoor use only)
Pwr. Cons.:	130 W	Material:	Metal / Plastic
Pwr. Conn. In.:	Pro Power Blue	Housing:	Metal
		Colour:	Black

FEATURES:

- DMX LED dimmer with 6 x E27 socket
- Suitable for six LED light sources up to 8 W
- Manual and DMX control
- Manual, Auto run and Sound-controlled mode
- Lockable menu
- Mounting bracket included
- Optional extension cable and design light bulbs



Edison Bar E6

30749 DMX LED dimmer with 6 x E27 Socket

SHOWTEC

Specifications:

Light Src. Quant. :	6	Pwr. Conn. In.:	Pro Power Blue
Socket:	E27	Pwr. Conn. Out.:	ProPower Grey
Socket Quant.:	6	DMX Conn.:	XLR 3P In/Out
Ctrl. Mode:	Built-in Program / DMX / Manual / Sound	Length (mm):	1041 mm
		Height (mm):	170 mm
DMX Ch.:	1 / 6	Width (mm):	135 mm
Protocols:	DMX	Weight:	4.5 kg
Pwr. Supp.:	220V-240 VAC 50 Hz	IP Rate:	IP20(indoor use only)
Pwr. Cons.:	130 W	Material:	Metal / Plastic
		Housing:	Metal
		Colour:	Black

FEATURES:

- DMX LED dimmer with 6 x E27 socket
- Suitable for six LED light sources up to 8 W
- Manual and DMX control
- Manual, Auto run and Sound-controlled mode
- Lockable menu
- Mounting bracket included
- Optional extension cable and design light bulbs

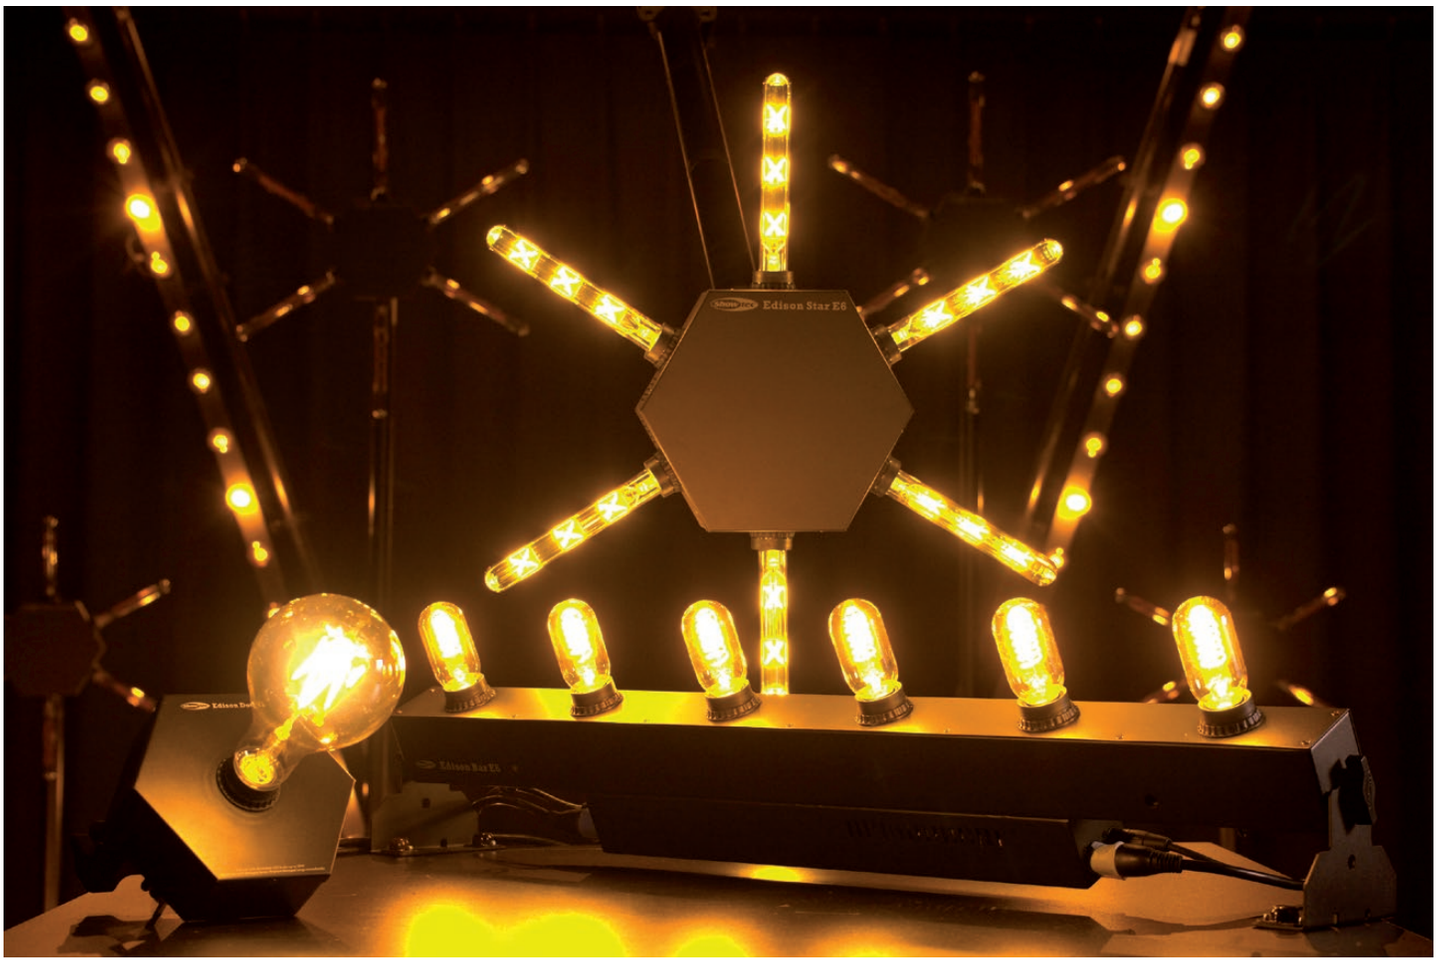

E27 Dropper SHOWTEC

30790	0.5 m
30791	1 m
30792	2 m
30793	3 m





LED Rubber String Light WW

41700 **100 LEDs - 10 m - LED Space - 10 cm**

41701 **200 LEDs - 20 m - LED Space - 10 cm**

SHOWTEC

Specifications:

Light Src. Type:	LED	Cable Length:	1.5 m
Light Src. Quant. /m:	10	Length String:	10000 mm
LED Colour Type:	WW	String Spacing:	100 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	1.045 kg
Pwr. Cons.:	7.2 W	IP Rate:	IP66
Pwr. Conn. In.:	Dedicated connector	Material:	Rubber
Pwr. Conn. Out.:	Dedicated connector	Colour:	Black
		Lamp Spacing:	100 mm

FEATURES:

- 10/20 m long Warm White LED String
- Daisy chainable up to 16/8 strings
- IP66
- End cap included



LED Rubber Twinkle Light WW

41710 **100 LEDs - 10 m - LED Space - 10 cm**

41711 **200 LEDs - 20 m - LED Space - 10 cm**

SHOWTEC

Specifications:

Light Src. Type:	LED	Cable Length:	1.5 m
Light Src. Quant. /m:	10	Length String:	10000 mm
LED Colour Type:	WW	String Spacing:	100 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	1.25 kg
Pwr. Cons.:	9.2 W	IP Rate:	IP44
Pwr. Conn. In.:	Dedicated connector	Material:	Rubber
Pwr. Conn. Out.:	Dedicated connector	Colour:	Black
		Lamp Spacing:	100 mm

FEATURES:

- 10/20 m long Warm White LED String
- Daisy chainable up to 2 strings per controller
- IP44
- End cap included



LED Rubber Curtain Light WW

41721 **900 LEDs - 36 LEDs - 3 m - String**

41722 **1200 LEDs - 60 LEDs - 6 m String**

SHOWTEC

Specifications:

Light Src. Type:	LED	Cable Length:	1.5 m
Light Src. Quant. :	900	Length String:	3000 mm
Light Src. Quant. /String:	36	String Spacing:	100 mm
LED Colour Type:	WW	Weight:	6.24 kg
Pwr. Supp.:	240 VAC 50-60 Hz	IP Rate:	IP44
Pwr. Cons.:	90 W	Material:	Rubber
Pwr. Conn. In.:	Dedicated connector	Colour:	Black
Pwr. Conn. Out.:	Dedicated connector	Lamp Spacing:	100 mm
		String Quant.:	25

FEATURES:

- 3/6 m long Warm White LED Curtain
- 16/20 strings of 25/20 LEDs each
- Daisy chainable up to 3 sets
- Suitable for tree decoration (IP44)
- Available in different sizes
- Ready-to-use
- Including end cap and power cord

LED Rubber Net Light WW

41730 **176 LEDs - 200 x 100 cm - Connectable**

41731 **288 LEDs - 300 x 200 cm - Connectable**

41732 **540 LEDs - 400 x 200 cm - Connectable**

SHOWTEC

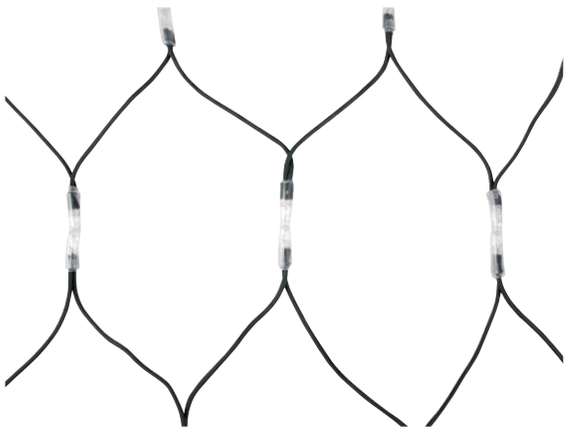

Specifications:

Light Src. Type:	LED	Pwr. Conn. Out.:	Dedicated connector
Light Src. Quant. :	176	Cable Length:	1.5 m
LED Colour Type:	WW	Length String:	2000 mm
Pwr. Supp.:	240 VAC 50-60 Hz	String Spacing:	200 mm
Pwr. Cons.:	11 W	Weight:	1.217 kg
Pwr. Conn. In.:	Dedicated connector	IP Rate:	IP44
		Material:	Rubber
		Colour:	Black

FEATURES:

- 2x1, 3x2 or 4x2 m Warm White LED Net
- 176, 288 or 540 LEDs
- Daisy chainable up to 6 sets
- Suitable for bush decoration (IP44)
- Ready-to-use
- Including end cap and power cord

LED Rubber Icicle Light WW

41740 **112 LEDs, Connectable**

41741 **144 LEDs, Connectable**

SHOWTEC

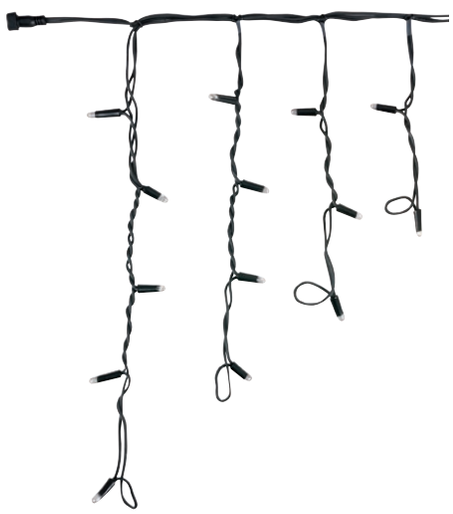

Specifications:

		Cable Length:	1.5 m
		Length String:	3000 mm
Light Src. Type:	LED	String Spacing:	100 mm
Light Src. Quant. :	112	Weight:	1.124 kg
LED Colour Type:	WW	IP Rate:	IP44 / IP66
Pwr. Supp.:	240 VAC 50-60 Hz	Material:	Rubber
Pwr. Cons.:	7.2 W	Colour:	Black
Pwr. Conn. In.:	Dedicated connector	Lamp Spacing:	100 mm
Pwr. Conn. Out.:	Dedicated connector	String Quant.:	32

FEATURES:

- Warm White LED Icicle
- Available in 5 & 9 metre
- 112 LEDs
- Daisy chainable up to 6 sets
- Suitable for roof decoration (IP44)
- Ready-to-use
- Including end cap and power cord

Belt Light E27, Black cable

41760 **IP44, 50 m, without Lamps**

41761 **IP44, 20 m, without Lamps**

41762 **IP44, 10 m, without Lamps**

SHOWTEC



Specifications:

		String Spacing:	1000 mm
		Weight:	9.58 kg
Pwr. Supp.:	240 VAC 50-60 Hz	IP Rate:	IP44
Pwr. Conn. In.:	Schuko Plug	Material:	Rubber
Cable Length:	2.5 m	Colour:	Black
Length String:	50000 mm	Lamp Spacing:	1000 mm

FEATURES:

- Available in 10, 20 and 50 metre
- 100 cm spacing between sockets
- Length from plug to the first socket is 3 m
- LED bulbs not included

Mirror Balls

Professional Mirror Ball

SHOWGEAR

60430 5 x 5 mm Mirror Ball without motor, 30 cm
60431 5 x 5 mm Mirror Ball without motor, 40 cm
60432 5 x 5 mm Mirror Ball without motor, 50 cm



Mirror Ball

SHOWGEAR

60409 75 cm - without motor
60410 100 cm - without motor
60420 150 cm - without motor
60418 200 cm - without motor



Mirror Ball Set

SHOWTEC

30235 30 cm



Half Mirror Ball

SHOWGEAR

60401 30 cm half Mirror Ball for wall and Ceiling Mounting with motor
60402 40 cm half Mirror Ball for wall and Ceiling Mounting with motor
60403 50 cm half Mirror Ball for wall and Ceiling Mounting with motor



Mirror Ball

SHOWGEAR

60412 5 cm - without motor
60413 10 cm - without motor
60414 15 cm - without motor
60404 20 cm - without motor
60406 40 cm - without motor
60405 30 cm - without motor
60407 50 cm - without motor





Mirrorball Motor up to 40-50 cm

SHOWGEAR

60411 **Up to 10 kg**

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	10 W
Height (mm):	145 mm
Width (mm):	190 mm
Depth (mm):	190 mm
Weight:	1.2 kg
Max. Load:	10 kg
Rot. Speed:	1 rpm



Mirrorball Motor up to 100 cm

SHOWGEAR

60416 **Up to 40 kg**

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	18 W
Pwr. Conn. In.:	Schuko Plug
Height (mm):	190 mm
Width (mm):	287 mm
Depth (mm):	238 mm
Weight:	5.8 kg
Max. Load:	40 kg
Rot. Speed:	1 rpm



Mirror Ball Motor

ARNOLD LICHTTECHNIK

60450 **Up to 500 kg DMX**

Pwr. Supp.:	12 VDC
Pwr. Cons.:	2 W
Pwr. Conn. In.:	XLR 4P Straight
Height (mm):	410 mm
Width (mm):	110 mm
Depth (mm):	110 mm
Weight:	4.1 kg
Max. Load:	500 kg
Rot. Speed:	0.5 rpm



Mirror Ball Motor DMX 2 Channel

SHOWGEAR

60449

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	10 W
DMX Conn.:	XLR 3P In/Out
Height (mm):	150 mm
Width (mm):	140 mm
Depth (mm):	230 mm
Weight:	2.5 kg
Max. Load:	10 kg
Rot. Speed:	5 rpm
DMX Ch.:	2



Mirror Ball Motor Controller

ARNOLD LICHTTECHNIK

60455

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	10 W
Pwr. Conn. In.:	XLR 3P
DMX Conn.:	XLR 5P In/Out
Height (mm):	105 mm
Width (mm):	105 mm
Depth (mm):	127 mm
Weight:	1.3 kg
Max. Load:	500 kg
Rot. Speed:	0.5 rpm



Mirror Ball Motor until 30 cm

SHOWGEAR

604081 **Up to 3 kg**

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	4 W
Pwr. Conn. In.:	Schuko Plug
Height (mm):	80 mm
Width (mm):	115 mm
Depth (mm):	115 mm
Weight:	3 kg
Max. Load:	3 kg
Rot. Speed:	1 rpm



Mirror Ball Motor until 30 cm

SHOWGEAR

604083 **Up to 3 kg**

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	3.5 W
Pwr. Conn. In.:	Schuko Plug
Height (mm):	60 mm
Width (mm):	112 mm
Depth (mm):	112 mm
Weight:	0.4 kg
Max. Load:	3 kg
Rot. Speed:	3 rpm



Par 36 Bulb Osram, Screw

OSRAM

80100 **6 V, 35 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	35 W
Light Src. Brand:	Osram
Socket:	G53
Lumen Total:	320 lm
CRI:	100
CCT:	2900 K
Dimmable:	Yes
Pwr. Supp.:	6 VDC
Pwr. Cons.:	35 W
Length (mm):	67 mm
Ø:	111 mm



Par 36 12 V 30 W Tungsram 4405

80128

Light Src. Type:	Tungsten
Light Src. Pwr.:	30 W
Light Src. Brand:	GE
Lumen Total:	50000 lm
Dimmable:	Yes
Pwr. Supp.:	12 VDC
Pwr. Cons.:	30 W
Length (mm):	41.27 mm
Ø:	114 mm



Par 36 G53 Screw MFL Tungsram

80117 **120 V 650 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	650 W
Light Src. Brand:	GE
Socket:	Terminal
Lumen Total:	7400 lm
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	120 VAC
Pwr. Cons.:	650 W
Length (mm):	70 mm
Ø:	114.3 mm



Par 36 G53 Screw Aircraft Tungsram

80112 **28 V 250 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	250 W
Light Src. Brand:	GE
Socket:	Terminal
Lumen Total:	150000 lm
CCT:	3000 K
Dimmable:	Yes
Pwr. Supp.:	28 VDC
Pwr. Cons.:	250 W
Length (mm):	70 mm
Ø:	114.3 mm



Par 56 GX16d MFL Tungsram

80103 **240 V, 300 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	300 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	3450 lm
CCT:	2750 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Length (mm):	100 mm
Ø:	178 mm



Par 56 GX16d NSP Tungsram

80102 **240 V, 300 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	300 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	1900 lm
CCT:	2750 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Length (mm):	127 mm
Ø:	178 mm



Par 56 GX16d WFL Tungsram

80104 **240 V, 300 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	300 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	3450 lm
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Length (mm):	100 mm
Ø:	178 mm



Par 56 GX16d Philips

PHILIPS

80103P **240 V, 300 W, 20°**

Light Src. Type:	Halogen
Light Src. Pwr.:	300 W
Light Src. Brand:	Philips
Socket:	GX16D
Lumen Total:	3450 lm
CCT:	3000 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Length (mm):	127 mm
Ø:	178 mm



Par 64 GX16d VNSP Tungsram

80111 **Power Saver 28 V 250 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	250 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	26800 lm
Dimmable:	Yes
Pwr. Supp.:	28 VDC
Pwr. Cons.:	250 W
Length (mm):	142 mm
Ø:	203 mm



Par 64 240 V 500 W VNSP CP86 Tungsram

80127G **SuperCP86 240 V 500 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	500 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	6500 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	500 W
Length (mm):	150 mm
Ø:	204 mm



Par 64 GX16d NSP Tungsram

80105 **SuperCP87 240 V 500 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	500 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	7200 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	500 W
Length (mm):	142 mm
Ø:	203 mm



Par 64 GX16d MFL Tungsram

80106 **SuperCP88 240 V 500 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	500 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	6500 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	500 W
Length (mm):	142 mm
Ø:	203 mm



Par 64 GX16d VNSP Tungsram

80107 **SuperCP60 240 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	16500 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	142 mm
Ø:	203 mm



Par 64 GX16d XWFL Tungsram

80123G **SuperCP95 240 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	15200 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	150 mm
Ø:	204 mm



Par 64 GX16d MFL Tungsram

80109 **SuperCP62 240 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	17000 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	142 mm
Ø:	203 mm



Par 64 CP62 GX16d Philips

PHILIPS

80109P **240 V, 1000 W, 23°**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	Philips
Socket:	GX16D
Lumen Total:	17000 lm
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	150 mm
Ø:	204 mm



Par 64 GX16d NSP Tungsram

80108 **SuperCP61 240 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	GE
Socket:	GX16D
Lumen Total:	17000 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	142 mm
Ø:	203 mm



GY9.5 Tungsram

80703G **240 V 300 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	300 W
Light Src. Brand:	GE
Socket:	GY9.5
Lumen Total:	3900 lm
CRI:	100
CCT:	2900 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Length (mm):	80 mm
Ø:	15 mm



GY9.5 Osram

OSRAM

807030 **230 V 300 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	300 W
Light Src. Brand:	Osram
Socket:	GY9.5
Lumen Total:	5000 lm
CCT:	2900 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Length (mm):	80 mm
Ø:	15 mm



GY9.5 Tungsram

80704G **240 V 500 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	500 W
Light Src. Brand:	GE
Socket:	GY9.5
Lumen Total:	8500 lm
CRI:	100
CCT:	2900 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	500 W
Length (mm):	84 mm
Ø:	30 mm



GY9.5 Osram

OSRAM

807040 **230 V 500 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	500 W
Light Src. Brand:	Osram
Socket:	GY9.5
Lumen Total:	8500 lm
CCT:	2900 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	500 W
Length (mm):	89.9 mm
Ø:	22 mm



GY9.5 Tungsram

80706G **230 V 500 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	500 W
Light Src. Brand:	GE
Socket:	GY9.5
Lumen Total:	11000 lm
CRI:	100
CCT:	3050 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	500 W
Length (mm):	85 mm
Ø:	25 mm



GY9.5 Tungsram

80701G **240 V 500 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	500 W
Light Src. Brand:	GE
Socket:	GY9.5
Lumen Total:	13000 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	500 W
Length (mm):	75 mm
Ø:	28.5 mm



GY9.5 Tungsram

80705G **230 V 650 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	650 W
Light Src. Brand:	GE
Socket:	GY9.5
Lumen Total:	15000 lm
CRI:	100
CCT:	3100 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	650 W
Length (mm):	46 mm
Ø:	25 mm



GY9.5 Osram

OSRAM

807020 **240 V 650 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	650 W
Light Src. Brand:	Osram
Socket:	GY9.5
Lumen Total:	16500 lm
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	650 W
Length (mm):	64 mm
Ø:	21 mm



GX9.5 Tungsram

80751G **240 V 650 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	650 W
Light Src. Brand:	GE
Socket:	GX9.5
Lumen Total:	13500 lm
CRI:	100
CCT:	3000 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	650 W
Length (mm):	105 mm
Ø:	25 mm



GX9.5 Osram

OSRAM

807510 **230 V 650 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	650 W
Light Src. Brand:	Osram
Socket:	GX9.5
Lumen Total:	12000 lm
CCT:	3000 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	650 W
Length (mm):	110 mm
Ø:	35 mm



GX9.5 Tungsram

80752G **240 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	GE
Socket:	GX9.5
Lumen Total:	25000 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	105 mm
Ø:	23 mm



GX9.5 Osram

OSRAM

807520 **230 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	Osram
Socket:	GX9.5
Lumen Total:	26000 lm
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	110 mm
Ø:	26 mm



GX9.5 Osram

OSRAM

80753 **230 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	Osram
Socket:	GX9.5
Lumen Total:	20500 lm
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	110 mm
Ø:	26 mm



GX9.5 Tungsram

80755G **240 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	GE
Socket:	GX9.5
Lumen Total:	21000 lm
CRI:	100
CCT:	3050 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	105 mm
Ø:	35 mm



G6.35 Osram

OSRAM

805120 **12 V 50 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	50 W
Light Src. Brand:	Osram
Socket:	G6.35
Lumen Total:	1600 lm
CCT:	3350 K
Dimmable:	Yes
Pwr. Supp.:	12 VDC
Pwr. Cons.:	50 W
Length (mm):	44 mm
Ø:	11.5 mm



G6.35 Osram

OSRAM

80514 **24 V 150 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	150 W
Light Src. Brand:	Osram
Socket:	G6.35
Lumen Total:	5000 lm
CCT:	3450 K
Dimmable:	Yes
Pwr. Supp.:	24 VDC
Pwr. Cons.:	150 W
Length (mm):	50 mm
Ø:	11.5 mm



GX6.35 Osram

OSRAM

80508 **120 V 300 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	300 W
Light Src. Brand:	Osram
Socket:	GX6.35
Lumen Total:	7700 lm
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	120 VAC
Pwr. Cons.:	300 W
Length (mm):	53 mm
Ø:	12.5 mm



GX6.35 Osram

OSRAM

80507 **230 V 300 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	300 W
Light Src. Brand:	Osram
Socket:	GX6.35
Lumen Total:	7300 lm
CCT:	3150 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	300 W
Length (mm):	53 mm
Ø:	18.5 mm



GX6.35 Osram

OSRAM

80511 **230 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	Osram
Socket:	GX6.35
Lumen Total:	27500 lm
CCT:	3400 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	67.5 mm
Ø:	24 mm



G6.35 240 V 150 W A1/248 Tungsram

80515G **240 V 150 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	150 W
Light Src. Brand:	GE
Socket:	G6.35
Lumen Total:	3000 lm
CRI:	100
CCT:	3400 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	150 W
Length (mm):	62 mm
Ø:	16.3 mm



G22 Tungsram

80802G **240 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	GE
Socket:	G22
Lumen Total:	26000 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	140 mm
Ø:	26 mm



GY16 Osram

OSRAM

808050 **230 V 2000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	2000 W
Light Src. Brand:	Osram
Socket:	GY16
Lumen Total:	52000 lm
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	2000 W
Length (mm):	145 mm
Ø:	35 mm



GY16 Tungsram

80805G **240 V 2000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	2000 W
Light Src. Brand:	GE
Socket:	GY16
Lumen Total:	54000 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	2000 W
Length (mm):	145 mm
Ø:	26.5 mm



HPL-575 Tungsram

80815G **240 V 575 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	575 W
Light Src. Brand:	GE
Socket:	G9.5HS
Lumen Total:	11780 lm
CRI:	100
CCT:	3050 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	575 W
Length (mm):	106 mm
Ø:	19 mm



HPL-575 Osram

OSRAM

808120 **240 V 575 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	575 W
Light Src. Brand:	Osram
Socket:	G9.5
Lumen Total:	14900 lm
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	575 W
Length (mm):	104 mm
Ø:	19 mm



HPL-575 300 hours/240 V/14900 Tungsram

80812G **240 V 575 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	575 W
Light Src. Brand:	GE
Socket:	G9.5HS
Lumen Total:	14900 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	575 W
Length (mm):	106 mm
Ø:	19 mm



HPL-750 Tungsram

80816G **240 V 750 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	750 W
Light Src. Brand:	GE
Socket:	G9.5
Lumen Total:	18975 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	750 W
Length (mm):	106 mm
Ø:	19 mm



R7S Bulb 189 mm Tungsram

80204 **230 V 1000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	1000 W
Light Src. Brand:	GE
Socket:	R7S
Lumen Total:	50000 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Length (mm):	190.5 mm
Ø:	10 mm



R7S Bulb 142.9 mm Tungsram

80759 **230 V 2000 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	2000 W
Light Src. Brand:	GE
Socket:	R7S
Lumen Total:	50000 lm
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	2000 W
Length (mm):	143 mm
Ø:	26.5 mm



R7S Bulb 78 mm Tungsram

80811 **240 V 800 W**

Light Src. Type:	Halogen
Light Src. Pwr.:	800 W
Light Src. Brand:	GE
Socket:	R7S
Lumen Total:	20000 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	800 W
Length (mm):	80 mm
Ø:	15 mm



GKV-600 Osram

OSRAM

80824 230 V 600 W

Light Src. Type:	Halogen
Light Src. Pwr.:	600 W
Light Src. Brand:	Osram
Socket:	G9.5
Lumen Total:	13500 lm
CCT:	3050 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	600 W
Length (mm):	101 mm
Ø:	19 mm



GKV-600 Tungsram

80825 230 V 600 W 250 h

Light Src. Type:	Halogen
Light Src. Pwr.:	600 W
Light Src. Brand:	GE
Socket:	G9.5
Lumen Total:	14000 lm
CRI:	100
CCT:	3200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	600 W
Length (mm):	105 mm
Ø:	18 mm



GKV 600 W 230 V G9,5 1500 h 3000 K 39751 Tungsram

80826 230 V 600 W 1500 h

Light Src. Type:	Halogen
Light Src. Pwr.:	600 W
Light Src. Brand:	GE
Socket:	G9.5
Lumen Total:	11000 lm
CRI:	100
CCT:	3000 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	600 W
Length (mm):	105 mm
Ø:	18 mm



Projection Bulb Philips, GX5.3

PHILIPS

80823 ELC 24 V 250 W

Light Src. Type:	Halogen
Light Src. Pwr.:	250 W
Light Src. Brand:	Philips
Socket:	GX5.3
Lumen Total:	750 lm
CRI:	100
CCT:	3100 K
Dimmable:	Yes
Pwr. Supp.:	24 VDC
Pwr. Cons.:	250 W
Length (mm):	44.5 mm
Ø:	50 mm



Projection Bulb ELC GX5.3 Philips

PHILIPS

80814 24 V 250 W

Light Src. Type:	Halogen
Light Src. Pwr.:	250 W
Light Src. Brand:	Philips
Socket:	GX5.3
Lumen Total:	750 lm
CRI:	100
CCT:	3400 K
Dimmable:	Yes
Pwr. Supp.:	24 VDC
Pwr. Cons.:	250 W
Length (mm):	44.5 mm
Ø:	50 mm



Projection Bulb ELC GX5.3 Osram

OSRAM

808090 24 V 250 W

Light Src. Type:	Halogen
Light Src. Pwr.:	250 W
Light Src. Brand:	Osram
Socket:	GX5.3
Lumen Total:	900 lm
CRI:	100
CCT:	3400 K
Dimmable:	Yes
Pwr. Supp.:	24 VDC
Pwr. Cons.:	250 W
Length (mm):	44.5 mm
Ø:	51 mm



Projection Bulb ELC GX5.3 Philips

PHILIPS

80809P 24 V 250 W

Light Src. Type:	Halogen
Light Src. Pwr.:	250 W
Light Src. Brand:	Philips
Socket:	GX5.3
Lumen Total:	840 lm
CCT:	3400 K
Dimmable:	Yes
Pwr. Supp.:	24 VDC
Pwr. Cons.:	250 W
Length (mm):	44.5 mm
Ø:	50 mm



Halospot 111-IRC

OSRAM

80428 35 W G53 24°, 12 V

Light Src. Type:	Halogen
Light Src. Pwr.:	35 W
Light Src. Brand:	Osram
Socket:	G53
Lumen Total:	440 lm
CRI:	100
CCT:	2900 K
Dimmable:	Yes
Pwr. Supp.:	12 VDC
Pwr. Cons.:	35 W
Length (mm):	67 mm
Ø:	111 mm



Halospot 111

OSRAM

80127 12 V 50 W G53 45° 1400cd 3000 K

Light Src. Type:	Halogen
Light Src. Pwr.:	50 W
Light Src. Brand:	Osram
Socket:	G53
Lumen Total:	510 lm
CRI:	100
CCT:	2950 K
Dimmable:	Yes
Pwr. Supp.:	12 VDC
Pwr. Cons.:	50 W
Length (mm):	67 mm
Ø:	111 mm



MR11 Decostar 35 Titan GU4

OSRAM

80977 12 V 35 W GU4 10° 6200 cd 3000 K

Light Src. Type:	Halogen
Light Src. Pwr.:	35 W
Light Src. Brand:	Osram
Socket:	GU4
Lumen Total:	480 lm
CRI:	100
CCT:	3000 K
Dimmable:	Yes
Pwr. Supp.:	12 VDC
Pwr. Cons.:	35 W
Length (mm):	42 mm
Ø:	35 mm



MR11 Decostar 35 Titan GU4

OSRAM

80978 12 V 35 W GU4 36° 1350 cd 3000 K

Light Src. Type:	Halogen
Light Src. Pwr.:	35 W
Light Src. Brand:	Osram
Socket:	GU4
Lumen Total:	480 lm
CRI:	100
CCT:	3000 K
Dimmable:	Yes
Pwr. Supp.:	12 VDC
Pwr. Cons.:	35 W
Length (mm):	40 mm
Ø:	35 mm



Decostar 51 Titan 10° GU 5.3

OSRAM

80451 Multi-Mirror 20 W

Light Src. Type:	Halogen
Light Src. Pwr.:	20 W
Light Src. Brand:	Osram
Socket:	GU5.3
Lumen Total:	300 lm
CRI:	100
CCT:	3000 K
Dimmable:	Yes
Pwr. Supp.:	12 VDC
Pwr. Cons.:	20 W
Length (mm):	45 mm
Ø:	51 mm



Projection Bulb EFR GZ6.35 Philips

PHILIPS

80807 15 V 150 W

Light Src. Type:	Halogen
Light Src. Pwr.:	150 W
Light Src. Brand:	Philips
Socket:	GZ6.35
Lumen Total:	840 lm
CRI:	100
CCT:	3380 K
Dimmable:	Yes
Pwr. Supp.:	15 VDC
Pwr. Cons.:	150 W
Length (mm):	42 mm
Ø:	50 mm



Projection Bulb ENH GY5.3 Osram

OSRAM

808080 120 V 250 W

Light Src. Type:	Halogen
Light Src. Pwr.:	250 W
Light Src. Brand:	Osram
Socket:	GY5.3
Lumen Total:	340 lm
CCT:	3150 K
Dimmable:	Yes
Pwr. Supp.:	120 VAC
Pwr. Cons.:	250 W
Length (mm):	45 mm
Ø:	51 mm



Projection Bulb EVC G6.35 Osram

OSRAM

80820 24 V 250 W

Light Src. Type:	Halogen
Light Src. Pwr.:	250 W
Light Src. Brand:	Osram
Socket:	G6.35
Lumen Total:	9000 lm
Dimmable:	Yes
Pwr. Supp.:	24 VDC
Pwr. Cons.:	250 W
Length (mm):	55 mm
Ø:	13.5 mm



Projection Bulb EFP GZ6.35 Osram

OSRAM

808100 12 V 100 W

Light Src. Type:	Halogen
Light Src. Pwr.:	100 W
Light Src. Brand:	Osram
Socket:	GZ6.35
Lumen Total:	750 lm
CCT:	3400 K
Dimmable:	Yes
Pwr. Supp.:	12 VDC
Pwr. Cons.:	100 W
Length (mm):	42 mm
Ø:	51 mm



Projection Bulb EFP GZ6.35 Philips

PHILIPS

80810 12 V 100 W

Light Src. Type:	Halogen
Light Src. Pwr.:	100 W
Light Src. Brand:	Philips
Socket:	GZ6.35
Lumen Total:	750 lm
CCT:	3400 K
Dimmable:	Yes
Pwr. Supp.:	12 VDC
Pwr. Cons.:	100 W
Length (mm):	42 mm
Ø:	50 mm



Bulb for Minilight

OSRAM

80518 12 V 5 W

Light Src. Type:	Tungsten
Light Src. Pwr.:	5 W
Light Src. Brand:	Osram
Socket:	BA9S
Lumen Total:	80 lm
Dimmable:	Yes
Pwr. Supp.:	12 VDC
Pwr. Cons.:	5 W
Length (mm):	33 mm
Ø:	9 mm



Sirius HRI 140 W — OSRAM

81011

Light Src. Type:	Discharge
Light Src. Pwr.:	140 W
CRI:	60
CCT:	9200 K
Dimmable:	No
Pwr. Supp.:	70 VDC
Pwr. Cons.:	140 W



Sirius HRI 330 W x 8 — OSRAM

81017 7400 K

Light Src. Type:	Discharge
Light Src. Pwr.:	330 W
CRI:	85
CCT:	8000 K
Dimmable:	No
Pwr. Supp.:	70 VDC
Pwr. Cons.:	330 W



R3 Lamp 150 W — YODN

82623

Light Src. Type:	Discharge
Light Src. Pwr.:	150 W
Socket:	Terminal
CRI:	68
CCT:	8600 K
Dimmable:	No
Pwr. Supp.:	70 VDC
Pwr. Cons.:	150 W



R5 Lamp 200 W — YODN

82621

Light Src. Type:	Discharge
Light Src. Pwr.:	200 W
Socket:	Terminal
CRI:	70
CCT:	8000 K
Dimmable:	No
Pwr. Supp.:	70 VDC
Pwr. Cons.:	200 W



R16 C8 Lamp 330 W — YODN

82622

Light Src. Type:	Discharge
Light Src. Pwr.:	330 W
Socket:	Terminal
CRI:	85
CCT:	7600 K
Dimmable:	No
Pwr. Cons.:	330 W



Sirius HRI 132 W (2R) — OSRAM

81012 9200 K

Light Src. Type:	Discharge
Light Src. Pwr.:	132 W
CRI:	60
CCT:	9200 K
Pwr. Supp.:	70 VDC
Pwr. Cons.:	132 W



Sirius HRI 190 W (5R) — OSRAM

81013 8200 K

Light Src. Type:	Discharge
Light Src. Pwr.:	190 W
CRI:	73
CCT:	8200 K
Dimmable:	No
Pwr. Supp.:	70 VDC
Pwr. Cons.:	190 W



Sirius HRI 230 W — OSRAM

81014 8000 K

Light Src. Type:	Discharge
Light Src. Pwr.:	230 W
CRI:	75
CCT:	8000 K
Dimmable:	No
Pwr. Supp.:	70 VDC
Pwr. Cons.:	230 W



Sirius HRI 280 W — OSRAM

81015 7800 K

Light Src. Type:	Discharge
Light Src. Pwr.:	280 W
CRI:	78
CCT:	7800 K
Dimmable:	No
Pwr. Supp.:	70 VDC
Pwr. Cons.:	280 W



MSD Platinum 5R — PHILIPS

80988 8000 K

Light Src. Type:	Discharge
Light Src. Pwr.:	189 W
Socket:	E20.6
CRI:	75
CCT:	8000 K
Dimmable:	Yes
Pwr. Cons.:	189 W



MSD Platinum 2R — PHILIPS

809881 8000 K

Light Src. Type:	Discharge
Light Src. Pwr.:	132 W
Socket:	E19
CCT:	8000 K
Dimmable:	Yes
Pwr. Cons.:	132 W



MSR Gold 300/2 — PHILIPS

80851 Mini Fast Fit 8000 K 750 h

Light Src. Type:	Discharge
Light Src. Pwr.:	300 W
Socket:	PGJX28
CCT:	8000 K
Dimmable:	No
Pwr. Supp.:	198 VAC
Pwr. Cons.:	300 W



EMH 250 W — OSRAM

81935

Light Src. Type:	Discharge
Light Src. Pwr.:	250 W
Socket:	GY9.5
CRI:	60
CCT:	8000 K
Dimmable:	No
Pwr. Supp.:	95 VAC
Pwr. Cons.:	250 W



HMI 575 Osram — OSRAM

809010 Discharge Lamp 575 W

Light Src. Type:	Discharge
Light Src. Pwr.:	575 W
Socket:	SFC10-4
CCT:	6000 K
Dimmable:	No
Pwr. Supp.:	95 VAC
Pwr. Cons.:	575 W



Blacklight Slimline G13 Philips — PHILIPS

80301P 240 V 18 W

Light Src. Type:	Discharge
Light Src. Pwr.:	18 W
Socket:	G13
Dimmable:	No
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	18 W



Blacklight E40 — SHOWGEAR

82485 240 V, 400 W

Light Src. Type:	Discharge
Light Src. Pwr.:	400 W
Socket:	E40
Dimmable:	No
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	400 W



Blacklight Slimline — PHILIPS

80302P 240 V 36 W

Light Src. Type:	Discharge
Light Src. Pwr.:	36 W
Socket:	G13
Dimmable:	No
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	36 W

HSD 250 GY9.5 Osram — OSRAM

809200 Discharge Lamp 90 V / 250 W

Light Src. Type:	Discharge
Light Src. Pwr.:	250 W
Socket:	GY9.5
CCT:	6000 K
Dimmable:	No
Pwr. Supp.:	90 VAC
Pwr. Cons.:	250 W



HSD-250/80 GY9.5 Osram — OSRAM

80935 Discharge Lamp 250 W

Light Src. Type:	Discharge
Light Src. Pwr.:	250 W
Socket:	GY9.5
CCT:	8000 K
Dimmable:	No
Pwr. Supp.:	95 VAC
Pwr. Cons.:	250 W



MSD 250/2 GY9.5 Philips — PHILIPS

80926P Discharge Lamp 250 W

Light Src. Type:	Discharge
Light Src. Pwr.:	250 W
Socket:	GY9.5
CRI:	70
CCT:	8100 K
Dimmable:	No
Pwr. Supp.:	207 VAC
Pwr. Cons.:	250 W



MSR-575/2 GX9.5 Philips

PHILIPS

80923 **Discharge Lamp 575 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	575 W
Socket:	GX9.5
CRI:	70
CCT:	6990 K
Dimmable:	No
Pwr. Supp.:	207 VAC
Pwr. Cons.:	575 W



CSR-575/2 Tungsram

80923G **Discharge Lamp 575 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	575 W
Socket:	GX9.5
CCT:	7200 K
Dimmable:	No
Pwr. Supp.:	95 VAC
Pwr. Cons.:	575 W



HTI-300 SFc10-4 Osram

OSRAM

80917 **Discharge Lamp 300 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	300 W
Socket:	SFC10-4
CRI:	85
CCT:	6500 K
Dimmable:	No
Pwr. Supp.:	100 VAC
Pwr. Cons.:	300 W



HTI-150 GY9.5 Osram

OSRAM

80922 **Discharge Lamp 150 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	150 W
Socket:	GY9.5
CRI:	70
CCT:	6500 K
Dimmable:	No
Pwr. Supp.:	100 VAC
Pwr. Cons.:	150 W



HSD-150/70 G12 Osram

OSRAM

80940 **Discharge Lamp 150 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	150 W
Socket:	G12
CCT:	7500 K
Dimmable:	No
Pwr. Supp.:	95 VAC
Pwr. Cons.:	150 W



Discharge Bulb Philips, G12

PHILIPS

80974 **CDM 96 V 150 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	150 W
Socket:	G12
CRI:	88
CCT:	3000 K
Dimmable:	No
Pwr. Supp.:	198 VAC
Pwr. Cons.:	150 W



Discharge Bulb Philips, G12

PHILIPS

80975 **CDM 96 V 150 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	150 W
Socket:	G12
CRI:	96
CCT:	4200 K
Dimmable:	No
Pwr. Supp.:	198 VAC
Pwr. Cons.:	150 W



CMH-150 6000 hours 4200 K Tungsram

80925 **Discharge Lamp 150 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	150 W
Socket:	G12
CRI:	90
CCT:	4200 K
Dimmable:	No
Pwr. Supp.:	95 VAC
Pwr. Cons.:	150 W



Floodlight HQ-400 400 W Bulb

SHOWGEAR

81021

Light Src. Type:	Discharge
Light Src. Pwr.:	400 W
Socket:	E40
CRI:	65
CCT:	4200 K
Dimmable:	No
Pwr. Supp.:	135 VAC
Pwr. Cons.:	400 W



MSI 1200 SFc10-4 Philips

PHILIPS

80902P **Discharge Lamp 1200 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	1200 W
Socket:	SFC10-4
CRI:	85
CCT:	6000 K
Dimmable:	No
Pwr. Supp.:	198 VAC
Pwr. Cons.:	1200 W



HMI 4000 W Osram

OSRAM

80929 **Discharge Lamp 4000 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	4000 W
Socket:	SFA21-12
CRI:	90
CCT:	6000 K
Dimmable:	No
Pwr. Supp.:	200 VAC
Pwr. Cons.:	4000 W



Floodlight HQ-150 150 W Bulb

SHOWGEAR

81020

Light Src. Type:	Discharge
Light Src. Pwr.:	150 W
Socket:	R7S
CRI:	75
CCT:	4200 K
Dimmable:	No
Pwr. Supp.:	95 VAC
Pwr. Cons.:	150 W



HMI 1200 DE Osram Double Ended

OSRAM

809020 **Discharge Lamp 1200 W**

Light Src. Type:	Discharge
Light Src. Pwr.:	1200 W
Socket:	SFC15-5
CCT:	6000 K
Dimmable:	No
Pwr. Supp.:	90 VAC
Pwr. Cons.:	250 W





LED Filament Bulb T9

SHOWGEAR

83268 185 mm, Crossed Filament

Light Src. Type:	LED
Light Src. Pwr.:	4 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	440 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	4 W
Length (mm):	185 mm
Ø:	28 mm



LED Filament Bulb T9

SHOWGEAR

83271 185 mm, Straight Filament

Light Src. Type:	LED
Light Src. Pwr.:	4 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	440 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	4 W
Length (mm):	185 mm
Ø:	28 mm



LED Filament Bulb T9

SHOWGEAR

83267 225 mm, Crossed Filament

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	650 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	225 mm
Ø:	28 mm



LED Filament Bulb T9

SHOWGEAR

83270 225 mm, Straight Filament

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	650 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	225 mm
Ø:	28 mm



LED Filament Bulb T9

SHOWGEAR

83266 300 mm, Crossed Filament

Light Src. Type:	LED
Light Src. Pwr.:	8 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	800 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	8 W
Length (mm):	300 mm
Ø:	28 mm



LED Filament Bulb T9

SHOWGEAR

83269 300 mm, Straight Filament

Light Src. Type:	LED
Light Src. Pwr.:	8 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	800 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	8 W
Length (mm):	300 mm
Ø:	28 mm



LED Filament Bulb BT180

SHOWGEAR

83275 6 W, dimmable

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	360 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	360 mm
Ø:	180 mm



LED Filament Bulb BT118

SHOWGEAR

83276 6 W, dimmable

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	360 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	258 mm
Ø:	118 mm



LED Filament Bulb G200

SHOWGEAR

83277 6 W, dimmable

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	360 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	290 mm
Ø:	200 mm



LED Filament Bulb PS52

SHOWGEAR

83278 6 W, dimmable

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	360 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	300 mm
Ø:	160 mm



Light Bulbs

LED Filament Bulb PS35

SHOWGEAR

83279 **6 W, dimmable**

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	360 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	200 mm
Ø:	110 mm



LED Filament Bulb BTT80

SHOWGEAR

83280 **6 W, dimmable**

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	360 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	340 mm
Ø:	60 mm



LED Filament Bulb R160

SHOWGEAR

83281 **6 W, dimmable**

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	360 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	245 mm
Ø:	160 mm



LED Filament Bulb E27

SHOWGEAR

83261 **5 W, Dimmable, Gold glass cover**

Light Src. Type:	LED
Light Src. Pwr.:	5 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	480 lm
CCT:	2200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	5 W
Length (mm):	142 mm
Ø:	64 mm



LED Filament Bulb E27

SHOWGEAR

83262 **5 W, Dimmable, Gold glass cover**

Light Src. Type:	LED
Light Src. Pwr.:	5 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	480 lm
CCT:	2200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	5 W
Length (mm):	120 mm
Ø:	80 mm



LED Filament Bulb E27

SHOWGEAR

83264 **5 W, Dimmable, Gold glass cover**

Light Src. Type:	LED
Light Src. Pwr.:	5 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	480 lm
CCT:	2200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	5 W
Length (mm):	111 mm
Ø:	45 mm



LED Filament Bulb E27

SHOWGEAR

83260 **4 W, Dimmable, Gold glass cover**

Light Src. Type:	LED
Light Src. Pwr.:	4 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	385 lm
CCT:	2200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	4 W
Length (mm):	105 mm
Ø:	60 mm



LED Filament Candle Bulb B10

SHOWGEAR

83265 **Spiral Filament**

Light Src. Type:	LED
Light Src. Pwr.:	2 W
LED Colour Type:	WW
Socket:	E14
Lumen Total:	140 lm
CCT:	2200 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	2 W
Length (mm):	100 mm
Ø:	35 mm



LED Sunstrip Lamp GU10

SHOWTEC

83120 **Retrofit GU10 Bulb**

Light Src. Type:	LED
Light Src. Pwr.:	10 W
Exp. Life:	25000 h
Socket:	GU10
Lumen Total:	520 lm
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	11 W
Length (mm):	55 mm
Ø:	49.6 mm



LED Ball 50 mm

SHOWGEAR

83210 **E27, 19 x LED Red**

Light Src. Type:	LED
Light Src. Pwr.:	1 W
LED Colour Type:	R
Socket:	E27
Lumen Total:	150 lm
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1 W
Length (mm):	90 mm
Ø:	50 mm



LED Ball 50 mm

SHOWGEAR

83211 **E27, 19 x LED Yellow**

Light Src. Type:	LED
Light Src. Pwr.:	1 W
LED Colour Type:	Y
Socket:	E27
Lumen Total:	150 lm
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1 W
Length (mm):	90 mm
Ø:	50 mm



LED Ball 50 mm

SHOWGEAR

83212 **E27, 19 x LED Blue**

Light Src. Type:	LED
Light Src. Pwr.:	1 W
LED Colour Type:	B
Socket:	E27
Lumen Total:	150 lm
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1 W
Length (mm):	90 mm
Ø:	50 mm



LED Ball 50 mm

SHOWGEAR

83213 **E27, 19 x LED Green**

Light Src. Type:	LED
Light Src. Pwr.:	1 W
LED Colour Type:	G
Socket:	E27
Lumen Total:	150 lm
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1 W
Length (mm):	90 mm
Ø:	50 mm



LED Ball 50 mm

SHOWGEAR

83214 **E27, 19 x LED Warm White**

Light Src. Type:	LED
Light Src. Pwr.:	1 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	150 lm
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1 W
Length (mm):	90 mm
Ø:	50 mm



LED Ball 50 mm

SHOWGEAR

83215 **E27, 19 x LED RGB**

Light Src. Type:	LED
Light Src. Pwr.:	1 W
LED Colour Type:	RGB
Socket:	E27
Lumen Total:	120 lm
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1 W
Length (mm):	90 mm
Ø:	50 mm



LED Ball 100 mm

SHOWGEAR

83224 **E27, 19 x LED Warm White**

Light Src. Type:	LED
Light Src. Pwr.:	1 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	150 lm
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1 W
Length (mm):	150 mm
Ø:	100 mm



Light Bulbs

LED Bulb Clear WW E27 — SHOWGEAR

83250 4 W, dimmable

Light Src. Type:	LED
Light Src. Pwr.:	4 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	385 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	4 W
Length (mm):	105 mm
Ø:	60 mm



LED Bulb Clear WW E27 — SHOWGEAR

83251 6 W, dimmable

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	550 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	105 mm
Ø:	60 mm



LED Bulb Clear WW E27 — SHOWGEAR

83252 8 W, dimmable

Light Src. Type:	LED
Light Src. Pwr.:	8 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	750 lm
CCT:	2700 K
Dimmable:	Yes
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	8 W
Length (mm):	105 mm
Ø:	60 mm



LED Bulb Clear WW E27 — SHOWGEAR

83230 2 W, non-dimmable

Light Src. Type:	LED
Light Src. Pwr.:	2 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	160 lm
CCT:	2700 K
Dimmable:	No
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	2 W
Length (mm):	70 mm
Ø:	50 mm



LED Bulb Clear WW E27 — SHOWGEAR

83231 3 W, non-dimmable

Light Src. Type:	LED
Light Src. Pwr.:	3 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	300 lm
CCT:	2700 K
Dimmable:	No
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	3 W
Length (mm):	70 mm
Ø:	50 mm



LED Bulb Clear WW E27 — SHOWGEAR

83240 4 W, non-dimmable

Light Src. Type:	LED
Light Src. Pwr.:	4 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	320 lm
CCT:	2700 K
Dimmable:	No
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	4 W
Length (mm):	105 mm
Ø:	60 mm



LED Bulb Clear WW E27 — SHOWGEAR

83241 6 W, non-dimmable

Light Src. Type:	LED
Light Src. Pwr.:	6 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	2700 lm
CCT:	2700 K
Dimmable:	No
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	6 W
Length (mm):	105 mm
Ø:	60 mm



LED Bulb Clear WW E27 — SHOWGEAR

83242 8 W, non-dimmable

Light Src. Type:	LED
Light Src. Pwr.:	8 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	640 lm
CCT:	2700 K
Dimmable:	No
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	8 W
Length (mm):	105 mm
Ø:	60 mm



Parathom Par 16 with GU10 Socket — OSRAM

83310 **4.9 W LED, 3000 K, 36°**

Light Src. Type:	LED
Light Src. Pwr.:	49 W
LED Colour Type:	WW
Socket:	GU10
Lumen Total:	230 lm
CCT:	3000 K
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	4.9 W
Length (mm):	55 mm
Ø:	51 mm



Parathom Par 20, E27 — OSRAM

83320 **5 W LED, 2700 K, 36°**

Light Src. Type:	LED
Light Src. Pwr.:	5 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	345 lm
Dimmable:	Yes
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	5 W
Length (mm):	88 mm
Ø:	64 mm



Parathom Par 30, E27 — OSRAM

83330 **10.5 W LED, 2700 K, 36°**

Light Src. Type:	LED
Light Src. Pwr.:	5 W
LED Colour Type:	WW
Socket:	E27
Lumen Total:	633 lm
Dimmable:	Yes
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	10.5 W
Length (mm):	90 mm
Ø:	95 mm



Parathom Par 16 with GU10 Socket — OSRAM

83311 **6.5 W LED, 3000 K, 36°**

Light Src. Type:	LED
Light Src. Pwr.:	6.5 W
LED Colour Type:	WW
Socket:	GU10
Lumen Total:	633 lm
CCT:	3000 K
Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	6.5 W
Length (mm):	56 mm
Ø:	51 mm







MT-150 Lifting Tower

70863 **Mammoth Stands 5.30 m**

SHOWGEAR

Specifications:

Length (mm):	1730 mm	Weight:	55 kg
Width (mm):	380 mm	Max. Load:	150 kg
Max. Height (m):	5.3 m	Material:	Steel
		Winch:	500 kg

FEATURES:

- Maximum load ranging from 150–500 kg
- Maximum hight ranging from 5.3–6.5 m



MT-200 Lifting Tower

70860 **Mammoth Stands 6.40 m**

SHOWGEAR

Specifications:

Length (mm):	1920 mm	Weight:	86 kg
Width (mm):	465 mm	Max. Load:	200 kg
Max. Height (m):	6.4 m	Material:	Steel
		Winch:	500 kg

FEATURES:

- Maximum load ranging from 150–500 kg
- Maximum hight ranging from 5.3–6.5 m

MT-230 Lifting Tower

70861 Mammoth Stands 5.30 m

SHOWGEAR

Specifications:

		Weight:	78 kg
		Max. Load:	230 kg
Length (mm):	1820 mm	Material:	Steel
Width (mm):	465 mm	Winch:	500 kg
Max. Height (m):	5.3 m		

FEATURES:

- Maximum load ranging from 150–500 kg
- Maximum hight ranging from 5.3–6.5 m



MT-300 Lifting Tower

70862 Mammoth Stands 6.10 m

SHOWGEAR

Specifications:

		Weight:	90 kg
		Max. Load:	300 kg
Length (mm):	1920 mm	Material:	Steel
Width (mm):	465 mm	Winch:	900 kg
Max. Height (m):	6.1 m		

FEATURES:

- Maximum load ranging from 150–500 kg
- Maximum hight ranging from 5.3–6.5 m





MAT-250 Line Array Tower

70870 **Mammoth Stand 5.4 m**

SHOWGEAR

Specifications:

Length (mm):	1760 mm	Weight:	96 kg
Width (mm):	480 mm	Max. Load:	250 kg
Max. Height (m):	5.4 m	Material:	Aluminium
		Winch:	900 kg

FEATURES:

- Maximum load ranging from 150–500 kg
- Maximum hight ranging from 5.3–6.5 m



MAT-250+ Line Array Tower

70873 **Mammoth Stand 6.5 m**

SHOWGEAR

Specifications:

Length (mm):	1970 mm	Weight:	107 kg
Width (mm):	0.48 mm	Max. Load:	250 kg
Max. Height (m):	6.5 m	Material:	Aluminium
		Winch:	900 kg

FEATURES:

- Maximum load ranging from 150–500 kg
- Maximum hight ranging from 5.3–6.5 m

Line Array Tower

70871 MAT-350 - Mammoth Stand 6.5 m

SHOWGEAR

Specifications:

		Weight:	184 kg
		Max. Load:	350 kg
Length (mm):	1.99 mm	Material:	Aluminium
Width (mm):	650 mm	Winch:	1700 kg
Max. Height (m):	6.5 m		

FEATURES:

- Maximum load ranging from 150–500 kg
- Maximum hight ranging from 5.3–6.5 m



Line Array Tower

70872 MAT-500 - Mammoth Stand 6.5 m

SHOWGEAR

Specifications:

		Weight:	184 kg
		Max. Load:	500 kg
Length (mm):	1990 mm	Material:	Aluminium
Width (mm):	650 mm	Winch:	1700 kg
Max. Height (m):	6.5 m		

FEATURES:

- Maximum load ranging from 150–500 kg
- Maximum hight ranging from 5.3–6.5 m





Follow Spot Stand

74002 **1346 - 2040 mm**

SHOWGEAR

Specifications:

Length (mm):	1426 mm	Weight:	7 kg
Width (mm):	980 mm	Max. Load:	30 kg
Max. Height (m):	2.04 m	Material:	Metal
		Colour:	Black

FEATURES:

- 1.346–2.04 m high
- 30 kg maximum load
- Suitable for 4 lights



Light Stand Aluminium (incl. Spigot Adapter)

70912 **Including Spigot Adapter**

SHOWGEAR

Specifications:

Length (mm):	1390 mm	Weight:	3.85 kg
Width (mm):	1090 mm	Max. Load:	30 kg
Max. Height (m):	3.13 m	Material:	Aluminium
		Colour:	Black

FEATURES:

- Maximum Height 3 metre
- Including spigot adaptor for 28 mm spigot
- Robust design

Metal Medium Light Stand

70910 **Mammoth Stands**

SHOWGEAR

Specifications:

Length (mm):	1305 mm	Weight:	5.6 kg
Width (mm):	1000 mm	Max. Load:	30 kg
Max. Height (m):	3 m	Material:	Steel
		Colour:	Black

FEATURES:

- Compact
- T-bar Included
- Magnesium joint
- Double leg reinforcement



Light Stand ECO (10 kg)

70102

SHOWGEAR

Specifications:

Length (mm):	1003 mm	Weight:	3.651 kg
Width (mm):	950 mm	Max. Load:	10 kg
Max. Height (m):	2.5 m	Material:	Steel
		Colour:	Black

FEATURES:

- 1.1–2.5 m high
- 10 kg maximum load
- Suitable for 4 lights



Floor Stand

70191 **30 x 30 cm, 50 mm Tube**

SHOWGEAR

Specifications:

Length (mm):	300 mm	Weight:	1.602 kg
Width (mm):	300 mm	Max. Load:	50 kg
		Material:	Metal
		Colour:	Black

FEATURES:

- Equipped with rubber feet to prevent slipping
- Can be installED on a square 30-truss, for use as a pillar or suspension
- Easily stackable





Basic 3800 Wind up stand

70831 **80 kg**

SHOWGEAR

Specifications:

		Weight:	17 kg
		Max. Load:	80 kg
Height (mm):	1755 mm	Material:	Aluminium / Metal
Max. Height (m):	3.8 m	Colour:	Black / Silver

FEATURES:

- No cables or winch
- Load 80 kg
- Lightweight design



Basic 2800 Wind up stand

70830 **80 kg (Adapter 70835 not included)**

SHOWGEAR

Specifications:

		Weight:	15 kg
		Max. Load:	80 kg
Height (mm):	1510 mm	Material:	Aluminium / Metal
Max. Height (m):	2.8 m	Colour:	Black / Silver

FEATURES:

- No winch and cable
- Excellent price - quality ratio
- Load 80 kg

Wind-Up Light Stand 3000 mm

74000 **Max. Load 20 kg**

SHOWGEAR

Specifications:

		Weight:	13 kg
		Max. Load:	20 kg
Width (mm):	1130 mm	Material:	Metal
Height (mm):	1260 mm	Colour:	Black
Max. Height (m):	3 m		

FEATURES:

- Adjustable height (1461–2110 mm)
- Maximum load: 20 kg
- Including Hex (inbus) key, spigot Adapter 35 mm - 25 mm & spigot mounting plate



Follow Spot Stand Wind-Up

74001 **1461 - 2110 mm**

SHOWGEAR

Specifications:

		Weight:	10 kg
		Max. Load:	20 kg
Height (mm):	1461 mm	Material:	Metal
Max. Height (m):	2110 m	Colour:	Black

FEATURES:

- Adjustable height (1.76–3 m)
- Maximum load: 20 kg
- Including Hex (inbus) key, spigot Adapter 35 mm - 25 mm & spigot mounting plate



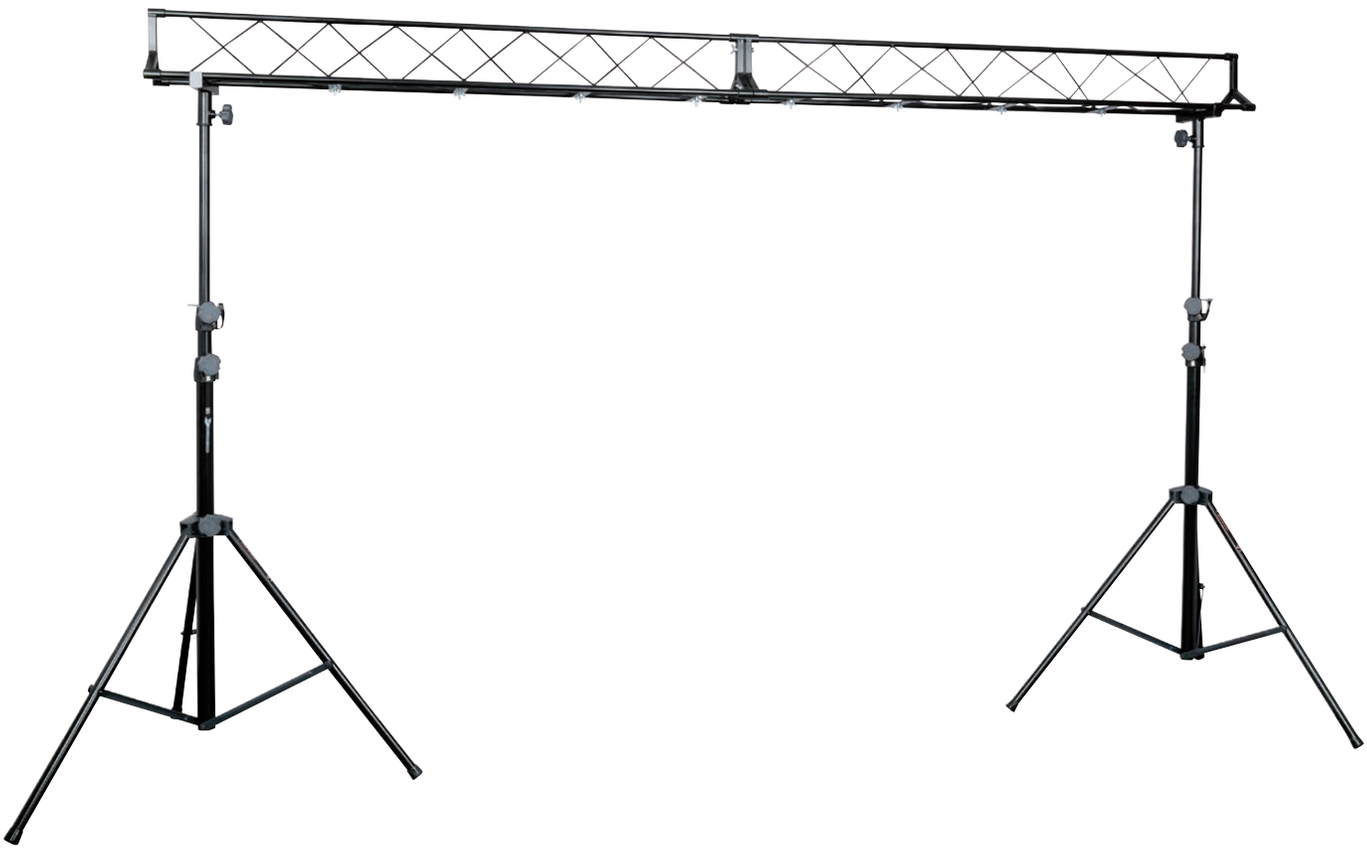

Light Bridge Set

70930 **Mammoth Stands**

SHOWGEAR

Specifications:

Length (mm):	3000 mm	Max. Height (m):	3410 m
Width (mm):	3000 mm	Weight:	19 kg
Min. Height (m):	1330 m	Max. Load:	60 kg
		Material:	Steel
		Colour:	Black

FEATURES:

- 3 m height & width
- 8 attach points
- 60 kg load
- Easy to assemble

Adapter 28-35 mm

SHOWGEAR

70835 for Basic Stand

Length (mm):	70 mm
Width (mm):	70 mm
Height (mm):	180 mm
Ø Main Tube:	35 mm
Weight:	0.309 kg
Max. Load:	80 kg
Material:	Steel



Adjustable Truss Support 400 mm

SHOWGEAR

70836 for Basic and Pro series

Length (mm):	405 mm
Width (mm):	52 mm
Height (mm):	197 mm
Ø Main Tube:	35 mm
Weight:	2.092 kg
Max. Load:	80 kg
Material:	Steel



Adapter 35 mm

SHOWGEAR

70176 For Spigot Mounting

Length (mm):	65 mm
Width (mm):	80 mm
Height (mm):	159 mm
Ø Main Tube:	50 mm
Weight:	0.534 kg
Max. Load:	30 kg
Material:	Aluminium / Steel



TV Spigot

DOUGHTY

PASP14 29 mm

Length (mm):	27 mm
Width (mm):	27 mm
Height (mm):	147 mm
Weight:	0.241 kg
Max. Load:	30 kg
Material:	Aluminium



Powerdrive Adapter

SHOWGEAR

70116

Length (mm):	85 mm
Width (mm):	42 mm
Height (mm):	82 mm
Ø Main Tube:	35 mm
Weight:	0.189 kg
Max. Load:	20 kg
Material:	Metal



Adjustable Truss Mount for MT-series

SHOWGEAR

70869 Double wing nut

Length (mm):	540 mm
Width (mm):	45 mm
Height (mm):	284 mm
Ø Main Tube:	35 mm
Weight:	2.4 kg
Max. Load:	300 kg
Material:	Steel



TA-30

SHOWGEAR

70806 Truss Adapter adjustable for MT/LT Series

Length (mm):	552 mm
Width (mm):	40 mm
Height (mm):	350 mm
Ø Main Tube:	35 mm
Weight:	3.7 kg
Max. Load:	300 kg
Material:	Steel



Rigging Bar 1 for MAT-250/350

SHOWGEAR

70880 Mammoth Stands

Length (mm):	432 mm
Width (mm):	111 mm
Height (mm):	70 mm
Weight:	2.66 kg
Max. Load:	250 kg
Material:	Steel



Rigging Bar 2 for MAT-250/350

SHOWGEAR

70881 Mammoth Stands

Length (mm):	825 mm
Width (mm):	195 mm
Height (mm):	70 mm
Weight:	8 kg
Max. Load:	250 kg
Material:	Steel



Rigging Bar 3 for MAT-250/350

SHOWGEAR

70882 Mammoth Stands

Length (mm):	800 mm
Width (mm):	87 mm
Height (mm):	70 mm
Weight:	3.5 kg
Max. Load:	250 kg
Material:	Steel



Rotating Truss Holder for MAT Series

SHOWGEAR

70883 Mammoth Stands

Length (mm):	50 mm
Width (mm):	50 mm
Height (mm):	170 mm
Weight:	0.83 kg
Max. Load:	100 kg
Material:	Steel



Accentuate your architecture and set the mood

Architecture should be enjoyable. Our architectural lighting will improve the way you perceive structural design, objects, and areas even more. It draws attention to textures, colours, and shapes of a room, venue, or object. It determines how people feel when they reside in a space or at a site. This is especially important in public areas, such as shopping centres, theme parks, and business parks. Exterior lighting should draw the consumer in, and the interior lighting should engage them as they walk through the doors in addition to showing off products or services. In residential settings the lighting should provide a feeling of comfort and cosiness and make you feel safe and at home.

We offer solutions for all! Our accent lighting solutions complement any existing functional lighting and can be used indoors as well as outdoors. In many ways, our products allow you to improve the ambiance in gardens, around buildings, at public sites, in businesses, and at home.

Our Architectural Lighting products range from down lights to office lights and from LED strips to façade lighting. With the latest LED technology, we are able to provide durable solutions that are incredibly energy efficient and offer an incredibly long life span. Our rail systems offer flexible solutions in museums, galleries, shops, and reception areas.







New York

A0320011 **Black - RAL9004 - MR-16 - GU5.3**
A0320012 **White - RAL9003 - MR-16 - GU5.3**
A0320013 **Silver - RAL9006 - MR-16 - GU5.3**

ARTECTA

Specifications:

Pwr. Cons.:	50 W
Weight:	0.27 kg
Colour:	Black

FEATURES:
- 1-Phase track spot
- Suitable for MR16 GU5.3 light sources up to 50 watt
- Horizontally and vertically rotatable



Barcelona

A0320041 **Black - RAL9004 111-IRC - G53**
A0320042 **White - RAL9003 111-IRC - G53**
A0320043 **Silver - RAL9006 111-IRC - G53**

ARTECTA

Specifications:

Pwr. Cons.:	50 W
Weight:	0.3 kg
Colour:	Black

FEATURES:
- 1-Phase track spot
- Suitable for QR111/AR111 GU53 light sources up to 50 watt
- Horizontally and vertically rotatable

1-Phase Track 1000 mm

A0311001 **Black - RAL9004**
A0311002 **White - RAL9003**
A0311003 **Silver - RAL9006**

ARTECTA



Specifications:

Pwr. Supp.:	240 VAC 50-60Hz
Rated Curr. (A):	16 A
Length (m):	1 m
Colour:	Black

1-Phase Track 2000 mm

A0312001 **Black - RAL9004**
A0312002 **White - RAL9003**
A0312003 **Silver - RAL9006**

ARTECTA



Specifications:

Pwr. Supp.:	240 VAC 50-60Hz
Rated Curr. (A):	16 A
Length (m):	2 m
Colour:	Black



Trenton GU10 Track Light Black

A0320015 **Black**
A0320016 **White**

ARTECTA

Specifications:

Weight:	0.25 kg
IP Rate:	IP20(indoor use only)
Colour:	Black

FEATURES:
- Track Light with GU10D socket
- Suitable for 3-phase track rail
- Fit for a light source up to 50 W (LED & halogen)
- Available in either black and white
- Light source not included



New Port 15 W CCT 38°

A0320200 **Black**
A0320201 **White**

ARTECTA

Specifications:

Light Src. Type:	LED	Beam °:	38 °
LED Colour Type:	CW / NW / WW	Dimmable:	Yes
CRI:	90	Pwr. Cons.:	15 W
Dimmable (Type):	Leading Edge / Trailing edge / Triac	Weight:	0.55 kg
		IP Rate:	IP20(indoor use only)
		Colour:	Black

FEATURES:
- 15 W Dimmable White LED Track Light
- Suitable for 3-phase track rail
- Dimmable driver
- 2700 K, 4000 K & 6000 K colour temperature
- High CRI for accurate colour rendering
- 38° beam angle
- Available in black and white



Ancona 3-Phase Pinspot

A0320061 **Black - RAL9004 GU10**

ARTECTA

Specifications:

		Length (mm):	190 mm
		Height (mm):	230 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Width (mm):	116 mm
Pwr. Cons.:	100 W	Colour:	Black

FEATURES:
- 3-Phase track light Pin spot
- Suitable for GU10 light sources up to 100 watt
- Both horizontal and vertical rotatable

New Port 30W CCT 38°

A0320210 Black
A0320211 White

ARTECTA



Specifications:

Light Src. Type:	LED	Beam °:	38 °
LED Colour Type:	WW / CW / NW	Dimmable:	Yes
CRI:	90	Pwr. Cons.:	35 W
Dimmable (Type):	Leading Edge / Trailing edge / Triac	Weight:	0.7 kg
		IP Rate:	IP20 (indoor use only)
		Colour:	Black

FEATURES:

- 30 W Dimmable White LED Track Light
- Suitable for 3-phase track rail
- Dimmable driver
- 2700 K, 4000 K & 6000 K colour temperature
- High CRI for accurate colour rendering
- 38° beam angle
- Available in black and white

Newark 30W CCT Zoom 20°–60°

A0320220 Black
A0320221 White

ARTECTA



Specifications:

Light Src. Type:	LED	Dimmable:	Yes
LED Colour Type:	WW / CW / NW	Pwr. Cons.:	35 W
CRI:	90	Weight:	0.95 kg
Dimmable (Type):	Leading Edge / Trailing edge / Triac	IP Rate:	IP20 (indoor use only)
		Colour:	Black

FEATURES:

- 30 W Dimmable White LED Track Light
- Manually adjustable 20°–60° zoom
- Suitable for 3-phase track rail
- Dimmable driver
- 2100 K, 4000 K & 6000 K colour temperature
- High CRI for accurate colour rendering
- Available in black and white



PAR 16 Track Light Warm-On-Dim

A0320070 **Warm White LED Par - 500 lumen - 3-phase**

ARTECTA

Specifications:

Light Src. Type:	LED	Beam °:	36 °
LED Colour Type:	Warm-on-Dim	Dimmable:	Yes
CRI:	95	Pwr. Cons.:	87 W
Dimmable (Type):	Triac	Weight:	0.34 kg
		IP Rate:	IP20(indoor use only)
		Colour:	Black

FEATURES:

- 10 W / 500 lumen Warm White track LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries
- Including 3-phase track adapter



PAR 20 Track Light Warm-On-Dim

A0320071 **Warm White LED Par - 800 lumen - 3-phase**

ARTECTA

Specifications:

Light Src. Type:	LED	Beam °:	45 °
LED Colour Type:	Warm-on-Dim	Dimmable:	Yes
Lumen Total:	800 lm	Pwr. Cons.:	15 W
CRI:	95	Weight:	0.5 kg
Dimmable (Type):	Triac	IP Rate:	IP20(indoor use only)
		Colour:	Black

FEATURES:

- 15 W / 800 lumen Warm White track LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries
- Including 3-phase track adapter



PAR 30 Track Light Warm-On-Dim

A0320072 **Warm White LED Par - 1100 lumen - 3-phase**

ARTECTA

Specifications:

Light Src. Type:	LED	Beam °:	45 °
LED Colour Type:	Warm-on-Dim	Dimmable:	Yes
Lumen Total:	1100 lm	Pwr. Cons.:	20 W
CRI:	95	Weight:	0.6 kg
Dimmable (Type):	Triac	IP Rate:	IP20(indoor use only)
		Colour:	Black

FEATURES:

- 20 W / 1100 lumen Warm White track LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries
- Including 3-phase track adapter

PAR 46 Track Light Warm-On-Dim

A0320073 **Warm White LED Par - 1800 lumen - 3-phase**

ARTECTA

Specifications:

		Beam °:	60 °
		Dimmable:	Yes
Light Src. Type:	LED	Pwr. Cons.:	28 W
LED Colour Type:	Warm-on-Dim	Weight:	1.48 kg
Lumen Total:	1800 lm	IP Rate:	IP20(indoor use only)
CRI:	95	Colour:	Black
Dimmable (Type):	Triac		



FEATURES:

- 28 W / 1800 lumen Warm White track LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries
- Including 3-phase track adapter

PAR 56 Track Light Warm-On-Dim

A0320074 **Warm White LED Par - 3380 lumen - 3-phase**

ARTECTA

Specifications:

		Beam °:	60 °
		Dimmable:	Yes
Light Src. Type:	LED	Pwr. Cons.:	35 W
LED Colour Type:	Warm-on-Dim	Weight:	1.8 kg
Lumen Total:	3380 lm	IP Rate:	IP20(indoor use only)
CRI:	95	Colour:	Black
Dimmable (Type):	Triac		



FEATURES:

- 35 W / 3380 lumen Warm White track LED Par
- High CRI for accurate colour rendering
- Compatible with a traditional halogen infrastructure
- Triac Dimming Technology
- No UV radiation
- Safe usage in clothing shops and galleries
- Including 3-phase track adapter



Display Track Fresnel 20 SW

A0320140 **20 W Switchable White LED Fresnel - Black**
A0320141 **20 W Switchable White LED Fresnel - White**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	Yes
LED Colour Type:	WW / CW	Pwr. Cons.:	25 W
Lumen Total:	537 lm	Weight:	2.1 kg
CRI:	95	IP Rate:	IP20 (indoor use only)
		Colour:	Black

FEATURES:
- 20 W LED Track Light Fresnel
- Compatible with Artecta 3-phase tracks
- 2-step CCT: 3000 K & 6000 K
- Wide adjustable beam angle (13°–57°)
- Dimmer function
- Barndoor included
- Available in either black and white



Display Track Fresnel 50 SW

A0320150 **50 W Switchable White LED Fresnel - Black**
A0320151 **50 W Switchable White LED Fresnel - White**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	Yes
LED Colour Type:	WW / CW	Pwr. Cons.:	55 W
Lumen Total:	3373 lm	Weight:	2.1 kg
CRI:	95	IP Rate:	IP20 (indoor use only)
		Colour:	Black

FEATURES:
- 50 W LED Track Light Fresnel
- Compatible with Artecta 3-phase tracks
- 2-step CCT: 3000 K & 6000 K
- Wide adjustable beam angle (18°–58°)
- Dimmer function
- Barndoor included
- Available in either black and white



Display Track Profile 50 SW

A0320160 **50 W Switchable White LED Profile - Black**
A0320161 **50 W Switchable White LED Profile - White**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	Yes
LED Colour Type:	WW / CW	Pwr. Cons.:	55 W
Lumen Total:	1504 lm	Weight:	5.6 kg
CRI:	95	IP Rate:	IP20 (indoor use only)
		Colour:	Black

FEATURES:
- 50 W LED Track Light Profile
- Compatible with Artecta 3-phase tracks
- 2-step CCT: 3000 k & 6000 K
- Wide adjustable beam angle (13°–30°)
- Dimmer function
- Gobo holder included
- Available in either black and white

3-Phase Track 1000 mm

A0331001 **Black - RAL9004**
A0331002 **White - RAL9003**
A0331003 **Silver - RAL9006**

ARTECTA

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz
Rated Curr. (A):	16 A
Length (m):	1 m
Colour:	Black



3-Phase Track 2000 mm

A0332001 **Black - RAL9004**
A0332002 **White - RAL9003**
A0332003 **Silver - RAL9006**

ARTECTA

Specifications:

Pwr. Supp.:	240 VAC 50-60Hz
Rated Curr. (A):	16 A
Length (m):	2 m
Colour:	Black



1-Phase Adapter
ARTECTA

A0313101 Black - RAL9004
A0313102 White - RAL9003
A0313103 Silver - RAL9006



1-Phase Feed-In Connector
ARTECTA

A0313201 Black - RAL9004
A0313202 White - RAL9003
A0313203 Silver - RAL9006



1-Phase End Cap
ARTECTA

A0313301 Black - RAL9004
A0313302 White - RAL9003
A0313303 Silver - RAL9006



1-Phase Straight Connector
ARTECTA

A0313401 Black - RAL9004
A0313402 White - RAL9003
A0313403 Silver - RAL9006



1-Phase Corner Connector
ARTECTA

A0313501 Black - RAL9004
A0313502 White - RAL9003
A0313503 Silver - RAL9006



1-Phase Left T-Connector
ARTECTA

A0313701 Black - RAL9004
A0313702 White - RAL9003
A0313703 Silver - RAL9006



1-Phase Right T-Connector
ARTECTA

A0313711 Black - RAL9004
A0313712 White - RAL9003
A0313713 Silver - RAL9006



3-Phase Adapter
ARTECTA

A0333101 Black - RAL9004
A0333102 White - RAL9003
A0333103 Silver - RAL9006



Lamp Fixing Set for 1-Phase Adapter
ARTECTA

A0313104



Lamp Fixing Set for 3-Phase Adapter
ARTECTA

A0333105



3-Phase Left Feed-In Connector

ARTECTA

A0333201 Black - RAL9004
A0333202 White - RAL9003
A0333203 Silver - RAL9006



3-Phase Right Feed-In Connector

ARTECTA

A0333211 Black - RAL9004
A0333212 White - RAL9003
A0333213 Silver - RAL9006



3-Phase Straight Connector

ARTECTA

A0333401 Black - RAL9004
A0333402 White - RAL9003
A0333403 Silver - RAL9006



3-Phase Corner Connector

ARTECTA

A0333501 Black - RAL9004
A0333502 White - RAL9003
A0333503 Silver - RAL9006



3-Phase Left T-Connector

ARTECTA

A0333701 Black - RAL9004
A0333702 White - RAL9003
A0333703 Silver - RAL9006



3-Phase Right T-Connector

ARTECTA

A0333711 Black - RAL9004
A0333712 White - RAL9003
A0333713 Silver - RAL9006



3-Phase End Cap

ARTECTA

A0333301 Black - RAL9004
A0333302 White - RAL9003
A0333303 Silver - RAL9006



3-Phase Ceiling Kit

ARTECTA

A0333801 Black - RAL9004
A0333802 White - RAL9003
A0333803 Silver - RAL9006



3-Phase Ceiling Suspension Kit

ARTECTA

A0333811 Black - RAL9004 - with 1500 mm steel wire maximum

A0333812 White - RAL9003 - with 1500 mm steel wire maximum

A0333813 Silver - RAL9006 - with 1500 mm steel wire maximum

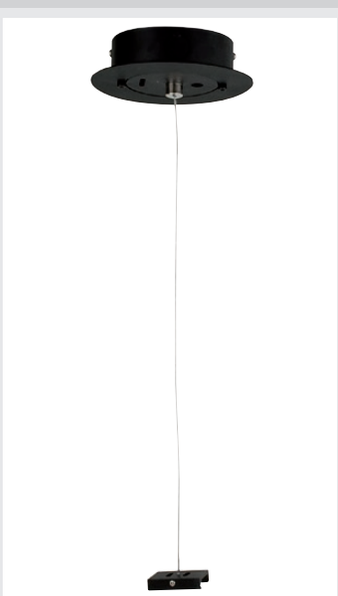

3-Phase Ceiling Suspension Kit

ARTECTA

A0333821 Black - RAL9004 - with 1500 mm steel wire maximum

A0333822 White - RAL9003 - with 1500 mm steel wire maximum

A0333823 Silver - RAL9006 - with 1500 mm steel wire maximum

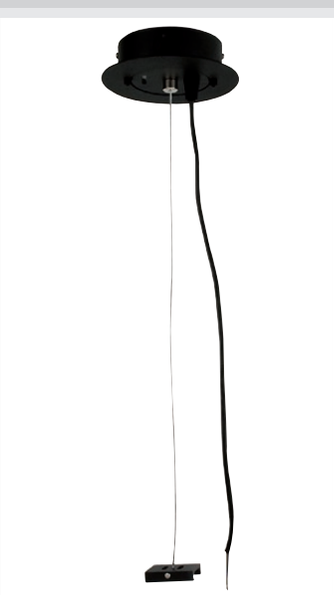



Havana Halo
A0851027



Havana Halo
A0851030



Havana Halo
A0851040



Havana Halo
A0851060



Havana Halo
A0851070

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0851027	24 VDC	50 W	2700 K	512	1000	5	8	62,5	IP20
A0851030	24 VDC	50 W	3000 K	512	1080	5	8	62,5	IP20
A0851040	24 VDC	50 W	4000 K	512	1150	5	8	62,5	IP20
A0851060	24 VDC	50 W	6000 K	512	1100	5	8	62,5	IP20
A0851070	24 VDC	70 W	RGB	840	718	5	10	50	IP20



Havana Ribbon
1808 - 140
A0852600



Havana Ribbon
1808 - 140
A0852601



Havana Ribbon
1808 - 140
A0852602

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852600	24 VDC	36 W	2700 K	140	750	5	3	50	IP20
A0852601	24 VDC	36 W	3000 K	140	780	5	3	50	IP20
A0852602	24 VDC	36 W	4000 K	140	812	5	3	50	IP20



Havana Ribbon
1808 - 350
A0852610



Havana Ribbon
1808 - 350
A0852611



Havana Ribbon
1808 - 350
A0852612

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852610	24 VDC	90 W	2700 K	350	1850	5	10	20	IP20
A0852611	24 VDC	90 W	3000 K	350	1920	5	10	20	IP20
A0852612	24 VDC	90 W	4000 K	350	2016	5	10	20	IP20



Havana Ribbon 120-24 V
A0852043



Havana Ribbon 120-24 V
A0852040



Havana Ribbon 120-24 V
A0852041



Havana Ribbon 120-24 V
A0852044

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852043	24 VDC	48 W	2400 K	120	810	5	8	50	IP20
A0852040	24 VDC	48 W	2700 K	120	810	5	8	50	IP20
A0852041	24 VDC	48 W	3000 K	120	830	5	8	50	IP20
A0852044	24 VDC	48 W	4000 K	120	850	5	8	50	IP20



Havana Ribbon 60-24 V
A0852030



Havana Ribbon 60-24 V
A0852031



Havana Ribbon 60-24 V
A0852034

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852030	24 VDC	24 W	2700 K	60	430	5	8	100	IP20
A0852031	24 VDC	24 W	3000 K	60	440	5	8	100	IP20
A0852034	24 VDC	24 W	4000 K	60	450	5	8	100	IP20



Havana Ribbon 3000 K 240 - 24 V
A0852061



Havana Ribbon Tunable White
A0851110

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852061	24 VDC	96 W	3000 K	240	1680	5	15	50	IP20

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0851110	24 VDC	96 W	2200-4000 K	120	300	5	10	100	IP20



Havana Ribbon 60-24 V
A0852050



Havana Ribbon 60-24 V
A0852051



Havana Ribbon 60-24 V
A0852054

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852050	24 VDC	72 W	2700 K	60	1210	5	10	100	IP20
A0852051	24 VDC	72 W	3000 K	60	1250	5	10	100	IP20
A0852054	24 VDC	72 W	4000 K	60	1280	5	10	100	IP20



Havana Ribbon 60-24 V
A0852070



Havana Ribbon 60-24 V
A0852071



Havana Ribbon 60-24 V
A0852072

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852070	24 VDC	72 W	2700 K	60	1240	5	10	100	IP20
A0852071	24 VDC	72 W	3000 K	60	1260	5	10	100	IP20
A0852072	24 VDC	72 W	4000 K	60	1290	5	10	100	IP20



Havana Ribbon 120-24 V
A0852076



Havana Ribbon 120-24 V
A0852077



Havana Ribbon 120-24 V
A0852078

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852076	24 VDC	144 W	2700 K	120	2450	5	10	50	IP20
A0852077	24 VDC	144 W	3000 K	120	2510	5	10	100	IP20
A0852078	24 VDC	144 W	4000 K	120	2580	5	10	100	IP20



Havana Ribbon 240-24 V
A0852105



Havana Ribbon 240-24 V
A0852106



Havana Ribbon 240-24 V
A0852107

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852105	24 VDC	240 W	2700 K	240	4710	5	12	25	IP20
A0852106	24 VDC	240 W	3000 K	240	4790	5	12	25	IP20
A0852107	24 VDC	240 W	4000 K	240	4820	5	10	25	IP20



Havana Ribbon 2200-6000K
A0852350



Havana Ribbon 3000-6000 K
A0852020



Havana Ribbon 2200-6000K
A0852348

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852350	24 VDC	48 W	/	120	800	5	8	100	IP20
A0852020	24 VDC	96 W	/	120	1500	5	8	100	IP20
A0852348	24 VDC	72 W	/	60	1105	5	10	66,7	IP20



Havana Ribbon RGB 30-24V
A0852021



Havana Ribbon RGB 60-24 V
A0852022

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852021	24 VDC	36 W	/	30	295	5	10	166,7	IP20
A0852022	24 VDC	72 W	/	60	590	5	10	100	IP20





Havana Ribbon RGB 30-24V
A0852001

Havana Ribbon RGB 60-24 V
A0852002

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852001	24 VDC	36 W	/	60	590	5	10	100	IP20
A0852002	24 VDC	72 W	/	30	295	5	10	166,7	IP20



Havana Ribbon RGB 120 - 24 V
A0852003

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852003	24 VDC	144 W	/	120	1180	5	12	50	IP20







Havana Ribbon RGB + WW 24 V
A0852024

Havana Ribbon RGB + WW 24 V
A0852025

Havana Ribbon RGB + WW 24 V
A0852026

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852024	24 VDC	58 W	2200 K	72	567	5	10	166,7	IP20
A0852025	24 VDC	58 W	2400 K	72	578	5	10	166,7	IP20
A0852026	24 VDC	58 W	4000 K	72	591	5	10	166,7	IP20



Havana Ribbon 72-24 V RGB+WW
A0852004



Havana Ribbon 72-24 V RGB+CW
A0852005

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852004	24 VDC	58 W	3000 K	72	520	5	10	166,7	IP20
A0852005	24 VDC	24 W	6000 K	72	567	5	10	166,7	IP20



Havana Ribbon RGBW 24 V 4-in-1
A0852017



Havana Ribbon RGBW 24 V 4-in-1
A0852018



Havana Ribbon RGBW 24 V 4-in-1
A0852019

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852017	24 VDC	72 W	2200 K	60	850	5	12	100	IP20
A0852018	24 VDC	72 W	2400 K	60	860	5	12	/	IP20
A0852019	24 VDC	72 W	2700 K	60	820	5	12	100	IP20



Havana Ribbon RGBW 60 4-in-1
A0852006



Havana Ribbon RGBW 60 4-in-1
A0852007

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852006	24 VDC	96 W	3000 K	60	874	5	12	100	IP20
A0852007	24 VDC	96 W	6000 K	60	996	5	12	100	IP20





Havana Ribbon RGBW 2400 K
A0852028

Havana Ribbon RGB 2400 K–6000 K
A0852010

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852028	24 VDC	96 W	2400 K	120	935	5	10	100	IP20

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852010	24 VDC	120 W	2400 - 600 K	60	1280	5	12	100	IP20





Havana Ribbon RGB 30 - 12 V
A0852101

Havana Ribbon RGB 60 - 12 V
A0852102

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852101	12 VDC	72 W	/	30	295	5	10	100	IP20
A0852102	12 VDC	72 W	/	60	590	5	10	50	IP20







Havana Ribbon Red 60-24 V
A0852134

Havana Ribbon Green 60-24 V
A0852135

Havana Ribbon Blue 60-24 V
A0852136

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852134	24 VDC	72 W	/	60	420	5	10	100	IP20
A0852135	24 VDC	72 W	/	60	1110	5	10	100	IP20
A0852136	24 VDC	72 W	/	60	240	5	10	100	IP20



Havana Ribbon Red 240S - 24 V

A0852146

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852146	24 VDC	96 W	/	240	560	5	10	25	IP20



Havana Flex 60-24 VDC

A0852300



Havana Flex 60-24 VDC

A0852301



Havana Flex 60-24 VDC

A0852302

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852300	24 VDC	24 W	2700 K	60	408	5	6	100	IP20
A0852301	24 VDC	24 W	3000 K	60	440	5	6	/	IP20
A0852302	24 VDC	24 W	4000 K	60	460	5	6	100	IP20



Havana Pixel Strip RGB 24 V

A0852126

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852126	24 VDC	72 W	/	60	430	5	10	100	IP20



Havana Ribbon UV
60 - 24 V
A0852008



Havana Ribbon UV
60 - 24 V
A0852035

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852008	24 VDC	72 W	/	60	300	5	10	100	IP20
A0852035	24 VDC	24 W	/	60	60	5	8	100	IP20



Havana Food - 180-24 V
A0852500 MEAT / BACON



Havana Food - 180 - 24 V
A0852501 BREAD / CAKE



Havana Food - 180-24 V
A0852502 DAIRY / GOLD



Havana Food - 180-24 V
A0852503 FRUIT



Havana Food - 180-24 V
A0852504 FRESH MEAT



Havana Food - 180-24 V
A0852505 SEAFOOD

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852500	24 VDC	72 W	2000 K	180	800	5	10	33,3	IP20
A0852501	24 VDC	72 W	2400 K	120	800	5	10	33,3	IP20
A0852502	24 VDC	72 W	2700 K	180	800	5	10	33,3	IP20
A0852503	24 VDC	72 W	3000 K	180	800	5	10	33,3	IP20
A0852504	24 VDC	72 W	3500 K	180	800	5	10	33,3	IP20
A0852505	24 VDC	72 W	4200 K	180	800	5	10	33,3	IP20



Havana Ribbon Warm on Dim
A0851100

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0851100	24 VDC	75 W	2000 - 2700 K	168	1450	5	10	25	IP20



Havana Ribbon Single Cut 60
A0852570



Havana Ribbon Single Cut 60
A0852571



Havana Ribbon Single Cut 60
A0852572

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852570	24 VDC	36 W	2700	60	580	5	8	16,7	IP20
A0852571	24 VDC	36 W	3000	60	650	5	8	16,7	IP20
A0852572	24 VDC	36 W	4000	60	700	5	8	16,7	IP20



Havana Ribbon Single Cut 120
A0852573



Havana Ribbon Single Cut 120
A0852574



Havana Ribbon Single Cut 120
A0852575

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852573	24 VDC	48 W	2700	120	750	5	8	8,3	IP20
A0852574	24 VDC	48 W	3000	120	820	5	8	8,3	IP20
A0852575	24 VDC	48 W	4000	120	900	5	8	8,3	IP20



Havana Ribbon 60 - CRI 90
A0852580



Havana Ribbon 60 - CRI 90
A0852581



Havana Ribbon 60 - CRI 90
A0852582



Havana Ribbon 60 - CRI 90
A0852583

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852580	24 VDC	24 W	2400 K	60	350	5	8	100	IP20
A0852581	24 VDC	24 W	2700 K	60	380	5	8	100	IP20
A0852582	24 VDC	24 W	3000 K	60	400	5	8	100	IP20
A0852583	24 VDC	24 W	4000 K	60	410	5	8	100	IP20



Havana Ribbon 120 - CRI 90
A0852584



Havana Ribbon 120 - CRI 90
A0852585



Havana Ribbon 120 - CRI 90
A0852586



Havana Ribbon 120 - CRI 90
A0852587

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852584	24 VDC	48 W	2400 K	120	640	5	8	50	IP20
A0852585	24 VDC	48 W	2700 K	120	680	5	8	50	IP20
A0852586	24 VDC	24 W	3000 K	120	770	5	8	50	IP20
A0852587	24 VDC	24 W	4000 K	120	840	5	8	50	IP20



Santiago Ribbon 60-24V
A0852200



Santiago Ribbon 60-24V
A0852201



Santiago Ribbon 60-24V
A0852202



Santiago Ribbon 60-24V
A0852203

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852200	24 VDC	96 W	2400 K	60	400	20	10	100	IP20
A0852201	24 VDC	96 W	2700 K	60	420	20	10	100	IP20
A0852202	24 VDC	96 W	3000 K	60	450	20	10	100	IP20
A0852203	24 VDC	24 W	4000 K	60	460	20	10	100	IP20



Santiago Ribbon 120-24V
A0852220



Santiago Ribbon 120-24V
A0852221



Santiago Ribbon 120-24V
A0852222



Santiago Ribbon 120-24V
A0852223

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852220	24 VDC	192 W	2400 K	120	760	20	10	50	IP20
A0852221	24 VDC	192 W	2700 K	120	780	20	10	50	IP20
A0852222	24 VDC	192 W	3000 K	120	850	20	10	50	IP20
A0852223	24 VDC	192 W	4000 K	120	840	20	10	50	IP20



Havana Ribbon 1808 - 350
A0852610



Havana Ribbon 1808 - 350
A0852611



Havana Ribbon 1808 - 350
A0852612

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852610	24 VDC	48 W	2700	120	750	5	8	8,3	IP20
A0852611	24 VDC	48 W	3000	120	820	5	8	8,3	IP20
A0852612	24 VDC	48 W	4000	120	900	5	8	8,3	IP20



Havana Dropper 120-24 V
A0856567



Havana Dropper 120-24 V
A0856568



Havana Dropper 120-24 V
A0856569



Havana Dropper 120-24 V
A0856570



Havana Dropper 120-24 V
A0856571

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856567	24 VDC	48 W	2400 K	120	780	5	8	50	IP62
A0856568	24 VDC	48 W	2700 K	120	800	5	8	50	IP62
A0856569	24 VDC	48 W	3000 K	120	820	5	8	50	IP62
A0856570	24 VDC	48 W	4000 K	120	830	5	8	50	IP62
A0856571	24 VDC	48 W	6000 K	120	870	5	8	50	IP62



Havana Dropper 30-24 V
A0856527



Havana Dropper 30-24 V
A0856528



Havana Dropper 30-24 V
A0856529



Havana Dropper 30-24 V
A0856530



Havana Dropper 30-24 V
A0856531

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856527	24 VDC	36 W	2400 K	30	620	5	10	166,7	IP62
A0856528	24 VDC	36 W	2700 K	30	610	5	10	166,7	IP62
A0856529	24 VDC	36 W	3000 K	30	620	5	10	166,7	IP62
A0856530	24 VDC	36 W	4000 K	30	630	5	10	166,7	IP62
A0856531	24 VDC	36 W	6000 K	30	630	5	10	166,7	IP62



Havana Dropper 60-24 V
A0856532



Havana Dropper 60-24 V
A0856533



Havana Dropper 60-24 V
A0856534



Havana Dropper 60-24 V
A0856535



Havana Dropper 60-24 V
A0856536

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856532	24 VDC	36 W	2400 K	60	1200	5	10	100	IP62
A0856533	24 VDC	72 W	2700 K	60	1230	5	10	100	IP62
A0856534	24 VDC	72 W	3000 K	60	1250	5	10	100	IP62
A0856535	24 VDC	72 W	4000 K	60	1280	5	10	100	IP62
A0856536	24 VDC	72 W	6000 K	60	1324	5	10	100	IP62



Havana Dropper 120-24 V
A0856537



Havana Dropper 120-24 V
A0856538



Havana Dropper 120-24 V
A0856539



Havana Dropper 120-24 V
A0856540



Havana Dropper 120-24 V
A0856541

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856537	24 VDC	144 W	2400 K	120	2361	5	10	50	IP62
A0856538	24 VDC	144 W	2700 K	120	2400	5	10	50	IP62
A0856539	24 VDC	144 W	3000 K	120	2500	5	10	50	IP62
A0856540	24 VDC	144 W	4000 K	120	2580	5	10	50	IP62
A0856541	24 VDC	144 W	6000 K	120	2560	5	10	50	IP62



Havana Dropper 240-24 V
A0856542



Havana Dropper 240-24 V
A0856543



Havana Dropper 240-24 V
A0856544



Havana Dropper 240-24 V
A0856545



Havana Dropper 240-24 V
A0856546

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856542	24 VDC	288 W	2400 K	240	4723	5	12	25	IP62
A0856543	24 VDC	288 W	2700 K	240	4900	5	12	25	IP62
A0856544	24 VDC	288 W	3000 K	240	5000	5	12	25	IP62
A0856545	24 VDC	288 W	4000 K	240	5150	5	12	25	IP62
A0856546	24 VDC	288 W	6000 K	240	5300	5	12	25	IP62



Havana Dropper 60 - CRI 90
A0856420



Havana Dropper 60 - CRI 90
A0856421



Havana Dropper 60 - CRI 90
A0856422



Havana Dropper 60 - CRI 90
A0856423

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856420	24 VDC	24 W	2400 K	60	290	5	8	100	IP62
A0856421	24 VDC	24 W	2700 K	60	310	5	8	100	IP62
A0856422	24 VDC	24 W	3000 K	60	330	5	8	100	IP62
A0856423	24 VDC	24 W	4000 K	60	340	5	8	100	IP62



Havana Dropper 120 - CRI 90
A0856424



Havana Dropper 120 - CRI 90
A0856425



Havana Dropper 120 - CRI 90
A0856426



Havana Dropper 120 - CRI 90
A0856427

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856424	24 VDC	48 W	2400 K	120	530	5	8	50	IP62
A0856425	24 VDC	48 W	2700 K	120	310	5	8	50	IP62
A0856426	24 VDC	48 W	3000 K	120	330	5	8	50	IP62
A0856427	24 VDC	48 W	4000 K	120	340	5	8	50	IP62



Havana Dropper RGBW, 120-24 V
A0856400



Havana Dropper RGBW, 120-24 V
A0856401



Havana Dropper RGBW, 120-24 V
A0856402

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856400	24 VDC	58 W	2400 K	14	470	5	10	166,7	IP62
A0856401	24 VDC	58 W	2700 K	14	500	5	12	166,7	IP62
A0856402	24 VDC	58 W	3000 K	14	510	5	10	166,7	IP62



Havana Dropper
RGB 60 - 24 V
A0856553



Havana Dropper
RGBW 4-in-1, 60-24 V
A0856411



Havana Dropper
RGBW 4-in-1, 60-24 V
A0856412

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856553	24 VDC	72 W	/	60	590	5	10	100	IP21
A0856411	24 VDC	96 W	2700 K	60	660	5	12	100	IP62
A0856412	24 VDC	96 W	3000 K	60	670	5	12	100	IP62



Havana Jade
60-24 V
A0856803



Havana Jade
60-24 V
A0856806

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856803	24 VDC	24 W	3000 K	60	390	5	10	100	IP68
A0856806	24 VDC	24 W	6000 K	60	408	5	10	100	IP68



Havana Jade 120-24 V
A0856812



Havana Jade 120-24 V
A0856813



Havana Jade 120-24 V
A0856817



Havana Jade 120-24 V
A0856816

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856812	24 VDC	48 W	2700 K	120	750	5	10	50	IP68
A0856813	24 VDC	48 W	3000 K	120	780	5	10	50	IP68
A0856817	24 VDC	48 W	4000 K	120	790	5	10	50	IP68
A0856816	24 VDC	48 W	6000 K	120	810	5	10	50	IP68



Havana Jade 240-24 V
A0856823



Havana Jade 240-24 V
A0856818



Havana Jade 240-24 V
A0856826

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0856823	24 VDC	96 W	3000 K	240	1632	5	18	50	IP68
A0856828	24 VDC	96 W	4000 K	240	1625	5	18	50	IP68
A0856826	24 VDC	96 W	6000 K	120	1632	5	18	/	IP68



Havana Jade RGBW 120-24 V
A0852127



Havana Jade RGBW 120-24 V
A0852128



Havana Jade RGBW 120-24 V
A0852129

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Output /m	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852127	24 VDC	96 W	2400 K	120	789	5	12.5	100	IP68
A0852128	24 VDC	96 W	2700 K	120	789	5	12.5	100	IP68
A0852129	24 VDC	96 W	3000 K	120	798	5	12.5	100	IP68



Havana Neon 410
A0853100



Havana Neon 410
A0853101



Havana Neon 410
A0853102

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Total	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0853100	24 VDC	50 W	2700 K	144	130	5	4	42	IP65
A0853101	24 VDC	50 W	3000 K	144	150	5	4	42	IP65
A0853102	24 VDC	50 W	4000 K	144	160	5	4	42	IP65



Havana Neon 1010
A0853300



Havana Neon 1010
A0853301



Havana Neon 1010
A0853302

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Total	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0853300	24 VDC	70 W	2700 K	180	1000	5	10	33,3	IP65
A0853301	24 VDC	70 W	3000 K	180	1030	5	10	33,3	IP65
A0853302	24 VDC	70 W	4000 K	180	1060	5	10	33,3	IP65



Havana Neon 1018
A0853200



Havana Neon 1018
A0853201



Havana Neon 1018
A0853202



Havana Neon 1018
A0853210

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Total	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0853300	24 VDC	70 W	2700 K	180	1000	5	10	33,3	IP65
A0853301	24 VDC	70 W	3000 K	180	1030	5	10	33,3	IP65
A0853302	24 VDC	70 W	4000 K	180	1060	5	10	33,3	IP67
A0853210	24 VDC	70	/	60	200	5	10	100	IP67



Havana Neon RGB Pixel
A0852150

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Total	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0852150	24 VDC	72 W	/	60	140	5	10	100	IP67



Pensacola 2700K
A0854100

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Total	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0854100	24 VDC	160 W	2700 K	24	1020	10	23	250	IP65

ARTECTA



Havana Rigid 3000 K
72 - 24 VDC
A0866705

ARTECTA



Havana Rigid 6000 K
72 - 24 VDC
A0866706

ARTECTA



Havana Rigid RGB
72 - 24 VDC
A0866704

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Total	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0866705	24 VDC	17.2 W	3000 K	72	965	1	/	/	IP65
A0866706	24 VDC	17.2 W	6000 K	72	1115	1	/	/	IP65
A0866704	24 VDC	17.2 W	4000 K	72	612	1	/	/	IP65

ARTECTA



Cayenne 70
A0866790

ARTECTA



Cayenne RGB
A0866786

ARTECTA



Cayenne RGBW
A0866787

Product code	Power Supply	Power Consumption	CCT	Light Source Quantity /m	Lumen Total	Length (m)	Width (mm)	Cutting length (mm)	IP rating
A0866790	12 VDC	14.4 W	10000 K	72	1400	35	0.15	/	IP65
A0866786	12 VDC	13 W	6000 K	72	33	0.085	17.5	/	IP65
A0866787	24 VDC	0.65 W	4000 K	6	53	0.085	17.5	/	IP65

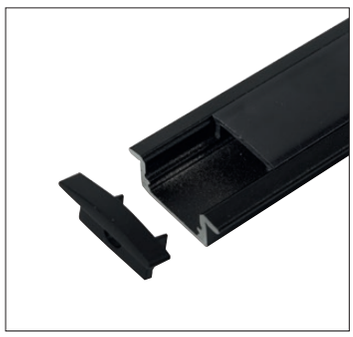



Profile Pro 1 Recessed

A9930431 **1 cover, black + 4 pcs End Caps**

ARTECTA

Specifications:

Height (mm):	8.5 mm
Width (mm):	23.1 mm
Length (m):	2 m
Colour:	Black
Incl. Acc.:	End Cap



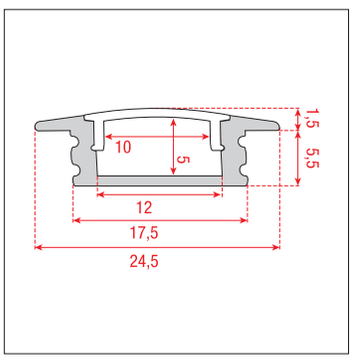

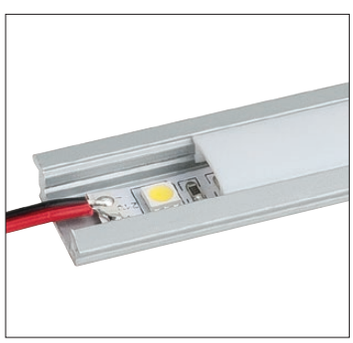



Profile Pro 1 Recessed

A9930302 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	8.5 mm
Width (mm):	23.1 mm
Length (m):	2 m
Colour:	Silver

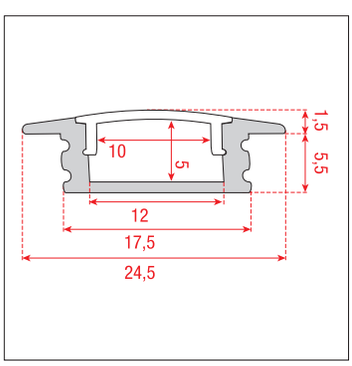

Profile Pro 5 Square

A9930305 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	16 mm
Width (mm):	16 mm
Length (m):	2 m
Colour:	Silver

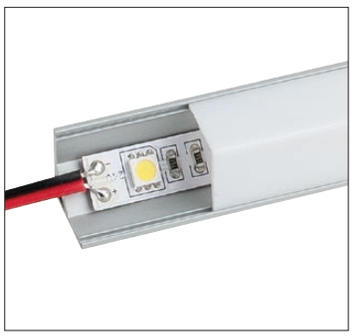



End Cap Set Profile Pro 5

A9930355 **Set of 2 pcs**

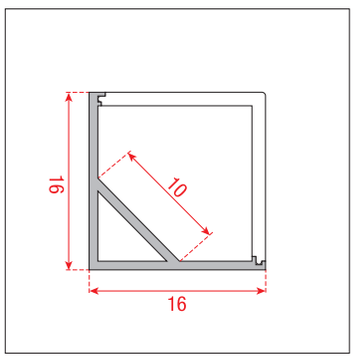

Profile Pro 6 Corner

A9930306 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	16 mm
Width (mm):	16 mm
Length (m):	2 m
Colour:	Silver

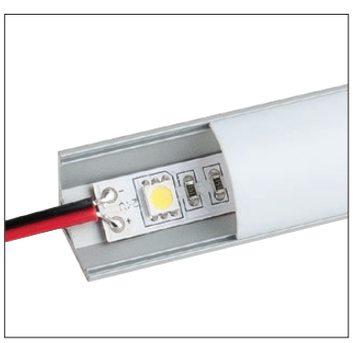



End Cap Set Profile Pro 6

A9930356 **Set of 2 pcs**

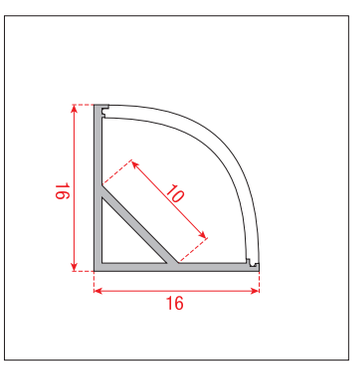

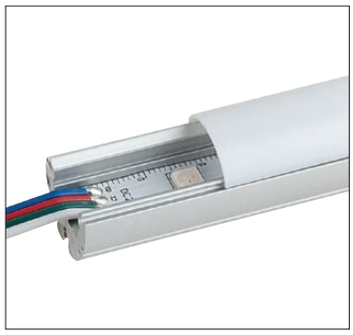

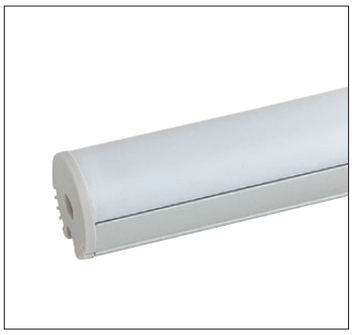

Profile Pro 8 Round

A9930308 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	21 mm
Width (mm):	21 mm
Length (m):	2 m
Colour:	Silver

End Cap Set Profile Pro 8

A9930358 **Set of 2 pcs**

Pro 8 Suspension Kit

A9931308

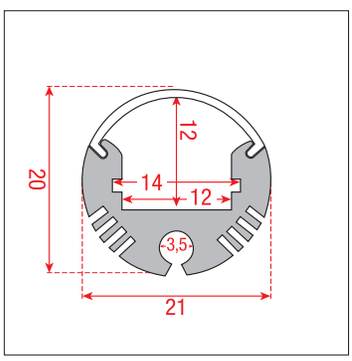

Pro 8 Mounting Bracket

A9930363 **1 piece**

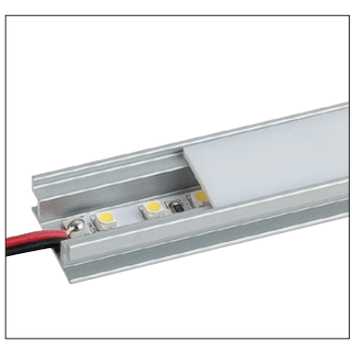



Profile Pro 9 Surface

A9930309 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	8.2 mm
Width (mm):	19.6 mm
Length (m):	2 m
Colour:	Silver

End Cap Set Profile Pro 9

A9930359 **Set of 2 pcs**

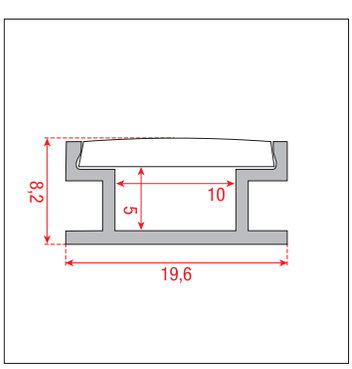

Profile Pro 10 Surface

A9930310 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	20 mm
Width (mm):	20 mm
Length (m):	2 m
Colour:	Silver





End Cap Set Profile Pro 10

A9930360 **Set of 2 pcs**

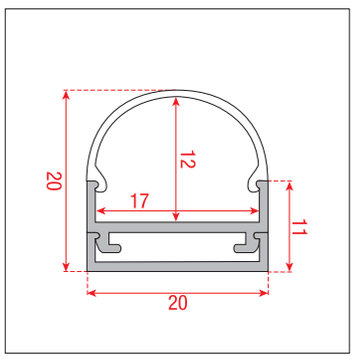

Profile Pro-Line 9

A9930415 **Black profile - for <10 mm wide LED Strips - 2 m**

ARTECTA

Specifications:

Height (mm):	8.2 mm
Width (mm):	19.6 mm
Length (m):	2 m
Colour:	Black





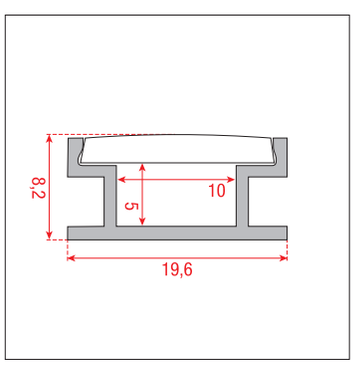

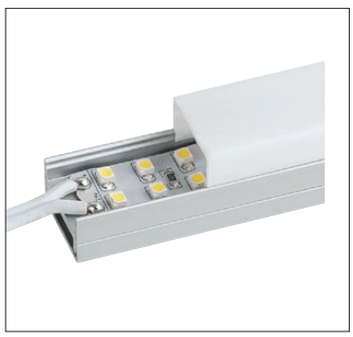



Profile Pro 11 Surface

A9930311 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	20 mm
Width (mm):	20 mm
Length (m):	2 m
Colour:	Silver

End Cap Set Profile Pro 11

A9930361 **Set of 2 pcs**

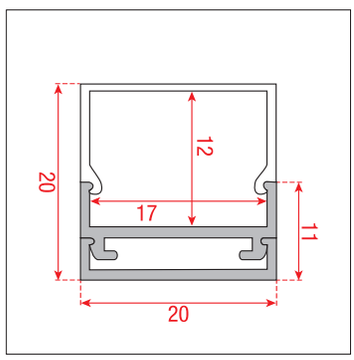

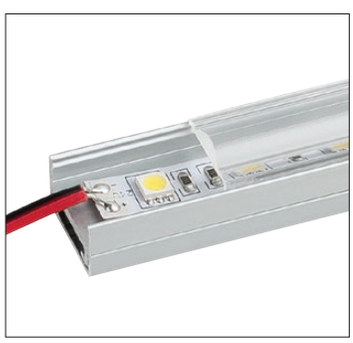



Profile Pro 12 Surface

A9930312 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	16 mm
Width (mm):	20 mm
Length (m):	2 m
Colour:	Silver

End Cap Set Profile Pro 12

A9930362 **Set of 2 pcs**

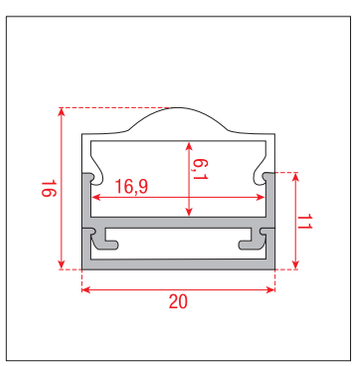

Profile Pro-line 17 Recessed

A9930432 **2 m, black**

ARTECTA

Specifications:

Height (mm):	15.3 mm
Width (mm):	23.2 mm
Length (m):	2 m
Colour:	Black
Incl. Acc.:	End Cap

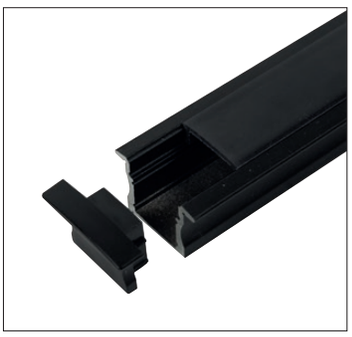



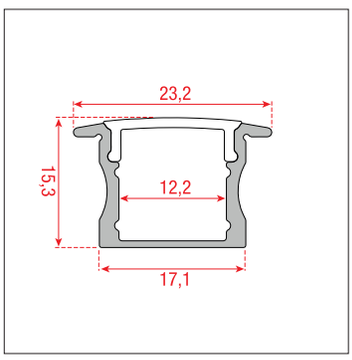

Profile Pro-line 17 Recessed

A9930401 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	15.3 mm
Width (mm):	23.2 mm
Length (m):	2 m
Colour:	Silver

Pro-Line 17 End Caps

A9931401 **Set of 4 pcs**

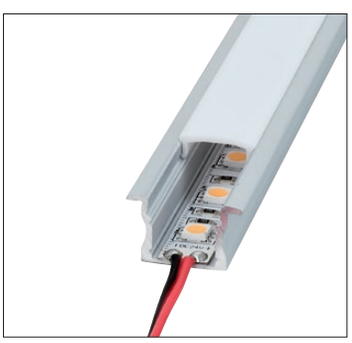



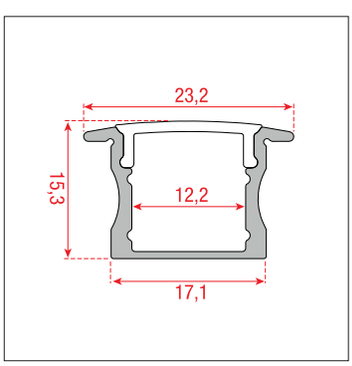

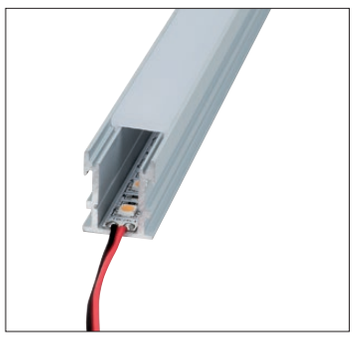



Profile Pro-Line 18 Recessed

A9930402 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	21.3 mm
Width (mm):	26.1 mm
Length (m):	2 m
Colour:	Silver

Pro-Line 18 End Caps

A9931407 **Set of 2 pcs**

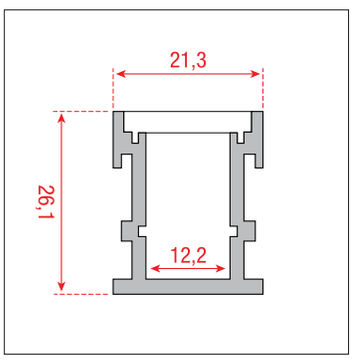





Profile Pro-Line 19 Recessed

A9930403 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	10.9 mm
Width (mm):	23.5 mm
Length (m):	2 m
Colour:	Silver

Pro-Line 19 End Caps

A9931403 **Set of 4 pcs**

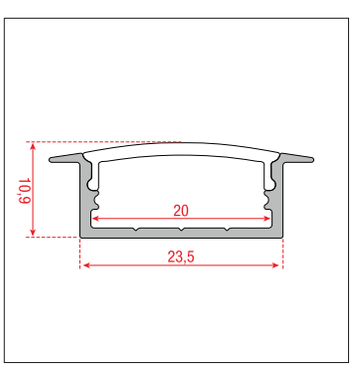

Profile Pro-Line 20 Corner

A9930404 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	18.4 mm
Width (mm):	18.4 mm
Length (m):	2 m
Colour:	Silver

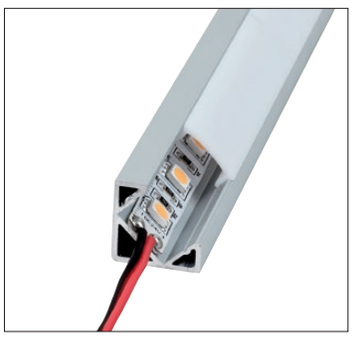



Pro-Line 20 End Caps

A9932422 **Set of 4 pcs**

Pro-Line 20 Mounting Clips

A9931402 **Set of 2 pcs**

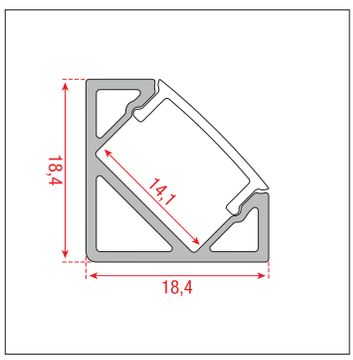

Profile Pro-Line 21 Corner

A9930405 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	30 mm
Width (mm):	30 mm
Length (m):	2 m
Colour:	Silver





Pro-Line 21 End Caps

A9932404 **Set of 2 pcs**

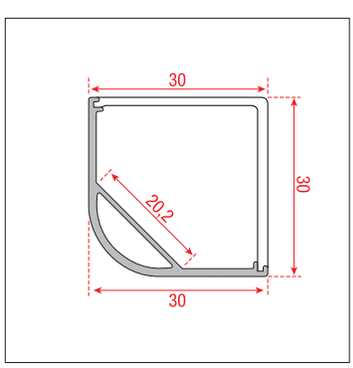



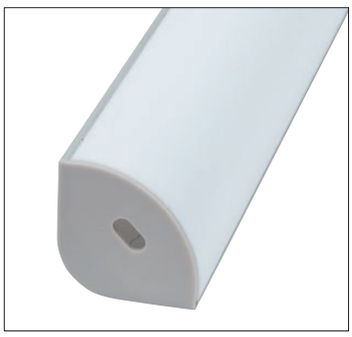

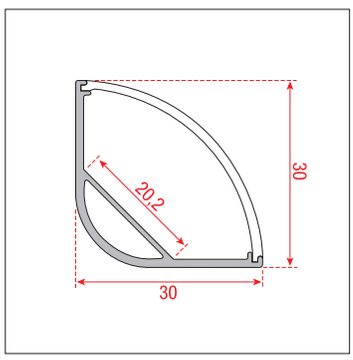

Profile Pro-Line 22 Corner

A9930406 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	30 mm
Width (mm):	30 mm
Length (m):	2 m
Colour:	Silver

Pro-Line 22 Connection 90°

A9930481 **1 piece**

Pro-Line 22 Mounting Clips

A9931405 **Set of 2 pcs**

Pro-Line 22 End Caps

A9932405 **2 sets of 2 pcs**

Pro-Line 22 straight Connection

A9930480 **1 piece**

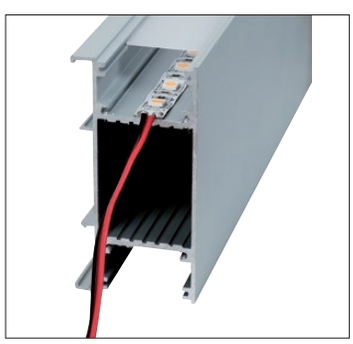



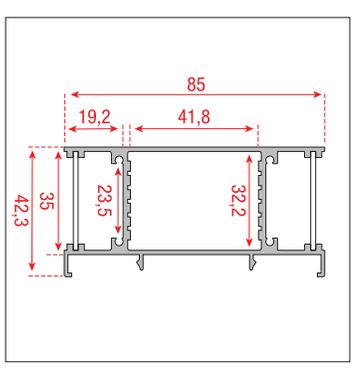

Profile Pro-Line 23 Surface

A9930407 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	42.3 mm
Width (mm):	85 mm
Length (m):	2 m
Colour:	Silver

Pro-Line 23 End Caps

A9932409 **Set of 2 pcs**

Pro-Line 23 Mounting Clips

A9931409 **Set of 2 pcs**

Profile Pro-Line 24 Surface

A9930408 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	17.7 mm
Width (mm):	48.5 mm
Length (m):	2 m
Colour:	Silver

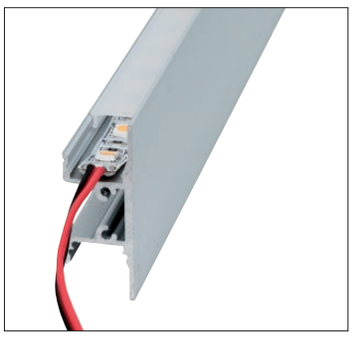



Pro-Line 24 End Caps

A9932408 **4 pieces**

Pro-Line 24 Mounting Clips

A9931406 **1 piece**

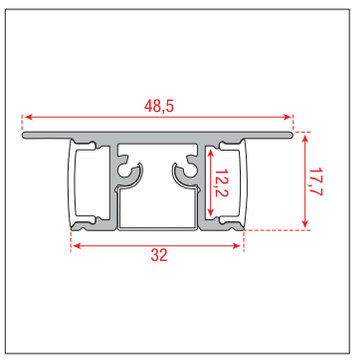

Profile Pro-Line 25 Surface

A9930409 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	35 mm
Width (mm):	35 mm
Length (m):	2 m
Colour:	Silver





Pro-Line 25 End Caps

A9932406 **Set of 2 pcs**

Pro-Line 25 Connection 120°

A9930483 **Set of 2 pcs**

Pro-Line 25 Connection 90°

A9930482 **Set of 2 pcs**

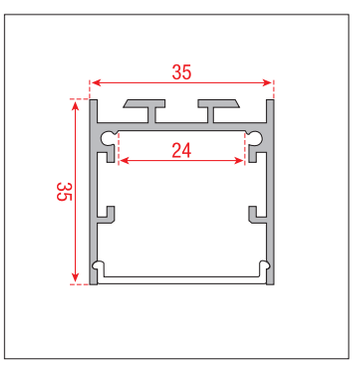





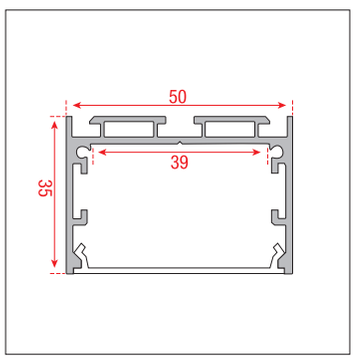

Profile Pro-Line 26 Surface

A9930410 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	35 mm
Width (mm):	50 mm
Length (m):	2 m
Colour:	Silver

Pro-Line 26 End Caps

A9932410 **Set of 2 pcs**

Pro-Line 26 Mounting Clips

A9931410 **Set of 2 pcs**

Pro-Line 26 Suspension Kit

A9930484 **1 kit**

Profile Pro-Line 26

A9930416 **Black profile - for <39 mm wide LED Strips - 2 m**





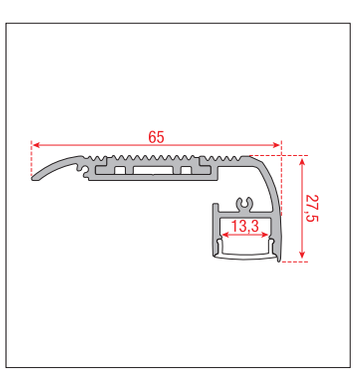

Profile Pro-Line 27 Stair

A9930411 **Black Anodised Aluminium**

A9930412 **Natural Anodised Aluminium**

ARTECTA

Specifications:

Height (mm):	27.5 mm
Width (mm):	65 mm
Length (m):	2 m
Colour:	Black

Profile Pro-Line 27 Anod Endcaps

A9931411 **Set of 2 pcs, black**

Profile Pro-Line 27 Anod Endcaps

A9931412 **Set of 2 pcs, light grey**

Profile Pro-Line 28

A9930413 Including end caps

ARTECTA

Specifications:

Height (mm):	35 mm
Width (mm):	65 mm
Length (m):	2 m
Colour:	Silver





Pro-Line 28 End Caps
A9932413 Set of 2 pcs

Pro-Line 28 Mounting Clips
A9931413 Set of 2 clips incl. 4 screws

Pro-Line 28 Connection 90°
A9934413 Including connection set

Pro-Line 28 straight Connection
A9933413 Set of 2 pieces

Pro-Line 28 T-connection
A9935413 Including connection set

Pro-Line 28 Cross Connection
A9936413 Including connection set

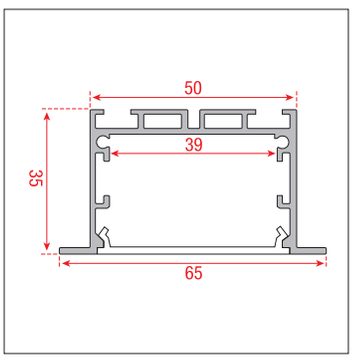

Profile Pro-Line 29

A9930421 Black LED Strip Profile

A9930412 Natural Anodised Aluminium

ARTECTA

Specifications:

Height (mm):	27.5 mm
Width (mm):	65 mm
Length (m):	2 m
Colour:	Black



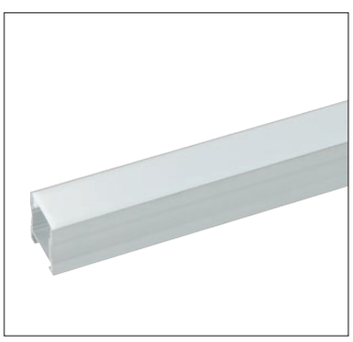

End Caps for Pro-Line 29
A9930423 2 pcs - black

End Caps for Pro-Line 29
A9930422 2 pcs - grey

Mounting Clips for Pro-Line 29
A9930424 10 pcs

Mounting Bracket for Pro-Line 29
A9930425 10 pcs - 45° tiltable

90° Horizontal Angle for Pro-Line 29
A9930426 Angle connector - 1 pcs

90° Vertical Angle for Pro-Line 29
A9930427 Angle connector - 1 pcs

135° Horizontal Angle for Pro-Line 29
A9930428 Angle connector - 1 pcs

135° Vertical Angle for Pro-Line 29
A9930429 Angle connector - 1 pcs

Connection Strip for Pro-Line 29
A9930430 Straight connector - 1 pcs

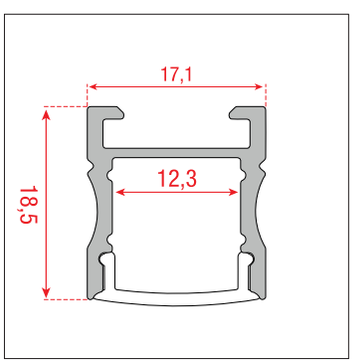



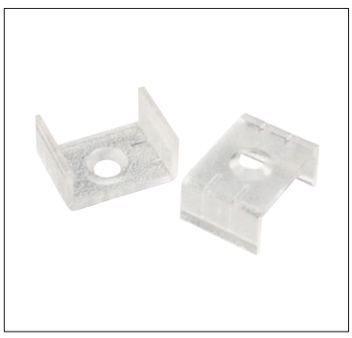

Profile Pro-Line 30 Aluminium

A9930096 **Black and silver LED strip profile**

ARTECTA

Specifications:

Height (mm):	15 mm
Width (mm):	16 mm
Length (m):	2 m
Colour:	Silver

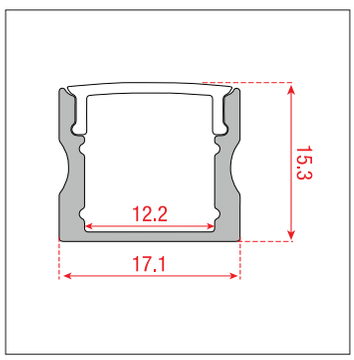





Profile Pro 30

A9930098 **Black profile - for <12 mm wide LED Strips up to 15 W/m - 2 m**

ARTECTA

Specifications:

Height (mm):	15.3 mm
Width (mm):	17.1 mm
Length (m):	2 m
Colour:	Black

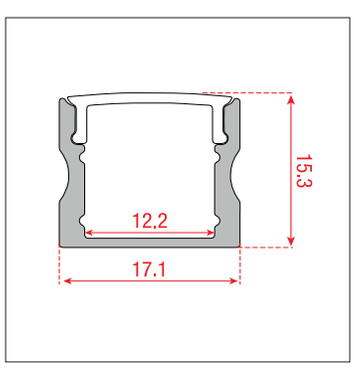

Profile LED aluminium + 2 Covers + End Caps

A9930090 **2000 x 17.1 x 8 mm**
A9930091 **2000 x 17.1 x 8 mm**

ARTECTA

Specifications:

Height (mm):	27.5 mm
Width (mm):	65 mm
Length (m):	2 m
Colour:	Black

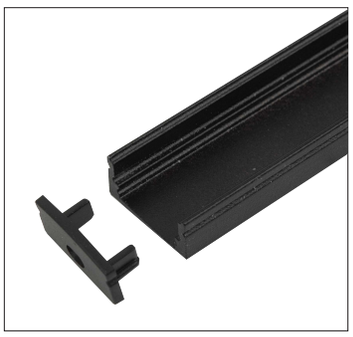

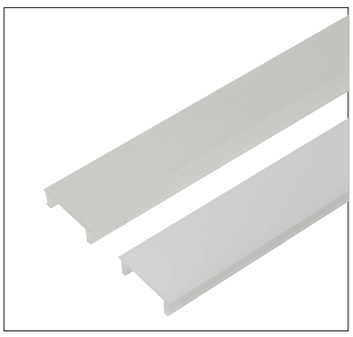

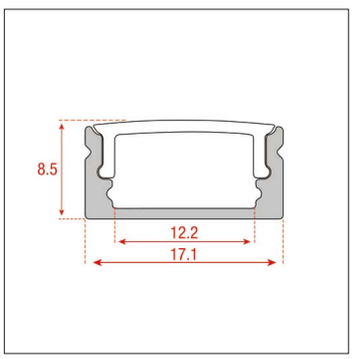

Profile LED aluminium + 2 Covers + 4 End Caps

A9930095 **2000 x 23.5 x 10 mm**

ARTECTA

Specifications:

Height (mm):	10 mm
Width (mm):	23.5 mm
Length (m):	2 m
Colour:	Silver



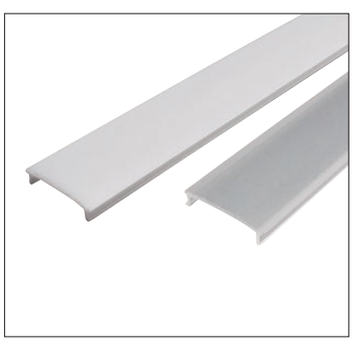

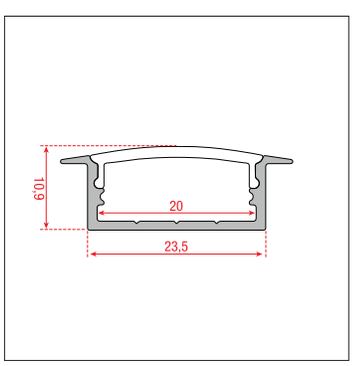



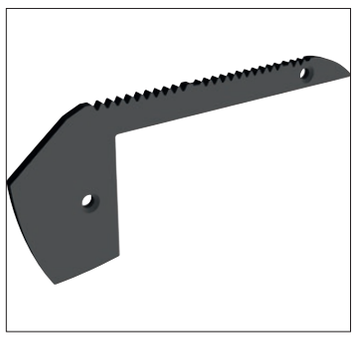

Profile Pro-Line for stairs black

A9930414

ARTECTA

Specifications:

Height (mm):	32 mm
Width (mm):	80 mm
Length (m):	2 m
Colour:	Black

Mounting Clips

A9930373 **for A9930305 & A9930306**

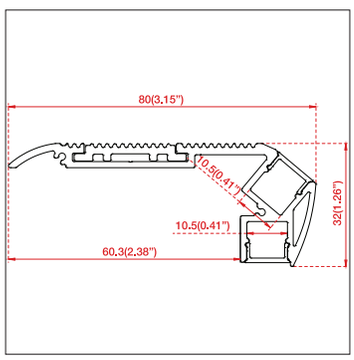

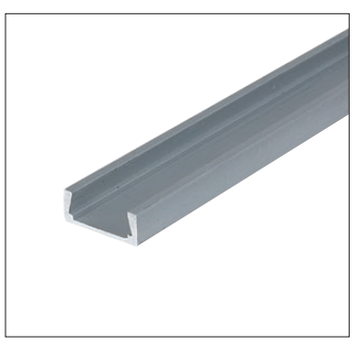

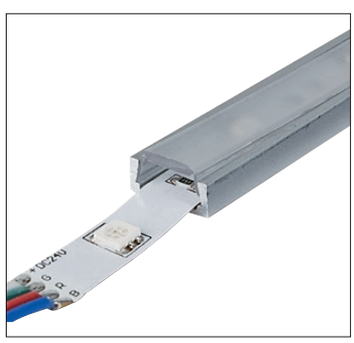

Profile Eco Surface 15

A9930030 **Length 2 m**

ARTECTA

Specifications:

Height (mm):	7 mm
Width (mm):	15 mm
Length (m):	2 m
Colour:	Silver

Profile Eco 10 Cover

A9930033 **Length 2 m, Clear**

Profile Eco 10 Cover

A9930034 **Length 2 m, Milky**

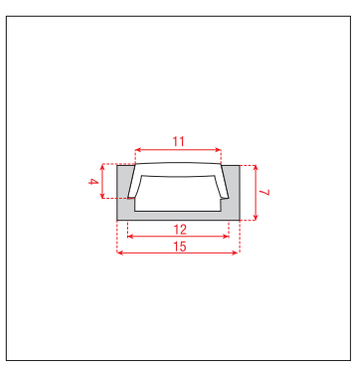

Profile Eco Surface 22

A9930020 **8 mm, length 2 m**

ARTECTA

Specifications:

Height (mm):	22 mm
Width (mm):	8 mm
Length (m):	2 m
Colour:	Silver



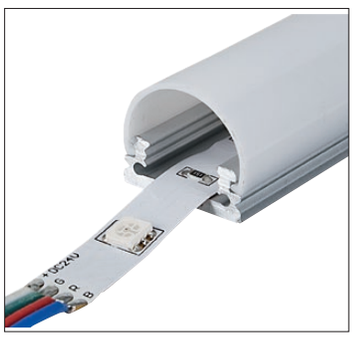

Profile Eco Surface 22 Cover White

A9930022 **15 mm, length 2 m**

Profile Eco 22 Side Cover R

A9930025 **23 mm round, incl. screws**

Profile Eco 22 Mounting Clips

A9930026 **10 pieces/bag**

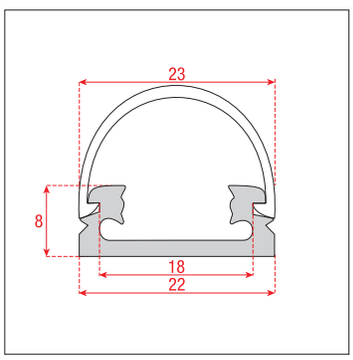



Pensacola - Input Connector ARTECTA

A0854180 White



Pensacola - End Cap ARTECTA

A0854181 White



Pensacola - Mounting Clips ARTECTA

A0854182 10 pieces



Cable Connector 2-pin SHOWGEAR

94000 Up to 16 A / 250 V



Cable link connector 2-pin SHOWGEAR

94003 Up to 16 A / 250 V



Cable Connector 4-pin SHOWGEAR

94001 RGB - Up to 16 A / 250 V



Cable Connector 5-pin SHOWGEAR

94002 RGBW - Up to 16 A / 250 V



Mounting clip single for 4-pin and 5-pin cable connector SHOWGEAR

94030 Red

94031 Red

Length (mm): 31 mm



Cable Terminal - 3-way SHOWGEAR

94014 Black Colour Coding
94013 White Colour Coding
94010 Red Colour Coding
94012 Blue Colour Coding
94011 Green Colour Coding



Cable Terminal - 5-way SHOWGEAR

94024 Black Colour Coding
94023 White Colour Coding
94020 Red Colour Coding
94022 Blue Colour Coding
94021 Green Colour Coding



Havana Ribbon Input Connector ARTECTA

A0852090 For Ribbon RGB series



Havana Ribbon Connector ARTECTA

A0852091 4-Pole for 10 mm strips



Havana Ribbon Cross-Connector

A0852092 For Ribbon RGB series



ARTECTA

Havana Ribbon Connector ARTECTA

A0852093 2-Pole



RGB Flat Cable ARTECTA

A9920606 25 m

A9920607 50 m

Cable Length:	25 m
Max. Wire Size:	0.92 mm²
Length (m):	25 m
IP Rate:	IP20(indoor use only)



RGBW Flat Cable ARTECTA

A9920608 25 m

A9920609 50 m

Cable Length:	25 m
Max. Wire Size:	0.92 mm²
Length (m):	25 m
IP Rate:	IP20(indoor use only)



Mounting Strip for Havana Neon 410

A0853170 2 metre ARTECTA



Havana Neon 1010 - Mounting Strip

A0853370 2 metre ARTECTA



Havana Neon 1018 - Single - Bottom

A0853280 Single colour ARTECTA



Havana Neon 1018 - Single - Side Conn.

A0853281 Single colour ARTECTA



Havana Neon 1018 - Single - Inline conn.

A0853282 Single colour ARTECTA



Havana Neon 1018 - RGB - Bottom Conn.

A0853290 RGB ARTECTA



Havana Neon 1018 - RGB - Side Conn.

A0853291 RGB ARTECTA



Havana Neon 1018 - RGB - Inline conn.

A0853292 RGB ARTECTA



Havana Neon 1018 - Endcap

A0853295 White ARTECTA



Havana Neon 1018 - Mounting Strip

A0853270 2 metre ARTECTA



Havana Neon 1018 - FlexMounting Strip

A0853271 1 metre ARTECTA





Malia-68 3000 K - 6W

A0135291 **Dimmable LED Recessed Spotlight - black**

A0135290 **Dimmable LED Recessed Spotlight - white**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	Yes
LED Colour Type:	WW	Pwr. Cons.:	6 W
Lumen Total:	405 lm	Driver:	Built-in
CRI:	83	Ø:	81 mm
CCT:	3000 K	IP Rate:	IP44
		Mounting Depth:	79 mm
		Mounting Size:	Ø 68-73 mm

FEATURES:

- Dimmable 6 W LED Spot
- Built-in driver with dimming function
- IP44
- Warm White 3000 K colour temperature
- 38° beam angle
- Mounting size Ø 68–73 mm/2.68”–2.87” and 79 mm height
- Available in black and white



Malia-90 3000 K - 9W

A0135301 **Dimmable LED Recessed Spotlight - black**

A0135300 **Dimmable LED Recessed Spotlight - white**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	Yes
LED Colour Type:	WW	Pwr. Cons.:	9 W
Lumen Total:	637 lm	Driver:	Built-in
CRI:	83	Ø:	103 mm
CCT:	3000 K	IP Rate:	IP44
		Mounting Depth:	91 mm
		Mounting Size:	Ø 90-95 mm

FEATURES:

- Dimmable 9 W LED Spot
- Built-in driver with dimming function
- IP44
- Warm White 3000 K colour temperature
- 38° beam angle
- Mounting size Ø 90–95 mm/3.54”–3.74” & 91 mm height (3.58”)
- Available in black and white

Athene 68 Round 3000K adj.

A0135287 **White 220 V / 7 W, 90°, 590 lm dimm. IP20**

ARTECTA



Specifications:

Light Src. Type:	LED	Dimmable:	Yes
LED Colour Type:	W / WW / CW	Pwr. Cons.:	7 W
Lumen Total:	550 lm	Driver:	Included
CRI:	80	Ø:	95 mm
CCT:	0 K	IP Rate:	IP20 (indoor use only)
		Mounting Depth:	575 mm
		Mounting Size:	Ø 68-80 mm

FEATURES:

- Triac dimmable
- Built-in driver
- Colour temperature switch - 3000 K–4000 K - 6000 K
- CRI >80

Athene 90 Round 3000K adj.

A0135289 **White 230 V / 9 W, 90°, 800 lm dimm. IP20**

ARTECTA



Specifications:

Light Src. Type:	LED	Pwr. Cons.:	9 W
LED Colour Type:	W / WW / CW	Driver:	Included
Lumen Total:	800 lm	Ø:	113 mm
CRI:	80	IP Rate:	IP20 (indoor use only)
CCT:	0 K	Mounting Depth:	58 mm
		Mounting Size:	Ø 90-102 mm

FEATURES:

- Triac dimmable
- Built-in driver
- Colour temperature switch - 3000 K–4000 K - 6000 K
- CRI >80



Display Fresnel 20 SW

A0320100 **20 W Switchable White LED Fresnel - Black**
A0320101 **20 W Switchable White LED Fresnel - White**

ARTECTA

Specifications:

Light Src. Type:	LED
LED Colour Type:	WW / CW
Lumen Total:	1212 lm
CRI:	95
Dimmable:	Yes
Pwr. Cons.:	25 W
Length (mm):	333 mm
Height (mm):	246 mm
Width (mm):	187 mm
IP Rate:	IP20 (indoor use only)
Colour:	Black

FEATURES:

- 20 W LED Fresnel
- 2-step CCT: 3000 K & 6000 K
- Wide adjustable beam angle
- Dimmer function
- Power cable & barndoor included
- Available in either black and white



Display Fresnel 50 SW

A0320110 **50 W Switchable White LED Fresnel - Black**
A0320111 **50 W Switchable White LED Fresnel - White**

ARTECTA

Specifications:

Light Src. Type:	LED
LED Colour Type:	WW / CW
Lumen Total:	3373 lm
CRI:	95
Dimmable:	Yes
Pwr. Cons.:	55 W
Length (mm):	245 mm
Height (mm):	239 mm
Width (mm):	165 mm
IP Rate:	IP20 (indoor use only)
Colour:	Black

FEATURES:

- 50 W LED Fresnel
- 2-step CCT: 3000 K & 6000 K
- Wide adjustable beam angle
- Dimmer function
- Power cable & barndoor included
- Available in either black and white

Display Profile 50 SW

A0320130 **50 W Switchable White LED Profile - Black**
A0320131 **50 W Switchable White LED Profile - White**
ARTECTA



Specifications:

Light Src. Type:	LED	Pwr. Cons.:	55 W
LED Colour Type:	WW / CW	Length (mm):	411 mm
Lumen Total:	1504 lm	Height (mm):	263 mm
CRI:	95	Width (mm):	170 mm
Dimmable:	Yes	IP Rate:	IP20 (indoor use only)
		Colour:	Black

FEATURES:
- 50 W LED Profile
- 2-step CCT: 3000 k & 6000 K
- Wide adjustable beam angle
- Dimmer function
- Power cable & gobo holder included
- Available in either black and white

Display Flood 80 SW

A0320120 **80 W Switchable White LED Flood - Black**
A0320121 **80 W Switchable White LED Flood - White**
ARTECTA



Specifications:

		Dimmable:	Yes
		Pwr. Cons.:	80 W
Light Src. Type:	LED	Length (mm):	422 mm
LED Colour Type:	WW / CW	Height (mm):	373 mm
Lumen Total:	5311 lm	Width (mm):	285 mm
CRI:	95	IP Rate:	IP20 (indoor use only)
Beam °:	95 °	Colour:	Black

FEATURES:
- 80 W LED Flood
- 2-step CCT: 3000 K & 6000 K
- Wide beam angle
- Dimmer function
- Available in either black and white



Olympia LED Panel 60x60 3000 K

A0160100 **2835 LED**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	No
LED Colour Type:	WW	Pwr. Cons.:	40 W
Lumen Total:	3920 lm	Driver:	Included
CRI:	80	IP Rate:	IP20(indoor use only)
CCT:	3000 K	Colour:	White
Dimmable (Type):	Optional	Mounting Depth:	11 mm
		Mounting Size:	595x595x11

FEATURES:

- Drop-in replacement for ceiling lights
- Driver included
- 3000K with a CRI of 80
- Frosted, milky front panel for diffused light
- Dimming optional



Olympia LED Panel 60x60 4000 K

A0160110 **2835 LED**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	No
LED Colour Type:	NW	Pwr. Cons.:	40 W
Lumen Total:	4240 lm	Driver:	Included
CRI:	80	IP Rate:	IP20(indoor use only)
CCT:	4000 K	Colour:	White
		Mounting Depth:	11 mm

FEATURES:

- Drop-in replacement for ceiling lights
- Driver included
- 4000K with a CRI of 80
- Frosted, milky front panel for diffused light
- Dimming optional



Olympia LED Panel 62x62 3000 K

A0160101 **2835 LED**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	No
LED Colour Type:	WW	Pwr. Cons.:	40 W
Lumen Total:	3920 lm	Driver:	Included
CRI:	80	IP Rate:	IP20(indoor use only)
CCT:	3000 K	Colour:	White
		Mounting Depth:	11 mm

FEATURES:

- Drop-in replacement for ceiling lights
- Driver included
- 3000K with a CRI of 80
- Frosted, milky front panel for diffused light
- Dimming optional

Olympia LED Panel 62x62 4000 K

A0160111 **2835 LED**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	No
LED Colour Type:	NW	Pwr. Cons.:	40 W
Lumen Total:	4240 lm	Driver:	Included
CRI:	80	IP Rate:	IP20(indoor use only)
CCT:	4000 K	Colour:	White
		Mounting Depth:	11 mm



FEATURES:

- Drop-in replacement for ceiling lights
- Driver included
- 4000K with a CRI of 80
- Frosted, milky front panel for diffused light
- Dimming optional

Olympia LED Panel 30x120 3000 K

A0160120 **2835 LED**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	No
LED Colour Type:	WW	Pwr. Cons.:	40 W
Lumen Total:	4100 lm	Driver:	Included
CRI:	80	IP Rate:	IP20(indoor use only)
CCT:	3000 K	Colour:	White
		Mounting Depth:	11 mm



FEATURES:

- Drop-in replacement for ceiling lights
- Driver included
- 3000K with a CRI of 80
- Frosted, milky front panel for diffused light
- Dimming optional

Olympia LED Panel 30x120 4000 K

A0160130 **2835 LED**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	No
LED Colour Type:	NW	Pwr. Cons.:	40 W
Lumen Total:	4220 lm	Driver:	Included
CRI:	80	IP Rate:	IP20(indoor use only)
CCT:	4000 K	Colour:	White
		Mounting Depth:	11 mm



FEATURES:

- Drop-in replacement for ceiling lights
- Driver included
- 4000K with a CRI of 80
- Frosted, milky front panel for diffused light
- Dimming optional



Argos LED Panel 60x60 3000K UGR<19

A0160200 **40 W Ceiling LED Panel - 60 x 60 cm**

ARTECTA

Specifications:

		UGR:	<19
		Dimmable:	No
Light Src. Type:	LED	Pwr. Cons.:	36 W
LED Colour Type:	WW	Driver:	Included
Lumen Total:	3787 lm	IP Rate:	IP20(indoor use only)
CRI:	80	Colour:	White
CCT:	3000 K	Mounting Depth:	34 mm

FEATURES:

- 60 x 60 cm LED panel (1.97 x 197 ft)
- Suitable for office (UGR< 19)
- Efficient light output (40 watt - 3530 lumen)
- Available in 3000 K and 4000 K
- Equipped with an LED-driver
- Also available in 30 x 120 cm (0.98 x 3.94 ft)



Argos LED Panel 60x60 4000K - UGR<19

A0160201 **40 W Ceiling LED Panel - 60 x 60 cm**

ARTECTA

Specifications:

		UGR:	<19
		Dimmable:	No
Light Src. Type:	LED	Pwr. Cons.:	40 W
LED Colour Type:	NW	Driver:	Included
Lumen Total:	3947 lm	IP Rate:	IP20(indoor use only)
CRI:	80	Colour:	White
CCT:	4000 K	Mounting Depth:	34 mm

FEATURES:

- 60 x 60 cm LED panel (1.97 x 197 ft)
- Suitable for office (UGR< 19)
- Efficient light output (40 watt - 3530 lumen)
- Available in 3000 K and 4000 K
- Equipped with an LED-driver
- Also available in 30 x 120 cm (0.98 x 3.94 ft)

Argos LED Panel 30x120 3000K- UGR<19

A0160210 **40 W Ceiling LED Panel - 30 x 120 cm**

ARTECTA

Specifications:

		UGR:	<19
		Dimmable:	No
Light Src. Type:	LED	Pwr. Cons.:	40 W
LED Colour Type:	WW	Driver:	Included
Lumen Total:	3828 lm	IP Rate:	IP20(indoor use only)
CRI:	80	Colour:	White
CCT:	3000 K	Mounting Depth:	34 mm



FEATURES:

- 30 x 120 cm LED panel (0.98 x 3.94 ft)
- Suitable for office (UGR< 19)
- Efficient light output (40 watt - 3530 lumen)
- Available in 3000 K and 4000 K
- Equipped with an LED-driver
- Also available in 60 x 60 cm (1.97 x 197 ft)

Argos LED Panel 30x120 4000K- UGR <19

A0160211 **40 W Ceiling LED Panel - 30 x 120 cm**

ARTECTA

Specifications:

		UGR:	<19
		Dimmable:	No
Light Src. Type:	LED	Pwr. Cons.:	40 W
LED Colour Type:	NW	Driver:	Included
Lumen Total:	3942 lm	IP Rate:	IP20(indoor use only)
CRI:	80	Colour:	White
CCT:	4000 K	Mounting Depth:	34 mm



FEATURES:

- 30 x 120 cm LED panel (0.98 x 3.94 ft)
- Suitable for office (UGR< 19)
- Efficient light output (40 watt - 3530 lumen)
- Available in 3000 K and 4000 K
- Equipped with an LED-driver
- Also available in 60 x 60 cm (1.97 x 197 ft)



Altha-1R 3000 K 30°

A0520060 **2 W outdoor recessed ground LED light**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	No
LED Colour Type:	WW	Pwr. Cons.:	26 W
Lumen Total:	100 lm	Prot. Class:	II
CCT:	3000 K	Mounting Size:	48 mm
Beam °:	30 °	Mounting Depth:	117 mm
		IP Rate:	IP67

FEATURES:

- 2 W Outdoor recessed ground LED light
- Warm White 3000 K colour temperature
- 30° beam angle
- 230 V direct voltage
- Steel aluminium die-cast
- Mounting sleeve included



Acapulco 1R 5W COB 3000K 24° HONEYCOMB

A0525130 **Outdoor recessed groundlight**

ARTECTA

Specifications:

Light Src. Type:	LED	Dimmable:	No
LED Colour Type:	WW	Pwr. Cons.:	6 W
Lumen Total:	300 lm	Prot. Class:	II
CCT:	3000 K	Mounting Size:	Ø 85 mm
Beam °:	24 °	Mounting Depth:	121 mm
		IP Rate:	IP67

FEATURES:

- 5 W Outdoor recessed ground light
- Warm White 3000 K colour temperature
- 24° beam angle
- 230 V direct voltage
- CREE COB LED

Sonara 1R 5W COB 3000K 24° HONEYCOMB

A0525140 **Outdoor recessed ground light, dimmable driver**

ARTECTA



Specifications:

Light Src. Type:	LED	Beam °:	24 °
LED Colour Type:	WW	Dimmable:	Yes
Lumen Total:	300 lm	Pwr. Cons.:	6 W
CCT:	3000 K	Prot. Class:	II
Dimmable (Type):	Trailing edge	Mounting Size:	Ø 85 mm
		Mounting Depth:	121 mm
		IP Rate:	IP67

FEATURES:

- 5 W outdoor recessed ground light
- Warm White 3000K colour temperature
- 24° beam angle
- 230 V direct voltage
- CREE COB LED
- Including built-in dimmable driver and Honeycomb Filter

Sonara 2R 10W COB 3000K 24° HONEYCOMB

A0525240 **Outdoor recessed ground light, dimmable driver**

ARTECTA



Specifications:

Light Src. Type:	LED	Beam °:	24 °
LED Colour Type:	WW	Dimmable:	Yes
Lumen Total:	415 lm	Pwr. Cons.:	96 W
CCT:	3000 K	Prot. Class:	II
Dimmable (Type):	Trailing edge	Mounting Size:	Ø 119 mm
		Mounting Depth:	135 mm
		IP Rate:	IP67

FEATURES:

- 10 W Outdoor recessed ground light
- Warm White 3000K colour temperature
- 24° beam angle
- 230 V direct voltage
- CREE COB LED
- Including built-in dimmable driver and Honeycomb Filter

Sonora 3R 15W COB 3000K 24° HONEYCOMB

A0525340 **Outdoor recessed groundlight, dimmable driver**

ARTECTA



Specifications:

Light Src. Type:	LED	Beam °:	24 °
LED Colour Type:	WW	Dimmable:	Yes
Lumen Total:	1100 lm	Pwr. Cons.:	14.6 W
CCT:	3000 K	Prot. Class:	II
Dimmable (Type):	Trailing edge	Mounting Size:	Ø 147 mm
		Mounting Depth:	160 mm
		IP Rate:	IP67

FEATURES:

- 10 W outdoor recessed ground light
- Warm White 3000K colour temperature
- 24° beam angle
- 230 V direct voltage
- CREE COB LED
- Including built-in dimmable driver and Honeycomb Filter



Canberra 1 7W COB 3000K 24°

A0720090 **Garden Light**

ARTECTA

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	76 W
LED Colour Type:	WW	Length (mm):	100 mm
Lumen Total:	415 lm	Height (mm):	354 mm
Beam °:	24 °	Width (mm):	60 mm
Dimmable:	No	IP Rate:	IP66
		Colour:	Grey

FEATURES:

- 7 W Warm White Garden Light
- Garden Spike and Wall Mount included
- 24° beam angle
- Built-in driver
- Precision optical lenses
- IP66 rated to endure heavy rainfall
- CREE COB LED



Canberra 2 12W COB 3000K 24°

A0720091 **Garden Light**

ARTECTA

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	10.6 W
LED Colour Type:	WW	Length (mm):	128 mm
Lumen Total:	994 lm	Height (mm):	375 mm
Beam °:	24 °	Width (mm):	80 mm
Dimmable:	No	IP Rate:	IP66
		Colour:	Grey

FEATURES:

- 12 W Warm White Garden Light
- Garden Spike and Wall Mount included
- 24° beam angle
- Built-in driver
- Precision optical lenses
- IP66 rated to endure heavy rainfall
- CREE COB LED



Canberra 3 20W COB 3000K 24°

A0720092 **Garden Light**

ARTECTA

Specifications:

Light Src. Type:	LED	Pwr. Cons.:	19.8 W
LED Colour Type:	WW	Length (mm):	160 mm
Lumen Total:	1900 lm	Height (mm):	480 mm
Beam °:	24 °	Width (mm):	100 mm
Dimmable:	No	IP Rate:	IP66
		Colour:	Grey

FEATURES:

- 20 W Warm White Garden Light
- Garden Spike and Wall Mount included
- 24° beam angle
- Built-in driver
- Precision optical lenses
- IP66 rated to endure heavy rainfall
- CREE COB LED

Carlow 21 RGB 7/3

A0720050 **7 x 3 W 3-in-1 LED**

ARTECTA



Specifications:

Light Src. Type:	LED	Length (mm):	178 mm
Lumen Total:	630 lm	Height (mm):	156 mm
Beam °:	18 °	Width (mm):	113 mm
Pwr. Cons.:	22 W	IP Rate:	IP66
		Colour:	Dark Grey

FEATURES:

- 7x 3 W RGB LED spot
- IP66
- 630 lumen output
- 18º beam angle
- Manual, DMX & Master/Slave control

Carlow 72 RGB 24/3

A0720051 **24 x 3 W 3-in-1 LED**

ARTECTA



Specifications:

		Pwr. Cons.:	78 W
		Length (mm):	270 mm
Light Src. Type:	LED	Height (mm):	170 mm
Lumen Total:	2404 lm	Width (mm):	327 mm
Beam °:	18 °	IP Rate:	IP66
Dimmable:	Yes	Colour:	Dark Grey

FEATURES:

- 24x 3 W RGB LED spot
- IP66
- 2404 lumen output
- 18º beam angle
- Manual, DMX & Master/Slave control



Aqua Spot 200

A0690001 **200 W LED projector spot with water pattern**

ARTECTA

Specifications:

		Pwr. Cons.:	220 W
		Length (mm):	560 mm
Light Src. Type:	LED	Height (mm):	200 mm
LED Colour Type:	CW	Width (mm):	318 mm
Lumen Total:	3900 lm	IP Rate:	IP65
Beam °:	35 °	Colour:	Light Grey
Dimmable:	Yes		

FEATURES:

- 200 W CW LED water effect projector
- Colour wheel with 7 colours
- IP65 rated, suitable for outdoor use
- Strobe, dimmer and focus function
- Wide beam angle
- Optional IP65 DMX connectors



Image Spot 100

A0690100 **100 W LED gobo projector spot with colour wheel**

ARTECTA

Specifications:

		Pwr. Cons.:	110 W
		Length (mm):	315 mm
Light Src. Type:	LED	Height (mm):	318 mm
LED Colour Type:	CW	Width (mm):	249 mm
Lumen Total:	2600 lm	IP Rate:	IP65
Dimmable:	Yes	Colour:	Light Grey

FEATURES:

- 100 W / 2600 lumen gobo projector spot
- IP65 rated, suitable for outdoor applications
- 7 gobos + open & 7 colours + white
- 3-facet rotational prism
- Adjustable zoom & focus
- Ripple effect
- Manual & DMX controllable



Image Spot 200

A0690101 **200 W LED gobo projector spot with colour wheel**

ARTECTA

Specifications:

		Pwr. Cons.:	220 W
		Length (mm):	560 mm
Light Src. Type:	LED	Height (mm):	200 mm
LED Colour Type:	CW	Width (mm):	318 mm
Lumen Total:	6600 lm	IP Rate:	IP65
Dimmable:	Yes	Colour:	Light Grey

FEATURES:

- 200 W / 6600 lumen gobo projector spot
- IP65 rated, suitable for outdoor applications
- 7 gobos + open & 7 colours + white
- 3-facet rotational prism
- Adjustable zoom & focus
- Ripple effect
- Manual & DMX controllable





Play-XV Wall Panel Single Zone RGBW RF-DMX

A9990365 **RF / DMX white**

ARTECTA

Specifications:

Ctrl. Mode:	DMX / RF	Length (mm):	86 mm
Pwr. Supp.:	12-24 VDC	Height (mm):	31.5 mm
		Width (mm):	86 mm
		IP Rate:	IP20 (indoor use only)

FEATURES:

- Single zone
- Control up to 4 channels
- DMX and RF (868 MHz)
- 10 built-in programs, 4 user-programmable scenes
- Touch sensitive
- Intended for installation in flush-mounted junction box



Play-XV Wall Panel RGBW Wi-Fi-DMX

A9990366 **Black 4 zones**

A9990367 **White 4 zones**

ARTECTA

Specifications:

		Out. Volt.:	12-24 VDC
		Length (mm):	86 mm
Ctrl. Mode:	Wi-Fi to DMX	Height (mm):	31 mm
DMX Ch.:	4	Width (mm):	86 mm
Pwr. Supp.:	12-24 VDC	IP Rate:	IP20(indoor use only)

FEATURES:

- Touch and Wi-Fi control
- Generates DMX signals
- Controls up to 4 zones, each with 4 channels



Play-XX Wall Panel RGBW RF-DMX

A9990375 **White 4 zones**

ARTECTA

Specifications:

		Length (mm):	86 mm
		Height (mm):	41 mm
Ctrl. Mode:	RF	Width (mm):	86 mm
Pwr. Supp.:	12-24 VDC	IP Rate:	IP20(indoor use only)

FEATURES:

- Control up to 4 zones simultaneously
- Control up to 4 channels
- 10 Built-in programs
- Touch sensitive
- Intended for installation in flush-mounted junction box



Domotion Wall Box PSU

A9900031 **24 VDC**

ARTECTA

Specifications:

		Length (mm):	53 mm
		Height (mm):	29.3 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Width (mm):	53 mm
Max. Out. Curr. (A):	0.45 A	IP Rate:	IP20(indoor use only)

FEATURES:

- Compact power supply
- 12 VDC / 800 mA
- Max power consumption: 9.6 W
- Suitable in combination with Artecta Domotion Wall Controller
- Fits inside a regular wall box
- Also available in 24 VDC

RF + Bluetooth Wall Remote

A9915855 **Control 2 zones**

ARTECTA



Specifications:

Ctrl. Mode:	Bluetooth / RF	Length (mm):	80 mm
RF Ch.:	24 ch	Height (mm):	13.6 mm
Batt. Type:	CR2450	Width (mm):	80 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- RF and Bluetooth connectivity
- Control 2 zones
- Quick and easy pairing with Bluetooth and RF receivers
- Intended for installation in flush-mounted junction box

Play Single mini RF Remote

A9915801 **868 MHz On/Off, dimm**

ARTECTA



Specifications:

Ctrl. Mode:	RF	Length (mm):	38.5 mm
Batt. Type:	CR2025	Height (mm):	14.8 mm
Pwr. Supp.:	3 VDC	Width (mm):	38.5 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Play XV Remote
- For controlling single colour devices
- Works in combination with RF Wall panel series
- ON/OFF
- Dimm

Play Single surface RF Remote

A9915802 **868 MHz, On/Off, dimm**

ARTECTA



Specifications:

Ctrl. Mode:	RF	Length (mm):	86 mm
Batt. Type:	CR2430	Height (mm):	26.9 mm
Pwr. Supp.:	3 VDC	Width (mm):	86 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Play XV Remote
- For controlling single and dual colour devices
- Works in combination with RF Wall panel series
- ON/OFF
- Dimm

Play Single recessed RF Remote

A9915803 **868 MHz, On/Off, dimm**

ARTECTA



Specifications:

Ctrl. Mode:	RF	Length (mm):	86 mm
Batt. Type:	CR2032	Height (mm):	41.6 mm
Pwr. Supp.:	3 VDC	Width (mm):	86 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Play XV Remote
- For controlling single and dual colour devices
- Works in combination with RF Wall panel series
- ON/OFF
- Dimm



RGB+CCT Handheld Remote

A9915856 **RF & Bluetooth connectivity**

ARTECTA

Specifications:

		Length (mm):	140 mm
		Height (mm):	17 mm
Ctrl. Mode:	RF / ZigBee	Width (mm):	44 mm
Batt. Type:	AAA	IP Rate:	IP20(indoor use only)

FEATURES:

- Suitable for RGB(W), RGB+CCT, DIM & CCT devices with RF receiver
- Enables to pair Artecta/ZigBee lighting devices and gateway products
- Battery operated with low power consumption
- Supports 3 zones
- 5 dynamically programmable scenes
- Transmission range up to 30 m (32.8 yard)



Play-V RF Remote Control

A9915800 **5 channels, single Colour**

ARTECTA

Specifications:

		Max. Out. Curr. (A):	1 A
		Length (mm):	136 mm
Ctrl. Mode:	RF	Height (mm):	11 mm
RF Ch.:	5 ch	Width (mm):	39 mm
Batt. Type:	CR2025	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	5 VDC		

FEATURES:

- 5x single colour RF remote
- Suitable for Play receiver dimmers and Play Receiver to DMX
- Can be combined with RF Wall Panel series



Play-XV RF Remote Control

A9990380 **RGBW 8 zones**

ARTECTA

Specifications:

		Length (mm):	130 mm
		Height (mm):	25 mm
Ctrl. Mode:	RF	Width (mm):	44 mm
Pwr. Supp.:	4.5 VDC	IP Rate:	IP20(indoor use only)

FEATURES:

- Control up to 8 zones
- Control up to 4 channels per zone
- For Play receivers



Play RGB Desk

A9990371 **868 MHz, On/Off, dimm, Colour**

ARTECTA

Specifications:

		Length (mm):	96 mm
		Height (mm):	74 mm
Ctrl. Mode:	RF	Width (mm):	65 mm
Pwr. Supp.:	3 VDC	IP Rate:	IP20(indoor use only)

FEATURES:

- Play XV Remote
- For controlling single and multi colour devices
- Dimmer/switch/colour adjustment functions
- Desktop model
- Battery powered

ZigBee Micro Smart Dimmer

A9915910 **1-channel dimmer with ZigBee protocol**

ARTECTA



Specifications:

		Max. Out. Curr. (A):	1.8 A
		Length (mm):	45 mm
Ctrl. Mode:	ZigBee	Height (mm):	20.3 mm
Protocols:	ZigBee	Width (mm):	45 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP20(indoor use only)

FEATURES:

- ZigBee and RF-remote supported dimmer
- 1 channel output, Up to 400 W
- ZigBee 3.0 mesh network
- Supports resistive loads, capacitive loads and inductive loads
- Philips HUE compatible and other universal ZigBee gateway products

For 2-wire connection without neutral

Bypass for Artecta Bluetooth + RF AC Phase Dimmer

A9915920 **For 2-wire connection without neutral**

ARTECTA



Specifications:

		Height (mm):	10 mm
		Width (mm):	20 mm
Length (mm):	25 mm	IP Rate:	IP20(indoor use only)

FEATURES:

- Prevents flickering of connected lights
- Prevents glowing of fluorescent lights when switched off
- Provides load for dimmer for correct operation with low loads

Bluetooth + RF AC Phase Dimmer

A9917000 **Up to 400 W - trailing & leading edge**

ARTECTA



Specifications:

		Height (mm):	20.3 mm
		Width (mm):	45 mm
Ctrl. Mode:	Bluetooth / RF	IP Rate:	IP20(indoor use only)
Length (mm):	455 mm		

FEATURES:

- Supports resistive loads and capacitive loads
- AC Phase cut dimmer based on RF + Bluetooth technology
- Up to 20 m transmission distance
- Mini size for wall box installation

Bluetooth + RF AC Dimmer

A9917100 **Up to 400 W - trailing & leading edge**

ARTECTA



Specifications:

		Length (mm):	45 mm
		Height (mm):	20.3 mm
Ctrl. Mode:	Bluetooth / Push-dim / RF	Width (mm):	45 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	IP Rate:	IP20(indoor use only)

FEATURES:

- AC Phase cut dimmer
- 1 channel, up to 400W
- Suitable for 100-240 VAC
- Quick and easy pairing to the smart app and RF remote controls
- Supports resistive and capacitive loads



LINEARdrive Constant Voltage

A9950210 **eldoLED LIN210D1 DALI 1 Ballast 2 outputs**

ELDOLED

Specifications:

Ctrl. Mode:	DALI	Max. Out. Curr. (A):	8 A
Protocols:	DALI	Length (mm):	153 mm
Pwr. Supp.:	12-28 VDC	Height (mm):	23 mm
Out. Volt.:	12-28 VDC	Width (mm):	50 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1%
- Auxiliary power output
- Exceptionally smooth colour fades



LINEARdrive Constant Voltage

A9950211 **eldoLED LIN211D1 0–10 VDC 1-channel 2 outputs**

ELDOLED

Specifications:

Ctrl. Mode:	0-10 VDC	Max. Out. Curr. (A):	8 A
Protocols:	0-10VDC	Length (mm):	153 mm
Pwr. Supp.:	12-28 VDC	Height (mm):	23 mm
Out. Volt.:	12-28 VDC	Width (mm):	50 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1%
- Auxiliary power output
- Exceptionally smooth colour fades



LINEARdrive Constant Voltage

A9950212 **eldoLED LIN212D1 DMX 1-channel 2 outputs**

ELDOLED

Specifications:

Ctrl. Mode:	DMX	Out. Volt.:	12-28 VDC
DMX Ch.:	1	Max. Out. Curr. (A):	8 A
Protocols:	DMX	Length (mm):	153 mm
Pwr. Supp.:	12-28 VDC	Height (mm):	23 mm
		Width (mm):	50 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1%
- Auxiliary power output
- Exceptionally smooth colour fades



LINEARdrive Constant Voltage

A9950220 **eldoLED LIN220D1 DALI 2 Ballasts 2 outputs**

ELDOLED

Specifications:

Ctrl. Mode:	DALI	Length (mm):	153 mm
Pwr. Supp.:	12-28 VDC	Height (mm):	23 mm
Max. Out. Curr. (A):	8 A	Width (mm):	50 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 2-Channel, 200 W LED driver
- Smooth, flickerfree dimming with linear and log curves
- Made for DALI environment
- Auxiliary output
- 12-28 VDC output up to 8 A in total

LINEARdrive Constant Voltage

A9950222 **eldoLED LIN222D1 DMX 2 channels 2 outputs**

ELDOLED

Specifications:

Ctrl. Mode:	DMX
Pwr. Supp.:	12-28 VDC
Out. Volt.:	12-28 VDC
Max. Out. Curr. (A):	8 A
Length (mm):	153 mm
Height (mm):	23 mm
Width (mm):	50 mm
IP Rate:	IP20(indoor use only)
Colour:	Black



FEATURES:

- 2-Channel, 200 W LED driver
- Smooth, flickerfree dimming with linear and log curves
- Made for DMX environment
- Auxiliary output
- 12-28 VDC output up to 8 A in total

LINEARdrive Constant Voltage

A9950050 **eldoLED LIN180D DMX 4 channels 4 outputs 1.5 A / Ch**

ELDOLED

Specifications:

Ctrl. Mode:	DMX
DMX Ch.:	4
Protocols:	DMX
Pwr. Supp.:	12-28 VDC
Out. Volt.:	12-28 VDC
Max. Out. Curr. (A):	6 A
Length (mm):	155 mm
Height (mm):	23 mm
Width (mm):	50 mm
IP Rate:	IP20(indoor use only)



FEATURES:

- 180 W dimmable RGB(W) LED driver
- Four channels
- Smooth, flickerfree dimming
- Made for DMX/DALI environment
- Maximum energy and operational efficiency
- 0—10 VDC / 6 A

LINEARdrive Constant Voltage

A9950051 **eldoLED LIN720D DALI / DMX 4 channels 4 outputs. 6 A / Ch**

ELDOLED

Specifications:

Ctrl. Mode:	DMX
DMX Ch.:	4
Protocols:	DMX
Pwr. Supp.:	12-28 VDC
Out. Volt.:	12-28 VDC
Max. Out. Curr. (A):	24 A
Length (mm):	155 mm
Height (mm):	23 mm
Width (mm):	50 mm
IP Rate:	IP20(indoor use only)



FEATURES:

- 720 W dimmable RGB(W) LED driver
- Four channels
- Smooth, flickerfree dimming
- Made for DMX/DALI environment
- Maximum energy and operational efficiency
- 12—28 VDC / 24 A

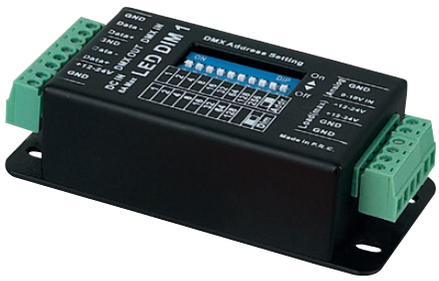

LED DIM-1 MKII

A9915041 **1 channel**

ARTECTA

Specifications:

Ctrl. Mode:	DMX	Out. Volt.:	12-24 VDC
DMX Ch.:	1	Max. Out. Curr. (A):	4 A
Protocols:	DMX	Length (mm):	90 mm
Pwr. Supp.:	12-24 VDC	Height (mm):	20 mm
		Width (mm):	40 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Compact size
- Easy to use
- Transfer any 12-24 V LED into DMX Controllable



Play-I LED 1-10 VDC Dimmer

A9915830 **Constant voltage single Colour**

ARTECTA

Specifications:

Ctrl. Mode:	0-10 VDC	Length (mm):	38 mm
Pwr. Supp.:	12-36 VDC	Height (mm):	20 mm
Max. Out. Curr. (A):	8 A	Width (mm):	101 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 1 Channel, up to 8 A
- Analogue dimmer (0-10 V dim signal)
- Logarithmic dimming curve

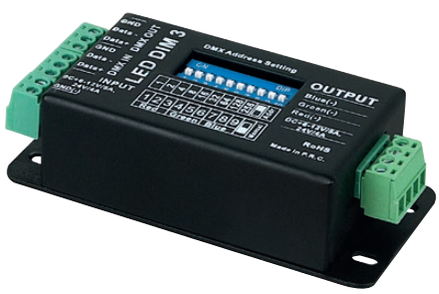

LED DIM-3 MKII

A9915042 **3 channels**

ARTECTA

Specifications:

Ctrl. Mode:	DMX	Out. Volt.:	12-24 VDC
DMX Ch.:	3	Max. Out. Curr. (A):	4 A
Protocols:	DMX	Length (mm):	90 mm
Pwr. Supp.:	12-24 VDC	Height (mm):	20 mm
		Width (mm):	40 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Compact size
- Easy to use
- Transfer any 12-24 V LED into DMX Controllable



LED RGB DMX Controller

A9915011 **3 channels**

ARTECTA

Specifications:

Ctrl. Mode:	DMX	Length (mm):	175 mm
Pwr. Supp.:	12-24 VDC	Height (mm):	35 mm
Max. Out. Curr. (A):	15 A	Width (mm):	45 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 3-channel (RGB) LED DMX controller
- 12-24 VDC / 15 A

LED Pixel 1

A9915120

ARTECTA



Specifications:

Ctrl. Mode:	DMX	Out. Volt.:	12-24 VDC
DMX Ch.:	512	Max. Out. Curr. (A):	1 A
Protocols:	SPI	Length (mm):	115 mm
Pwr. Supp.:	12-24 VDC	Height (mm):	24 mm
		Width (mm):	55 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Easy to install
- Wide range of SPI controls built-in
- 12 to 24 V Powersupply
- Controllable by DMX

Play-III LED DMX Dimmer

A9915850 **Constant voltage multicolour**

ARTECTA



Specifications:

Ctrl. Mode:	DMX	Length (mm):	170 mm
Pwr. Supp.:	12-36 VDC	Height (mm):	28 mm
Max. Out. Curr. (A):	5 A	Width (mm):	53 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 5-channel LED (strip) DMX PWM-dimmer
- Can be used as a RGB and RGBW dimmer
- 12-36 VDC / 5 A

Play-III DMX Din Rail Decoder

A9915860 **Constant voltage**

ARTECTA



Specifications:

Ctrl. Mode:	DMX	Max. Out. Curr. (A):	5 A
DMX Ch.:	4	Length (mm):	106 mm
Pwr. Supp.:	12-36 VDC	Height (mm):	65 mm
Out. Volt.:	12-36 VDC	Width (mm):	55 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- RDM bi-directional communication function
- Enable DMX master console to detect decoder info & set DMX address
- Gamma ray curves value adj. from 0.1 - 9.9, logarithmic & lin dimming

LED DIM-5

A9915043 **5 channels Neutrik XLR 3-pin & RJ45**

ARTECTA



Specifications:

Ctrl. Mode:	DMX	Out. Volt.:	12-24 VDC
DMX Ch.:	5	Max. Out. Curr. (A):	8 A
Protocols:	DMX	Length (mm):	164 mm
Pwr. Supp.:	12-24 VDC	Height (mm):	38 mm
		Width (mm):	73 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 5-channel (RGBW+dim) LED DMX controller
- 3-pin XLR & RJ45 in/output
- 12-24 VDC / 8 A



LED DIM-12

A9915045 **12-channel Constant Voltage PWM LED Dimmer**

ARTECTA

Specifications:

Ctrl. Mode:	DMX	Out. Volt.:	12-24 VDC
DMX Ch.:	48	Max. Out. Curr. (A):	15 A
Protocols:	DMX	Length (mm):	286 mm
Pwr. Supp.:	12-24 VDC	Height (mm):	90 mm
		Width (mm):	62 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 12 outputs of RGB or RGBW
- Clear OLED display for easy setup
- Including Phoenix terminals
- Control by DMX or stand alone



LED Dim Pro

A9915040 **4 channels**

ARTECTA

Specifications:

Ctrl. Mode:	DMX	Out. Volt.:	12-24 VDC
DMX Ch.:	1 / 4	Max. Out. Curr. (A):	8 A
Protocols:	DMX	Length (mm):	195 mm
Pwr. Supp.:	12-24 VDC	Height (mm):	80 mm
		Width (mm):	140 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Menu display with DU, EN & GE language select
- DMX fail back up function
- Stand-alone function
- RGBW Control for 12 V & 24 V strips
- Selectable PWM frequency
- IR Remote for controlling without DMX



Play-V LED RF Receiver

A9915810 **Constant voltage single Colour**

ARTECTA

Specifications:

Ctrl. Mode:	RF	Length (mm):	179 mm
Pwr. Supp.:	12-36 VDC	Height (mm):	22 mm
Max. Out. Curr. (A):	5 A	Width (mm):	46 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 4-zone LED (strip) driver with RF receiver
- Suitable for 4x single colour
- Group dimming
- 12-36 VDC / 4x 5 A output
- Wi-Fi accessable (Easy Lighting app)
- Controllable via RF remotes



ECOdrive DC 15 W

A9950030 **Constant Current RGB(W) LED driver/controller**

ELDOLED

Specifications:

Ctrl. Mode:	DMX	Length (mm):	153 mm
Pwr. Supp.:	12-32 VDC	Height (mm):	23 mm
Out. Volt.:	12-32 VDC	Width (mm):	50 mm
Max. Out. Curr. (A):	0.5 A	IP Rate:	IP20(indoor use only)
		Colour:	Black

FEATURES:

- 4-channel RGB(W) LED strip controller
- Power output range: 0—15 W
- 12-36 VDC / 200—500 mA
- Easy configuration

Play-V RF Receiver

A9910035 **Constant voltage single Colour, remote control not included**

ARTECTA



Specifications:

Ctrl. Mode:	Push-dim / RF	Length (mm):	95 mm
Pwr. Supp.:	12-36 VDC	Height (mm):	20 mm
Max. Out. Curr. (A):	8 A	Width (mm):	37 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 1-channel LED (strip) RF receiver
- Suitable for 1x single colour
- 12-36 VDC / 8 A
- Push-dim
- Wi-Fi accessable (Easy Lighting app)
- Controllable via RF remotes

ECOdrive DC 30 W

A9950031 **Constant Current RGB(W) LED driver/controller**

ELDOLED



Specifications:

Ctrl. Mode:	DMX	Length (mm):	153 mm
Pwr. Supp.:	12-32 VDC	Height (mm):	23 mm
Max. Out. Curr. (A):	1.05 A	Width (mm):	50 mm
		IP Rate:	IP20(indoor use only)
		Colour:	Black

FEATURES:

- 4-channel RGB(W) LED strip controller
- Power output range: 0—30 W
- 12-36 VDC / 200—1050 mA
- Easy configuration

ECOdrive DC 45 W

A9950032 **Constant Current RGB(W) LED driver/controller**

ELDOLED



Specifications:

Ctrl. Mode:	DMX	Length (mm):	153 mm
Pwr. Supp.:	12-32 VDC	Height (mm):	23 mm
Out. Volt.:	12-32 VDC	Width (mm):	50 mm
Max. Out. Curr. (A):	1.4 A	IP Rate:	IP20(indoor use only)
		Colour:	Black

FEATURES:

- 4-channel RGB(W) LED strip controller
- Power output range: 0—45 W
- 12-36 VDC / 200—1400 mA
- Easy configuration



POWERdrive DC 45 W

A9950040 **Constant Current RGB(W) LED driver/controller**

ELDOLED

Specifications:

Ctrl. Mode:	DMX	Length (mm):	153 mm
Pwr. Supp.:	12-32 VDC	Height (mm):	23 mm
Out. Volt.:	12-32 VDC	Width (mm):	50 mm
Max. Out. Curr. (A):	0.5 A	IP Rate:	IP20(indoor use only)
		Colour:	Black

FEATURES:

- 4-channel RGB(W) LED strip controller
- DMX, DALI and LedSync compatible
- 15-bit dimming and colour control
- Bidirectional communication for driver configuration and temp readout
- Power output range: 0—45 W
- 12-36 VDC / 200—500 mA
- Easy configuration



POWERdrive DC 90 W

A9950041 **Constant Current RGB(W) LED driver/controller**

ELDOLED

Specifications:

Ctrl. Mode:	DMX	Length (mm):	192 mm
Pwr. Supp.:	12-32 VDC	Height (mm):	23 mm
Out. Volt.:	12-32 VDC	Width (mm):	50 mm
Max. Out. Curr. (A):	1.05 A	IP Rate:	IP20(indoor use only)
		Colour:	Black

FEATURES:

- 4-channel RGB(W) LED strip controller
- DMX, DALI and LedSync compatible
- 15-bit dimming and colour control
- Bidirectional communication for driver configuration and temp readout
- Power output range: 0—90 W
- 12-36 VDC / 200—500 mA
- Easy configuration



POWERdrive DC 180 W

A9950042 **Constant Current RGB(W) LED driver/controller**

ELDOLED

Specifications:

Ctrl. Mode:	DMX	Length (mm):	192 mm
Pwr. Supp.:	12-32 VDC	Height (mm):	23 mm
Out. Volt.:	12-32 VDC	Width (mm):	50 mm
Max. Out. Curr. (A):	6.16 A	IP Rate:	IP20(indoor use only)
		Colour:	Black

FEATURES:

- 4-channel RGB(W) LED strip controller
- DMX, DALI and LedSync compatible
- 15-bit dimming and colour control
- Bidirectional communication for driver configuration and temp readout
- Power output range: 0—180 W
- 12-36 VDC / 200—500 mA
- Easy configuration

Play-XV RF Receiver

A9910020 **Constant voltage multicolour**

ARTECTA

Specifications:

		Max. Out. Curr. (A):	5 A
		Length (mm):	179 mm
Ctrl. Mode:	RF	Height (mm):	22 mm
RF Ch.:	4 ch	Width (mm):	46 mm
Pwr. Supp.:	12-36 VDC	IP Rate:	IP20(indoor use only)

FEATURES:

- 4-channel LED (strip) RF receiver
- Suitable for 4x single colour, 2x tunable white or 1x RGB(W)
- 12-36 VDC / 5 A
- Dimmable
- Wi-Fi accessable (Easy Lighting app)
- Controllable via RF remotes



Play-XV RF-Wi-Fi Receiver

A9910025 **Constant voltage multicolour, remote control not included**

ARTECTA

Specifications:

		Length (mm):	179 mm
		Height (mm):	22 mm
Ctrl. Mode:	App / RF / Wi-Fi/LAN to RF	Width (mm):	58 mm
Pwr. Supp.:	12-36 VDC	IP Rate:	IP20(indoor use only)
Max. Out. Curr. (A):	20 A		

FEATURES:

- 4-channel LED (strip) RF receiver
- Suitable for 4x single colour, 2x tunable white or 1x RGB(W)
- 12-36 VDC / 20 A
- Dimmable
- Wi-Fi accessable (Easy Lighting app)
- Controllable via RF remotes



Play-V RF Receiver Waterproof

A9910036 **Constant voltage single Colour**

ARTECTA

Specifications:

		Max. Out. Curr. (A):	5 A
		Length (mm):	181 mm
Ctrl. Mode:	Push-dim / RF	Height (mm):	38 mm
RF Ch.:	4 ch	Width (mm):	74 mm
Pwr. Supp.:	12-36 VDC	IP Rate:	IP66

FEATURES:

- 4-channel LED (strip) RF receiver
- Suitable for 4x single colour, 2x tunable white or 1x RGB(W)
- IP66 (waterproof)
- 12-36 VDC / 5 A
- Push-dim
- Wi-Fi accessable (Easy Lighting app)
- Controllable via RF remotes





Play-XV RF Receiver Waterproof

A9910026 **Constant voltage multicolour**

ARTECTA

Specifications:

Ctrl. Mode:	RF	Length (mm):	181 mm
Pwr. Supp.:	12-36 VDC	Height (mm):	38 mm
Max. Out. Curr. (A):	20 A	Width (mm):	74 mm
		IP Rate:	IP67

FEATURES:

- 4-channel LED (strip) RF receiver
- Suitable for 4x single colour, 2x tunable white or 1x RGB(W)
- IP67
- 12-36 VDC / 20 A
- Dimmable
- Wi-Fi accessable (Easy Lighting app)
- Controllable via RF remotes



Play-XV RF to DMX Receiver

A9910030 **8 zones multicolour**

ARTECTA

Specifications:

Ctrl. Mode:	RF to DMX	Length (mm):	178 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	21 mm
Max. Out. Curr. (A):	1 A	Width (mm):	57 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- RF to 8x4 DMX channel receiver
- For controlling multicolour RGB(W) DMX fixtures
- Send to 8 zones with 4 DMX channels each
- Wi-Fi accessable (Easy Lighting app)
- Controllable via RF remotes



Play-XV Wi-Fi to DMX Receiver

A9910031 **8 zones multicolour**

ARTECTA

Specifications:

Ctrl. Mode:	App / RF / Wi-Fi/LAN to RF	Length (mm):	178 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	21 mm
Max. Out. Curr. (A):	1 A	Width (mm):	57 mm
		IP Rate:	IP67

FEATURES:

- Wi-Fi to 8x4 DMX channel receiver
- For controlling multicolour RGB(W) DMX fixtures
- Send to 8 zones with 4 DMX channels each
- Wi-Fi accessable (Easy Lighting app)
- Controllable via RF remotes



Play Wi-Fi/LAN to RF Router

A9910032 **868 MHz, power supply incl.**

ARTECTA

Specifications:

Ctrl. Mode:	Wi-Fi/LAN to RF	Length (mm):	109.7 mm
Pwr. Supp.:	12 VDC	Height (mm):	24.2 mm
Max. Out. Curr. (A):	1 A	Width (mm):	84.7 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Wi-Fi/LAN to RF router
- Suitable for Android & iOS (Easy Lighting app)

ZigBee LED controller 5 ch

A9916000 **Compatible with ZigBee, Philips HUE and other smart home software**

ARTECTA

Specifications:

		Length (mm):	145 mm
		Height (mm):	16 mm
Ctrl. Mode:	ZigBee	Width (mm):	46.5 mm
Dimmable:	Yes	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	12-24 VDC		

FEATURES:

- Philips HUE compatible and other universal ZigBee gateway products
- Zigbee 3.0 mesh network
- Control single colour, Tunable White, RGB(W) and RGB+CCT



AC-DC RF wireless driver

A9915820 **50 W LED dimmable driver**

ARTECTA

Specifications:

		Out. Volt. Vf/Vo Max.:	48 VDC
		Length (mm):	210 mm
Ctrl. Mode:	RF	Height (mm):	32 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	Width (mm):	50 mm
Out. Volt. Vf/Vo Min.:	8 VDC	IP Rate:	IP20(indoor use only)

FEATURES:

- One channel for single colour dimmable lighting
- Controllable by RF remote
- Suitable for 12 and 24 VDC lighting
- Push switch function included
- Protection against overheating and overcurrent



Bluetooth + RF LED Controller

A9915811 **All-in-one RGB(W) LED strip controller**

ARTECTA

Specifications:

		Length (mm):	170 mm
		Height (mm):	29 mm
Ctrl. Mode:	Bluetooth / RF	Width (mm):	59 mm
Dimmable:	Yes	IP Rate:	IP20(indoor use only)
Pwr. Supp.:	12-24 VDC		

FEATURES:

- Bluetooth and RF control
- CCT, RGB/RGBW, RGB + CCT
- Up to 30 m transmission distance
- Pair up to 8 remotes





LED Driver Universal

A9900400 MEAN WELL LCM-25DA, 25 W

MEANWELL

Specifications:

Ctrl. Mode:	DALI / Push-dim	Out. Volt. Vf/Vo Max.:	54 VDC
Pwr. Supp.:	100-240 VAC 50-60 Hz	Length (mm):	105 mm
Out. Volt. Vf/Vo Min.:	6 VDC	Height (mm):	23 mm
		Width (mm):	105 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Constant current mode output
- Multiple levels selectable by DIP switch
- Active PFC
- DALI interface



LED Driver Universal

A9900405 MEAN WELL LCM-40DA, 40 W

MEANWELL

Specifications:

Ctrl. Mode:	DALI / Push-dim	Out. Volt. Vf/Vo Max.:	100 VDC
Pwr. Supp.:	100-240 VAC 50-60 Hz	Length (mm):	124 mm
Out. Volt. Vf/Vo Min.:	2 VDC	Height (mm):	23 mm
		Width (mm):	81.5 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Constant current mode output
- Multiple levels selectable by DIP switch
- Active PFC
- DALI interface



LED Driver Universal

A9900410 MEAN WELL LCM-60DA, 60 W

MEANWELL

Specifications:

Ctrl. Mode:	DALI / Push-dim	Out. Volt. Vf/Vo Max.:	90 VDC
Pwr. Supp.:	100-240 VAC 50-60 Hz	Length (mm):	124 mm
Out. Volt. Vf/Vo Min.:	2 VDC	Height (mm):	23 mm
		Width (mm):	81.5 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Constant current mode output
- Multiple levels selectable by DIP switch
- Active PFC
- DALI interface

TOOLbox PRO

A9915056 **Configuration Device eldoLED LED drivers**

ELDOLED



Specifications:

		Length (mm):	76 mm
		Height (mm):	25.4 mm
Ctrl. Mode:	DALI / DMX	Width (mm):	31.8 mm
Pwr. Supp.:	5 VDC	IP Rate:	IP20(indoor use only)

FEATURES:

- Configuration device for eldoLED LED drivers
- FluxTool software downloadable for MAC/PC
- Set DMX parametres (incl. current setting
- Test DALI functionality
- Program the driver via LEDcode interface

Solodrive 240 A

A9950240 **20 W Dali LED driver**

ELDOLED



Specifications:

		Out. Volt. Vf/Vo Min.:	2 VDC
		Out. Volt. Vf/Vo Max.:	40 VDC
Ctrl. Mode:	DALI	Length (mm):	160 mm
Dali Ballast:	1 Ballast	Height (mm):	31 mm
Dimmable:	Yes	Width (mm):	42 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	IP Rate:	IP20(indoor use only)

FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode2 supports several digital accessories and IoT applications
- NTC interface for robust thermal management
- Increase performance and capability of any LED fixture
- Reduce inventory and decrease lead times with configurable drivers
- Trusted brand with proven track record of performance and reliability

Solodrive 240 A

A9950250 **20 W Dali LED driver pulse dimming**

ELDOLED



Specifications:

		Out. Volt. Vf/Vo Max.:	40 VDC
		Length (mm):	160 mm
Ctrl. Mode:	Push-dim	Height (mm):	31 mm
Dimmable:	Yes	Width (mm):	42 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	IP Rate:	IP20(indoor use only)
Out. Volt. Vf/Vo Min.:	2 VDC		

FEATURES:

- Pulse dimming
- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode2 supports several digital accessories and IoT applications
- NTC interface for robust thermal management
- Increase performance and capability of any LED fixture



Solodrive 20 W Dali-2 Dim to dark LED driver

A9950243 **SL20 mA-E2Z0D1**

ELDOLED

Specifications:

Ctrl. Mode:	DALI	Out. Volt. Vf/Vo Max.:	40 VDC
Pwr. Supp.:	220V-240 VAC 50 Hz	Length (mm):	183.4 mm
Out. Volt. Vf/Vo Min.:	2 VDC	Height (mm):	30 mm
		Width (mm):	41.3 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- LightShape: Dim to Warm
- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode2 supports several digital accessories and IoT applications
- NTC interface for robust thermal management



Dual Drive 20 W Dali-2 dim to dark LED driver

A9950244 **DL20 mA-E2Z0D1**

ELDOLED

Specifications:

Ctrl. Mode:	DALI	Out. Volt. Vf/Vo Max.:	40 VDC
Pwr. Supp.:	220V-240 VAC 50 Hz	Length (mm):	183.4 mm
Out. Volt. Vf/Vo Min.:	2 VDC	Height (mm):	30 mm
		Width (mm):	41.3 mm
		IP Rate:	IP20 (indoor use only)

FEATURES:

- LightShape: intuitive colour temperature and intensity control
- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode2 supports several digital accessories and IoT applications
- NTC interface for robust thermal management



ECOdrive AC 30 W Constant Current

A9950370 **eldoLED ECO361 A 0–10 VDC 1 output**

ELDOLED

Specifications:

Ctrl. Mode:	0-10 VDC	Out. Volt. Vf/Vo Max.:	55 VDC
Dimmable:	Yes	Length (mm):	210 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	34 mm
Out. Volt. Vf/Vo Min.:	2 VDC	Width (mm):	41 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode supports most constant current LED modules and arrays
- NTC interface for robust thermal manage
- Increase performance and capability of any LED fixture
- Trusted brand with proven track record of performance and reliability

ECOdrive AC 30 W Constant Current

A9950371 **eldoLED ECO360 A DALI 1 output**

ELDOLED

Specifications:

Ctrl. Mode:	DALI	Out. Volt. Vf/Vo Min.:	2 VDC
Dali Ballast:	1 Ballast	Out. Volt. Vf/Vo Max.:	55 VDC
Dimmable:	Yes	Length (mm):	210 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	34 mm
		Width (mm):	41 mm
		IP Rate:	IP20(indoor use only)



FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode supports most constant current LED modules and arrays
- NTC interface for robust thermal management
- Increase performance and capability of any LED fixture
- Trusted brand with proven track record of performance and reliability

SOLOdrive AC 30 W Constant Current

A9950360 **eldoLED SL0361 A 0–10 VDC 1 output**

ELDOLED

Specifications:

Ctrl. Mode:	0-10 VDC	Out. Volt. Vf/Vo Max.:	55 VDC
Dimmable:	Yes	Length (mm):	210 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	33.8 mm
Out. Volt. Vf/Vo Min.:	2 VDC	Width (mm):	40 mm
		IP Rate:	IP20(indoor use only)



FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode supports most constant current LED modules and arrays
- NTC interface for robust thermal management
- Industry-best dimming performance for your fixture/application

SOLOdrive 360/S 30 W DALI CC

A9950362 **eldoLED SL0360S3**

ELDOLED

Specifications:

Dali Ballast:	1 Ballast	Min. Output Current (mA):	150 mA
Protocols:	DALI 2	Max. Out. Curr. (mA):	1400 mA
Dimmable:	Yes	Pwr. Conn. In.:	Open End
Pwr. Supp.:	100-240 VAC 50-60Hz	Pwr. Conn. Out.:	Open End
Out. Volt. Vf/Vo Min.:	2 VDC	Data Conn. In:	Open End
Out. Volt. Vf/Vo Max.:	55 VDC	Data Conn. Out:	Open End
Pwr. Cons.:	30 W	IP Rate:	IP20(indoor use only)
		Colour:	White



FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode2 supports several digital accessories and IoT applications
- NTC interface for robust thermal management
- Industry-best dimming performance for your fixture/application



SOLOdrive AC 30 W Constant Current

A9950361 **eldoLED SL0360 A DALI 1 output**

ELDOLED

Specifications:

Ctrl. Mode:	DALI	Out. Volt. Vf/Vo Min.:	2 VDC
Dali Ballast:	1 Ballast	Out. Volt. Vf/Vo Max.:	55 VDC
Dimmable:	Yes	Length (mm):	210 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	34 mm
		Width (mm):	41 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode2 supports several digital accessories and IoT applications
- NTC interface for robust thermal management
- Industry-best dimming performance for your fixture/application
- Wide application area thanks to fully configurable dimming curve



ECOdrive AC 50 W Constant Current

A9950570 **eldoLED ECO561 A 0–10 VDC 1 output**

ELDOLED

Specifications:

Ctrl. Mode:	0-10 VDC	Out. Volt. Vf/Vo Max.:	55 VDC
Dimmable:	Yes	Length (mm):	153 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	31 mm
Out. Volt. Vf/Vo Min.:	2 VDC	Width (mm):	76 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode supports most constant current LED modules and arrays
- Increase performance and capability of any LED fixture
- Reduce inventory and decrease lead times with configurable drivers



ECOdrive AC 50 W Constant Current

A9950571 **eldoLED ECO560 A DALI 1 output**

ELDOLED

Specifications:

Ctrl. Mode:	DALI	Out. Volt. Vf/Vo Min.:	2 VDC
Dali Ballast:	1 Ballast	Out. Volt. Vf/Vo Max.:	55 VDC
Dimmable:	Yes	Length (mm):	153 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	31 mm
		Width (mm):	76 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode2 supports several digital accessories and IoT applications
- NTC interface for robust thermal management
- Increase performance and capability of any LED fixture
- Trusted brand with proven track record of performance and reliability

SOLOdrive AC 50 W Constant Current

A9950560 **eldoLED SL0561 A 0–10 VDC 2 outputs**

ELDOLED



Specifications:

Ctrl. Mode:	0-10 VDC	Out. Volt. Vf/Vo Max.:	55 VDC
Dimmable:	Yes	Length (mm):	153 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	31 mm
Out. Volt. Vf/Vo Min.:	1.5 VDC	Width (mm):	76 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- LightShape: Dim to Warm
- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode supports most constant current LED modules and arrays
- NTC interface for robust thermal management
- Wide application area thanks to fully configurable dimming curve

SOLOdrive AC 50 W Constant Current

A9950561 **eldoLED SL0560 A DALI 1 Ballast 1 output**

ELDOLED



Specifications:

Ctrl. Mode:	DALI	Out. Volt. Vf/Vo Max.:	55 VDC
Dimmable:	Yes	Length (mm):	153 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	31 mm
Out. Volt. Vf/Vo Min.:	1.5 VDC	Width (mm):	76 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- LightShape: Dim to Warm
- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode2 supports several digital accessories and IoT applications
- NTC interface for robust thermal management
- Wide application area thanks to fully configurable dimming curve

DUALdrive AC 50 W Constant Current

A9950562 **eldoLED DL0560 A DALI 2 Ballast 2 outputs**

ELDOLED



Specifications:

Ctrl. Mode:	DALI	Out. Volt. Vf/Vo Min.:	1.5 VDC
Dali Ballast:	2 Ballast	Out. Volt. Vf/Vo Max.:	55 VDC
Dimmable:	Yes	Length (mm):	153 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	31 mm
		Width (mm):	76 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- LightShape: intuitive colour temperature and intensity control
- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- ledcode2 supports several digital accessories and IoT applications
- Wide application area thanks to fully configurable dimming curve
- Perfect for tunable white applications



SOLOdrive AC 100 W Constant Current

A9950060 eldoLED SL1061 A 0–10 VDC 4 outputs

ELDOLED

Specifications:

Ctrl. Mode:	0-10 VDC	Out. Volt. Vf/Vo Max.:	57 VDC
Dimmable:	Yes	Length (mm):	388 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	30 mm
Out. Volt. Vf/Vo Min.:	2 VDC	Width (mm):	42 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 100 W dimmable RGB(W) LED driver
- Smooth, flickerfree dimming
- Maximum energy and operational efficiency
- 0—10 VDC and 200 mA



SOLOdrive AC 100 W Constant Current

A9950061 eldoLED SL1060 A DALI 1 Ballast 4 outputs

ELDOLED

Specifications:

Ctrl. Mode:	DALI	Out. Volt. Vf/Vo Min.:	2 VDC
Dali Ballast:	1 Ballast	Out. Volt. Vf/Vo Max.:	57 VDC
Dimmable:	Yes	Length (mm):	388 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	30 mm
		Width (mm):	42 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 100 W dimmable RGB(W) LED driver
- Smooth, flickerfree dimming
- Made for DMX/DALI environment
- Maximum energy and operational efficiency
- 2—57 VDC and 200—1050 mA



DUALdrive AC 100 W Constant Current

A9950062 eldoLED DL1060 A DALI 2 Ballast 4 outputs

ELDOLED

Specifications:

Ctrl. Mode:	DALI	Out. Volt. Vf/Vo Min.:	2 VDC
Dali Ballast:	2 Ballast	Out. Volt. Vf/Vo Max.:	57 VDC
Dimmable:	Yes	Length (mm):	388 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	30 mm
		Width (mm):	42 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 100 W dimmable RGB(W) LED driver
- Smooth, flickerfree dimming
- Made for 2x DMX/DALI environment
- Maximum energy and operational efficiency
- 2—57 VDC and 200—1050 mA



POWERdrive AC 100 W Constant Current

A9950045 eldoLED PWR1060 A DALI / DMX 4 channels 4 outputs

ELDOLED

Specifications:

Ctrl. Mode:	DALI / DMX	Out. Volt. Vf/Vo Max.:	55 VDC
Pwr. Supp.:	100-240 VAC 50-60 Hz	Length (mm):	388 mm
Out. Volt. Vf/Vo Min.:	2 VDC	Height (mm):	30 mm
		Width (mm):	42 mm
		IP Rate:	IP20(indoor use only)

FEATURES:

- 100 W dimmable RGB(W) LED driver
- Smooth, flickerfree dimming
- Made for DMX/DALI environment
- Maximum energy and operational efficiency
- 2—55 VDC and 200—1050 mA

LINEARdrive AC 100 W Constant Voltage

A9950055 **eldoLED LIN100 A DALI / DMX 4 channels 4 outputs**

ELDOLED

Specifications:

Ctrl. Mode:	DALI / DMX	Pwr. Supp.:	100-240 VAC 50-60 Hz
DMX Ch.:	4	Length (mm):	388 mm
Dali Ballast:	4 Ballast	Height (mm):	30 mm
Dimmable:	Yes	Width (mm):	45 mm
		IP Rate:	IP20(indoor use only)



FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- Tunable dynamic response
- ledcode supports most constant current LED modules and arrays

POWERdrive AC 100 W Constant Current

A9950046 **PWR106S1 DMX/Dali**

ELDOLED

Specifications:

		Out. Volt. Vf/Vo Max.:	57 VDC
		Length (mm):	230 mm
Ctrl. Mode:	DALI / DMX	Height (mm):	80 mm
DMX Ch.:	4	Width (mm):	30 mm
Pwr. Supp.:	120-250 VAC 50-60 Hz	IP Rate:	IP20(indoor use only)
Out. Volt. Vf/Vo Min.:	2 VDC		



FEATURES:

- 100 W dimmable RGB(W) LED driver
- Made for DMX/DALI environment
- Maximum energy and operational efficiency
- 2—57 VDC and 200—1050 mA

LINEARdrive AC 100 W Constant Voltage

A9950056 **DMX/Dali**

ELDOLED

Specifications:

		Pwr. Supp.:	120-250 VAC 50-60 Hz
		Length (mm):	230 mm
Ctrl. Mode:	DALI / DMX	Height (mm):	30 mm
DMX Ch.:	4	Width (mm):	80 mm
Dali Ballast:	4 Ballast	IP Rate:	IP20(indoor use only)
Dimmable:	Yes		

FEATURES:

- Hybrid HydraDrive provides smooth, flicker-free dimming down to 1 %
- Tunable dynamic respons
- ledcode supports most constant current LED modules and arrays
- Compatible with enclosure system DRYverbox 100/S



Power Supply 35 W/12 VDC

A9900314 MEAN WELL LRS-35-12

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	12 VDC
Pwr. Cons.:	36 W
Out. Curr. (A):	3 A
Prot. Class:	I
Length (mm):	99 mm
Height (mm):	30 mm
Width (mm):	83 mm
IP Rate:	IP20(indoor use only)



Power Supply 50 W/12 VDC

A9900315 MEAN WELL LRS-50-12

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	12 VDC
Pwr. Cons.:	504 W
Out. Curr. (A):	4.2 A
Prot. Class:	I
Length (mm):	99 mm
Height (mm):	30 mm
Width (mm):	82 mm
IP Rate:	IP20(indoor use only)



Power Supply 100 W/12 VDC

A9900316 MEAN WELL LRS-100-12

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	12 VDC
Pwr. Cons.:	102 W
Out. Curr. (A):	8.5 A
Prot. Class:	I
Length (mm):	129 mm
Height (mm):	30 mm
Width (mm):	97 mm
IP Rate:	IP20(indoor use only)



Power Supply 100 W/12 VDC

A9900335 MEAN WELL RSP-100-12

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	12 VDC
Pwr. Cons.:	102 W
Out. Curr. (A):	8.49 A
Prot. Class:	I
Length (mm):	179 mm
Height (mm):	30 mm
Width (mm):	99 mm
IP Rate:	IP20(indoor use only)



Power Supply 150 W/12 VDC

A9900336 MEAN WELL RSP-150-12

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	12 VDC
Pwr. Cons.:	150 W
Out. Curr. (A):	12.5 A
Prot. Class:	I
Length (mm):	199 mm
Height (mm):	30 mm
Width (mm):	999 mm
IP Rate:	IP20(indoor use only)

Power Supply 200 W/12 VDC

A9900337 **MEAN WELL RSP-200-12**

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	12 VDC
Pwr. Cons.:	2004 W
Out. Curr. (A):	16.7 A
Prot. Class:	I
Length (mm):	245 mm
Height (mm):	30 mm
Width (mm):	115 mm
IP Rate:	IP20(indoor use only)



Power Supply 320 W/12 VDC

A9900338 **MEAN WELL RSP-320-12**

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	12 VDC
Pwr. Cons.:	3204 W
Out. Curr. (A):	26.7 A
Prot. Class:	I
Length (mm):	215 mm
Height (mm):	30 mm
Width (mm):	115 mm
IP Rate:	IP20(indoor use only)



Power Supply 40 W/12 VDC

A9900353 **MEAN WELL NPF-40-12**

MEANWELL

Specifications:

Pwr. Supp.:	90-305 VAC
Out. Volt.:	12 VDC
Pwr. Cons.:	4008 W
Out. Curr. (A):	3.34 A
Prot. Class:	II
Length (mm):	150 mm
Height (mm):	35 mm
Width (mm):	53 mm
IP Rate:	IP67



Power Supply 60 W/12 VDC

A9900354 **MEAN WELL NPF-60-12**

MEANWELL

Specifications:

Pwr. Supp.:	90-305 VAC
Out. Volt.:	12 VDC
Pwr. Cons.:	60 W
Out. Curr. (A):	5 A
Prot. Class:	II
Length (mm):	150 mm
Height (mm):	35 mm
Width (mm):	53 mm
IP Rate:	IP67



Power Supply 90 W/12 VDC

A9900355 **MEAN WELL NPF-90-12**

MEANWELL

Specifications:

Pwr. Supp.:	90-305 VAC
Out. Volt.:	12 VDC
Pwr. Cons.:	90 W
Out. Curr. (A):	7.5 A
Prot. Class:	II
Length (mm):	171 mm
Height (mm):	375 mm
Width (mm):	63 mm
IP Rate:	IP67





Power Supply 35 W/24 VDC

A9900324 MEAN WELL LRS-35-24

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	36 W
Out. Curr. (A):	1.5 A
Prot. Class:	I
Length (mm):	99 mm
Height (mm):	30 mm
Width (mm):	82 mm
IP Rate:	IP20(indoor use only)



Power Supply 50 W/24 VDC

A9900325 MEAN WELL LRS-50-24

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	528 W
Out. Curr. (A):	2.2 A
Prot. Class:	I
Length (mm):	99 mm
Height (mm):	30 mm
Width (mm):	82 mm
IP Rate:	IP20(indoor use only)



Power Supply 100 W/24 VDC

A9900326 MEAN WELL LRS-100-24

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	108 W
Out. Curr. (A):	4.5 A
Prot. Class:	I
Length (mm):	129 mm
Height (mm):	30 mm
Width (mm):	97 mm
IP Rate:	IP20(indoor use only)



Power Supply 100 W/24 VDC

A9900345 MEAN WELL RSP-100-24

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	100.8 W
Out. Curr. (A):	4.19 A
Prot. Class:	I
Length (mm):	179 mm
Height (mm):	30 mm
Width (mm):	99 mm
IP Rate:	IP20(indoor use only)



Power Supply 150 W/24 VDC

A9900346 MEAN WELL RSP-150-24

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	1512 W
Out. Curr. (A):	6.3 A
Prot. Class:	I
Length (mm):	199 mm
Height (mm):	30 mm
Width (mm):	99 mm
IP Rate:	IP20(indoor use only)

Power Supply 200 W/24 VDC

A9900347 MEAN WELL RSP-200-24

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	2016 W
Out. Curr. (A):	8.4 A
Prot. Class:	I
Length (mm):	245 mm
Height (mm):	30 mm
Width (mm):	115 mm
IP Rate:	IP20(indoor use only)



Power Supply 320 W/24 VDC

A9900348 MEAN WELL RSP-320-24

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	3216 W
Out. Curr. (A):	13.4 A
Prot. Class:	I
Length (mm):	215 mm
Height (mm):	30 mm
Width (mm):	115 mm
IP Rate:	IP20(indoor use only)



Power Supply 40 W/24 VDC

A9900363 MEAN WELL NPF-40-24

MEANWELL

Specifications:

Pwr. Supp.:	90-305 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	401 W
Out. Curr. (A):	1.67 A
Prot. Class:	II
Length (mm):	150 mm
Height (mm):	35 mm
Width (mm):	53 mm
IP Rate:	IP67



Power Supply 60 W/24 VDC

A9900364 MEAN WELL NPF-60-24

MEANWELL

Specifications:

Pwr. Supp.:	90-305 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	60 W
Out. Curr. (A):	2.5 A
Prot. Class:	II
Length (mm):	150 mm
Height (mm):	35 mm
Width (mm):	53 mm
IP Rate:	IP67



Power Supply 90 W/24 VDC

A9900365 MEAN WELL NPF-90-24

MEANWELL

Specifications:

Pwr. Supp.:	90-305 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	90 W
Out. Curr. (A):	3.75 A
Prot. Class:	II
Length (mm):	171 mm
Height (mm):	38 mm
Width (mm):	63 mm
IP Rate:	IP67





Power Supply 120 W/24 VDC

A9900366 **MEAN WELL NPF-120-24**

MEANWELL

Specifications:

Pwr. Supp.:	90-305 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	120 W
Out. Curr. (A):	5 A
Prot. Class:	II
Length (mm):	191 mm
Height (mm):	38 mm
Width (mm):	63 mm
IP Rate:	IP67



LED Power Supply 40 W/24 VDC

A9900380 **MEAN WELL HLG-40H-24**

MEANWELL

Specifications:

Pwr. Supp.:	90-305 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	40 W
Out. Curr. (A):	1.66 A
Prot. Class:	II
Length (mm):	171 mm
Height (mm):	37 mm
Width (mm):	61 mm
IP Rate:	IP67



LED Power Supply 60 W/24 VDC

A9900381 **MEAN WELL HLG-60H-24**

MEANWELL

Specifications:

Pwr. Supp.:	90-305 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	60 W
Out. Curr. (A):	2.5 A
Prot. Class:	II
Length (mm):	171 mm
Height (mm):	36.8 mm
Width (mm):	61.5 mm
IP Rate:	IP67



LED Power Supply 100 W/24 VDC

A9900382 **MEAN WELL HLG-100H-24**

MEANWELL

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Volt.:	24 VDC
Pwr. Cons.:	100 W
Out. Curr. (A):	4 A
Prot. Class:	II
Length (mm):	220 mm
Height (mm):	388 mm
Width (mm):	68 mm
IP Rate:	IP67



LED Power Supply 150 W/24 VDC

A9900383 **MEAN WELL HLG-150H-24**

MEANWELL

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Volt.:	24 VDC
Pwr. Cons.:	150 W
Out. Curr. (A):	6 A
Prot. Class:	II
Length (mm):	228 mm
Height (mm):	38 mm
Width (mm):	68 mm
IP Rate:	IP67

LED Power Supply 185 W/24 VDC

A9900384 **MEAN WELL HLG-185H-24**

MEANWELL

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Volt.:	24 VDC
Pwr. Cons.:	185 W
Out. Curr. (A):	77 A
Prot. Class:	II
Length (mm):	228 mm
Height (mm):	39 mm
Width (mm):	68 mm
IP Rate:	IP67



LED Power Supply 240 W/24 VDC

A9900385 **MEAN WELL HLG-240H-24**

MEANWELL

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Volt.:	24 VDC
Pwr. Cons.:	240 W
Out. Curr. (A):	10 A
Prot. Class:	II
Length (mm):	244 mm
Height (mm):	39 mm
Width (mm):	68 mm
IP Rate:	IP67



LED Power Supply 320 W/24 VDC

A9900386 **MEAN WELL HLG-320H-24**

MEANWELL

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Volt.:	24 VDC
Pwr. Cons.:	320 W
Out. Curr. (A):	13 A
Prot. Class:	II
Length (mm):	252 mm
Height (mm):	44 mm
Width (mm):	90 mm
IP Rate:	IP67



LED Power Supply Dinrail 120 W/24 VDC

A9900550 **MEAN WELL DR-120-24**

MEANWELL

Specifications:

Pwr. Supp.:	88-264 VAC
Out. Volt.:	24 VDC
Pwr. Cons.:	120 W
Out. Curr. (A):	5 A
Prot. Class:	I
Length (mm):	100 mm
Height (mm):	1252 mm
Width (mm):	655 mm
IP Rate:	IP20(indoor use only)





LED Power Supply IP67 75 W/24 V Dali

A9900681 **Meanwell ELG-75-V-24DA 3Y**

MEANWELL

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Volt.:	24 VDC
Pwr. Cons.:	75 W
Out. Curr. (A):	3 A
Prot. Class:	II
Length (mm):	180 mm
Height (mm):	63 mm
Width (mm):	36 mm
IP Rate:	IP67



LED Power Supply IP67 100 W/24 VDC Dali

A9900682 **Meanwell ELG-100-V-24DA 3Y**

MEANWELL

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Volt.:	24 VDC
Pwr. Cons.:	100 W
Out. Curr. (A):	4 A
Prot. Class:	II
Length (mm):	199 mm
Height (mm):	63 mm
Width (mm):	36 mm
IP Rate:	IP67



LED Power Supply IP67 150 W/24 V Dali

A9900683 **Meanwell ELG-150-V-24DA 3Y**

MEANWELL

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Volt.:	24 VDC
Pwr. Cons.:	150 W
Out. Curr. (A):	6 A
Prot. Class:	II
Length (mm):	219 mm
Height (mm):	36 mm
Width (mm):	63 mm
IP Rate:	IP67



LED Power Supply IP67 240 W/24 V Dali

A9900684 **Meanwell ELG-240-V-24DA 3Y**

MEANWELL

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz
Out. Volt.:	24 VDC
Pwr. Cons.:	240 W
Out. Curr. (A):	10 A
Prot. Class:	II
Length (mm):	244 mm
Height (mm):	38 mm
Width (mm):	71 mm
IP Rate:	IP67

IP67 Data Extension Cable ARTECTA

A9920800	1.5 m
A9920801	3 m
A9920802	6 m
A9920803	10 m



IP67 Power Extension Cable ARTECTA

A9920820	1.5 m
A9920821	3 m
A9920822	6 m
A9920823	10 m



Power cable euro-open end ARTECTA

A9920811



Wieland Plug + 2 m Cable WIELAND

90804



Olympia Surface Kit 4 Hooks ARTECTA

A0160920 For 60 x 60 LED Panels



Olympia Surface Kit 6 Hooks ARTECTA

A0160930 For 30 x 120 LED Panels



Olympia Suspension Kit 4 Wires ARTECTA

A0160900 For 60 x 60 LED Panels

A0160910 For 30 x 120 LED Panels

Length (mm):	40 mm
Height (mm):	17 mm
Width (mm):	20 mm
Cable Length:	1.5 m



Mounting frame for Argos LED Panel 60x60 ARTECTA

A0160940 Aluminium Frame

A0160941 Aluminium Frame

Length (mm):	600 mm
Height (mm):	70 mm
Width (mm):	600 mm
IP Rate:	IP20(indoor use only)



Olympia Surface Frame 6060 ARTECTA

A0160921

A0160931 Frame 30 x 120

Length (mm):	600 mm
Height (mm):	45 mm
Width (mm):	600 mm



Immerse your audience in a spectacular experience

The ultimate combination of show lights and special effects amplifies the mood and accentuates the highlights within the story of an event. There is no way around this if you want to make a lasting impression with your audience.

We provide solutions for a variety of effects, such as smoke, bubbles, snow, confetti, and CO_2. A single effect can be used for different purposes. Take fog, for example. It can be created through Fazers and Hazers to make beams of light more visible. It can be also used to block the view from certain areas or to draw people's attention with large, smoke-filled bubbles.

You can create a mystical or romantic effect by using a low-fog machine or even mimic CO_2 effects with an upward eject smoke machine for creating a bombastic experience. On top of that, you can add a fragrance to your smoke through a scented additive.

No matter what special effect solution you may need, you will require reliable, long-lasting, and safe devices that are perfectly capable of conveying your intentions. We offer a wide range of special effects for every setting, both for professional as well as consumer purposes. From fog and confetti machines to fans and special FX consumables.







Dragon 500

61100 400 W Fogmachine

SHOWTEC

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	500 W
Pwr. Conn. In.:	IEC C13 female
Heater:	400 W
Warm-up Time:	3 min
Output Cap.:	114 m³/min
Output Dir.:	Forward
Fluid Cons.:	125 ml/min
Length (mm):	260 mm
Height (mm):	110 mm
Width (mm):	160 mm
Weight:	2 kg
IP Rate:	IP20(indoor use only)
Ctrl. Mode:	Remote
Incl. Remote:	Wired

FEATURES:

- Compact and stylish design
- 400 W Heater
- Including wired on/off remote control
- Including hanging bracket



Dragon 1500

61102 1500 W Fogmachine

SHOWTEC

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1500 W
Pwr. Conn. In.:	IEC C13 female
Heater:	1500 W
Warm-up Time:	6 min
Output Cap.:	850 m³/min
Output Dir.:	Forward
Fluid Cons.:	125 ml/min
Length (mm):	423 mm
Height (mm):	268 mm
Width (mm):	320 mm
Weight:	7 kg
IP Rate:	IP20(indoor use only)
Ctrl. Mode:	Remote
WL:	Optional
Incl. Remote:	Wired

FEATURES:

- Powerful output
- Stylish design
- 1500 W Heater
- Including Wired Remote Controller
- Suitable for Club, DJ, Stage



Dragon 2000

61103 2000 W Fogmachine

SHOWTEC

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	2000 W
Pwr. Conn. In.:	IEC C13 female
Heater:	2000 W
Warm-up Time:	6 min
Output Cap.:	1130 m³/min
Output Dir.:	Forward
Fluid Cons.:	125 ml/min
Length (mm):	455 mm
Height (mm):	210 mm
Width (mm):	262 mm
Weight:	7.8 kg
IP Rate:	IP20(indoor use only)
Ctrl. Mode:	DMX / Remote
DMX Ch.:	1
WL:	Optional
Incl. Remote:	Wired

FEATURES:

- Powerful Output
- Perfect price / performance ratio
- Stylish design
- DMX512 Control
- Including Timer/Remote Controller
- 2000 W Heater

Z-80

60651 **700 W Fogger EU version**
60651UK **700W Fogger UK version**
ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	8 ml/min
Pwr. Cons.:	700 W	Length (mm):	333 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	130 mm
Heater:	700 W	Width (mm):	160 mm
Warm-up Time:	4 min	Weight:	3.6 kg
Output Dir.:	Forward	IP Rate:	IP20(indoor use only)
		Ctrl. Mode:	Remote
		Incl. Remote:	Z-10

FEATURES:
- Compact design
- 700 W Heater
- Wired remote included
- 1L Tank

Z-80

60650UK **700W Fogger UK incl. Wireless Remote**
ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	8 ml/min
Pwr. Cons.:	700 W	Length (mm):	333 mm
Pwr. Conn. In.:	UK plug	Height (mm):	130 mm
Heater:	700 W	Width (mm):	160 mm
Warm-up Time:	4 min	Weight:	3.6 kg
Output Dir.:	Forward	IP Rate:	IP20(indoor use only)
		Ctrl. Mode:	Remote
		Incl. Remote:	WL

FEATURES:
- Small output for small venues
- Z80 MK2 included wireless remote
- UK power connector
- 4 minute warmup time
- 0.8 L fluid tank capacity
- 8 ml / min (100 minutes at full output)

WTF-F800

61130 **800 W Fogger**
SHOWTEC



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	18 ml/min
Pwr. Cons.:	800 W	Length (mm):	330 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	235 mm
Heater:	800 W	Width (mm):	256 mm
Warm-up Time:	4 min	Weight:	4 kg
Output Cap.:	70 m³/min	IP Rate:	IP20(indoor use only)
Output Dir.:	Forward	Ctrl. Mode:	Remote
		Incl. Remote:	Wired

FEATURES:
- Powerful output
- Stylish design
- 800 W Heater
- Including Wired Remote Controller



Z-800 MKII

60672 **800 W Compact Fogger**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	13 ml/min
Pwr. Cons.:	800 W	Length (mm):	315 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	218 mm
Heater:	800 W	Width (mm):	128 mm
Warm-up Time:	2 min	Weight:	3.5 kg
Output Cap.:	85 m³/min	IP Rate:	IP20(indoor use only)
Output Dir.:	Forward	Ctrl. Mode:	Manual / Remote
		Incl. Remote:	Z-10

FEATURES:

- Small output for small venues
- Consistent, steady output
- Short heat-up time
- Effective heat energy transfer
- Efficient power control system
- 13 ml / min (60 minutes at full output)
- Controllable by wireless, timer or in stand-alone mode



Z-1000 MKII

60673 **1000 W Fogger**

60673UK **1000 W Fogger UK Version**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	56 ml/min
Pwr. Cons.:	1000 W	Length (mm):	433 mm
Pwr. Conn. In.:	IEC C13 female	Height (mm):	214 mm
DMX Conn.:	XLR 3P In/Out	Width (mm):	198 mm
Heater:	1000 W	Weight:	6.6 kg
Warm-up Time:	6 min	IP Rate:	IP20(indoor use only)
Output Cap.:	280 m³/min	Ctrl. Mode:	DMX / Manual / Remote
Output Dir.:	Forward	DMX Ch.:	1
		Incl. Remote:	Z-10

FEATURES:

- High performance output
- DMX, manual and cable remote controllable
- 6 min warm-up time
- 1.7 L fluid tank capacity
- 56 ml / min (30 minutes at full output)
- Z-10 remote included



WTF-F1000

61131 **1000 W DMX Fogger**

SHOWTEC

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	72 ml/min
Pwr. Cons.:	1000 W	Length (mm):	385 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	247 mm
Heater:	1000 W	Width (mm):	270 mm
Warm-up Time:	6 min	Weight:	5.8 kg
Output Cap.:	280 m³/min	IP Rate:	IP20(indoor use only)
Output Dir.:	Forward	Ctrl. Mode:	DMX / Remote
		DMX Ch.:	1
		Incl. Remote:	Wired

FEATURES:

- Powerful Output
- Stylish design
- 1000 W Heater
- Remote control

Z-1200 MKII

60674 **1200 W Fogger**
60674UK **1200 W Fogger UK Version**
ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	72 ml/min
Pwr. Cons.:	1200 W	Length (mm):	458 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	251 mm
DMX Conn.:	XLR 3P In/Out	Width (mm):	243 mm
Heater:	1200 W	Weight:	10.9 kg
Warm-up Time:	10 min	IP Rate:	IP20(indoor use only)
Output Dir.:	Forward	Ctrl. Mode:	DMX / Manual / Remote
		DMX Ch.:	1
		Incl. Remote:	Z-8

FEATURES:
- High performance output
- Suitable for creating an atmospheric effect and mid-air fog
- DMX, Manual and Timer remote controllable (wireless optional)
- Wireless remote is optional
- 2.5 L fluid tank capacity
- 72 ml / min (35 minutes at full output)
- Hanging bracket and Z-8 remote included

Z-1500 MKII

60675 **1500 W Fogger**
ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	110 ml/min
Pwr. Cons.:	1500 W	Length (mm):	688 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	257 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out	Width (mm):	285 mm
Heater:	1500 W	Weight:	14 kg
Warm-up Time:	10 min	IP Rate:	IP20(indoor use only)
Output Cap.:	560 m³/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Forward	DMX Ch.:	1
		Incl. Remote:	Z-20

FEATURES:
- High performance output
- Suitable for creating an atmospheric effect and mid-air fog
- DMX, Manual and Timer remote controllable (wireless optional)
- Wireless remote is optional
- 6 L fluid tank capacity
- 110 ml / min (50 minutes at full output)
- Z-20 remote control included

Z-3000 MKII

60676 **3000W Fogger**
60676UK **3000W Fogger UK Version**
ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	200 ml/min
Pwr. Cons.:	2500 W	Length (mm):	735 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	269 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out	Width (mm):	310 mm
Heater:	2500 W	Weight:	19.9 kg
Warm-up Time:	12 min	IP Rate:	IP20(indoor use only)
Output Cap.:	1130 m³/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Forward	DMX Ch.:	1
		Incl. Remote:	Z-20

FEATURES:
- High performance output
- Suitable for creating an atmospheric effect
- DMX, Manual and Timer remote controllable (wireless optional)
- Wireless remote is optional
- 6 L fluid tank capacity
- 200 ml / min (30 minutes at full output)
- Z-20 remote control included



W-515D

60780 **1500 W Pro Fogger W-DMX**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	100 ml/min
Pwr. Cons.:	1450 W	Length (mm):	561 mm
Pwr. Conn. In.:	powerCON Blue	Height (mm):	264 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Width (mm):	278 mm
Heater:	1450 W	Weight:	14.5 kg
Warm-up Time:	10 min	IP Rate:	IP20(indoor use only)
Output Cap.:	560 m³/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Forward	DMX Ch.:	1
		WL:	WL DMX
		Incl. Remote:	W-2

FEATURES:

- Smart Wireless Remote included
- Onboard W-DMX Wireless Solutions Sweden
- powerCON input
- Rugged housing
- Continous output



W-530D

60781 **3000 W Pro Fogger W-DMX**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	160 ml/min
Pwr. Cons.:	2500 W	Length (mm):	581 mm
Pwr. Conn. In.:	powerCON Blue	Height (mm):	265 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Width (mm):	278 mm
Heater:	2500 W	Weight:	19.1 kg
Warm-up Time:	12 min	IP Rate:	IP20(indoor use only)
Output Cap.:	1130 m³/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Forward	DMX Ch.:	1
		WL:	WL DMX
		Incl. Remote:	W-1

FEATURES:

- Wireless Remote included
- Onboard W-DMX Wireless Solutions Sweden
- powerCON input
- Rugged housing
- Continous output



M-5 Tour Fogger

60648 **1500 W Pro Fogger**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	668 mm
Pwr. Cons.:	1500 W	Height (mm):	170 mm
Pwr. Conn. In.:	powerCON Blue	Width (mm):	319 mm
DMX Conn.:	XLR 3P In/Out	Weight:	15.5 kg
Heater:	1500 W	IP Rate:	IP20(indoor use only)
Warm-up Time:	8 min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Cap.:	700 m³/min	DMX Ch.:	1
Output Dir.:	Forward	WL:	Optional
Fluid Cons.:	160 ml/min	Incl. Remote:	M-20

FEATURES:

- High performance stage fogger
- High tank capacity 10 L
- DMX512 on board
- 1500 watt Heater

M-10 Tour Fogger

60649 **3000 W Pro Fogger**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	690 mm
Pwr. Cons.:	3000 W	Height (mm):	298 mm
Pwr. Conn. In.:	powerCON Blue	Width (mm):	320 mm
DMX Conn.:	XLR 3P In/Out	Weight:	21 kg
Heater:	3000 W	IP Rate:	IP20(indoor use only)
Warm-up Time:	9.5 min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Cap.:	1415 m³/min	DMX Ch.:	1
Output Dir.:	Forward	WL:	Optional
Fluid Cons.:	250 ml/min	Incl. Remote:	M-20

FEATURES:

- High performance stage fogger
- High tank capacity 10 L
- DMX512 on board
- 3000 watt heater

Dragon 1500 Upright

61104 **CO_2-effect**

SHOWTEC



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	300 mm
Pwr. Cons.:	1500 W	Height (mm):	190 mm
Pwr. Conn. In.:	IEC C13 female	Width (mm):	400 mm
Heater:	1500 W	Weight:	7.7 kg
Warm-up Time:	6 min	IP Rate:	IP20(indoor use only)
Output Cap.:	850 m³/min	Ctrl. Mode:	DMX / Remote
Output Dir.:	Up	DMX Ch.:	1
Fluid Cons.:	140 ml/min	WL:	Optional
		Incl. Remote:	Wired

FEATURES:

- Powerful output
- CO_2 simulating Effect
- Suitable for Club, DJ, Stage
- Including Wired Remote Controller

Dragon 1500 Upright RGB

61105 **RGB CO_2-effect**

SHOWTEC



Specifications:

		Height (mm):	190 mm
		Width (mm):	400 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Weight:	7.9 kg
Pwr. Cons.:	1500 W	IP Rate:	IP20(indoor use only)
Pwr. Conn. In.:	IEC C13 female	Ctrl. Mode:	DMX / Manual / Stand Alone
Heater:	1500 W	DMX Ch.:	8
Warm-up Time:	6 min	WL:	Optional
Output Dir.:	Up	Light Src. Type:	LED
Fluid Cons.:	140 ml/min	LED Colour Type:	RGB
Length (mm):	300 mm	Incl. Remote:	Wired

FEATURES:

- Colourful CO_2 simulating effect
- RGB LED system
- 1500 W Heater
- Suitable for Club, DJ, Stage



Z-1020

60677 **1000 W CO_2 Simulating Fogger**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	24 ml/min
Pwr. Cons.:	1000 W	Length (mm):	408 mm
Pwr. Conn. In.:	IEC C13 female	Height (mm):	199 mm
DMX Conn.:	XLR 3P In/Out	Width (mm):	295 mm
Heater:	1000 W	Weight:	9.8 kg
Warm-up Time:	13 min	IP Rate:	IP20(indoor use only)
Output Cap.:	285 m³/min	Ctrl. Mode:	DMX / Manual / Remote
Output Dir.:	Up	DMX Ch.:	1
		Incl. Remote:	Z-10

FEATURES:

- High performance vertical & horizontal fogger
- Column of fog effect
- Low energy consumption
- DMX, Manual and Timer remote controllable (wireless optional)
- 2.4 L fluid tank capacity
- 90 ml / min (25 minutes at full output)
- Z-10 remote control included



Z-1520 RGB

60755 **1500 W CO_2 Simulating RGB Fogger**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	418 mm
Pwr. Cons.:	1550 W	Height (mm):	210 mm
Pwr. Conn. In.:	powerCON Blue	Width (mm):	295 mm
DMX Conn.:	XLR 3P In/Out	Weight:	10.4 kg
Heater:	1500 W	IP Rate:	IP20(indoor use only)
Warm-up Time:	5 min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Cap.:	85 m³/min	DMX Ch.:	8
Output Dir.:	Up	LED Colour Type:	B / G / R
Fluid Cons.:	143 ml/min	Incl. Remote:	W-2

FEATURES:

- High Pressure Pump System
- RGB LEDs create coloured smoke effect
- Powerful 1500 W Heater



W-715

60727 **1600 W CO_2 Simulating Fogger**

60727UK **1600 W CO_2 Simulating Fogger UK Version**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	300 ml/min
Pwr. Cons.:	1600 W	Length (mm):	448 mm
Pwr. Conn. In.:	powerCON Blue	Height (mm):	210 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Width (mm):	195 mm
Heater:	1600 W	Weight:	15.5 kg
Warm-up Time:	8 min	IP Rate:	IP20(indoor use only)
Output Dir.:	Up	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
		DMX Ch.:	1
		Incl. Remote:	W-1

FEATURES:

- Very direct fog burst of up to 5 m
- Powerful liquid pump
- Electric temp. control for instant available operation
- Advanced LCD and wireless remote included

M-4E

60764 **1500 W Pro CO_2 Simulating Fogger**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	120 ml/min
Pwr. Cons.:	1450 W	Length (mm):	345 mm
Pwr. Conn. In.:	powerCON Blue	Height (mm):	381 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out	Width (mm):	193 mm
		Weight:	11 kg
Heater:	1450 W	IP Rate:	IP20(indoor use only)
Warm-up Time:	5 min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Up	DMX Ch.:	1

FEATURES:

- Horizontal and vertical operation
- Powerful output, reaches up to 5 m high
- powerCON input
- Closed fluid tank compartment

M-4D

60765 **1500 W Pro CO_2 Simulating Fogger W-DMX**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	120 ml/min
Pwr. Cons.:	1450 W	Length (mm):	345 mm
Pwr. Conn. In.:	powerCON Blue	Height (mm):	381 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out	Width (mm):	193 mm
		Weight:	11 kg
Heater:	1450 W	IP Rate:	IP20(indoor use only)
Warm-up Time:	5 min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Up	DMX Ch.:	1
		WL:	WL DMX

FEATURES:

- Horizontal and Vertical operation
- Powerful output, reaches up to 5 m high
- W-DMX Sweden
- Closed fluid tank compartment

M-7X

60770 **1500 W Pro CO_2 Simulating RGBA Fogger**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	381 mm
Pwr. Cons.:	1520 W	Width (mm):	344 mm
Pwr. Conn. In.:	powerCON TRUE1 In (Male)	Weight:	14 kg
DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out	IP Rate:	IP20(indoor use only)
		Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Heater:	1500 W	DMX Ch.:	9
Warm-up Time:	7 min	WL:	Optional
Output Dir.:	Up	Light Src. Type:	LED
Fluid Cons.:	200 ml/min	LED Colour Type:	A / B / G / R
Length (mm):	344 mm	Incl. Remote:	W-2

FEATURES:

- Horizontal, Vertical and downward operation
- Integrated RGBA LED system
- Closed fluid tank compartment
- Built-in colour chases



M-9 Jet Fog Machine

60804 **1800 W Pro CO_2 Simulating 5in1 RGBWA Jet Fogger**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	393 mm
Pwr. Cons.:	1870 W	Height (mm):	420 mm
Pwr. Conn. In.:	powerCON TRUE1 In (Male)	Width (mm):	321 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Weight:	25 kg
Heater:	1500 W	IP Rate:	IP20(indoor use only)
Warm-up Time:	14 min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Up	DMX Ch.:	10 / 15 / 25
Fluid Cons.:	400 ml/min	WL:	Optional
		Light Src. Type:	LED
		LED Colour Type:	RGBWA

FEATURES:

- Horizontal, Vertical and downward operation
- Integrated 5-in-1 RGBWA LED system
- Closed fluid tank compartment
- Built-in colour chases



M-11 Tour Fogger

60805 **Dual Fog Pipe Pro Fogger**

ANTARI

Specifications:

		Fluid Cons.:	400 ml/min
		Length (mm):	675 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	285 mm
Pwr. Cons.:	1600 W	Width (mm):	320 mm
Pwr. Conn. In.:	powerCON TRUE1 In (Male)	Weight:	25 kg
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	IP Rate:	IP20(indoor use only)
		Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Heater:	1600 W		
Warm-up Time:	13 min	DMX Ch.:	1 / 3
Output Dir.:	Forward	WL:	Optional

FEATURES:

- High performance Dual Output Pipe
- High tank capacity 10 L
- Double pump system
- DMX 512 on board

IP-1500

60898 **1500 W Outdoor Fogger 110 V, 60 Hz**
60899 **1500 W Outdoor Fogger 240 V, 50 Hz**
ANTARI



Specifications:

Pwr. Supp.:	110 VAC 60Hz	Length (mm):	465 mm
Pwr. Cons.:	1500 W	Height (mm):	250 mm
DMX Conn.:	XLR 3P In/Out	Width (mm):	222 mm
Heater:	1500 W	Weight:	13.5 kg
Warm-up Time:	9 min	IP Rate:	IP63
Output Cap.:	560 m³/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Forward	DMX Ch.:	1
Fluid Cons.:	100 ml/min	Incl. Remote:	W-1

FEATURES:

- High performance waterproof fogger
- Suitable for outdoors & indoors (IP63)
- Low energy consumption
- DMX, Manual, Timer and Wireless control
- 100 ml / min (25 minutes at full output)
- W-1 wireless remote control, mounting bracket and fluid hose included





FT-20X

60775 **600 W Fire Training Fogger**

ANTARI

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Length (mm):	293 mm
Pwr. Cons.:	600 W	Height (mm):	283 mm
Pwr. Conn. In.:	Low Voltage DC plug	Width (mm):	108 mm
Output Dir.:	Forward	Weight:	8.5 kg
		Ctrl. Mode:	DMX / Manual / Remote

FEATURES:

- Powerful 600 W fog generator
- Battery Mode operation up to 18 minutes non-stop
- Sturdy, compact and light weight design
- Especially designed for fire training purposes
- Including flight case



FT-50

60783 **1450 W Fire Training Fogger**

ANTARI

Specifications:

		Output Dir.:	Forward
		Fluid Cons.:	110 ml/min
Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	346 mm
Pwr. Cons.:	1450 W	Height (mm):	251 mm
Pwr. Conn. In.:	IEC C13 female	Width (mm):	152 mm
Heater:	1450 W	Weight:	9.8 kg
Warm-up Time:	7.5 min	IP Rate:	IP20(indoor use only)
Output Cap.:	560 m³/min	Ctrl. Mode:	Manual

FEATURES:

- Powerful 1450 W fog generator
- Off-Power operation up to 40 minuts
- Sturdy, compact and light weight design
- Especially designed for fire training purposes

FT-100

60785 **1500 W Fire Training Fogger**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	100 ml/min
Pwr. Cons.:	1450 W	Length (mm):	580 mm
Pwr. Conn. In.:	powerCON TRUE1 In (Male)	Height (mm):	264 mm
DMX Conn.:	XLR 3P In/Out	Width (mm):	278 mm
Heater:	1500 W	Weight:	14.6 kg
Warm-up Time:	8.5 min	IP Rate:	IP20(indoor use only)
Output Cap.:	560 m³/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Forward	DMX Ch.:	1
		Incl. Remote:	W-2

FEATURES:

- Powerful 1500 W fog generator
- W-2 wireless remote included
- Sturdy design
- Especially designed for fire training purposes

FT-200

60784 **1600 W Fire Training Fogger**

ANTARI



Specifications:

		Length (mm):	301 mm
		Height (mm):	414 mm
Pwr. Supp.:	240 VAC 50-60 Hz	Width (mm):	194 mm
Pwr. Cons.:	1600 W	Weight:	16 kg
Pwr. Conn. In.:	powerCON TRUE1 In (Male)	IP Rate:	IP20(indoor use only)
Heater:	1600 W	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Warm-up Time:	7.5 min		
Output Dir.:	Up	DMX Ch.:	1
Fluid Cons.:	270 ml/min	Incl. Remote:	W-2

FEATURES:

- Powerful 1600 W fog generator
- W-2 wireless remote included
- Sturdy design
- Especially designed for fire training purposes



MB-1 Mobile Fog Machine

61700 Battery powered 75 W fog generator

ANTARI

Specifications:

Pwr. Supp.:	12 VDC	Fluid Cons.:	1.1 ml/min
Pwr. Cons.:	75 W	Length (mm):	228 mm
Pwr. Conn. In.:	Low Voltage DC plug	Height (mm):	112 mm
Heater:	75 W	Width (mm):	66 mm
Warm-up Time:	0.1 min	Weight:	1.8 kg
Output Dir.:	Forward	IP Rate:	IP20(indoor use only)
		Ctrl. Mode:	Manual
		WL:	Optional

FEATURES:

- Battery powered 75 W fog machine
- Compact and lightweight design
- One second warm-up time
- Accu lifespan of 10–12 min & 3 hour charging time
- Includes a battery + charger, flight case and 0.5 L fog fluid
- Optional wireless and timer remote
- Adapter & dummy battery optional for direct power by main supply



MB-20 Mobile Fog Machine

61710 Battery powered 600 W fog generator

ANTARI

Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Length (mm):	293 mm
Pwr. Cons.:	600 W	Height (mm):	108 mm
Pwr. Conn. In.:	Low Voltage DC plug	Width (mm):	108 mm
Heater:	600 W	Weight:	8.5 kg
Warm-up Time:	0.1 min	IP Rate:	IP20(indoor use only)
Output Dir.:	Forward	Ctrl. Mode:	Remote
Fluid Cons.:	16 ml/min	DMX Ch.:	1
		WL:	Optional

FEATURES:

- Battery powered 600 W fog machine
- Manual and DMX control
- One second warm-up time
- Accu lifespan of 12 min & 3 hour charging time
- Includes a battery + charger and 0.5 L fog fluid (FLM-05P)
- Optional wireless / cable remote
- Option for direct power by main supply (adapter & dummy battery)



MB-20S Power Base for MB-20

61711 **DC-12 V**

ANTARI



Specifications:

Pwr. Supp.:	100-240 VAC 50-60Hz	Length (mm):	293 mm
Pwr. Cons.:	600 W	Height (mm):	110 mm
Pwr. Conn. In.:	Low Voltage DC plug	Width (mm):	108 mm
		Weight:	6 kg
		IP Rate:	IP20(indoor use only)

FEATURES:

- 12 V power base for Antari MB-20
- For continuous use
- Up to 25 minutes @ full output without any action required

MB-55 Mobile Fog Machine

61720 **1450 W fog generator**

ANTARI



Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Fluid Cons.:	110 ml/min
Pwr. Cons.:	1450 W	Length (mm):	346 mm
Pwr. Conn. In.:	IEC C13 female	Height (mm):	251 mm
Heater:	1450 W	Width (mm):	152 mm
Warm-up Time:	7.5 min	Weight:	10.2 kg
Output Dir.:	Forward	IP Rate:	IP20(indoor use only)
		Ctrl. Mode:	Manual / Remote
		Incl. Remote:	Wired

FEATURES:

- 1450 W mobile fog machine
- Remote control
- Compact and lightweight design
- 7.5 minute warm-up time
- Remote use up to 45 minutes



Dragon F-350

61108 **Fazer**

SHOWTEC

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1000 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Heater:	1000 W
Warm-up Time:	3 min
Output Cap.:	56 m³/min
Output Dir.:	Forward
Fluid Cons.:	20 ml/min
Tank Cap.:	1.3 L
Length (mm):	490 mm
Height (mm):	190 mm
Width (mm):	300 mm
Weight:	7.9 kg
Ctrl. Mode:	DMX / Remote
DMX Ch.:	1
WL:	Optional
Incl. Remote:	Wired

FEATURES:

- Smooth even output
- DMX Control
- Create a thin haze of fog
- 1000 W Heater



Z-350

60760 **800 W Pro Fazer**

ANTARI

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	800 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out
Heater:	800 W
Warm-up Time:	4 min
Output Cap.:	85 m³/min
Output Dir.:	Forward
Fluid Cons.:	3 ml/min
Tank Cap.:	1.3 L
Length (mm):	320 mm
Height (mm):	391 mm
Width (mm):	153 mm
Weight:	8.8 kg
Ctrl. Mode:	DMX / Manual / Remote
DMX Ch.:	2

FEATURES:

- 3 ml / min (100 % Output)
- DMX & stand-alone control
- Self-cleaning function
- Non-stop haze at max output



Z-390 Fazer

60807 **Fazer**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Cons.:	1500 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out
Heater:	1500 W
Warm-up Time:	1.5 min
Output Dir.:	Forward
Fluid Cons.:	8 ml/min
Tank Cap.:	4 L
Length (mm):	368 mm
Height (mm):	268 mm
Width (mm):	278 mm
Weight:	9.45 kg
Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
DMX Ch.:	2
WL:	Optional

FEATURES:

- Compact size yet powerful outputs
- Adjustable fan speed
- LCD Screen
- Smart Auto Cleaning Function

Z-390R Fazer

60808 **Fazer**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	8 ml/min
Pwr. Cons.:	1500 W	Tank Cap.:	4 L
Pwr. Conn. In.:	IEC C13 female	Length (mm):	368 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Height (mm):	268 mm
Heater:	1500 W	Width (mm):	278 mm
Warm-up Time:	1.5 min	Weight:	9.45 kg
Output Dir.:	Forward	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
		DMX Ch.:	2
		WL:	WL DMX

FEATURES:

- Compact size yet powerful outputs
- Adjustable fan speed
- LCD Screen
- Smart Auto Cleaning Function
- Wireless operation

F-1

60761 **700 W Pro Fazer**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	8.5 ml/min
Pwr. Cons.:	760 W	Tank Cap.:	2.4 L
Pwr. Conn. In.:	powerCON Blue	Length (mm):	618 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Height (mm):	327 mm
Heater:	760 W	Width (mm):	275 mm
Warm-up Time:	5 min	Weight:	14.1 kg
Output Cap.:	175 m³/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Forward	DMX Ch.:	2
		WL:	Optional

FEATURES:

- Large tube diameter
- Self-cleaning function
- Neutrik powerCON
- 3 & 5P DMX connections

F-1

60762 **700 W Pro Fazer W-DMX**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	8.5 ml/min
Pwr. Cons.:	760 W	Tank Cap.:	2.4 L
Pwr. Conn. In.:	powerCON Blue	Length (mm):	618 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Height (mm):	327 mm
Heater:	760 W	Width (mm):	275 mm
Warm-up Time:	5 min	Weight:	14.1 kg
Output Cap.:	175 m³/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Forward	DMX Ch.:	2
		WL:	WL DMX

FEATURES:

- On board W-DMX Sweden
- Self-cleaning function
- Neutrik powerCON
- 3 & 5P DMX connections



F-4

60768 **1500 W Pro Fazer**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Fluid Cons.:	6.7 ml/min
Pwr. Cons.:	1450 W	Tank Cap.:	5 L
Pwr. Conn. In.:	Schuko Plug	Length (mm):	545 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Height (mm):	285 mm
Heater:	1450 W	Width (mm):	458 mm
Warm-up Time:	1 min	Weight:	20.3 kg
Output Cap.:	140 m³/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Forward	DMX Ch.:	2
		WL:	Optional

FEATURES:

- Roadproof Flight case design
- Works with regular fog liquid
- Fast heat up time (60 seconds)
- Low fluid consumption
- Compact size



WTF-FZ1500

61133 **1500 W DMX Fazer**

SHOWTEC

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Output Dir.:	Forward
Pwr. Cons.:	1450 W	Fluid Cons.:	51 ml/min
Pwr. Conn. In.:	Schuko Plug	Tank Cap.:	5 L
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Length (mm):	438 mm
Heater:	1450 W	Height (mm):	260 mm
Warm-up Time:	1.5 min	Width (mm):	395 mm
Output Cap.:	170 m³/min	Weight:	13.3 kg
		Ctrl. Mode:	DMX / Manual / Remote / Timer
		DMX Ch.:	2

FEATURES:

- Controllable Output
- Stylish design
- 1450 W Heater
- DMX control



F-7

60763 **Smaze, incl W-DMX**

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Tank Cap.:	5 L
Pwr. Cons.:	1620 W	Length (mm):	728 mm
Pwr. Conn. In.:	powerCON Blue	Height (mm):	719 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Width (mm):	428 mm
Heater:	1600 W	Weight:	52.5 kg
Warm-up Time:	8 min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Output Dir.:	Forward	DMX Ch.:	3
Fluid Cons.:	140 ml/min	WL:	WL DMX

FEATURES:

- Fog & Faze combination
- W-DMX Sweden
- Rugged Flight case design
- Adjustable fan position

Ice Fogmachine

60620 **Low fog effect**

ANTARI



Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Tank Cap.:	2.5 L
Pwr. Cons.:	1040 W	Length (mm):	618 mm
Pwr. Conn. In.:	IEC C13 female	Height (mm):	360 mm
Heater:	1040 W	Width (mm):	355 mm
Warm-up Time:	4 min	Weight:	24.4 kg
Output Dir.:	Forward	Ctrl. Mode:	Remote
Fluid Cons.:	25 ml/min	DMX Ch.:	1
		Incl. Remote:	Wired

FEATURES:

- Creates low fog
- Fogger and cooling combined
- Fog output up to 230 m³/minute

DNG-100 Fogcooler

60601 **Converts normal fog to a cloud of white fog**

ANTARI



Specifications:

		Length (mm):	780 mm
		Height (mm):	347 mm
Pwr. Supp.:	100-240 VAC 50-60 Hz	Width (mm):	607 mm
Pwr. Cons.:	750 W	Weight:	72 kg
Pwr. Conn. In.:	Schuko Plug	Ctrl. Mode:	Manual
Output Dir.:	Forward		

FEATURES:

- Creates dry ice fog effect
- Uses normal fog
- Works with any fog machine

DNG-100 Hose Adapter

60703 **FTA-11**

ANTARI

Specifications:

Length (mm):	292 mm
Height (mm):	77 mm
Width (mm):	155 mm
Weight:	0.6 kg





DNG-200

60608

ANTARI

Specifications:

		Fluid Cons.:	90.9 ml/min
		Tank Cap.:	10 L
Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	780 mm
Pwr. Cons.:	600 W	Height (mm):	686 mm
Pwr. Conn. In.:	powerCON Blue	Width (mm):	608 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Weight:	120 kg
		Ctrl. Mode:	Remote
Heater:	2500 W	DMX Ch.:	1
Warm-up Time:	12 min	Incl. Remote:	Wired
Output Dir.:	Forward		

FEATURES:

- No CO_2 or dry ice required
- DMX 512 on board
- Strong roadproof housing



DNG-250 Low Smoke Machine

60797 High Output Low Fogger

ANTARI

Specifications:

		Output Dir.:	Forward
		Fluid Cons.:	100 ml/min
Pwr. Supp.:	240 VAC 50-60 Hz	Tank Cap.:	10 L
Pwr. Cons.:	2800 W	Length (mm):	780 mm
Pwr. Conn. In.:	powerCON Blue	Height (mm):	715 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Width (mm):	608 mm
		Weight:	130 kg
Heater:	1600 W	Ctrl. Mode:	Manual
Warm-up Time:	8 min	DMX Ch.:	1

FEATURES:

- No CO_2 or dry ice required
- New LCD Touch Panel
- More efficient cooling sytem
- Strong roadproof housing

Mistique

60769 **CO_2 Hazer**

SHOWTEC



Specifications:

		Gas Consumption/hour:	0.36 kg/h
		Gas Pressure Min.:	3.4 bar
Pwr. Supp.:	100-240 VAC 50-60 Hz	Gas Pressure Max.:	4.1 bar
Pwr. Cons.:	1250 W	Length (mm):	503 mm
Pwr. Conn. In.:	powerCON TRUE1 In (Male)	Height (mm):	310 mm
		Width (mm):	334 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/ Out	Weight:	17 kg
		IP Rate:	IP20(indoor use only)
Output Cap.:	140 m³/min	Ctrl. Mode:	DMX / Manual / Timer
Output Dir.:	Up	DMX Ch.:	1 / 3 / 5
Fluid Cons.:	120 ml/min	WL:	WL DMX
Tank Cap.:	2.5 L	Gas Type:	CO_2 / N2

FEATURES:

- Even and thin haze ensures no visible cloudy effect on stage
- Customizable output direction gives extra flexibility
- Extreme silent operation due to CO_2 supply
- Output and fan speed remote controllable by DMX and W-DMX
- Fast and easy setup with Q-lock CO_2- hose system
- Very low fluid consumption and long lasting smoke
- Automatic cleaning system

Case for Mistique

D7271 **Premium Line**

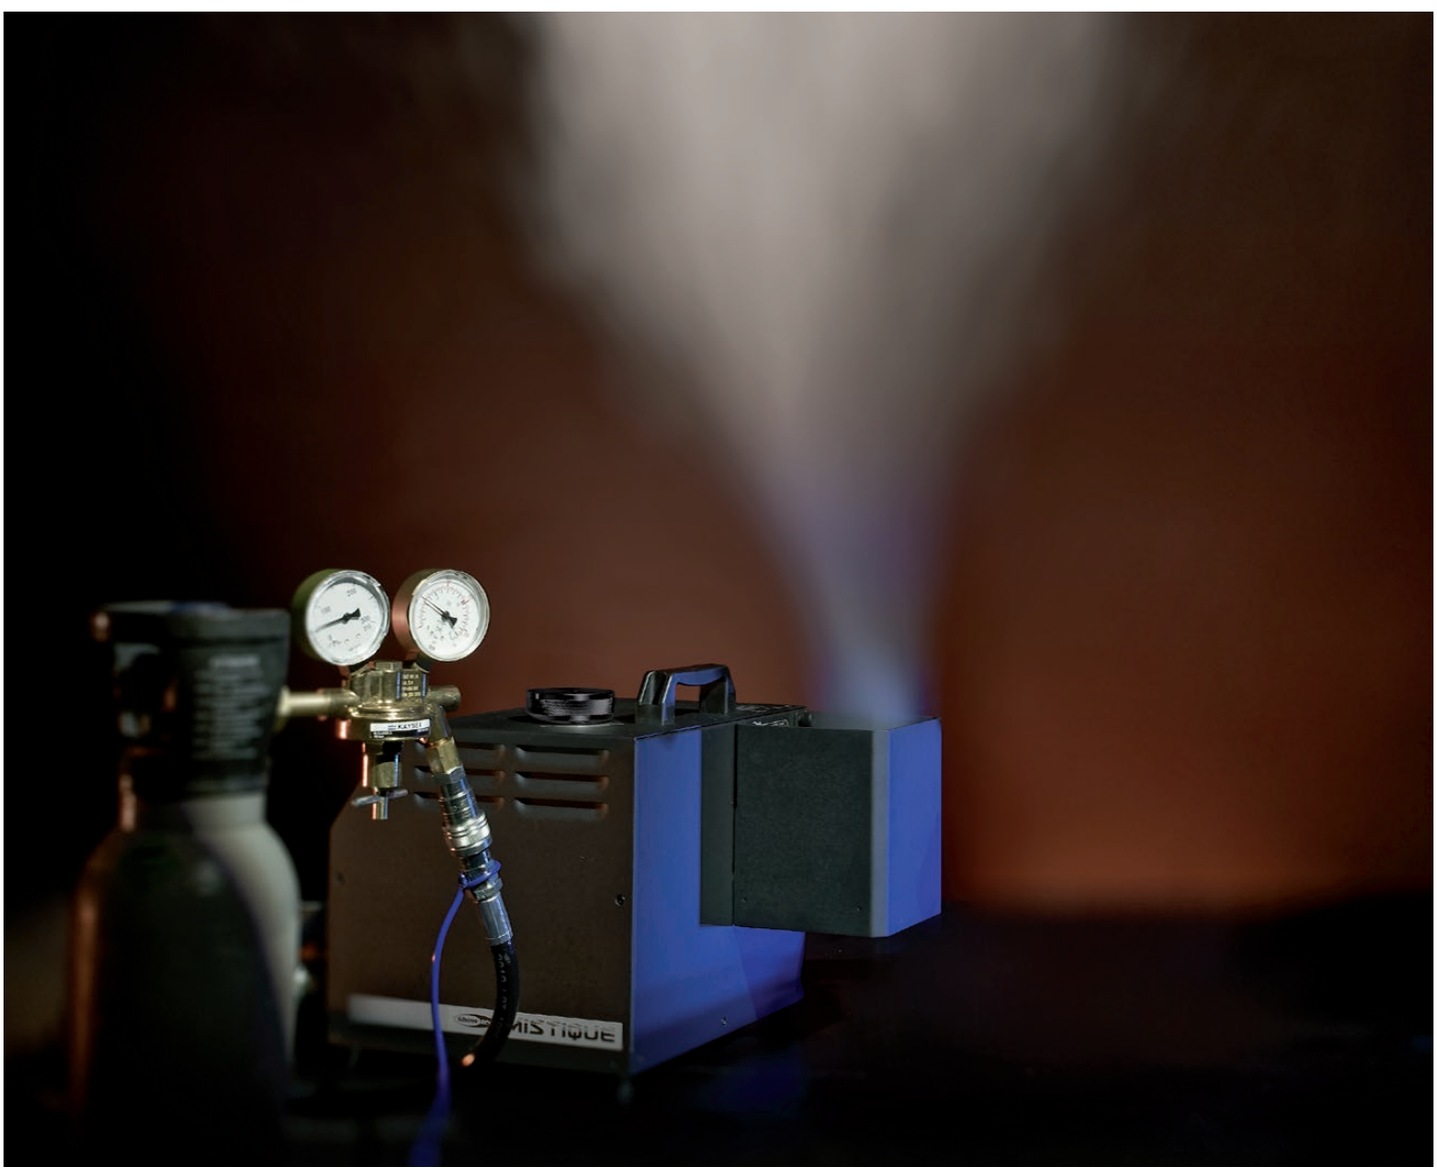



HZ-350

60621 **Pro Hazer**

ANTARI

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	315 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 5P In/Out
Output Cap.:	56 m³/min
Output Dir.:	Forward
Fluid Cons.:	0.8 ml/min
Tank Cap.:	2.5 L
Gas Pressure Max.:	2 bar
Length (mm):	491 mm
Height (mm):	315 mm
Width (mm):	273 mm
Weight:	14.2 kg
Ctrl. Mode:	Built-in Program / DMX / Manual
DMX Ch.:	1
Incl. Remote:	W-1

FEATURES:

- Compact design
- Powerful output
- True Haze effect
- Very Low Power Consumption
- DMX Control
- Bright LCD
- Silent operation



HZ-400

60662 **Pro Hazer**

ANTARI

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Cons.:	400 W
Pwr. Conn. In.:	IEC C13 female
DMX Conn.:	XLR 5P In/Out
Output Cap.:	115 m³/min
Output Dir.:	Forward
Fluid Cons.:	1.1 ml/min
Tank Cap.:	2.5 L
Length (mm):	500 mm
Height (mm):	250 mm
Width (mm):	320 mm
Weight:	17.5 kg
Ctrl. Mode:	DMX / Manual / Remote
DMX Ch.:	1
Incl. Remote:	Wired

FEATURES:

- Professional haze machine
- Maintenance free
- Quiet and efficient operations
- No warm-up times during operation
- Oil based
- DMX, Manual, Timer and Wireless control
- 110 ml/min (20 minutes at full output)

HZ-500

60622 Pro Hazer

ANTARI



Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Fluid Cons.:	1.1 ml/min
Pwr. Cons.:	480 W	Tank Cap.:	2.5 L
Pwr. Conn. In.:	IEC C13 female	Gas Pressure Max.:	2 bar
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Length (mm):	490 mm
Output Cap.:	84.95 m³/min	Height (mm):	338 mm
Output Dir.:	Up	Width (mm):	351 mm
		Weight:	31.5 kg
		Ctrl. Mode:	DMX / Manual / Timer
		DMX Ch.:	1

FEATURES:

- Roadproof design
- Including Flight case
- Works with hazer liquid
- DMX Control
- Direct operation
- Low fluid consumption

HZ-1000

60619 Pro Hazer

ANTARI



Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Tank Cap.:	6.4 L
Pwr. Cons.:	1150 W	Gas Pressure Max.:	2 bar
Pwr. Conn. In.:	powerCON TRUE1 In (Male)	Length (mm):	690 mm
DMX Conn.:	XLR 3P In/Out / XLR 5P In/Out	Height (mm):	610 mm
Output Cap.:	210 m³/min	Width (mm):	510 mm
Output Dir.:	Up	Weight:	74.6 kg
Fluid Cons.:	2.2 ml/min	Ctrl. Mode:	DMX / Manual / Timer
		DMX Ch.:	2
		WL:	Optional

FEATURES:

- Including flight case
- Twin Compressor Mode
- Touch display
- DMX Control
- Direct operation
- Low fluid consumption



Dragon S100

61110 Snow machine

SHOWTEC

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	185 mm
Pwr. Cons.:	650 W	Height (mm):	170 mm
Pwr. Conn. In.:	Schuko Plug	Width (mm):	334 mm
Fluid Cons.:	138 ml/min	Weight:	4 kg
Tank Cap.:	1.1 L	IP Rate:	IP20(indoor use only)
		Ctrl. Mode:	Remote
		Incl. Remote:	Wired

FEATURES:

- Compact size
- Including hanging bracket
- Plug & Play



S-100X Snowmachine

80386 Snow Machine

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	310 mm
Pwr. Cons.:	880 W	Width (mm):	576 mm
Pwr. Conn. In.:	IEC C13 female	Weight:	11 kg
Fluid Cons.:	160 ml/min	IP Rate:	IP20(indoor use only)
Tank Cap.:	5 L	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Length (mm):	505 mm	DMX Ch.:	1
		Incl. Remote:	SC-2 Cable Remote

FEATURES:

- 160 ml/min output
- DMX/Manual/Remote/Stand alone/Timer controlled
- 1 DMX channel
- Including power cable
- Including SC-2 Cable Remote



S-120 Foam Machine

80364

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	600 mm
Pwr. Cons.:	880 W	Height (mm):	300 mm
Pwr. Conn. In.:	IEC C13 female	Width (mm):	260 mm
Fluid Cons.:	350 ml/min	Weight:	12 kg
Tank Cap.:	5 L	IP Rate:	IP20(indoor use only)
		Ctrl. Mode:	Manual

FEATURES:

- Manual control
- 5 L tank capacity
- 350 ml/min
- Including power cable

S-200X Snow Machine Silent

80387 **Silent Snow Machine**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	280 mm
Pwr. Cons.:	880 W	Width (mm):	276 mm
Pwr. Conn. In.:	IEC C13 female	Weight:	11.5 kg
Fluid Cons.:	200 ml/min	IP Rate:	IP20(indoor use only)
Tank Cap.:	5 L	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Length (mm):	505 mm	DMX Ch.:	1
		Incl. Remote:	SC-2 Cable Remote

FEATURES:

- 200 ml/min output
- 1 DMX channel
- Extra silent
- Including power cable
- Including SC-2 Cable Remote

SW-250

80372 **High Power Snowmachine**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Height (mm):	276 mm
Pwr. Cons.:	1290 W	Width (mm):	228 mm
Pwr. Conn. In.:	IEC C13 female	Weight:	12.6 kg
Fluid Cons.:	250 ml/min	IP Rate:	IP20(indoor use only)
Tank Cap.:	5 L	Ctrl. Mode:	DMX / Manual / Remote / Timer
Length (mm):	544 mm	DMX Ch.:	1
		Incl. Remote:	W-1

FEATURES:

- Powerful output
- Wireless Control as standard
- DMX Control on board
- Bright and clear LCD
- Silent operation

SW-300 Snow Machine

60806 **High Power Snow machine**

ANTARI



Specifications:

Pwr. Supp.:	100-240 VAC 50-60 Hz	Height (mm):	276 mm
Pwr. Cons.:	880 W	Width (mm):	311 mm
Pwr. Conn. In.:	IEC C13 female	Weight:	11.5 kg
Fluid Cons.:	280 ml/min	IP Rate:	IP20(indoor use only)
Tank Cap.:	5 L	Ctrl. Mode:	DMX / Manual / Remote / Timer
Length (mm):	500 mm	DMX Ch.:	2
		Incl. Remote:	W-1

FEATURES:

- Powerful output
- Wireless Control as standard
- DMX Control on board
- Bright and clear LCD
- Adjustable snowflake size



S-500

80378 Snow Machine

ANTARI

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Height (mm):	651 mm
Pwr. Cons.:	900 W	Width (mm):	551 mm
Pwr. Conn. In.:	powerCON Blue	Weight:	37.2 kg
Output Cap.:	80 m³/min	IP Rate:	IP20(indoor use only)
Fluid Cons.:	400 ml/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Tank Cap.:	20 L	DMX Ch.:	2
Length (mm):	592 mm	WL:	Optional

FEATURES:

- Flight Case included
- Optional Pan Motor
- DMX Control
- Big Volume Output



S-500 L Snow Machine

80393 Snow Machine

ANTARI

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Height (mm):	651 mm
Pwr. Cons.:	900 W	Width (mm):	603 mm
Pwr. Conn. In.:	powerCON Blue	Weight:	46.4 kg
Output Cap.:	80 m³/min	IP Rate:	IP20(indoor use only)
Fluid Cons.:	400 ml/min	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone / Timer
Tank Cap.:	20 L	DMX Ch.:	2
Length (mm):	803 mm	WL:	Optional

FEATURES:

- Flight Case included
- Optional Pan Motor
- DMX Control
- Big volume output
- Including 20 m hose



PM-1

80378P Pan Motor for S-500

ANTARI

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz	Height (mm):	15 mm
Pwr. Cons.:	11 W	Width (mm):	154 mm
Pwr. Conn. In.:	IEC C13 female	Weight:	2.45 kg
Length (mm):	169 mm	IP Rate:	IP20(indoor use only)
		Ctrl. Mode:	DMX / Manual / Stand Alone
		DMX Ch.:	2

FEATURES:

- For Antari S-500
- Increased snow coverage
- DMX / Manual / Standalone control

B-100 Bubble Machine

40124 **Standard Version**
40125 **Optional Wireless remote**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Tank Cap.:	0.7 L
Pwr. Cons.:	30 W	Length (mm):	341 mm
Pwr. Conn. In.:	Schuko Plug	Height (mm):	217 mm
Fluid Cons.:	8.3 ml/min	Width (mm):	170 mm
		Weight:	4.2 kg
		Ctrl. Mode:	Manual

FEATURES:

- No dripping of liquid
- Easy liquid refill
- Easy to use
- Large output
- Including hanging bracket

B-200

40122 **DMX High Power Bubble Machine**

ANTARI



Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	425 mm
Pwr. Cons.:	120 W	Height (mm):	197 mm
Pwr. Conn. In.:	IEC C13 female	Width (mm):	250 mm
Fluid Cons.:	50 ml/min	Weight:	11.5 kg
Tank Cap.:	1.5 L	Ctrl. Mode:	DMX / Manual / Remote
		DMX Ch.:	1

FEATURES:

- High-output 120 W bubble machine
- Suitable for large size clubs, theatrical production and venues
- Manual remote, DMX-mode and optional (wireless) remote
- 40 minutes at maximum output
- 2 litre tank capacity (0.53 gallon)





SF-100

80390 Axial Universal Fan

SHOWGEAR

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	610 mm
Pwr. Cons.:	155 W	Height (mm):	610 mm
Pwr. Conn. In.:	Schuko Plug	Width (mm):	280 mm
Airflow:	6295 m³/h	Weight:	5.5 kg
		Ctrl. Mode:	Manual

FEATURES:

- Medium power Fan
- Can be used with each smoke machine
- 3 speed modes



SF-125

80391 Axial Power Fan

SHOWGEAR

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	500 mm
Pwr. Cons.:	180 W	Height (mm):	545 mm
Pwr. Conn. In.:	Schuko Plug	Width (mm):	252 mm
Airflow:	3489 m³/h	Weight:	6.5 kg
		Ctrl. Mode:	Manual

FEATURES:

- High velocity Fan with air-guide.
- Metal Drum Cage with 14” Aluminium Fan Blade
- Sturdy Tilt stand with rubber floor guards and wall mountable.
- 3 speed rotary switch



SF-150

80376 Axial Touring Fan

SHOWGEAR

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	650 mm
Pwr. Cons.:	280 W	Height (mm):	785 mm
Pwr. Conn. In.:	Schuko Plug	Width (mm):	265 mm
Airflow:	13552 m³/h	Weight:	26 kg
		Ctrl. Mode:	Manual

FEATURES:

- High power touring Fan
- Can be used with each smoke machine
- Wheels
- 3 speed modes

AF-3E

80373 DMX Effect Fan

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	124 mm
Pwr. Cons.:	116 W	Height (mm):	368 mm
Pwr. Conn. In.:	powerCON Blue	Width (mm):	316 mm
Airflow:	1020 m³/h	Weight:	6.3 kg
Fan Speed:	2550 rpm	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone
		DMX Ch.:	1

FEATURES:

- Strong roadproof housing
- DMX controlled variable wind speed
- Variable adjustable blowing direction
- Manual Controlled variable wind speed



AF-4

80392 DMX Effect Fan

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	353 mm
Pwr. Cons.:	115 W	Height (mm):	517 mm
Pwr. Conn. In.:	Schuko Plug	Width (mm):	377 mm
Airflow:	1750 m³/h	Weight:	9 kg
Fan Speed:	1289 rpm	Ctrl. Mode:	DMX / Manual / Remote / Stand Alone
		DMX Ch.:	1

FEATURES:

- Strong road proof housing
- Manual, timer, DMX and Wireless controlled variable wind speed
- Low Noise Level
- Strong Centre flow of air up to 20 meters



AF-5E

80374 DMX Effect Fan

ANTARI

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	558 mm
Pwr. Cons.:	1600 W	Height (mm):	578 mm
Pwr. Conn. In.:	Schuko Plug	Width (mm):	465 mm
Airflow:	50 m³/h	Weight:	17.5 kg
Fan Speed:	1289 rpm	Ctrl. Mode:	DMX / Manual
		DMX Ch.:	1

FEATURES:

- Strong roadproof housing
- DMX Controlled
- 3 different speeds
- Adjustable wind angle (horizontal, vertical, 45°)
- Speed Control by DMX
- Manual Control Mode





SF-250

80375 Radial Touring Fan

SHOWGEAR

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Length (mm):	515 mm
Pwr. Cons.:	700 W	Height (mm):	545 mm
Pwr. Conn. In.:	Schuko Plug	Width (mm):	490 mm
Airflow:	1701 m³/h	Weight:	18.5 kg
		Ctrl. Mode:	Manual

FEATURES:

- High power touring Fan
- Safety protection grid
- 3 output levels (slow, medium and fast)
- 2 output positions (horizontal and 45 ° vertical)
- 8.5 meter cable included



FX Ice Jet MKII

61002 **CO2 Shooter**

SHOWTEC

Specifications:

		Length (mm):	195 mm
		Height (mm):	244 mm
Pwr. Supp.:	220V-240 VAC 50 Hz	Width (mm):	125 mm
Pwr. Cons.:	20 W	Gas conn.:	3/8
Pwr. Conn. In.:	powerCON Blue	Gas Type:	CO_2
Pwr. Conn. Out.:	powerCON Grey		



FEATURES:

- CO_2 jet special effect
- Suitable for vibrant venues
- Easy to install on stage (base plate) or to a truss (clamp)
- Can be rotated in any direction
- Handy firing system (DMX switch)
- Safe Q-lock compatible adapter
- PowerCON in & out connector

FX Ice Gun

61001 **CO_2 Shooter**

SHOWTEC

Specifications:

		Width (mm):	70 mm
		Gas conn.:	3/8
Length (mm):	570 mm	Gas Type:	CO_2
Height (mm):	210 mm		



FEATURES:

- Eye-catching CO_2 gun
- Safe Q-lock compatible adapter
- No tools required for a sound and secure connection



FX Shot MKII

60906 Electronic Confetti Shooter

SHOWTEC

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Pwr. Conn. Out.:	powerCON Grey
Pwr. Cons.:	100 W	Length (mm):	150 mm
Pwr. Conn. In.:	powerCON Blue	Height (mm):	170 mm
		Width (mm):	145 mm
		Weight:	1.7 kg

FEATURES:

- Easy setup and use
- Suited for 50 cm and 80 cm shooters
- Plug-and-play
- powerCON in/output



FX Gun

61030 Electronic Confetti Shooter

SHOWTEC

Specifications:

Pwr. Supp.:	18 VDC	Height (mm):	75 mm
Length (mm):	450 mm	Width (mm):	190 mm
		Weight:	2.5 kg

FEATURES:

- Integrated Safety Catch
- 100 shots possible with one full charge
- 12 V SLA Battery Pack Inside
- Fast charged in 6 hours



FX Blaster XL

61031 CO_2 Confetti Shooter

SHOWTEC

Specifications:

FX Cap. (kg):	10 kg	Width (mm):	380 mm
Length (mm):	660 mm	Weight:	56 kg
Height (mm):	1350 mm	Gas Type:	CO_2

FEATURES:

- Four output angles
- CO_2 Powered unit
- Including flight case
- Including CO_2 connection-kit

FX Drop

61040 Curtain drop system

SHOWTEC

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz	Max. Load:	20 kg
Pwr. Cons.:	30 W	Length (mm):	77 mm
Pwr. Conn. In.:	powerCON Blue	Height (mm):	140 mm
		Width (mm):	70 mm

FEATURES:

- Plug & play backdrop drop system
- 20 kg load capacity
- powerCON daisy chain
- Road proof housing



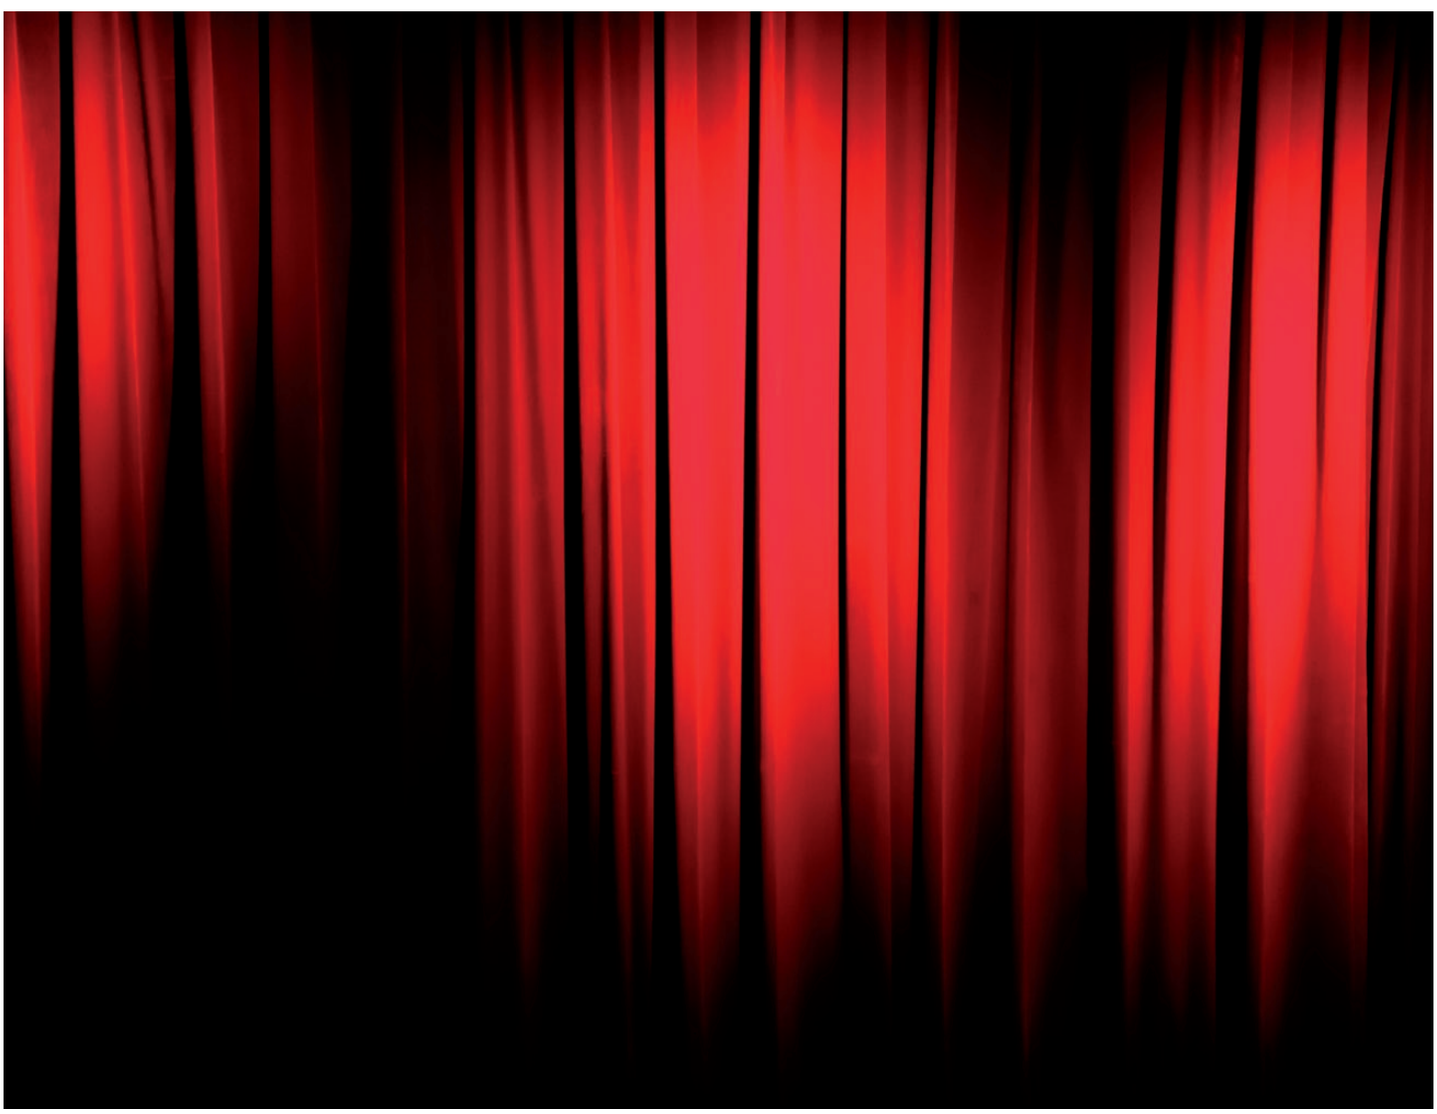

FX Shot Base Plate

SHOWTEC

60907 For 1, 2, or 4 pcs FX Shot

Length (mm):	300 mm
Height (mm):	20 mm
Width (mm):	300 mm



12 VDC Power Adaptor with Dummy Battery

ANTARI

61701 12 VDC

Pwr. Supp.:	12 VDC
Cable Length:	1.5 m



FX Shot Cannon Clamp

SHOWTEC

60909 Certified Safety Cable included

Length (mm):	755 mm
Height (mm):	65 mm
Width (mm):	20 mm



ST-10 Black Extension Hose

ANTARI

80389 for S-501, 10 m

Length (m):	10 m



FTA-3 Tube Adaptor

ANTARI

60654 for 1500-II/ 3000-II

Length (mm):	180 mm
Height (mm):	100 mm
Width (mm):	100 mm



LCU-1S

ANTARI

60702 Liquid Control Unit

Length (mm):	203 mm
Height (mm):	96 mm
Width (mm):	179 mm
Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Conn. In.:	IEC C13 female
Ctrl. Mode:	DMX / Manual / Timer



Liquid Filter for Liquid Tube

ANTARI

60685 4 mm

Length (mm):	20 mm
Height (mm):	10 mm
Width (mm):	10 mm



Filter for 6 mm Liquid Tube

ANTARI

60686

Colour:	Gold



Wireless Remote Dragon Series SHOWTEC

61120 Wireless Remote Controller



Z-1 ANTARI

60695 Remote Control for Z-800, Z-1000 MKI



Z-3 ANTARI

60726 Remote control for Z-350 Fazer



Z-4 ANTARI

60696 Remote Control for Z-800, Z-1000



Z-5 ANTARI

60692 Remote Control for Z-300 Fazer



Z-8 ANTARI

60697 Remote Control



Z-9 ANTARI

60698 Wireless Remote Control



Z-10 ANTARI

60700 Remote Control



Z-30 ANTARI

60679 Wireless Remote Control Module



Z-20 Remote Control ANTARI

60599



Z-40 ANTARI

60690 Remote Control



Z-50 ANTARI

60678 Wireless Remote Control



W-1 ANTARI

60579 Wireless Remote Controller



M-1 ANTARI

60639 Wireless Remote Control for M-1 Mobile Fogger



M-30 ANTARI

60583 Wireless remote for M5/M-10



SC-2 ANTARI

60600 Remote Control for S-100-II



BCR-1 ANTARI

40127 Wireless remote for B100 x & B200



SC-3 ANTARI

60587 Remote Control



MCR-1F Wireless Remote for MB-1

61703 Wireless ON/OFF



ANTARI

MC-1 Wired Remote for MB-56

61716 Manual ON/OFF



ANTARI

FCR-1 Wireless Remote for MB-55

61717 Wireless ON/OFF



ANTARI

WTR-10 Wireless Remote Kit F1 ANTARI

60576



WTR-20 Wireless Remote ANTARI

60779



MCT-2 2-knob Timer Remote for MB-1 ANTARI

61702 Timer with interval and duration; manual ON/OFF



CO_2 High Pressure Hose — SHOWTEC

61010 5 m, 3 / 8 male - female

Gas Pressure Max.:	175 bar
Length (mm):	500 mm
Gas conn.:	3/8
Gas Type:	CO_2



CO_2 High Pressure Hose — SHOWTEC

61011 10 m, 3 / 8 male - female

Gas Pressure Max.:	175 bar
Length (mm):	1000 mm
Gas conn.:	3/8
Gas Type:	CO_2



CO_2 High Pressure Hose — SHOWTEC

61012 15 m, 3 / 8 male - female

Gas Pressure Max.:	175 bar
Length (mm):	1500 mm
Gas conn.:	3/8
Gas Type:	CO_2



CO_2 3/8 Q-Lock Hose — SHOWTEC

61017 0.75 m
61013 2.5 m
61014 5 m
61015 10 m
61016 15 m



CO_2 Q-Lock Regulator — SHOWTEC

61019 1 x Female Q-Lock

Gas Pressure Min.:	5 bar
Gas Pressure Max.:	10 bar
Length (mm):	70 mm
Height (mm):	210 mm
Width (mm):	200 mm
Gas conn.:	3/8 / Quick-Lock
Gas Type:	CO_2



CO_2 Q-Lock Shut-off Valve — SHOWTEC

61029 Closed system

Length (mm):	35 mm
Height (mm):	75 mm
Width (mm):	180 mm
Gas conn.:	Quick-Lock
Gas Type:	CO_2



CO_2 Bottle to 3/8 Q-Lock Adapter — SHOWTEC

61020 Closed system

Length (mm):	145 mm
Height (mm):	32 mm
Width (mm):	32 mm
Gas conn.:	Quick-Lock
Gas Type:	CO_2



CO_2 3/8 Q-Lock 2-way Combiner — SHOWTEC

61023 Closed system

Length (mm):	145 mm
Height (mm):	35 mm
Width (mm):	130 mm
Gas conn.:	Quick-Lock
Gas Type:	CO_2



CO_2 90° 3/8 Q-Lock Connector — SHOWTEC

61021 Closed system

Length (mm):	90 mm
Height (mm):	30 mm
Width (mm):	90 mm
Gas conn.:	Quick-Lock
Gas Type:	CO_2



CO_2 3/8 Q-Lock 2-way Splitter — SHOWTEC

61024 Closed system

Length (mm):	155 mm
Height (mm):	35 mm
Width (mm):	135 mm
Gas conn.:	Quick-Lock
Gas Type:	CO_2



CO_2 3/8 Q-lock Release Valve — SHOWTEC

61022 Closed system

Length (mm):	145 mm
Height (mm):	68 mm
Width (mm):	135 mm
Gas conn.:	Quick-Lock
Gas Type:	CO_2



CO_2 3/8 Q-Lock 4-way Distributor — SHOWTEC

61025 Closed system

Length (mm):	110 mm
Height (mm):	100 mm
Width (mm):	290 mm
Gas conn.:	Quick-Lock
Gas Type:	CO_2



CO_2 3/8 to Q-Lock Adapter female

SHOWTEC

61026 **Closed system**

Length (mm):	92 mm
Height (mm):	35 mm
Width (mm):	35 mm
Gas conn.:	Quick-Lock
Gas Type:	CO_2



CO_2 3/8 to Q-Lock Adapter male

SHOWTEC

61027 **Closed system**

Length (mm):	75 mm
Height (mm):	29 mm
Width (mm):	29 mm
Gas conn.:	Quick-Lock
Gas Type:	CO_2



CO_2 90° 3/8 to Q-lock Adapter male

SHOWTEC

61028 **Closed system**

Length (mm):	85 mm
Height (mm):	29 mm
Width (mm):	40 mm
Gas conn.:	Quick-Lock
Gas Type:	CO_2





Fog Liquids
FX Consumables

Magican Hazecan ANTARI

60659 Fog in a spraycan



Fog Fluid Scent SHOWGEAR

60574APPEL Apple, 20 ml



Fog Fluid Scent SHOWGEAR

60574BANAN Banana, 20 ml



Fog Fluid Scent SHOWGEAR

60574CHERR Cherry, 20 ml



Fog Fluid Scent SHOWGEAR

60574COCOS Cocos, 20 ml



Fog Fluid Scent SHOWGEAR

60574DISCO Disco, 20 ml



Fog Fluid Scent SHOWGEAR

60574ENERG Energy, 20 ml



Fog Fluid Scent SHOWGEAR

60574LEMON Lemon, 20 ml



Fog Fluid Scent SHOWGEAR

60574MARAC Maracuja, 20 ml



Fog Fluid Scent SHOWGEAR

60574MINT Mint, 20 ml



Fog Fluid Scent SHOWGEAR

60574RASP Raspberry, 20 ml



Fog Fluid Scent Strawberry SHOWGEAR

60574STRAW 30 ml



Fog Fluid Scent Tutti Frutti SHOWGEAR

60574TUTTI 30 ml



Fog Fluid Scent Vanilla SHOWGEAR

60574VANIL 30 ml



Fog Fluid High Density SHOWGEAR

60637 5 litre High Density



Fog Fluid High Density SHOWGEAR

606381 25 litre High Density



Fog Fluid Light SHOWGEAR

60629 5 litre



Fog Fluid Light SHOWGEAR

6062925 25 litre



FLL-5 Low Fog Effects Fluid ANTARI

60568 5 Liter Low Fog



Low Smoke Fluid SHOWGEAR

60647 5 litre Low smoke



FLM-05S Fog Liquid 0.5 L for MB-2

61730 Ready-to-use



ANTARI

FLM-05P Fog Liquid 0.5 L for MB-20 / FT-21

61731 Ready-to-use



ANTARI

Fog Fluid Fast Dissipating SHOWGEAR

60596 5 litre, CO_2 jet simulation



MHL-2 Hazer Fluid SHOWTEC

60569 2 litre



Hazer Fluid SHOWGEAR

60624 1 litre, oil-based



Hazer Fluid SHOWGEAR

60626 5 litre, oil-based



Hazer Fluid 5 Liter Water base

60575



SHOWGEAR

Fog Fluid FLR-5 ANTARI

60590 5 litre, Light



Fog Fluid FLG-5 ANTARI

60595 5 litre, Heavy



Fog Fluid SFD ANTARI

60728 5 litre, Super Fast Dissipating



Fog Liquid FLP ANTARI

60594 6 litre, for Fire Training



FLM-05 Mobile Fog Liquid ANTARI

606351 500 ml



Hazer Fluid HZL ANTARI

60597 1 litre, oil-based



Hazer Fluid HZL ANTARI

60598 5 litre, oil-based



Hazerfluid HZL-5W ANTARI

60577 5 litre (water-based)



Fog Liquids
FX Consumables

Fog Fluid Regular SHOWGEAR

60627 1 litre



Fog Fluid Regular SHOWGEAR

60603 5 litre



Fog Fluid Regular SHOWGEAR

606131 25 litre



Fog Fluid Regular SHOWGEAR

60636 200 litre



FLP-700 ANTARI

60565 Dedicated fog fluid for FT-50 Fire Training machine 720 ml



Bubble Liquids
FX Consumables

Bubble Liquid SHOWGEAR

80352 5 litre, Concentrate



Bubble Liquid SHOWGEAR

80360 5 litre, Ready To Use



Bubble Liquid, BL-5 ANTARI

60591 5 litre



Snow Liquids
FX Consumables

Snow/Foam Concentrate 5 litre

80342 Water Based



SHOWGEAR

Snow Liquid SL-5 ANTARI

60592 5 litre, Regular



Snow Liquid SL-5N ANTARI

60589 5 litre, Fine



Snow/Foam Concentrate 1 litre

80340 Water Based



SHOWGEAR

Snow Liquid SL-5A ANTARI

60593 5 litre, Premium



Snow Liquid SL-5AN ANTARI

60588 5 litre, Premium Fine



Snow Liquid SL20-N ANTARI

60581 20 litre, Premium Fine



Snow/Foam Liquid 5 litre SHOWGEAR

80341 Water Based



Show Confetti Metal

60915SI Silver, Stars, 1 kg flame proof



Show Confetti Round Ø55 mm

60917SI Silver, 1 kg Fireproof



Show Confetti Metal

60919GO Gold, Pixiedust, 1 kg Flameproof



Show Confetti Metal

60919SI Silver, Pixiedust, 1 kg Flameproof



Show Confetti Metal

60921GM Gold, Hearts, 1 kg Flameproof



Show Confetti Metal

60921RM Red, Hearts, 1 kg, Flameproof



Show Confetti Metal

60921SM Silver, Hearts, 1 kg, Flameproof



Show Confetti Metal

60922GM Gold, Flowers, 1 kg, Flameproof



Show Confetti Metal

60922SM Silver, Flowers, 1 kg, Flameproof



Show Confetti Metal

60923GM Gold, Butterflies, 1 kg, Flameproof



Show Confetti Metal

60923SM Silver, Butterflies, 1 kg, Flameproof



Show Confetti Metal

60914B Black, Rectangle, 1 kg Flameproof



Show Confetti Metal

60914G Green, Rectangle, 1 kg Flameproof



Show Confetti Metal

60914O Orange, Rectangle, 1 kg Flameproof



Show Confetti Metal

60914R Red, Rectangle, 1 kg Flameproof



Show Confetti Metal

60914U Blue, Rectangle, 1 kg Flameproof



Show Confetti Metal

60914WH White, Rectangle, 1 kg Flameproof



Show Confetti Metal

60924G Gold, Laser, 1 kg, Flameproof



Show Confetti Metal

60924S Silver, Laser, 1 kg, Flameproof



Show Confetti Rectangle 55 x 17 mm

60910 Multicolour, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910B Black, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910CGR Clear green, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910CU Clear blue, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910GR Green, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

609100 Orange, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910PI Pink, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910PU Purple, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910R Red, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910U Blue, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910WH White, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910Y Yellow, 1 kg Fireproof



Show Confetti Round Ø55 mm

60912 Multicolour, 1 kg Fireproof



Show Confetti Round Ø55 mm

60912B Black, 1 kg Fireproof



Show Confetti Round Ø55 mm

60912WH White, 1 kg Fireproof



Show Confetti Rectangle 55 x 17 mm

60910Y Yellow, 1 kg Fireproof



Show Confetti Metal

60914GO Gold, Rectangle, 1 kg Flameproof



Show Confetti Metal

60914SI Silver, Rectangle, 1 kg Flameproof



Show Confetti Metal

60916GO Gold, Square, 1 kg Flameproof



Show Confetti Metal

60916SI Silver, Square, 1 kg Flameproof



Slowfall Confetti 55 x 17 mm

60910FG Fluor green, 1 kg Flameproof



Slowfall Confetti 55 x 17 mm

60910FO Fluor orange, 1 kg Flameproof



Slowfall Confetti 55 x 17 mm

60910FPI Fluor pink, 1 kg Flameproof



Slowfall Confetti 55 x 17 mm

60910FY Fluor yellow, 1 kg Flameproof



Electric Confetti Cannon

62050BW	50 cm, blue/white
62050RGG	50 cm, red/yellow/green
62050M	50 cm, multicolour
62050RH	50 cm, red Hearts
62050	50 cm, black
62050LG	50 cm, light green
62050LU	50 cm, light blue
62050DG	50 cm, dark green
62050GM	50 cm, gold metallic
62050MM	50 cm, multi metallic
620500	50 cm, orange
62050P	50 cm, pink
62050PU	50 cm, purple
62050R	50 cm, red
62050SM	50 cm, silver metallic
62050DU	50 cm, dark blue
62050W	50 cm, white
62050WS	50 cm, white/silver
62050GRM	50 cm, green metallic
62050PM	50 cm, pink metallic
62050RM	50 cm, red metallic
62050UM	50 cm, blue metallic
62050Y	50 cm, yellow

Electric Confetti Cannon

62090	80 cm, snowflake white
62070BW	80 cm, blue/white
62070RGG	80 cm, red/yellow/green
62070	80 cm, black
62070BM	80 cm, black metallic
62070GRM	80 cm, green metallic
62070M	80 cm, multicolour
620700M	80 cm, orange metallic
62070PM	80 cm, pink metallic
62070RH	80 cm, red Hearts
62070RM	80 cm, red metallic
62070UM	80 cm, blue metallic
62070WM	80 cm, white metallic
62070LG	80 cm, light green
62070LU	80 cm, light blue
62070DG	80 cm, dark green
62070GM	80 cm, gold metallic
62070MM	80 cm, multi metallic
620700	80 cm, orange
62070P	80 cm, pink
62070PU	80 cm, purple
62070R	80 cm, red
62070SM	80 cm, silver metallic
62070DU	80 cm, dark blue
62070W	80 cm, white
62070WS	80 cm, white/silver
62070Y	80 cm, yellow

Electric Streamer Cannon

62060M	50 cm, multicolour
62060	50 cm, black
62060LG	50 cm, light green
62060LU	50 cm, light blue
62060DG	50 cm, dark green
62060GM	50 cm, gold metallic
62060MM	50 cm, multi metallic
620600	50 cm, orange
62060P	50 cm, pink
62060PU	50 cm, purple
62060R	50 cm, red
62060SM	50 cm, silver metallic
62060DU	50 cm, dark blue
62060W	50 cm, white
62060GRM	50 cm, green metallic
62060PM	50 cm, pink metallic
62060RM	50 cm, red metallic
62060UM	50 cm, blue metallic
62060WS	50 cm, white/silver
62060Y	50 cm, yellow

Electric Streamer Cannon Pro

62080M	80 cm, multicolour
62080	80 cm, black
62080LG	80 cm, light green
62080LU	80 cm, light blue
62080DG	80 cm, dark green
62080GM	80 cm, Gold metallic
62080MM	80 cm, multi metallic
620800	80 cm, orange
62080P	80 cm, pink
62080PU	80 cm, purple
62080R	80 cm, red
62080SM	80 cm, silver metallic
62080DU	80 cm, dark blue
62080W	80 cm, white
62080BM	80 cm, black metallic
62080GRM	80 cm, green metallic
620800M	80 cm, orange metallic
62080PM	80 cm, pink metallic
62080RM	80 cm, red metallic
62080UM	80 cm, blue metallic
62080WM	80 cm, white metallic
62080WS	80 cm, white/silver
62080Y	80 cm, yellow



Handheld Confetti Cannons

FX Consumables

Handheld Confetti Cannon Small

62000BW	28 cm, blue/white
62000RGG	28 cm, red/yellow/green
62000M	28 cm, multicolour
62000GM	28 cm, Gold metallic
62000SM	28 cm, silver metallic
62000W	28 cm, white
62000WS	28 cm, white/silver
62000RH	28 cm, red Hearts

Handheld Confetti Cannon

62010BW	50 cm, blue/white
62010RGG	50 cm, red/yellow/green
62010	50 cm, black
62010DG	50 cm, dark green
62010DU	50 cm, dark blue
62010GM	50 cm, gold metallic
62010GRM	50 cm, green metallic
62010LG	50 cm, light green
62010LU	50 cm, light blue
62010M	50 cm, multicolour
62010MM	50 cm, multi metallic
62010O	50 cm, orange
62010P	50 cm, pink
62010PM	50 cm, pink metallic
62010PU	50 cm, purple
62010R	50 cm, red
62010RH	50 cm, red hearts
62010RM	50 cm, red metallic
62010SM	50 cm, silver metallic
62010UM	50 cm, blue metallic
62010W	50 cm, white
62010Y	50 cm, yellow
62010WS	50 cm, white/silver

Handheld Confetti Cannon Pro

62090W	80 cm, Snowflake white
62030BW	80 cm, blue/white
62030RGG	80 cm, red/yellow/green
62030	80 cm, black
62030BM	80 cm, black metallic
62030DG	80 cm, dark green
62030DU	80 cm, dark blue
62030GRM	80 cm, green metallic
62030LG	80 cm, light green
62030LU	80 cm, light blue
62030M	80 cm, multicolour
62030MM	80 cm, multi metallic
62030O	80 cm, orange
62030OM	80 cm, orange metallic
62030P	80 cm, pink
62030PM	80 cm, pink metallic
62030PU	80 cm, purple
62030R	80 cm, red
62030RM	80 cm, red metallic
62030UM	80 cm, blue metallic
62030WM	80 cm, white metallic
62030Y	80 cm, yellow
62030GM	80 cm, gold metallic
62030SM	80 cm, silver metallic
62030W	80 cm, white
62030WS	80 cm, white/silver
62030RH	80 cm, red hearts

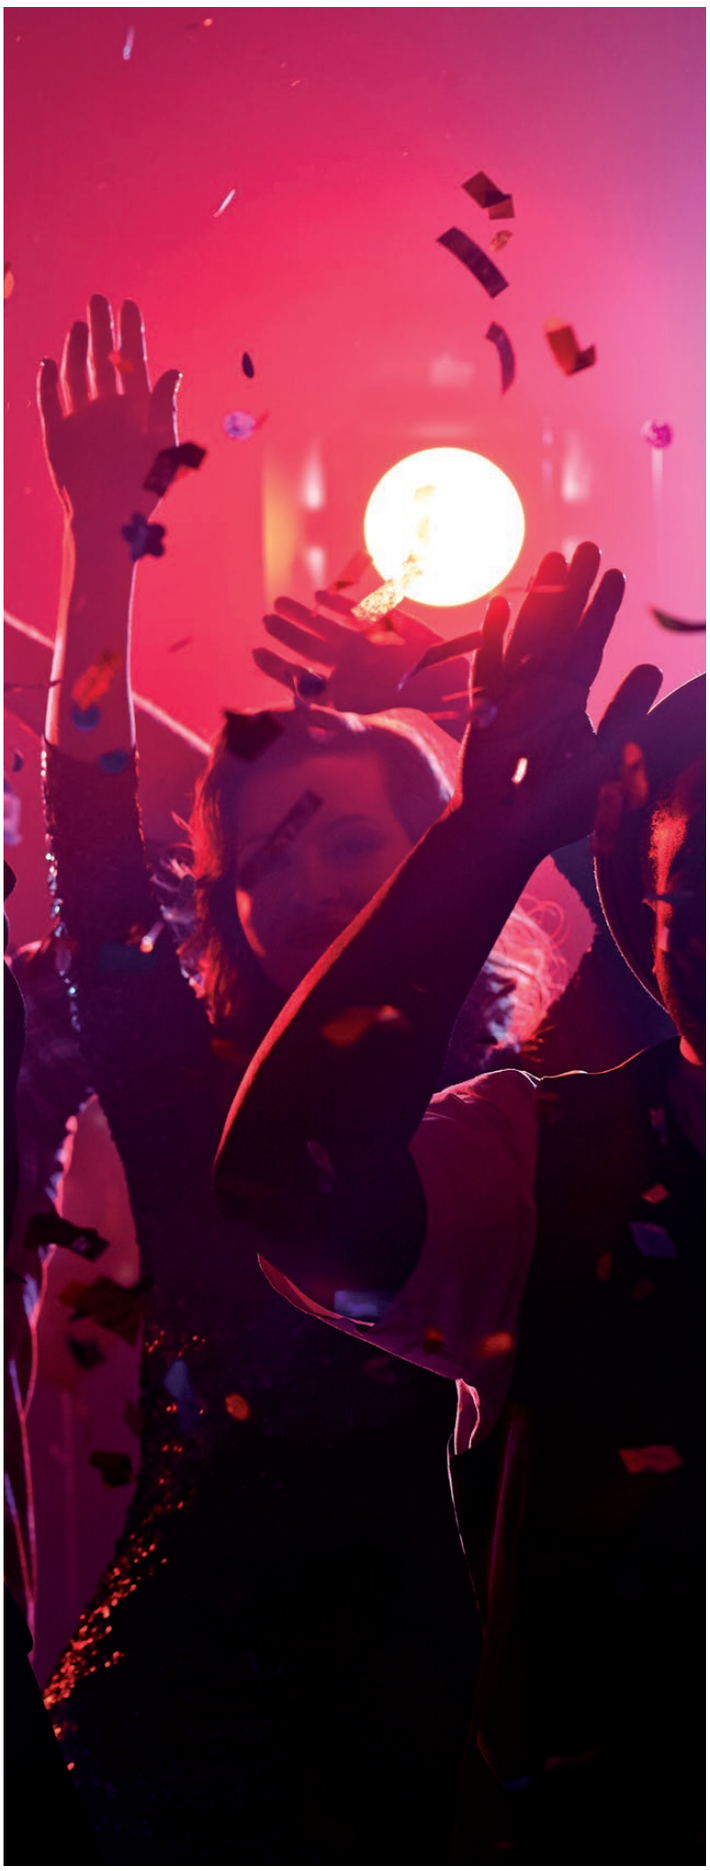

Handheld Streamer

62020M	50 cm, multicolour
62020	50 cm, black
62020DG	50 cm, dark green
62020DU	50 cm, dark blue
62020GM	50 cm, gold metallic
62020GRM	50 cm, green metallic
62020LG	50 cm, light green
62020LU	50 cm, light blue
62020MM	50 cm, multi metallic
62020O	50 cm, orange
62020P	50 cm, pink
62020PM	50 cm, pink metallic
62020PU	50 cm, purple
62020R	50 cm, red
62020RH	50 cm, red metallic
62020SM	50 cm, silver metallic
62020UM	50 cm, blue metallic
62020W	50 cm, white
62020WS	50 cm, white/silver
62020Y	50 cm, yellow

Handheld Streamer Cannon Pro

62040	80 cm, black
62040BM	80 cm, black metallic
62040DG	80 cm, dark green
62040DU	80 cm, dark blue
62040GRM	80 cm, green metallic
62040LG	80 cm, light green
62040LU	80 cm, light blue
62040M	80 cm, multicolour
62040MM	80 cm, multi metallic
62040O	80 cm, orange
62040OM	80 cm, orange metallic
62040P	80 cm, pink
62040PM	80 cm, pink metallic
62040PU	80 cm, purple
62040R	80 cm, red
62040UM	80 cm, blue metallic
62040WM	80 cm, white metallic
62040Y	80 cm, yellow
62040GM	80 cm, gold metallic
62040SM	80 cm, silver metallic
62040W	80 cm, white
62040WS	80 cm, white/silver

Cables and connectors matter

Cables and connectors can really make a difference. The use of inferior cables and connectors can affect not only the quality of the signal, but also the proper functioning of your equipment. At the end of the day, your investment in cables and connectors is worth it when you consider multiple aspects, not only in terms of cost, but also in terms of quality, reliability, and longevity.

We offer good and affordable connection solutions for audio, audiovisual, light, power, instruments, and data. They are suitable for any environment and built to survive the rigours of frequent touring.

Our audiovisual products range from prefab cables, connectors, and adapters to cables on spool and power distribution. The best materials, a solid connection, and functional designs allow you to build sturdy, noiseless and interference-free connections that go unnoticed and unseen.



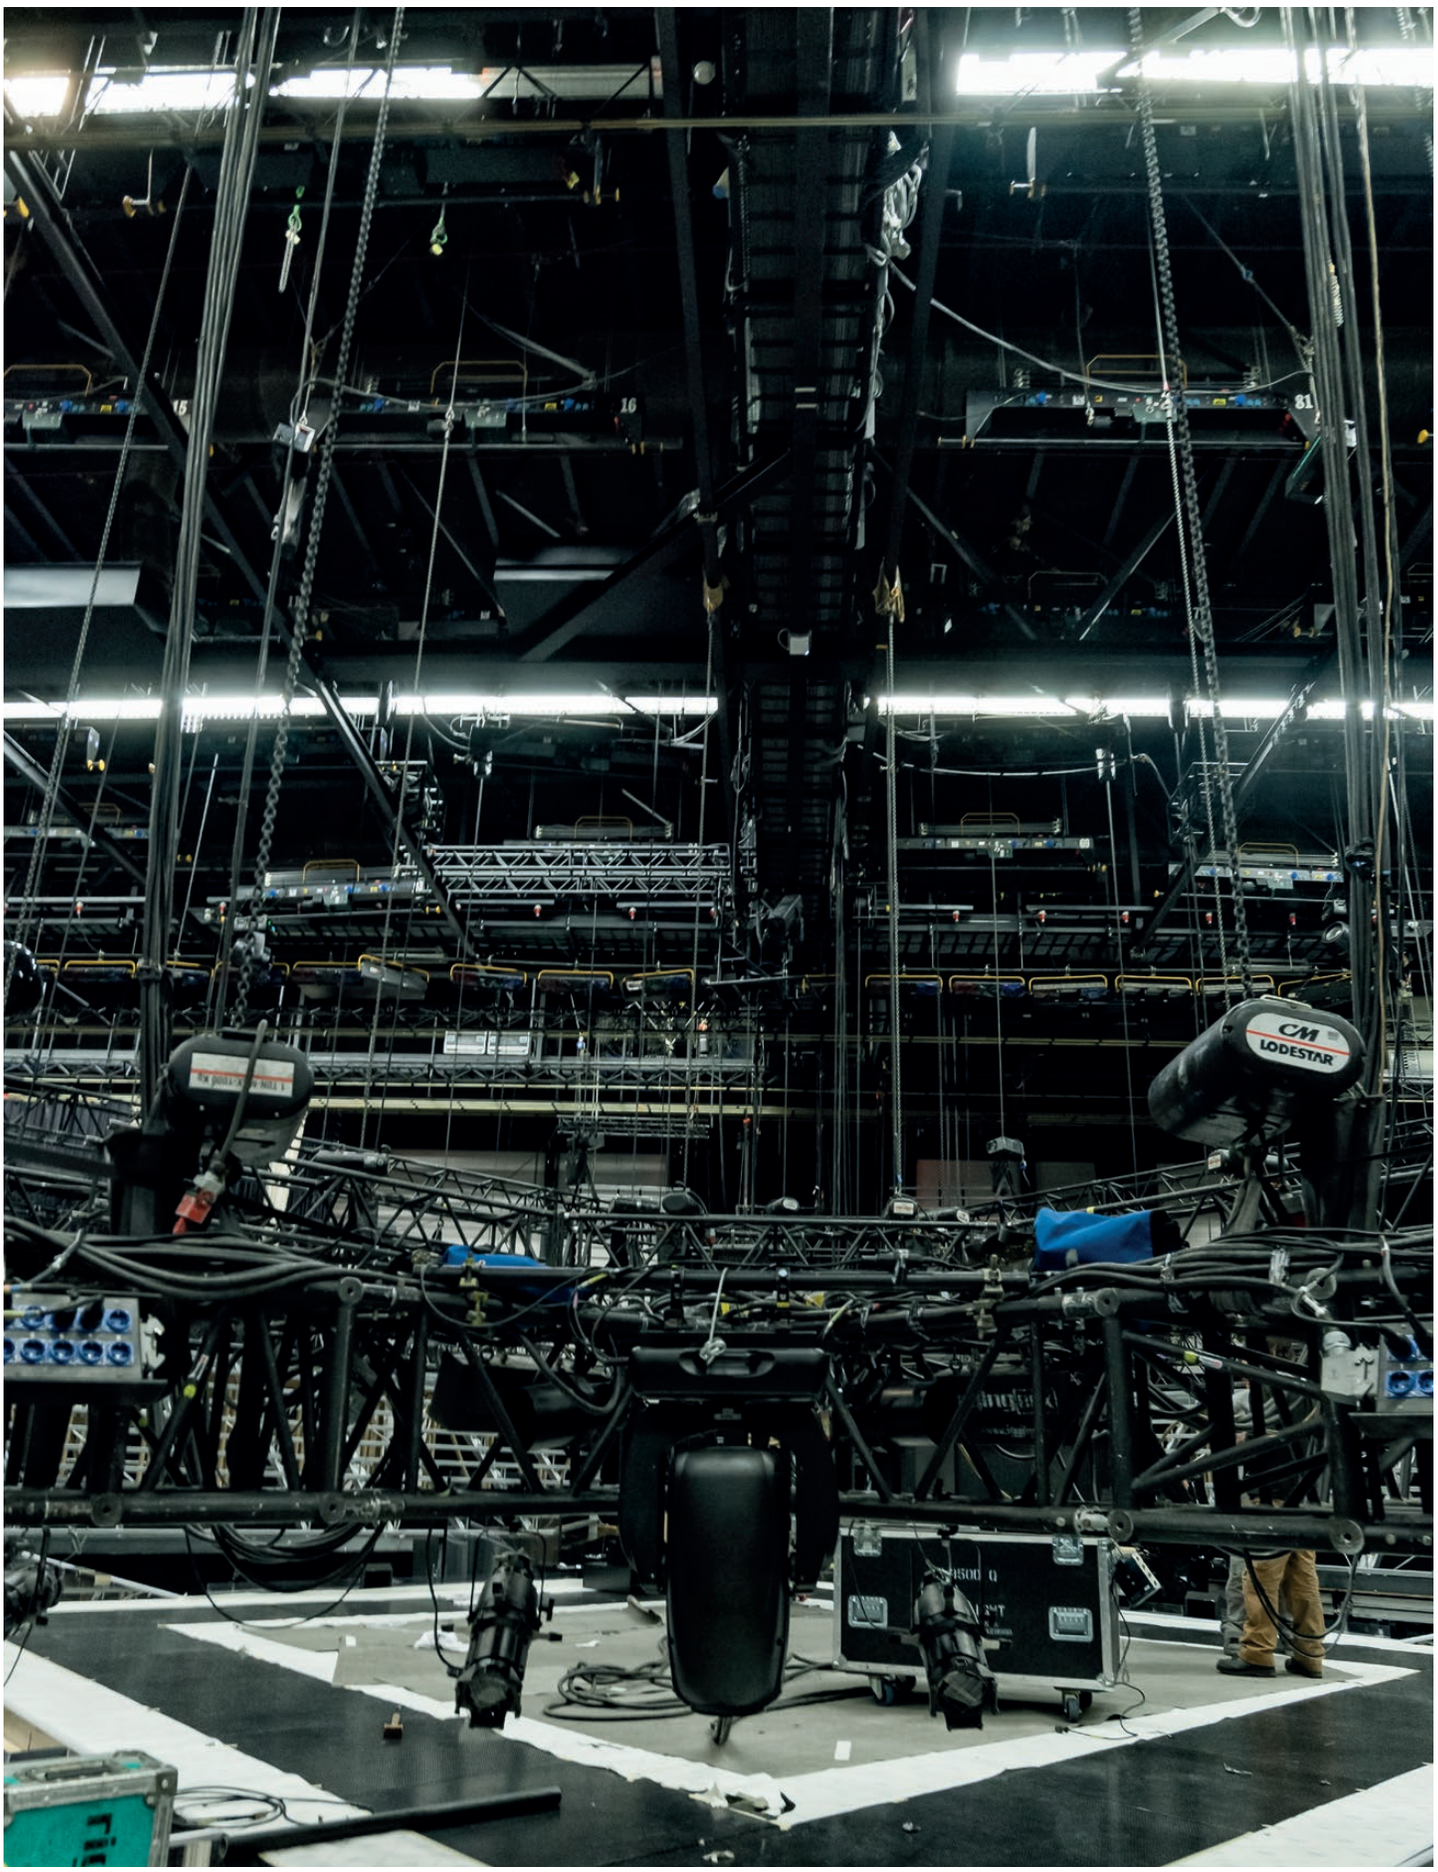
CM
LODESTAR

FLX01- bal. XLR/M 3P to XLR/F 3P — DAP

FLX0175	0.75 m X-type
FLX01150	1.5 m X-type
FLX013	3 m X-type
FLX016	6 m X-type
FLX0110	10 m X-type



FL01 - bal. XLR/M 3P to XLR/F 3P — DAP

FL0175	0.75 m
FL01150	1.5 m
FL013	3 m
FL016	6 m
FL0110	10 m
FL0115	15 m
FL0120	20 m



XGL12 - XLR/M to XLR/F — DAP

XGL1275	0.75 m
XGL12150	1.5 m
XGL123	3 m
XGL126	6 m
XGL1210	10 m



FL71 - bal. XLR/M 3P to XLR/F 3P Neutrik — DAP

FL71150	1.5 m
FL713	3 m
FL716	6 m
FL7110	10 m



FL72 - bal. XLR/M 3P to XLR/F 3P Neutrik XX — DAP

FL7275	0.75 m
FL72150	1.5 m
FL723	3 m
FL726	6 m
FL7210	10 m



FL73 - IP65 XLR/M 3P to XLR/F 3P Neutrik XX HD — DAP

FL73150	1.5 m
FL733	3 m
FL736	6 m
FL7310	10 m



FL74 XLR M/F Mic/Line Cable — DAP

FL7410	10 m
FL74150	1.5 m
FL743	3 m
FL746	6 m



FL81 - XLR/M 4P to XLR/F 4P Neutrik — DAP

FL816	6 m
FL8110	10 m
FL8120	20 m



FL06 - unbal. Jack mono to Jack mono

DAP

FL066	6 m
FL0610	10 m



FL16 - Stage Guitar Cable straight Ø6 mm

DAP

FL166	6 m
FL1610	10 m



FL18 - Stage Guitar Cable straight Ø6 mm to 90°

DAP

FL186	6 m
FL1810	10 m



FL17 - Road Guitar Cable straight Ø7 mm

DAP

FL176	6 m
FL1710	10 m



FL19 - Road Guitar Cable straight Ø7 mm to 90°

DAP

FL196	6 m
FL1910	10 m



FL03 - bal. XLR/F 3P to Jack stereo

DAP

FL03150	1.5 m
FL033	3 m
FL036	6 m



FL04 - bal. XLR/M 3P to Jack stereo

DAP

FL04150	1.5 m
FL043	3 m
FL046	6 m



FL02 - unbal. XLR/F 3P to Jack mono

DAP

FL02150	1.5 m
FL023	3 m
FL026	6 m



FL13 - unbal. XLR 3P, male to Jack mono

DAP

FL13150	1.5 m



FL07 - bal. stereo Jack to stereo Jack

DAP

FL07150	1.5 m
FL073	3 m
FL076	6 m
FL0710	10 m



FL40 - bal. stereo Jack to stereo female Jack

DAP

FL403	3 m
FL406	6 m
FL4010	10 m



FLX05 - unbal. Jack mono to Jack mono X-type

DAP

FLX05150	1.5 m
FLX053	3 m
FLX056	6 m
FLX0510	10 m



FL05 - unbal. Jack mono to Jack mono DAP

FL05150	1.5 m
FL053	3 m
FL056	6 m
FL0510	10 m
FL0515	15 m



FL10 - unbal. Jack mono to Jack mono 90° DAP

FL10150	1.5 m
FL103	3 m
FL106	6 m



FL28 - unbal. Jack mono to Jack mono DAP

FL28150	1.5 m
FL283	3 m



FL29 - unbal. Jack mono to Jack mono 90° DAP

FL29150	1.5 m
FL293	3 m
FL296	6 m





FL24 - 2 RCA male L/R to 2 RCA male L/R

DAP

FL2475	0.75 m
FL24150	1.5 m
FL243	3 m
FL246	6 m



FL27 - 2 RCA male L/R to 2 RCA female L/R

DAP

FL2775	0.75 m
FL27150	1.5 m
FL273	3 m
FL276	6 m



FL23 - 2 RCA male L/R to 2 mono Jack L/R

DAP

FL23150	1.5 m
FL233	3 m



FL22 - 2 mono Jack L/R to 2 mono Jack L/R

DAP

FL22150	1.5 m
FL223	3 m
FL226	6 m



FL25 - 2 RCA male L/R to 2 XLR/F 3P

DAP

FL25150	1.5 m
FL253	3 m



FL26 - 2 RCA male L/R to 2 XLR/M 3P

DAP

FL26150	1.5 m
FL263	3 m



FL43 - 2 unbal. Jack mono L/R to 2 XLR/F 3P

DAP

FL43150	1.5 m
FL433	3 m



FL44 - 2 unbal. Jack mono L/R to 2 XLR/M 3P

DAP

FL44150	1.5 m
FL443	3 m



FL45 - mini-jack to mini-jack

DAP

FL45150	1.5 m
FL453	3 m
FL456	6 m



FL47 - 2x RCA + 1x Digital cable

DAP

FL4775	0.75 m
FL47150	1.5 m
FL473	3 m
FL476	6 m



RCA Digital Cable

DAP

FL4875	0.75 m
FL48150	1.5 m
FL483	3 m
FL486	6 m



FL30 - stereo mini-jack to 2 RCA male L/R

DAP

FL30150 1.5 m
FL303 3 m
FL306 6 m



FLX30 - Stereo mini-jack to 2 RCA male

DAP

FLX30150 1.5 m recessed jack body
FLX303 3m recessed jack body
FLX306 6m recessed jack body



FL31 - stereo mini-jack to 2 mono Jack L/R

DAP

FL31150 1.5 m
FL313 3 m



FLX31 - stereo mini-jack to 2 mono Jack L/R

DAP

FLX31150 1.5 m recessed jack body
FLX313 3m recessed jack body
FLX316 6m recessed jack body



FL46 - stereo mini-jack to 2 XLR/M 3P

DAP

FL46150 1.5 m
FL463 3 m
FL466 6 m



FLX46 - stereo mini-jack to 2 XLR/M 3P

DAP

FLX46150 1.5 m recessed jack body
FLX463 3m recessed jack body
FLX466 6m recessed jack body



FL32 - mono Jack to 2 mono Jack L/R

DAP

FL32150 1.5 m
FL323 3 m



FL33 - mono Jack to 2 RCA male L/R

DAP

FL33150 1.5 m
FL333 3 m



FL34 - stereo Jack to 2 mono Jack L/R

DAP

FL3475 0.75 m
FL34150 1.5 m
FL343 3 m
FL346 6 m



FL35 - Stereo Jack to 2 RCA male L/R

DAP

FL35150 1.5 m
FL353 3 m
FL356 6 m



FL36 - 2 x bal. XLR 3P, male to Jack stereo

DAP

FL36150 1.5 m



FL37 - 2 x bal. XLR 3P, female to Jack stereo

DAP

FL37150 1.5 m



FL38 - bal. XLR 3P, male to 2 x XLR 3P female

DAP

FL38150 1.5 m



FL39 - bal. XLR 3P, female to 2 x XLR 3P male

DAP

FL39150 1.5 m



FS01 - Jack mono to Jack mono, 2 x 1.5 mm²

DAP

FS01150	1.5 m
FS013	3 m
FS016	6 m
FS0110	10 m
FS0115	15 m



FS02 - Jack mono to XLR/F 3P, 2 x 1.5 mm²

DAP

FS026	6 m
FS0210	10 m



FS03 - XLR/F 3P to XLR/M 3P, 2 x 1.5 mm²

DAP

FS033	3 m
FS036	6 m
FS0310	10 m



FS17 - speakON to speakON, 2 x 1.5 mm², Neutrik

DAP

FS173	3 m
FS176	6 m
FS1710	10 m
FS1715	15 m
FS1720	20 m



FS04 - speakON to speakON, 2 x 2.5 mm², Neutrik

DAP

FS043	3 m
FS046	6 m
FS0410	10 m
FS0415	15 m
FS0420	20 m



FS14 - speakON to speakON, 4 x 2.5 mm², Neutrik

DAP

FS143	3 m
FS146	6 m
FS1410	10 m
FS1415	15 m
FS1420	20 m



FS18 - Speaker to Speaker, 2 x 1.5 mm²

DAP

FS183	3 m
FS186	6 m
FS1810	10 m
FS1815	15 m



FS12 - 2 Speaker female to Speaker female, 2 x 1.5 mm²

DAP

FS12150	1.5 m



FS13 - 2 Speaker female to speakON male, 2 x 1.5 mm²

DAP

FS13150	1.5 m Neutrik



FS15 - speakON to speakON, 4 x 4 mm², Neutrik

DAP

FS153	3 m
FS156	6 m
FS1510	10 m
FS1515	15 m
FS1520	20 m



FS16 - Jack mono to speakON/Male, 2 x 1.5 mm², Neutrik

DAP

FS163	3 m
FS166	6 m
FS1610	10 m
FS1620	20 m



FL11 - 6 coloured unbal. patch

DAP

FL1130	30 cm, black
FL1160	60 cm, black
FL1190	90 cm, black



FL12 - 6 coloured bal. patch

DAP

FL1230	30 cm, black
FL1260	60 cm, black
FL1290	90 cm, black



FL14 - 6 coloured unbal. patch straight to 90°

DAP

FL1430	30 cm, black
FL1460	60 cm, black
FL1490	90 cm, black



FL15 - 6 coloured bal. patch straight to 90°

DAP

FL1530	30 cm, black
FL1560	60 cm, black
FL1590	90 cm, black



FL41 - 6 coloured unbal. patch 90° to 90°

DAP

FL4130	30 cm, black
FL4160	60 cm, black
FL4190	90 cm, black



FL42 - 6 coloured bal. patch 90° to 90°

DAP

FL4230	30 cm, black
FL4260	60 cm, black
FL4290	90 cm, black





FL60 - 8 XLR/M 3P to 8 XLR/F 3P

DAP

FL60300 3 m
FL60600 6 m



FL61 - 8 XLR/F 3P to 8 Jack mono

DAP

FL61300 3 m
FL61600 6 m



FL62 - 8 XLR/M 3P to 8 Jack mono

DAP

FL62300 3 m
FL62600 6 m



FL63 - 8 Jack mono to 8 Jack mono

DAP

FL63300 3 m
FL63600 6 m



FL64 - 8 Jack mono to 8 RCA/M

DAP

FL64300 3 m
FL64600 6 m



FL65 - 8 RCA/M to 8 RCA/M

DAP

FL65300 3 m
FL65600 6 m



FL66 - 8 Jack stereo to 8 Jack stereo

DAP

FL66300 3 m
FL66600 6 m



FL67 - 8 XLR/F 3P to 8 Jack stereo

DAP

FL67300 3 m
FL67600 6 m



FL68 - 8 XLR/M 3P to 8 Jack stereo

DAP

FL68300 3 m
FL68600 6 m



FL69 - 8 Jack mono to 4 Jack stereo

DAP

FL69300 3 m
FL69600 6 m



FL21 - 3 mono Jack to 3 mono Jack

DAP

FL21150 1.5 m
FL213 3 m



FL20 - 4 mono Jack to 4 mono Jack

DAP

FL20150 1.5 m
FL203 3 m



CobraX 6 StageSnake DAP

D961510 10m
D961515 15m



CobraX 8 StageSnake DAP

D961610 10m
D961615 15m



CobraX 12/4 StageSnake DAP

D961715 15m
D961730 30m



CobraX 16/4 StageSnake DAP

D961830 30m



CobraX 24/4 StageSnake DAP

D961930 30m





Cable Drum with 50 m Microphone Cable DAP

D954050



Python 8 Stagewheel 8 x XLR DAP

D9509 16 m



CobraX Stagewheel 16/4 DAP

D961030 30m
D961050 50m



CobraX Stagewheel 24/4 DAP

D961130 30m
D961150 50m



CobraX Stagewheel 24/8 DAP

D961230 30m
D961330 30m





FL09 - DMX/AES-EBU XLR/M 3P to XLR/F 3P

DAP

FL0975	0.75 m
FL09150	1.5 m
FL093	3 m
FL096	6 m
FL0910	10 m
FL0915	15 m
FL0920	20 m



FL08 - DMX/AES-EBU XLR/M 5P to XLR/F 5P

DAP

FL08150	1.5 m
FL083	3 m
FL086	6 m
FL0810	10 m
FL0820	20 m



FL84 - DMX/AES-EBU XLR/M 5P to XLR/F 5P Neutrik

DAP

FL8475	0.75 m
FL84150	1.5 m
FL843	3 m
FL846	6 m
FL8410	10 m
FL8415	15 m
FL8420	20 m



FL85 - Digi Quad 5P Neutrik XLR

DAP

FL8575	0.75 m
FL85150	1.5 m
FL853	3 m
FL856	6 m
FL8510	10 m
FL8515	15 m
FL8520	20m



FL82 - IP65 DMX/AES-EBU XLR/M 3P to XLR/F 3P Neutrik XX HD

DAP

FL82150	1.5 m
FL8210	10 m
FL823	3 m
FL826	6 m
FL8220	20 m



FL83 - IP65 DMX/AES-EBU XLR/M 5P to XLR/F 5P Neutrik XX HD

DAP

FL83150	1.5 m
FL833	3 m
FL836	6 m
FL8310	10 m
FL8320	20 m



FLA36 - XLR 5P male to XLR 3P female

DAP

FLA36	25 cm
FLA37	25 cm



Neutrik DMX Snake 4-way 3-pin XLR

DAP

FL9010	4-Universe - 10 m
FL9015	4-Universe - 15 m
FL9020	4-Universe - 20 m
FL9050	4-Universe - 50 m



Neutrik DMX Snake 4-way 5-pin XLR

DAP

FL9110	4-Universe - 10 m
FL9115	4-Universe - 15 m
FL9120	4-Universe - 20 m
FL9150	4-Universe - 50 m



DMX Snake 4-way 3-pin XLR

DAP

FL9210	4-Universe - 10 m
FL9215	4-Universe - 15 m
FL9220	4-Universe - 20 m
FL9250	4-Universe - 50 m



DMX Snake 4-way 5-pin XLR

DAP

FL9310	4-Universe - 10 m
FL9315	4-Universe - 15 m
FL9320	4-Universe - 20 m
FL9350	4-Universe - 50 m



Cat5e Cable - U/UTP Black

DAP

FD0175	0.75 m
FD01150	1.5 m
FD013	3 m
FD016	6 m
FD0110	10 m
FD0120	20 m



CAT6 Cable - F/UTP Black

DAP

FD0275	0.75 m
FD02150	1.5 m
FD023	3 m
FD026	6 m
FD0210	10 m
FD0220	20 m



FL55 - CAT5 Cable

DAP

FL55150	1.5 m
FL553	3 m
FL556	6 m
FL5510	10 m
FL5515	15 m
FL5520	20 m



FL57 - CAT5E Cable with Neutrik etherCON

DAP

FL57150	1.5 m
FL573	3 m
FL576	6 m
FL5710	10 m
FL5715	15 m
FL5720	20 m



FL56 - CAT6 Cable

DAP

FL563	3 m
FL566	6 m
FL5610	10 m
FL5615	15 m
FL5640	40



FL58 - CAT6E Cable with Neutrik etherCON

DAP

FL58150	1.5 m Neutrik
FL583	3 m Neutrik
FL586	6 m Neutrik
FL5810	10 m
FL5815	15 m Neutrik
FL5820	20 m Neutrik



USB 3.0 Active Extension Cable black, male - female

DAP

FD5010	10 m
FD5015	15 m
FD5020	20 m



FC01 - USB-A to USB-A

DAP

FC01150	1.5 m
FC013	3 m



FC02 - USB-A to USB-B

DAP

FC02150	1.5 m
FC023	3 m



FC06 - Mini-Din 8P to Mini-Din 8P

DAP

FC06150	1.5 m
FC063	3 m



FL50 - DIN 5P to DIN 5P

DAP

FL5075	0.75 m
FL50150	1.5 m
FL503	3 m
FL506	6 m
FL5010	10 m



FL52 - DIN 5P to DIN 5P

DAP

FL523	3 m
FL526	6 m



PC Midi & Data Cables

Prefab Cables

UCI-10 USB XLR Microphone interface — DAP

D1630	3 m



UCI-20 USB Jack Instrument interface — DAP

D1631	3 m



Power-Audiosignal Cables

Prefab Cables

Cable Drum with 15 m Audio Power/Signal Cable — DAP

D954120	



FP08 - Schuko/XLR F - IEC/XLR M - Audio / Power — DAP

FP0810	10 m, Blue Jacket
FP0810B	10 m, Black jacket
FP0815	15 m, Blue Jacket
FP0815B	15 m, Black jacket
FP0820	20 m, Blue jacket
FP0820B	20 m, Black jacket



FP09 - Schuko/XLR F - Schuko/XLR M - Audio / Power — DAP

FP0910	10 m, Blue jacket
FP0910B	10 m, Black jacket
FP0915	15 m, Blue jacket
FP0915B	15 m, Black jacket
FP0920	20 m, Blue jacket
FP0920B	20 m, Black jacket



FP10 - Schuko/XLR F - powerCON/XLR M - Audio / Power — DAP

FP1010	10 m, Blue jacket
FP1015	15 m, Blue jacket
FP1020	20 m, Blue jacket



FP17 Hybrid Cable - PowerCON & 3-pin XLR - DMX / Power — DAP

90900	0.75 m, Blue jacket
90901	1.5 m, Blue jacket
90902	3 m, Blue jacket
90903	6 m, Blue jacket
90904	10 m, Blue jacket



FP12 - IEC/XLR M - IEC/XLR F - DMX / Power

DAP

FP12150	1.5 m, Blue jacket
FP12150B	1.5 m, Black jacket
FP123	3 m, Blue jacket
FP123B	3 m, Black jacket
FP126	6 m, Blue jacket
FP126B	6 m, Black jacket
FP1210	10 m, Blue jacket
FP1210B	10 m, Black jacket



FP04 - Schuko/XLR M - IEC/XLR F - DMX / Power

DAP

FP0410	10 m, Blue jacket
FP0415	15 m, Blue jacket
FP0420	20 m, Blue jacket



FP05 - Schuko/XLR M - Schuko/XLR F - DMX / Power

DAP

FP053	3 m, Blue jacket
FP056	6 m, Blue jacket
FP0510	10 m, Blue jacket
FP0515	15 m, Blue jacket
FP0520	20 m, Blue jacket



FP06 - Schuko/XLR M - powerCON/XLR F - DMX / Power

DAP

FP0610	10 m, Blue jacket
FP0615	15 m, Blue jacket
FP0620	20 m, Blue jacket



powerCON/XLR M - powerCON/XLR F - DMX / Power

DAP

90480	0.75 m, Blue jacket
90481	1.5 m, Blue jacket
90482	3 m, Blue jacket
90483	6 m, Blue jacket
90484	10 m, Blue jacket



FP18 Hybrid Cable - powerCON & 5-pin XLR - DMX / Power

DAP

93000	0.75 m, Blue jacket
93001	1.5 m, Blue jacket
93002	3 m, Blue jacket
93003	6 m, Blue jacket
93004	10 m, Blue jacket



FP-13 Hybrid Cable - powerCON TRUE1 & 3-pin XLR - DMX / Power

DAP

FP13150	1.5 m, Blue jacket
FP133	3 m, Blue jacket
FP136	6 m, Blue jacket
FP1310	10 m, Blue jacket
FP1315	15 m, Blue jacket



FP-14 Hybrid Cable - powerCON TRUE1 & 5-pin XLR - DMX / Power

DAP

FP14150	1.5 m, Blue jacket
FP143	3 m, Blue jacket
FP146	6 m, Blue jacket
FP1410	10 m, Blue jacket
FP1415	15 m, Blue jacket



FP-15 Hybrid Cable - powerCON TRUE1 & 3-pin XLR IP - DMX / Power

DAP

FP15150	1.5 m, Blue jacket
FP153	3 m, Blue jacket
FP156	6 m, Blue jacket
FP1510	10 m, Blue jacket
FP1515	15 m, Blue jacket



FP-16 Hybrid Cable - powerCON TRUE1 & 5-pin XLR IP - DMX / Power

DAP

FP16150	1.5 m, Blue jacket
FP163	3 m, Blue jacket
FP166	6 m, Blue jacket
FP1610	10 m, Blue jacket
FP1615	15 m, Blue jacket



powerCON/RJ45 - powerCON/RJ45 - Data / Power

DAP

90485	0.5 m, Blue jacket
90486	1.5 m, Blue jacket
90487	3 m, Blue jacket
90488	6 m, Blue jacket
90489	10 m, Blue jacket



Neutrik powerCON / etherCON Extension Cable - Data / Power

DAP

90490	0.5 m, Blue jacket
90491	1.5 m, Blue jacket
90492	3 m, Blue jacket
90493	6 m, Blue jacket
90494	10 m, Blue jacket



FV01 - BNC to BNC Ø6 mm

DAP

FV01150	1.5 m
FV0175	75 cm
FV013	3 m
FV016	6 m
FV0110	10 m
FV0115	15 m



FV02 - 3 BNC to 3 BNC Ø6 mm

DAP

FV023	3 m
FV026	6 m



FV50 - SDI Cable with Neutrik BNC to BNC

DAP

FV50150	150 cm
FV503	3 m
FV506	6 m
FV5010	10 m
FV5015	15 m
FV5020	20 m
FV5050	50 m



FV05 - BNC to BNC Ø6 mm

DAP

FV05150	1.5 m
FV053	3 m



FV34 - DVI to DVI

DAP

FV343	3 m
FV346	6 m
FV3410	10 m
FV3415	15 m
FV3425	25 m



HDMI 2.0, 4K, 60 Hz, 18 Gbps

DAP

FV43150	1.5 m
FV433	3 m
FV436	6 m
FV4310	10 m
FV4315	15 m



FV41 HDMI 2.0 Cable

DAP

FV41150	1.5m
FV413	3m
FV416	6m
FV4110	10m
FV4115	15m



HDMI 2.1, 8K/60 Hz, 4K/120 Hz, 48 Gbps

DAP

FV44150	1.5 m
FV443	3 m



FV03 - Ø6 mm RCA/M to RCA/M

DAP

FV03150	1.5 m
FV033	3 m
FV036	6 m



FOP01 - Toslink to Toslink

DAP

FOP0175	0.75 m
FOP01150	1.5 m
FOP013	3 m
FOP016	6 m



FOP02 - Miniplug to Miniplug Black DAP

FOP0275	0.75 m
FOP02150	1.5 m
FOP023	3 m
FOP026	6 m



FV33 - VGA to VGA DAP

FV3375	0.75 m
FV33150	1.5 m
FV333	3 m
FV336	6 m
FV3310	10 m
FV3315	15 m
FV3320	20 m





Cable Tester Pro — SHOWGEAR

D1909



Eco Cable Tie 12x200mm — SHOWGEAR

D9578 100 Pcs



Economic Cable Tie 20 x 400 mm

D9590 100 pcs



SHOWGEAR

Velcro Cable Tie on Roll — SHOWGEAR

89102 Black, 20mm x 4500mm



Snap Fastener with Clip 377x38mm — SHOWGEAR

D9579 5 Pcs



Snap Fastener 10x120 — SHOWGEAR

D9580B	Black, 10 pieces
D9580U	Blue, 10 pieces
D9580R	Red, 10 pieces
D9580G	Green, 10 pieces
D9580Y	Yellow, 10 pieces



Snap Fastener 20x200 — SHOWGEAR

D9581B	Black, 10 pieces
D9581U	Blue, 10 pieces
D9581R	Red, 10 pieces
D9581G	Green, 10 pieces
D9581Y	Yellow, 10 pieces



Snap Fastener 20x300 — SHOWGEAR

D9582B	Black, 10 pieces
D9582U	Blue, 10 pieces
D9582R	Red, 10 pieces
D9582G	Green, 10 pieces
D9582Y	Yellow, 10 pieces



Snap Fastener 40x400 — SHOWGEAR

D9583B	Black, 10 pieces
D9583U	Blue, 10 pieces
D9583R	Red, 10 pieces
D9583G	Green, 10 pieces
D9583Y	Yellow, 10 pieces



Snap Fastener 50x500 — SHOWGEAR

D9584B	Black, 10 pieces
D9584U	Blue, 10 pieces
D9584R	Red, 10 pieces
D9584G	Green, 10 pieces
D9584Y	Yellow, 10 pieces



Cable Strap — SHOWGEAR

D9600	25 x 750 mm, 1 piece
D9601	25 x 1500 mm, 1 piece
D9602	25 x 5000 mm, 1 piece



MC-20

DAP

D9434B Mic/Line cable, 100 m on Spool, Ø 5 mm, Black



D9435B Mic/Line cable, 100 m on Spool, Ø 6 mm, Black



Ω:	0.075 Ω
Cable Length:	100 m
Conductor Res.:	160 Ω/km
Conductor Capacitance:	60 pF/m
Max. Wire Size:	0.1 mm²
Outer Cable Ø:	5 mm
Outer Isol. Type:	PVC
1st Shield:	Twisted

MC-216

DAP

D9431B Mic/Line cable, 100 m on Spool, Black



Black	Blue	Red	Green	Yellow
D9431B	D9431U	D9431R	D9431G	D9431Y



Ω:	0.075 Ω
Cable Length:	100 m
Conductor Res.:	80 Ω/km
Conductor Capacitance:	45 pF/m
Max. Wire Size:	0.1 mm²
Outer Cable Ø:	6 mm
Outer Isol. Type:	PVC
1st Shield:	Twisted
2nd Shield:	Plastic foil

MC-226

DAP

D9432B Microphone cable double isolation, 100 m on Spool, Black



Black	Blue	Red	Green	Yellow
D9432B	D9432U	D9432R	D9432G	D9432Y



Ω:	0.075 Ω
Cable Length:	100 m
Conductor Res.:	90 Ω/km
Conductor Capacitance:	60 pF/m
Max. Wire Size:	0.12 mm²
Outer Cable Ø:	6 mm
Outer Isol. Type:	PVC
1st Shield:	Twisted
2nd Shield:	Plastic foil

MCD-224

DAP

D9422U Dual line cable, 100 m on Spool, Blue

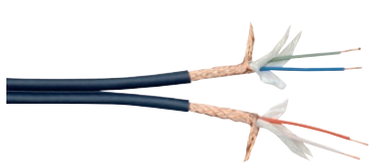

Ω:	0.1 Ω
Cable Length:	100 m
Conductor Res.:	80 Ω/km
Conductor Capacitance:	65 pF/m
Max. Wire Size:	0.12 mm²
Outer Cable Ø:	4 mm
Outer Isol. Type:	PVC
1st Shield:	Braided
2nd Shield:	Plastic foil

LC-126

DAP

D9411B **Line cable a-symmetric, 100 m on Spool, Black**



Ω:	0.05 Ω
Cable Length:	100 m
Conductor Res.:	80 Ω/km
Conductor Capacitance:	65 pF/m
Max. Wire Size:	0.2 mm²
Outer Isol. Type:	PVC
1st Shield:	Plastic foil
2nd Shield:	Twisted

AV

DAP

D9401 **Audio/Video Cable A-symmetric 75 Ohm 100 m on Spool - 3 mm**



D9402 **Audio/Video Cable A-symmetric 75 Ohm 100 m on Spool - 4 mm**



Ω:	0.035 Ω
Cable Length:	100 m
Conductor Res.:	80 Ω/km
Conductor Capacitance:	160 pF/m
Max. Wire Size:	0.12 mm²
Outer Isol. Type:	PVC
1st Shield:	Twisted

AV-84

DAP

D9403 **4-way Audio/Video Cable A-symmetric 75 Ohm 100 m on Spool**



Ω:	0.035 Ω
Cable Length:	100 m
Conductor Res.:	80 Ω/km
Conductor Capacitance:	160 pF/m
Max. Wire Size:	0.12 mm²
Outer Isol. Type:	PVC
1st Shield:	Twisted

SPE-275

DAP

D9101 Speaker Cable 2 x 0.75 mm, 100 m



Cable Length:	100 m
Max. Wire Size:	0.75 mm²
Outer Cable Ø:	5.6 mm
Outer Isol. Type:	PVC

SPE-215

DAP

D9102 Speaker Cable 2 x 1.5 mm, 100 m



D9102500 Speaker Cable 2 x 1.5 mm, 500 m



Cable Length:	100 and 500 m
Max. Wire Size:	1.5 mm²
Outer Cable Ø:	8 mm
Outer Isol. Type:	PVC

SPE-225

DAP

D9103 Speaker Cable 2 x 2.5 mm, 100 m



Cable Length:	100 m
Max. Wire Size:	2.5 mm²
Outer Cable Ø:	8 mm
Outer Isol. Type:	PVC

SPE-240

DAP

D9104 Speaker Cable 2 x 4.0 mm. 100 m Spool



Cable Length:	100 m
Max. Wire Size:	4 mm²
Outer Cable Ø:	9 mm
Outer Isol. Type:	PVC

SPE-2 LSHF

DAP

D9111 Speaker Cable 2 x 0.75 mm², LSHF Jacket, Spool 100 m



D9112 Speaker Cable 2 x 1.5 mm², LSHF Jacket, Spool 100 m



Cable Length:	100 m
Max. Wire Size:	0.75 and 1.5mm²
Outer Cable Ø:	5.6 mm
Outer Isol. Type:	PVC

SPC-225

DAP

D9203 Stage Speaker Cable 2x 2.5 mm, 100 m on Spool, Blue Jacket



D9203B Stage Speaker Cable 2x 2.5 mm, 100 m on Spool, Black Jacket



Cable Length:	100 m
Max. Wire Size:	2.5 mm²
Outer Cable Ø:	7.7 mm
Outer Isol. Type:	PVC

SPC-240

DAP

D9206 Speaker Cable, 50 m on Spool



Cable Length:	50 m
Max. Wire Size:	4 mm²
Outer Cable Ø:	9.5 mm
Outer Isol. Type:	PVC
1st Shield:	Foil

SPK-275

DAP

D9201 Stage Speaker Cable 2x 0.75 mm, 100 m on Spool, Blue Jacket



D9201B Stage Speaker Cable 2x 0.75 mm, 100 m on Spool, Black Jacket



Cable Length:	100 m
Max. Wire Size:	0.75 mm²
Outer Cable Ø:	6.5 mm
Outer Isol. Type:	PVC

SPK-215

DAP

D9202 Stage Speaker Cable 2x 1.5 mm, 100 m on Spool, Blue Jacket



D9202B Stage Speaker Cable 2x 1.5 mm, 100 m on Spool, Black Jacket



Cable Length:	100 m
Max. Wire Size:	1.5 mm²
Outer Cable Ø:	8 mm
Outer Isol. Type:	PVC

SPK-225

DAP

D9204 Stage Speaker Cable 2x 2.5 mm, 100 m on Spool, Blue Jacket



D9204B Stage Speaker Cable 2x 2.5 mm, 100 m on Spool, Black Jacket



Cable Length:	100 m
Max. Wire Size:	2.5 mm²
Outer Cable Ø:	9 mm
Outer Isol. Type:	PVC

SPK-240

DAP

D9205 Stage Speaker Cable 2x 4 mm, 50 m on Spool, Blue Jacket



D9205B Stage Speaker Cable 2x 4 mm, 50 m on Spool, Blue Jacket



Cable Length:	50 m
Max. Wire Size:	4 mm²
Outer Cable Ø:	10 mm
Outer Isol. Type:	PVC

SPK-440

DAP

D9302 Stage Multi Speaker Cable 4x 4 mm, 50 m on Spool, Blue Jacket



D9302B Stage Multi Speaker Cable 4x 4 mm, 50 m on Spool, Black Jacket



Cable Length:	50 m
Max. Wire Size:	4 mm²
Outer Cable Ø:	16 mm
Outer Isol. Type:	PVC

SPK-645

DAP

D9303 Stage Multi Speakercable 4 x 4 mm + 2 x 2.5 mm, 50 m on spool, Blue Jacket



Cable Length:	50 m
Max. Wire Size:	4 mm²
Outer Cable Ø:	18 mm
Outer Isol. Type:	PVC

SPK-825

DAP

D9304 Stage Multi Speaker Cable 8x 2.5 mm, Blue Jacket, price per m



D9304B Stage Multi Speaker Cable 8x 2.5 mm, Black Jacket, price per m



Cable Length:	1 m
Max. Wire Size:	2.5 mm²
Outer Cable Ø:	16 mm
Outer Isol. Type:	PVC

Speaker Cables

Cables on Spool

SPK-425 MKII

DAP

D9305 **Stage Speaker Cable 4 x 2.5 mm Twist protection, 50 m on Spool, Blue Jacket**



Cable Length:	50 m
Max. Wire Size:	2.5 mm²
Outer Cable Ø:	13 mm
Outer Isol. Type:	PVC

D9305B **Stage Speaker Cable 4 x 2.5 mm Twist protection, 50 m on Spool, Black jacket**



Data Cables

Cables on Spool

CAT5e U/UTP LAN Cable

DAP

D9420 **Spool 305 m, Black Jacket**



Cable Length:	305m
Conductor Res.:	938 Ω/km
Outer Cable Ø:	5 mm
Outer Isol. Type:	PVC
Insulation Ω:	5 GΩ
1st Shield:	Twisted
Packaging:	Dispenser Box

CAT6a U/FTP Lan Cable

DAP

D9421 **Spool 305 m, Black Jacket**



Cable Length:	305m
Conductor Res.:	938 Ω/km
Cap./Shield Inner Cond. :	33 pF/m
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
Packaging:	Spool

Flexible CAT5E cable Reel

DAP

D9409 100 m Spool, Blue Jacket



D9409B 100 m Spool, Black Jacket



Ω:	100 Ω
Cable Length:	100 m
Conductor Res.:	78.4 Ω/km
Max. Wire Size:	0.28 mm²
Outer Cable Ø:	5.5 mm
Outer Isol. Type:	PVC

Flexible CAT5 + Power cable 3x 1.5 mm²

DAP

D9412 100 m on Spool



Cable Length:	100 m
Conductor Res.:	94.7 Ω/km
Max. Wire Size:	1.5 mm²
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil

CAT Flex

DAP

D9410 Flexible CAT5 cable, 100 m on Spool



Cable Length:	100 m
Conductor Res.:	78.4 Ω/km
Max. Wire Size:	0.2 mm²
Outer Cable Ø:	7.6 mm
Outer Isol. Type:	PVC

DIG-110 AES-EBU

DAP

D9433B 110 Ohm Digital Cable, 100 m on Spool, Black Jacket



D9433U 10 Ohm Digital Cable, 100 m on Spool, Blue Jacket



Ω:	110 Ω
Cable Length:	100 m
Conductor Res.:	130 Ω/km
Conductor Capacitance:	20 pF/m
Cap./Shield Inner Cond. :	65 pF/m
Max. Wire Size:	1.8 mm²
Outer Cable Ø:	6 mm
Outer Isol. Type:	PE
1st Shield:	Braided
2nd Shield:	Oxygen Free Copper

Digi-Quad

DAP

D9471 DMX Quad 4-pin digital cable



Ω:	110 Ω
Cable Length:	100 m
Conductor Res.:	110 Ω/km
Conductor Capacitance:	35 pF/m
Cap./Shield Inner Cond. :	52 pF/m
Outer Cable Ø:	7 mm
Outer Isol. Type:	PE
1st Shield:	Braided Tinned Copper

Media-Flex 113

DAP

D9472 **Power+Audio+Coax, Black Jacket, Price per metre**



Conductor Res.:	65 Ω/km
Max. Wire Size:	1.5 mm²
Outer Cable Ø:	4.2 mm
Outer Isol. Type:	PVC
1st Shield:	Twisted

Media-Flex 523

DAP

D9474 **Power+2x Audio+5x Coax, Black Jacket, Price per metre**



Conductor Res.:	65 Ω/km
Max. Wire Size:	1.5 mm²
Outer Cable Ø:	4.2 mm
Outer Isol. Type:	PVC
1st Shield:	Twisted

PSC-211

DAP

D9482 **Power/Signal Cable, Blue Jacket, price per metre**



D9482B **Power/Signal Cable, Black Jacket, price per meter**



Conductor Res.:	80 Ω/km
Max. Wire Size:	1.5 mm²
Outer Cable Ø:	1.3 mm
Outer Isol. Type:	PVC
1st Shield:	Twisted

PMC-216

DAP

D9481 **AUDIO Power/Signal Cable, Blue Jacket, Price per meter**



D9481B **AUDIO Power/Signal Cable, Black Jacket, Price per meter**



Conductor Res.:	80 Ω/km
Max. Wire Size:	1.5 mm²
Outer Cable Ø:	3.7 mm
Outer Isol. Type:	PVC
1st Shield:	Twisted

MK-422

DAP

D9441 4 Pair Studio Multicore, Blue Jacket, Price per meter



D9441B 4 Pair Studio Multicore, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	10 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Braided Tinner Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	4

MK-822

DAP

D9442 8 Pair Studio Multicore, Blue Jacket, Price per meter



D9442B 8 Pair Studio Multicore, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	13.5 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	8

MK-1222

DAP

D9443 12 Pair Studio Multicore, Blue Jacket, Price per meter



D9443B 12 Pair Studio Multicore, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	15 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	12

MK-1622

DAP

D9444 16 Pair Studio Multicore, Blue Jacket, Price per meter



D9444B 16 Pair Studio Multicore, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	18.5 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	16

MK-2022

DAP

D9445 20 Pair Studio Multicore, Blue Jacket, Price per meter



D9445B 20 Pair Studio Multicore, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	18.5 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	20

MK-2422

DAP

D9446 24 Pair Studio Multicore, Blue Jacket, Price per meter



D9446B 24 Pair Studio Multicore, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	22 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	24

MK-2822

DAP

D9447 28 Pair Studio Multicore, Blue Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	24.5 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Paper
Number of Pairs:	28

MK-3222

DAP

D9448 32 Pair Studio Multicore, Blue Jacket, Price per meter



D9448B 32 Pair Studio Multicore, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	25.5 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	32

MK-3622

DAP

D9449 36 Pair Studio Multicore, Blue Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	26.5 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	36

MK-4822

DAP

D9450 48 pair Studiomulticore, Blue Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	22.3 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton
Number of Pairs:	48

MK-432

DAP

D9451 4 Pair Stage Multicore, Double Shielded, Blue Jacket, Price per meter



D9451B 4 Pair Stage Multicore, Double Shielded, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	11.8 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper

MK-832

DAP

D9452 8 Pair Stage Multicore, Double Shielded, Blue Jacket, Price per meter.



D9452B 8 Pair Stage Multicore, Double Shielded, Black Jacket, Price per meter.



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	13.5 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	8

MK-1232

DAP

D9453 12 Pair Stage Multicore, Double Shielded, Blue Jacket, Price per meter



D9453B 12 Pair Stage Multicore, Double Shielded, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	17 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	12

MK-1632

DAP

D9454 16 Pair Stage Multicore, Double Shielded, Blue Jacket, Price per meter



D9454B 16 Pair Stage Multicore, Double Shielded, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	18 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	16

MK-2032

DAP

D9455 20 Pair Stage Multicore, Double Shielded, Blue Jacket, Price per meter



D9455B 20 Pair Stage Multicore, Double Shielded, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	22 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	20

MK-2432

DAP

D9456 24 Pair Stage Multicore, Double Shielded, Blue Jacket, Price per meter



D9456B 24 Pair Stage Multicore, Double Shielded, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	23 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	24

MK-2832

DAP

D9457 28 Pair Stage Multicore, Double Shielded, Blue Jacket, Price per meter



D9457B 28 Pair Stage Multicore, Double Shielded, Black Jacket, Price per meter



Cable Length:	1 m
Max. Wire Size:	3 mm²
Outer Cable Ø:	26 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper
Filler Mat.:	Cotton / Paper
Number of Pairs:	28

MK-SPIN

DAP

D9421U Mic/line cable, 100 m on Spool



Cable Length:	100 m
Conductor Res.:	160 Ω/km
Conductor Capacitance:	60 pF/m
Max. Wire Size:	0.18 mm²
Outer Cable Ø:	3 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil
2nd Shield:	Tinned Copper

LED Control Cable 5 x 0.75 mm²

DAP

D9476 25 m

D9477 50 m

D9478 100 m



Cable Length:	25, 50 and 100 m
Conductor Res.:	3 Ω/km
Max. Wire Size:	0.75 mm²
Outer Cable Ø:	6.5 mm
Outer Isol. Type:	PVC

SD-SDI

DAP

D9467B Single Shielded Coax Cable, 100 m on Spool



Ω:	75 Ω
Cable Length:	100 m
Max. Wire Size:	4 mm²
Outer Isolation Ø:	4 mm
Outer Isol. Type:	PVC
1st Shield:	Oxygen Free Copper
2nd Shield:	Braided

HD-SDI

DAP

D9468B Double Shielded Coax Cable, 100 m on Spool



Ω:	75 Ω
Cable Length:	100 m
Max. Wire Size:	4.65 mm²
Outer Isol. Type:	PVC
1st Shield:	Braided
2nd Shield:	Aluminium foil

3G-SDI

DAP

D9469B Double Shielded Coax Cable, 100 m on Spool



Ω:	75 Ω
Cable Length:	100 m
Max. Wire Size:	7.6 mm²
Outer Isol. Type:	PVC
1st Shield:	Braided
2nd Shield:	Aluminium foil

AV-14

DAP

D9461 4-way Audio/Video Cable A-symmetric 75 Ohm 100 m on Spool



Ω:	75 Ω
Cable Length:	100 m
Max. Wire Size:	0.4 mm²
Outer Isol. Type:	PVC
1st Shield:	Oxygen Free Copper

AV-20

DAP

D9460 Double shielded RG-179 video cable, 100 m on Spool



Ω:	75 Ω
Cable Length:	100 m
Max. Wire Size:	1.4 mm²
Outer Isolation Ø:	2.54 mm
Outer Isol. Type:	PVC
1st Shield:	Aluminium foil

AV-80

DAP

D9463B **Double Shielded Video Cable 75 Ohm 100 m on Spool**



D9463W **Double Shielded Video Cable 75 Ohm 100 m on Spool**



Ω:	75 Ω
Cable Length:	100 m
Max. Wire Size:	0.58 mm²
Outer Isolation Ø:	6.2 mm
Outer Isol. Type:	PE
1st Shield:	Oxygen Free Copper

AV-100

DAP

D9462 **Super-Flex Shielded Video Cable 75 Ohm 100 m on Spool**



Ω:	75 Ω
Cable Length:	100 m
Max. Wire Size:	0.58 mm²
Outer Isol. Type:	PVC
1st Shield:	Oxygen Free Copper

AV-150

DAP

D9464 **Double shielded videocable HD-ready high flexibility (RG-59) 100 m on Spool**



Ω:	75 Ω
Cable Length:	100 m
Max. Wire Size:	3.7 mm²
Outer Isol. Type:	PVC
1st Shield:	Braided Tinned Copper
2nd Shield:	Oxygen Free Copper

AV-500

DAP

D9466 **5 Way Video Cable 75 Ohm price per meter**



Ω:	75 Ω
Cable Length:	1 m
Max. Wire Size:	0.58 mm²
Outer Isolation Ø:	4.2 mm
Outer Isol. Type:	PE
1st Shield:	Oxygen Free Copper



XLR 3P X-type, male

DAP

XMX203BB Black end cap - Black Housing

XMX203NB Black end cap - Nickel Housing

Colour:	Black and silver
Bush Col.:	Black
Contact Type:	Nickel plated



XLR 3P X-type female

DAP

XFX203BB Black end cap - Black Housing

XFX203NB Black end cap - Nickel Housing

Colour:	Black and silver
Bush Col.:	Black
Contact Type:	Nickel plated



XLR 3P Connector, male, Neutrik XX

NEUTRIK

NC3MXXBAG Silver contacts - Black metal housing

NC3MXX Silver contacts - Nickel housing

Pins:	3
Outer Cable Ø:	8 mm
Colour:	Black and silver
Bush Col.:	Black
Contact Type:	Silver plated



XLR 3P Connector, female, Neutrik XX

NEUTRIK

NC3FXXBAG Silver contacts - Black metal housing

NC3FXX Silver contacts - Nickel housing

Pins:	3
Outer Cable Ø:	8 mm
Colour:	Black and silver
Bush Col.:	Black
Contact Type:	Bronze



XLR 3P Chassis, female

NEUTRIK

NC3FAH Gold contacts - Nickle housing

Pins:	3
Colour:	Black
Contact Type:	Bronze



XLR 3P Receptacle, female

NEUTRIK

NC3FAV Vertical PCB mount

Colour:	Black
Contact Type:	Bronze



XLR 3P Connector, female

NEUTRIK

NC3FXXB Gold contacts, Black metal housing

Pins:	3
Outer Cable Ø:	8 mm
Colour:	Black
Bush Col.:	Black
Contact Type:	Gold plated



XLR 4P Receptacle, male

NEUTRIK

NC3MAV Vertical PCB mount

Pins:	3
Colour:	Black
Contact Type:	Gold plated



XLR 3P 'Heavy Duty' IP Connector male, Neutrik XX HD

NEUTRIK

NC3MXXHDD Gold contacts, Silver Housing, incl. assembly tool. Min. order 25 pcs

Pins:	3
Colour:	Silver
Bush Col.:	Black
Contact Type:	Gold plated



XLR 3P 'Heavy Duty' IP Connector, female, Neutrik XX HD

NEUTRIK

NC3FXXHDD Gold contacts, Silver Housing, incl. assembly tool. Min. order 25 pcs

Pins:	3
Colour:	Black
Bush Col.:	Black
Contact Type:	Gold plated



XLR 3P Connector male TOP

NEUTRIK

NC3MXTOP Gold contacts, Stainless steel Housing

Pins:	3
Colour:	Silver
Bush Col.:	Black
Contact Type:	Gold plated



XLR 3P Connector, female TOP

NEUTRIK

NC3FXTOP Gold contacts, Stainless steel Housing

Pins:	3
Colour:	Silver
Bush Col.:	Black
Contact Type:	Gold plated



XLR 5P Connector, male TOP

NEUTRIK

NC5MXTOP **Gold contacts, Stainless steel Housing**

Pins:	3
Colour:	Silver
Bush Col.:	Black
Contact Type:	Gold plated



XLR 5P Connector, female TOP

NEUTRIK

NC5FXTOP **Gold contacts, Stainless steel Housing**

Pins:	5
Colour:	Silver
Bush Col.:	Black
Contact Type:	Gold plated



IP65 Sealing Cover for NC3MDX-TOP

NEUTRIK

SCMDXTOP **Black**

Colour:	Black



IP65 Sealing Cover for NC3FDX-TOP

NEUTRIK

SCFDXTOP **Black**

Colour:	Black



XLR 3P Chassis male TOP

NEUTRIK

NC3MDXTOP **Gold contacts, Black Housing**

Pins:	3
Colour:	Black
Contact Type:	Gold plated



XLR 3P Chassis, female TOP

NEUTRIK

NC3FDXTOP **Gold contacts, Black Housing**

Pins:	3
Colour:	Black
Contact Type:	Gold plated



XLR 5P Chassis, male TOP

NEUTRIK

NC5MDXTOP **Gold contacts, Black Housing**

Pins:	5
Colour:	Silver
Contact Type:	Gold plated



XLR 5P Chassis, female TOP

NEUTRIK

NC5FDXTOP **Gold contacts, Black Housing**

Pins:	5
Colour:	Black
Contact Type:	Gold plated



XLR 5P Receptacle, male

NEUTRIK

NC5MAV **Vertical PCB mount**

Pins:	5
Colour:	Black
Contact Type:	Gold plated



XLR 3P 90° Connector, male, Neutrik RX — NEUTRIK

NC3MRX Silver contacts - Nickel Housing

NC3MRXBAG Silver Contacts - Black Metal Housing

Pins:	3
Colour:	Silver and black
Bush Col.:	Black
Contact Type:	Silver plated



XLR 3P 90° Connector, female, Neutrik RX — NEUTRIK

NC3FRX Silver contacts - Nickel Housing

NC3FRXBAG Silver contacts - Black Metal Housing

Pins:	3
Colour:	Silver and black
Bush Col.:	Black
Contact Type:	Silver plated



XLR 3P Connector, male, Nickel housing — DAP

XMK203NB Black endcap
XMK203NU Blue endcap
XMK203NR Red endcap
XMK203NG Green endcap
XMK203NY Yellow endcap



XLR 3P Connector, female, Nickel housing — DAP

XFK203NB Black end cap
XFK203NU Blue end cap
XFK203NR Red end cap
XFK203NG Green end cap
XFK203NY Yellow end cap



XLR 3P Connector, male, black housing — DAP

XMK203BB Black endcap
XMK203BU Blue endcap
XMK203BR Red endcap
XMK203BG Green endcap
XMK203BY Yellow endcap



XLR 3P Connector, female, black housing — DAP

XFK203BB Black end cap
XFK203BU Blue end cap
XFK203BR Red end cap
XFK203BG Green end cap
XFK203BY Yellow end cap



N-CON Mini XLR 4P Plug, male — DAP

XMK204NB Nickel housing

Colour:	Silver
Bush Col.:	Black
Contact Type:	Nickel plated



N-CON Mini XLR 4P Plug, female — DAP

XFK204NB Nickel housing

Colour:	Silver
Bush Col.:	Black
Contact Type:	Nickel plated



XLR 4P Connector, male — NEUTRIK

NC4MX Silver contacts - Black housing

Pins:	4
Colour:	Black
Bush Col.:	Black
Contact Type:	Silver plated



XLR 4P Connector, female — NEUTRIK

NC4FX Silver contacts - Black housing

Pins:	4
Colour:	Black
Bush Col.:	Black
Contact Type:	Silver plated



XLR 5P Connector, male — DAP

XMK105NB Black endcap, Nickel housing

Colour:	Silver
Bush Col.:	Black
Contact Type:	Nickel plated



XLR 5P Connector, female — DAP

XFK105NB Black endcap, Nickel housing

Colour:	Silver
Bush Col.:	Black
Contact Type:	Nickel plated



XLR 5P Connector, male, Neutrik XX

NEUTRIK

NC5MXX Silver contacts - Nickel housing

NC5MXXB Silver contacts - Black housing

Colour:	Silver and black
Bush Col.:	Black
Contact Type:	Silver plated



XLR 5P Connector, female, Neutrik XX

NEUTRIK

NC5FXX Silver contacts - Nickel housing

NC5FXXB Silver contacts - Black housing

Pins:	5
Colour:	Silver and black
Bush Col.:	Black
Contact Type:	Silver plated



XLR 5P Connector, male IP66, Neutrik XX

NEUTRIK

NC5MXXHDD Gold contacts, Silver Housing, incl. assembly tool. Min. order 25 pcs

Pins:	5
Outer Cable Ø:	8 mm
Colour:	Silver
Bush Col.:	Black
Contact Type:	Brass



XLR 5P Connector, female IP65, Neutrik XX HD

NEUTRIK

NC5FXXHDD Gold contacts, Silver Housing, incl. assembly tool. Min. order 25 pcs

Pins:	5
Colour:	Silver
Bush Col.:	Black
Contact Type:	Gold plated



XLR 5P Connector, female

NEUTRIK

NC5FX Silver contacts, Nickel housing

Pins:	5
Colour:	Silver
Bush Col.:	Black
Contact Type:	Silver plated



XLR 5P Connector, female, Neutrik XX

NEUTRIK

NC5FXXBAG Silver contacts, black housing

Pins:	5
Colour:	Black
Bush Col.:	Black
Contact Type:	Silver plated



XLR 5P Connector, male, Neutrik XX

NEUTRIK

NC5MXXBAG Silver contacts, black housing

Colour:	Black
Bush Col.:	Black
Contact Type:	Silver plated



XLR 3P Chassis, male

DAP

XMC103B Black housing

XMC103N Nickel housing

Colour:	Black and silver
Contact Type:	Nickel plated



XLR 3P Chassis, female

DAP

XFC103B Black housing

XFC103N Nickel housing

Colour:	Black and silver
Contact Type:	Nickel plated



XLR 3P Chassis, male

NEUTRIK

NC3MDLXBAG Silver contacts - Black metal housing

NC3MDLX Silver contacts - Nickel housing

Pins:	3
Colour:	Black and silver
Contact Type:	Silver plated



XLR 3P Chassis, female — NEUTRIK

NC3FDLXBAG Silver contacts - Black metal housing

NC3FDLX Silver contacts - Nickel housing

Pins:	3
Colour:	Black and silver
Contact Type:	Silver plated



XLR 5P Chassis, male — NEUTRIK

NC5MDLXBAG Silver contacts - Black metal housing

NC5MDLX Silver contacts - Nickel housing

Pins:	5
Colour:	Black and silver
Contact Type:	Silver plated



XLR 5P Chassis, female — NEUTRIK

NC5FDLXBAG Silver contacts - Black metal housing

NC5FDLX Silver contacts - Nickel housing

Pins:	5
Colour:	Black and silver
Contact Type:	Silver plated



XLR 5P Chassis, female — NEUTRIK

NC5FAH Silver contacts - ABS housing - Horizontal PCB mount

NC5FAV Silver contacts - ABS housing - Vertical PCB mount

Pins:	5
Colour:	Black
Contact Type:	Gold plated



XLR 5P Chassis, male — DAP

XMC105N Nickel housing

Colour:	Silver
Contact Type:	Nickel plated



XLR 5P Chassis, female — DAP

XFC105N Nickel housing

Colour:	Silver
Contact Type:	Nickel plated



6.3 mm Jack X-type Mono

DAP

JMX102BB Black housing - black end cap

JMX102NB Nickel housing - black end cap

Pins:	2
Colour:	Black and silver
Bush Col.:	Black
Contact Type:	Nickel plated



6.3 mm Jack X-type Stereo

DAP

JMX103BB Black housing - black end cap

JMX103NB Nickel housing - black end cap

Pins:	3
Colour:	Black and silver
Bush Col.:	Black
Contact Type:	Nickel plated



6.3 mm Right-angle Jack X-type Mono

DAP

JMX202BB Black housing - black end cap

JMX202NB Nickel housing - black end cap

Pins:	2
Colour:	Black and silver
Bush Col.:	Black
Contact Type:	Nickel plated



6.3 mm Right-angle Jack X-type Stereo

DAP

JMX203BB Black housing - black end cap

JMX203NB Nickel housing - black end cap

Pins:	3
Colour:	Black and silver
Bush Col.:	Black
Contact Type:	Nickel plated



6.3 mm Jack Plug Mono Nickel housing

DAP

JMK102NB Black end cap
JMK102NU Blue end cap
JMK102NR Red end cap
JMK102NG Green end cap
JMK102NY Yellow end cap



6.3 mm Jack Plug Mono Black housing

DAP

JMK102BB Black end cap
JMK102BU Blue end cap
JMK102BR Red end cap
JMK102BG Green end cap
JMK102BY Yellow end cap



6.3 mm Jack Plug Stereo Nickel housing

DAP

JMK103NB Black end cap
JMK103NU Blue end cap
JMK103NR Red end cap
JMK103NG Green end cap
JMK103NY Yellow end cap



6.3 mm Jack Plug Stereo Black housing

DAP

JMK103BB Black end cap
JMK103BU Blue end cap
JMK103BR Red end cap
JMK103BG Green end cap



Mini Jack

DAP

JMX303BR Recessed body

Pins:	3
Colour:	Black
Bush Col.:	Red
Contact Type:	Nickel plated



Jack Plug Mono — NEUTRIK

NP2C Nickel housing

Pins:	2
Colour:	Silver
Bush Col.:	Black
Contact Type:	Nickel plated



Jack Plug Stereo — NEUTRIK

NP3C Nickel housing

Pins:	3
Colour:	Silver
Bush Col.:	Black
Contact Type:	Nickel plated



Jack Plug 6.3 mm Mono — NEUTRIK

NP2X Nickel housing

Pins:	2
Colour:	Silver
Bush Col.:	Black
Contact Type:	Nickel plated



Jack Plug 6.3 mm Stereo — NEUTRIK

NP3X Nickel housing

Pins:	3
Colour:	Silver
Bush Col.:	Black
Contact Type:	Nickel plated



Jack Plug 6.3 mm Mono, 90° — NEUTRIK

NP2RX Nickel housing

Pins:	2
Colour:	Silver
Bush Col.:	Black
Contact Type:	Nickel plated



Jack Plug 6.3 mm Stereo, 90° — NEUTRIK

NP3RX Nickel housing

Pins:	3
Colour:	Silver
Bush Col.:	Black
Contact Type:	Nickel plated



Jack Plug with Spring Mono — DAP

JMK202N Nickel housing

Pins:	2
Colour:	Silver
Contact Type:	Nickel plated



Jack Plug with Spring Stereo — DAP

JMK203N Nickel housing

Pins:	3
Colour:	Silver
Contact Type:	Nickel plated



Jack Plug, Stereo, Locking, female — DAP

JFK102NB Black endcap, Nickel housing

Pins:	3
Colour:	Silver
Bush Col.:	Black
Contact Type:	Brass



Jack Chassis, Locking, female — DAP

JFC102N Nickel housing

Pins:	3
Colour:	Silver
Contact Type:	Brass



speakON 2P Plug, male — NEUTRIK

NL2FX Grey/Blue housing

Pins:	2
Colour:	Grey
Bush Col.:	Blue
Contact Type:	Brass



Speaker 4P Connector, male — DAP

SMK204BU Black/Blue housing

Pins:	4
Colour:	Black
Bush Col.:	Blue
Contact Type:	Brass



Speaker 4P Connector, female — DAP

SFK204BU Black/Blue housing

Pins:	4
Colour:	Black
Bush Col.:	Blue
Contact Type:	Brass



speakON 4P Connector SPX, male — NEUTRIK

NL4FX Black/Blue housing

Pins:	4
Colour:	Black
Bush Col.:	Black
Contact Type:	Brass



speakON 4P Connector SPX 90°, male — NEUTRIK

NL4FRX Black/Blue housing

Pins:	4
Colour:	Black
Bush Col.:	Black
Contact Type:	Brass



speakON 4P, female — NEUTRIK

NLT4FX Silver/Blue housing

Pins:	4
Colour:	Silver
Contact Type:	Brass



speakON 8P Plug, female — NEUTRIK

NL8FC Black/Blue housing

Pins:	8
Colour:	Black
Bush Col.:	Blue
Contact Type:	Brass



Pomona Plug — DAP

PMK102B Black

PMK102R Red

Pins:	2
Colour:	Black and red
Contact Type:	Nickel plated



speakON 4P Chassis, female — NEUTRIK

NL4MP Black housing

Pins:	4
Colour:	Black
Contact Type:	Bronze



Speaker 4P Chassis, female — DAP

SFC204B Black housing

Pins:	4
Colour:	Black
Contact Type:	Brass



speakON 8P Chassis, male — NEUTRIK

NL8MPR Nickel housing

Pins:	8
Colour:	Silver
Contact Type:	Bronze



speakON 8P Chassis PCB mount, male — NEUTRIK

NL8MDV Nickel housing

Pins:	8
Colour:	Silver
Contact Type:	Bronze



RCA Connector, male, black Housing

DAP

RMK102B Black endcap
RMK102U Blue endcap
RMK102R Red endcap
RMK102G Green endcap
RMK102Y Yellow endcap



RCA Male to RCA Female 90° adapter

DAP

FLA16 Red
FLA16B Black



HDMI Feedthrough Adapter D-size

NEUTRIK

NAHDMIW Nickel housing

NAHDMIWB Black housing

Colour:	Silver and black
Contact Type:	Gold plated
Data Conn. In:	HDMI
Data Conn. Out:	HDMI



BNC Plug - 75 Ohm

DAP

BMK101 for 6 mm cable

Colour:	Black
Contact Type:	Gold plated



USB D-size

NEUTRIK

NAUSBW Nickel housing

NAUSBWB Black housing

Colour:	Silver and black
Data Conn. In:	USB
Data Conn. Out:	USB



etherCON D-size PCB mount

NEUTRIK

NE8FAH Feedthrough receptacle in D-sized flange with the secure latching system. Plastic

Colour:	Black
Contact Type:	Gold plated
Data Conn. In:	etherCON / RJ45



etherCON D-size

NEUTRIK

NE8FDP Nickel housing

Colour:	Silver
Contact Type:	Gold plated
Data Conn. In:	etherCON / RJ45
Data Conn. Out:	RJ45



Ethernet RJ45 D-size Chassis

DAP

RFC01 Feedthrough receptacle in D-sized metal flange with the secure latching system. Nickel. CAT5E

Colour:	Silver
Data Conn. In:	etherCON / RJ45
Data Conn. Out:	RJ45



etherCON D-size

NEUTRIK

NE8FDPB Black housing

Colour:	Black
Contact Type:	Gold plated
Data Conn. In:	etherCON / RJ45
Data Conn. Out:	RJ45



etherCON CAT-6 D-size — NEUTRIK

NE8FDYC6B **D-shape CAT6 panel connector with black Chrome housing**

Colour: Black
Contact Type: Gold plated
Data Conn. In: RJ45



etherCON RJ45 Carrier — NEUTRIK

NE8MXB **Black housing**

Colour: Black
Data Conn. In: RJ45



etherCON RJ45 Carrier — NEUTRIK

NE8MX **Nickel Housing**

Colour: Silver
Data Conn. In: RJ45



etherCON CAT6A Cable connector — NEUTRIK

NE8MX6 **Nickel housing**

Colour: Silver



opticalCON DUO Chassis — NEUTRIK

NO24FDWA

Fibre Conn. 1: LC
Fibre Conn. 2: opticalCON DUO
Colour: Black





Trumpet Screw PG13.5 ILME

90706P For housing with 6 pins



Cablehood Side Entry PG13.5 ILME

90701 Grey



6P Cablehood Top Entry PG13.5 ILME

90727 Grey



6P Cablehood Top Entry PG16 ILME

90732 Grey with Lockers



6P Insert male ILME

90705



6P Insert female ILME

90704



6P Squich Insert male ILME

90705SQ



6P Squich Insert female ILME

90704SQ



6P Chassis Open Bottom ILME

90703 Grey with Clips



6P Chassis Closed Bottom ILME

90702 Grey with Clips



Trumpet Screw PG16 ILME

90712P For housing with 10 pins



10-pin Cablehood Side Entry PG16 ILME

90707 Grey



10-pin Cablehood Side Entry PG16 ILME

90707B Black



10P Cablehood Top Entry PG16 ILME

90728 Grey



10P Cablehood Top Entry PG16 ILME

90729 Grey with Clips



10P Insert male ILME

90711



10P Insert female ILME

90710



10P Chassis Open Bottom ILME

90709 Grey with Clips



10P Chassis Closed Bottom ILME

90708 Grey with Clips



Protection Cap ILME

90749 for 10 pole Cablehood



16/72-pin Cablehood Side Entry PG21

90713 Grey



ILME

16/72-pin Cablehood Side Entry PG21

90713B Black



ILME

16/72-pin Cablehood Top Entry PG21

90725 Grey



ILME

16/72-pin Cablehood Top Entry PG21

90725B Black



ILME

16/72P Cablehood Side Entry PG29 ILME

90744 Grey



16/72P Cablehood Top Entry PG29 ILME

90742 Grey



16P Cablehood Top Entry PG29 ILME

90726 Grey with Clips



16/72P Cablehood Top Entry PG29 ILME

90748 Grey, High model with clips



16P Insert male ILME

90717



16P Insert female ILME

90716



16P Squich Insert male ILME

90717SQ



16P Squich Insert female ILME

90716SQ



16/72P Chassis Closed Bottom/Clips PG29

90746 Grey with Clips



ILME

16/72-pin Chassis Open Bottom/Clips

90715 Grey with Clips



ILME

16/72-pin Chassis Open Bottom/Clips

90715B Black with Clips



ILME

16/72-pin Chassis Closed Bottom PG21

90714 Grey with Clips



ILME

16/72-pin Chassis Closed Bottom PG21

90714B Black with Clips



ILME

Protection Cap ILME

90740 for 16-72 pole Cablehood



Trumpet Screw PG21 ILME

90718P For housing with 16-24 pole



24P Cablehood Side Entry PG21 ILME

90719 Grey



24P Cablehood Top Entry PG21 ILME

90730 Grey



24/108P Cablehood Side Entry PG29

90745 Grey, 24/108 Pole



ILME

24/108P Cablehood Top Entry PG29

90743 Grey, 24/108 Pole



ILME

24P Cablehood Top Entry PG21 ILME

90731 Grey with Lockers



24P Insert male ILME

90723



24P Insert female ILME

90722



24P Chassis Open Bottom

90721 Grey with Clips



ILME

24/108P Chassis Closed Bottom PG29

90747 Grey with Clips



ILME

Protection Cap ILME

90741 for 24-108 pole Cablehood



72P Audio Insert male ILME

90752 Without Contactpins



72P Audio Insert female ILME

90751 Without Contactpins



108P Audio Pole Insert male ILME

90754 Without Contactpins



108P Audio Insert female ILME

90753 Without Contactpins



Audio Contactpin Silverplated ILME

90756 Male



Audio Contactpin Silverplated ILME

90755 Female



Guide Pin ILME

90757M Male



Guide Pin ILME

90757F Female



Insertion Tool ILME

90763 For insertion of the pin-contacts into the inserts.



Removal Tool Budget Version ILME

90764B To remove the pin-contacts from the inserts.



Empty Stage Box DAP

FSB12E 12 holes
FSB16E 16 holes
FSB20E 20 holes
FSB28E 28 holes



Empty Stage Box DAP

FSB8E 8 holes



Strain Relief DAP

D9551 8 to 20 pair
D9552 20 to 36 pair



Suspension Loop DAP

D9556 8 to 20 pair
D9557 20 to 36 pair





Dummy plate to cover D-shape cut outs

DBABL



NEUTRIK

Ring for X-type XLR Connector

DAP

XXRE	Red
XXGR	Green
XXYE	Yellow
XXBL	Blue
XXOR	Orange



XX-Series coloured Ring

NEUTRIK

XXCR	Transparant
XXR1	Brown
XXR2	Red
XXR3	Orange
XXR4	Yellow
XXR5	Green
XXR6	Blue
XXR7	Violet
XXR8	Grey
XXR9	White



Ring for X-type Jack Connector

DAP

JMXRE	Red
JMXGR	Green
JMXYE	Yellow
JMXBL	Blue
JMXOR	Orange



Coloured Boots for NP-X Jack

NEUTRIK

BPX1	Brown
BPX2	Red
BPX3	Orange
BPX4	Yellow
BPX5	Green
BPX6	Blue
BPX7	Violet
BPX8	Grey
BPX9	White



XX-Series coloured Bushing

NEUTRIK

BXX1	Brown
BXX2	Red
BXX3	Orange
BXX4	Yellow
BXX5	Green
BXX6	Blue
BXX7	Violet
BXX8	Grey
BXX9	White





FLA21 - XLR 3P female to XLR 3P female

DAP

FLA21

Conn. 1: XLR 3P
Conn. 2: XLR 3P



FLA25 - XLR 3P male to XLR 3P male

DAP

FLA25

Conn. 1: XLR 3P
Conn. 2: XLR 3P



FLA22 - XLR 3P female to Jack stereo female

DAP

FLA22

Conn. 1: XLR 3P
Conn. 2: TRS 6.3 mm bal.



FLA24 - XLR 3P female to Jack stereo male

DAP

FLA24

Conn. 1: XLR 3P
Conn. 2: TRS 6.3 mm bal.



FLA26 - XLR 3P male to Jack stereo female

DAP

FLA26

Conn. 1: XLR 3P
Conn. 2: TRS 6.3 mm bal.



FLA28 - XLR 3P male to Jack stereo male

DAP

FLA28

Conn. 1: XLR 3P
Conn. 2: TRS 6.3 mm bal.



FLA35 - Jack stereo female to Jack stereo female

DAP

FLA35

Conn. 1: TRS 6.3 mm bal.
Conn. 2: TRS 6.3 mm bal.



FLA50 - XLR 3P female to XLR 3P male chassis

DAP

FLA50

Conn. 1: XLR 3P
Conn. 2: XLR 3P



FLA51 - XLR 3P male to XLR 3P female chassis

DAP

FLA51

Conn. 1: XLR 3P
Conn. 2: XLR 3P



XGA21 - XLR/F 3P to XLR/F 3P

DAP

XGA21

Conn. 1: XLR 3P
Conn. 2: XLR 3P



XGA25 - XLR/M 3P to XLR/M 3P

DAP

XGA25

Conn. 1: XLR 3P
Conn. 2: XLR 3P



XGA29 - XLR/M 5P to XLR/F 3P

DAP

XGA29

Conn. 1: XLR 5P
Conn. 2: XLR 5P



XGA30 - XLR/F 5P to XLR/M 3P

DAP

XGA30

Conn. 1: XLR 5P
Conn. 2: XLR 5P



XGA36 - XLR/M 3P to XLR/F 3P Phase Reverse

DAP

XGA36

Conn. 1: XLR 3P
Conn. 2: XLR 3P



XGA37 - XLR/M 3P to XLR/F 3P Phase Reverse Switch

DAP

XGA37

Conn. 1: XLR 3P
Conn. 2: XLR 3P



XGA22 - XLR/F 3P to Jack/F Balanced

DAP

XGA22

Conn. 1: XLR 3P
Conn. 2: TRS 6.3 mm bal.



XGA24 - XLR/F 3P to Jack/M stereo

DAP

XGA24

Conn. 1: XLR 3P
Conn. 2: TRS 6.3 mm bal.



XGA28 - XLR/M 3P to Jack/M stereo

DAP

XGA28

Conn. 1: XLR 3P
Conn. 2: XLR 3P



XGA35 - XLR/M 3P to Jack/F Balanced

DAP

XGA35

Conn. 1: XLR 3P
Conn. 2: TRS 6.3 mm bal.



XGA02 - mini-jack/F to mini-jack/F

DAP

XGA02

Conn. 1: TRS 3.5 mm bal.
Conn. 2: TRS 3.5 mm bal.



XGA03 - Jack/F to Jack/F

DAP

XGA03

Conn. 1: TRS 3.5 mm bal.
Conn. 2: TRS 3.5 mm bal.



XGA08 - mini-jack/M stereo to mini-jack/F, 90° DAP

XGA08

Conn. 1: TRS 3.5 mm bal.
Conn. 2: TRS 3.5 mm bal.



XGA12 - Jack/M stereo to mini-jack/F, incl. 2 x 10 kilo-Ohm resistors DAP

XGA12

Conn. 1: TRS 6.3 mm bal.
Conn. 2: TRS 3.5 mm bal.



XGA13 - Jack/M stereo to mini-jack/F DAP

XGA13

Conn. 1: TRS 6.3 mm bal.
Conn. 2: TRS 3.5 mm bal.



XGA15 - mini-jack/M stereo to 2 x mini-jack/F DAP

XGA15

Conn. 1: TRS 3.5 mm bal.
Conn. 2: TRS 3.5 mm bal.



XGA20 - Jack/M stereo to 2 x Jack/F DAP

XGA20

Conn. 1: TRS 6.3 mm bal.
Conn. 2: TRS 6.3 mm bal.



FLA23 - XLR 3P female to Jack mono male

DAP

FLA23

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: XLR 3P



FLA27 - XLR 3P male to Jack mono male

DAP

FLA27

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: XLR 3P



FLA31 - XLR 3P female to RCA male

DAP

FLA31

Conn. 1: RCA
Conn. 2: XLR 3P



FLA32 - XLR 3P male to RCA male

DAP

FLA32

Conn. 1: RCA
Conn. 2: XLR 3P



FLA33 - XLR 3P female to RCA female

DAP

FLA33

Conn. 1: RCA
Conn. 2: XLR 3P



XGA39 - mini-jack/F to Jack/M stereo

DAP

XGA39

Conn. 1: TRS 6.3 mm bal.
Conn. 2: TRS 3.5 mm bal.



XGA44 - mini-jack/M stereo to 2 x mini-jack/F, incl. 4 x 10 kOhm resistors

DAP

XGA44

Conn. 1: TRS 3.5 mm bal.
Conn. 2: TRS 3.5 mm bal.



FLA10 - Mini XLR 4P adapter

DAP

FLA10

Conn. 1: XLR 4P mini
Conn. 2: XLR 3P



FLA34 - XLR 3P male 3P to RCA female

DAP

FLA34

Conn. 1: RCA
Conn. 2: XLR 3P



FLA13 - Jack mono male to RCA female

DAP

FLA13

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: RCA



FLA15 - RCA female to RCA female

DAP

FLA15

Conn. 1: RCA
Conn. 2: RCA



XGA23 - XLR/F 3P to Jack/M mono

DAP

XGA23

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: XLR 3P



XGA27 - XLR/M 3P to Jack/M mono

DAP

XGA27

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: XLR 3P



XGA31 - XLR/F 3P to RCA/M

DAP

XGA31

Conn. 1: RCA
Conn. 2: XLR 3P



XGA33 - XLR/F 3P to RCA/F

DAP

XGA33

Conn. 1: RCA
Conn. 2: XLR 3P



XGA32 - XLR/M 3P to RCA/M

DAP

XGA32

Conn. 1: RCA
Conn. 2: XLR 3P



XGA34 - XLR/M 3P to RCA/F

DAP

XGA34

Conn. 1: RCA
Conn. 2: XLR 3P



XGA01 - RCA/F to RCA/F

DAP

XGA01

Conn. 1: RCA
Conn. 2: RCA



XGA04 - RCA/M to mini-jack/F

DAP

XGA04

Conn. 1: RCA
Conn. 2: TRS 3.5 mm unbal.



XGA05 - RCA/M to Jack/F

DAP

XGA05

Conn. 1: RCA
Conn. 2: TRS 6.3 mm unbal.



XGA06 - RCA/F to Jack/M mono

DAP

XGA06

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: RCA



XGA07 - mini-jack/M mono to mini-jack/F

DAP

XGA07

Conn. 1: TRS 3.5 mm unbal.
Conn. 2: TRS 3.5 mm unbal.



XGA09 - Jack/M mono to Jack/F

DAP

XGA09

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: TRS 6.3 mm unbal.



XGA10 - Jack/M mono to mini-jack/F, 90°, incl. 2 x 10 kilo-Ohm resistors — DAP

XGA10

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: TRS 3.5 mm unbal.



XGA11 - Jack/M mono to mini-jack/F, incl. 2 x 10 kilo-Ohm resistors — DAP

XGA11

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: TRS 3.5 mm unbal.



XGA14 - mini-jack/M mono to 2 x mini-jack/F — DAP

XGA14

Conn. 1: TRS 3.5 mm unbal.
Conn. 2: TRS 3.5 mm unbal.



XGA16 - mini-jack/M stereo to 2 x mini-jack/F — DAP

XGA16

Conn. 1: TRS 3.5 mm unbal.
Conn. 2: TRS 3.5 mm unbal.



XGA17 - mini-jack/M stereo to 2 x RCA/F — DAP

XGA17

Conn. 1: TRS 3.5 mm bal.
Conn. 2: RCA



XGA18 - Jack/M stereo to 2 x RCA/F — DAP

XGA18

Conn. 1: TRS 6.3 mm bal.
Conn. 2: RCA





XGA19 - Jack/M mono to 2 x RCA/F

DAP

XGA19

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: RCA



XGA38 - 2 x RCA/F to RCA/M, incl. 2 x 10 kilo-Ohm resistors

DAP

XGA38

Conn. 1: RCA
Conn. 2: RCA



XGA40 - mini-jack/M to 2 x mini-jack/F, incl. 2 x 10 kilo-Ohm resistors

DAP

XGA40

Conn. 1: TRS 3.5 mm unbal.
Conn. 2: TRS 3.5 mm unbal.



XGA41 - Jack/M mono to 2 x RCA/F, incl. 2 x 10 kilo-Ohm resistors

DAP

XGA41

Conn. 1: RCA
Conn. 2: TRS 6.3 mm unbal.



XGA42 - 2 x RCA/F to RCA/M

DAP

XGA42

Conn. 1: RCA
Conn. 2: RCA



XGA43 - mini-jack/M mono to mini-jack/F, incl. 2 x 10 kOhm resistors

DAP

XGA43

Conn. 1: TRS 3.5 mm unbal.
Conn. 2: TRS 3.5 mm unbal.



FLA52 - Jack chassis female to Jack female

DAP

FLA52

Conn. 1: TRS 6.3 mm unbal.
Conn. 2: TRS 6.3 mm unbal.



FLA17 - RCA male to 6.3 mm Jack female

DAP

FLA17

Conn. 1: RCA
Conn. 2: TRS 6.3 mm unbal.



FSA03 - Jack female locking to Speaker 2P male — DAP

FSA03

Conn. 1: NL2
Conn. 2: XLR 3P
Pins: 7



FSA04 - Jack female locking to Speaker 2P female — DAP

FSA04

Conn. 1: NL2
Conn. 2: XLR 3P
Pins: 7



FSA06 - XLR 3P male to Speaker 2P female — DAP

FSA06

Conn. 1: NL2
Conn. 2: XLR 3P
Pins: 2



FSA05 - XLR 3P female to Speaker 2P female — DAP

FSA05

Conn. 1: NL2
Conn. 2: XLR 3P
Pins: 2



FSA01 - Speaker 2P female to Speaker 2P female — DAP

FSA01

Conn. 1: NL2
Conn. 2: NL2
Pins: 2



FSA02 - Speaker 4P female to Speaker 4P female — DAP

FSA02

Conn. 1: NL4
Conn. 2: NL4
Pins: 4



FSA11 - Speaker 4P female to Speaker 4P female — DAP

FSA11

Conn. 1: NL4
Conn. 2: NL4
Pins: 4



Lockable Coupler for NL2/4, Neutrik — NEUTRIK

NL4MMX **4P**

Conn. 1: speakON NL4
Conn. 2: speakON NL4
Pins: 4



Lockable Coupler for NL8, Neutrik — NEUTRIK

NL8MM

Conn. 1: speakON NL8
Conn. 2: speakON NL8
Pins: 8



speakON male to 6.3 mm Jack 2P, Neutrik — NEUTRIK

NA4LJX

Conn. 1: speakON NL4
Conn. 2: TRS 6.3 mm unbal.
Pins: 2



FLA29 - XLR 5P male to XLR 3P female adapter

DAP

FLA29

DMX Conn. in: XLR 5P
DMX Conn. out: XLR 3P



FLA30 - XLR 5P female to XLR 3P male adapter

DAP

FLA30

DMX Conn. in: XLR 3P
DMX Conn. out: XLR 5P



FLA42 - DMX Terminator 3-pin XLR Male

DAP

FLA42

DMX Conn. in: XLR 3P



FLA43 - DMX Terminator 5-pin XLR Male

DAP

FLA43

DMX Conn. in: XLR 5P



FLA38 - XLR 3P male to RJ45 female

DAP

FLA38

DMX Conn. in: XLR 3P
Data Conn. Out: RJ45



FLA39 - XLR 3P female to RJ45 female

DAP

FLA39

DMX Conn. out: XLR 3P
Data Conn. In: RJ45



FLA40 - XLR 5P male to RJ45 female

DAP

FLA40

DMX Conn. in: XLR 5P
Data Conn. Out: RJ45



FLA41 - XLR 5P female to RJ45 female

DAP

FLA41

DMX Conn. out: XLR 5P
Data Conn. In: RJ45



3-pin male to 5-pin female DMX adapter, Neutrik XX

DAP

FLA44

DMX Conn. in: XLR 3P
DMX Conn. out: XLR 5P



3-pin female to 5-pin male DMX adapter, Neutrik XX

DAP

FLA45

DMX Conn. in: XLR 5P
DMX Conn. out: XLR 3P



CS-4M/3 - 4-channel DMX Shuttle - 3 Pole XLR Male

SHOWGEAR

96000

DMX Conn. in: XLR 3P
Data Conn. Out: ProCat



CS-4F/3 - 4-channel DMX Shuttle - 3 Pole XLR Female

SHOWGEAR

96001

DMX Conn. out: XLR 3P
Data Conn. In: RJ45



CS-4M/5 - 4-channel DMX Shuttle - 5 Pole XLR Male

SHOWGEAR

96010

DMX Conn. in: XLR 5P
Data Conn. Out: RJ45



CS-4F/5 - 4-channel DMX Shuttle - 5 Pole XLR Female

SHOWGEAR

96011

DMX Conn. out: XLR 5P
Data Conn. In: RJ45



FLA60 - CAT5 Ethernet Adapter

DAP

FLA60

Data Conn. In: RJ45
Data Conn. Out: RJ45



FLA62 - RJ45 CAT5 Adapter

DAP

FLA62

Data Conn. In: RJ45
Data Conn. Out: RJ45



DS-24M/3 - DMX Racksplit - 3 Pole XLR Female

SHOWGEAR

96020

DMX Conn. out: XLR 3P
Data Conn. In: RJ45



DS-24F/3 - DMX Racksplit - 3 Pole XLR Male

SHOWTEC

96021

DMX Conn. in: XLR 3P
Data Conn. Out: RJ45



DS-24M/5 - DMX Racksplit - 5 Pole XLR Female

SHOWGEAR

96030

DMX Conn. out: XLR 5P
Data Conn. In: RJ45



DS-24F/5 - DMX Racksplit - 5 Pole XLR Male

SHOWGEAR

96031

DMX Conn. in: XLR 5P
Data Conn. Out: RJ45



RJ45 to ProCAT adaptor

SHOWGEAR

FLA63

Data Conn. In: RJ45
Data Conn. Out: ProCat



etherCON Extender

NEUTRIK

NE8FF

Data Conn. In: etherCON
Data Conn. Out: etherCON



FVA14 HDMI Adapter 1080P / 4K, female - female — DAP

FVA14

Conn. 1: HDMI
Conn. 2: HDMI



FVA10 - VGA female to DVI male — DAP

FVA10

Conn. 1: VGA
Conn. 2: DVI



FVA12 - DVI male to HDMI female — DAP

FVA12

Conn. 1: HDMI
Conn. 2: DVI



FVA11 - DVI female to HDMI male — DAP

FVA11

Conn. 1: DVI
Conn. 2: HDMI



FVA13 - VGA female to VGA female — DAP

FVA13

Conn. 1: VGA
Conn. 2: VGA



FVA04 - BNC female to BNC female 75 Ohm — DAP

FVA04

Conn. 1: BNC
Conn. 2: BNC



BNC Connector, male — NEUTRIK

NBNC75BTU11

Conn. 1: BNC



HD BNC Cable Connector, male — NEUTRIK

NBNC75BZV14

Conn. 1: BNC



BNC Connector, male — NEUTRIK

NBNC75BZV14X

Conn. 1: BNC



CEE 16 A/110 V 4P Plug - male, yellow PCE

91311

Rated Curr. (A):	16 A
Pins:	4
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
Cable Entry:	6-15 mm
IP Rate:	IP44
Housing:	Plastic



CEE 16 A/110 V 4P Plug - female, yellow PCE

91312

Rated Curr. (A):	16 A
Pins:	4
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
Cable Entry:	6-15 mm
IP Rate:	IP44
Housing:	Plastic



CEE 16 A/110 V 4P Socket - male, yellow PCE

91313

Rated Curr. (A):	16 A
Pins:	4
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Plastic



CEE 16 A/110 V 4P Socket - female, yellow PCE

91314

Rated Curr. (A):	16 A
Pins:	4
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Plastic





PVC Schuko Connector Female — ABL

90392 **240 V, CEE7/VII**

Rated Curr. (A):	16 A
IP Rate:	IP20(indoor use only)
Housing:	Polyamide



PVC Schuko Connector Male — ABL

90405 **240 V**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	1.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	PVC



PVC Schuko Connector Female — ABL

90406 **240 V**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	1.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	PVC



Rubber Schuko Connector Male — ABL

90401 **240 V, CEE7/VII**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	1.5 mm²
IP Rate:	IP44
Housing:	Rubber



Rubber Schuko Connector Female — ABL

90402 **240 V**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	1.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	Rubber



Rubber Schuko Connector Male — ABL

90397 **240 V, CEE 7/VII**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Rubber



Rubber Schuko Connector Female — ABL

90396 **240 V, CEE 7/VII**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	Rubber



Rubber Schuko Connector Male — SHOWGEAR

90390 **240 V**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Plastic / Rubber



Rubber Schuko Connector Female — SHOWGEAR

90391 **240 V**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Plastic / Rubber



Rubber Schuko Connector Male — PCE

91300 **240 V, PCE**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Rubber



Rubber Schuko Connector Female — PCE

91303 **240 V, PCE**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	Rubber



Rubber Schuko Connector Female — PCE

91304 **240 V, PCE**

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Rubber



Rubber Schuko Connector Male — PCE

91301 Red, 240 V, PCE, CEE 7/VII

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Rubber



Rubber Schuko Connector Male — PCE

91302 240 V, PCE, CEE 7/VII

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Rubber



Rubber Schuko Connector Female — PCE

91305 Red, 240 V, PCE, CEE 7/VII

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Rubber



Rubber Schuko Connector Female — PCE

91306 240 V, PCE, CEE 7/VII

Rated Curr. (A):	16 A
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Rubber



Rubber Schuko Connector Male — PCE

90398 Grey, 240 V, CEE 7/VII
90398G Green, 240 V, CEE 7/VII
90398O Orange, 240 V, CEE 7/VII
90398R Red, 240 V, CEE 7/VII
90398U Blue, 240 V, CEE 7/VII
90398Y Yellow, 240 V, CEE 7/VII



Chassis connector with cover — ABL

90403

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP54
Housing:	Plastic



Chassis Connector without Cover — ABL

90438

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	Plastic



Chassis Connector with cover — PCE

91310 PCE

Rated Curr. (A):	16 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP54
Housing:	Plastic



Chassis connector with cover VDE — SHOWGEAR

90413U Blue
90413B Black
90413R Red



IEC Euro Male Connector — SHOWGEAR

90434

Rated Curr. (A):	10 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	1.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	Plastic



IEC Euro Female Connector — SHOWGEAR

90435

Rated Curr. (A):	10 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	1.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	Plastic



UK to Schuko Plug adapter — DAP

90450 230 V / 240 V

Rated Curr. (A):	10 A
IP Rate:	IP20(indoor use only)
Housing:	Plastic



Europlug to UK Plug Adapter — DAP

90451 230 V / 240 V

Rated Curr. (A):	13 A
IP Rate:	IP20(indoor use only)
Housing:	Plastic



IEC Euro Male Chassis — SHOWGEAR

90436

Rated Curr. (A):	10 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	1.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	Plastic



IEC Euro Female Chassis — SHOWGEAR

90437

Rated Curr. (A):	10 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	1.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	Plastic



powerCON Connector — NEUTRIK

NAC3FCA Blue

NAC3FCB Grey

Rated Curr. (A):	20 A
Min. Wire Size:	0.75 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP20(indoor use only)
Housing:	Polyamide



powerCON Connector 32 A — NEUTRIK

NAC3FCHC Black

Rated Curr. (A):	32 A
Min. Wire Size:	2.5 mm²
Max. Wire Size:	6 mm²
IP Rate:	IP20(indoor use only)
Housing:	Polyamide



powerCON NAC3MPA1 in - NAC3MPB1 out — NEUTRIK

NAC3MM1 coupler for linking cables.

Rated Curr. (A):	16 A
IP Rate:	IP20(indoor use only)
Housing:	Steel



powerCON Chassis input — NEUTRIK

NAC3MPA1 Blue

NAC3MPB1 Grey



powerCON Chassis output 32 A — NEUTRIK

NAC3MPHC Black

Rated Curr. (A):	32 A
Min. Wire Size:	2.5 mm²
Max. Wire Size:	6 mm²
IP Rate:	IP20(indoor use only)
Housing:	Polyamide



MFD M3 Mounting frame — NEUTRIK

905311 for NAC3 mPA & NAC3 mPB

IP Rate:	IP20(indoor use only)



powerCON TRUE1 Power Out — NEUTRIK

NAC3MXWTOP locking male connector

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP65
Housing:	Polyamide



powerCON TRUE1 power in — NEUTRIK

NAC3FXWTOP locking female connector

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP65
Housing:	Polyamide



powerCON TRUE1 outlet connector — NEUTRIK

NAC3FPXTOP locking 16 A mains connector

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP65
Housing:	Polyamide



powerCON TRUE1 Inlet Connector — NEUTRIK

NAC3MPXTOP locking 16 A mains connector

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP65
Housing:	Polyamide



powerCON TRUE1 Inlet Connector — NEUTRIK

NAC3PXTOP locking 16 A mains connector

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP65
Housing:	Polyamide



Sealing Cover — NEUTRIK

SCNAC-FPX for powerCON True1 chassis outlet connector

IP Rate:	IP65



Sealing Cover — NEUTRIK

SCNAC-MPX for powerCON True1 chassis inlet connector

IP Rate:	IP65



Sealing Cover — NEUTRIK

SCNAC-PX for powerCON True1 chassis in/outlet connector

IP Rate:	IP65



D-Size Sealing Cover IP66 — NEUTRIK

SCCDW Spring loaded

IP Rate:	IP65
Housing:	Plastic
Colour:	Black / Transparent



D-size hinged Cover IP43 — NEUTRIK

SCDX Black

IP Rate:	IP42
Material:	Plastic
Colour:	Black



Sealing Gasket — NEUTRIK

SCDPO for D-size chassis connectors

IP Rate:	IP20(indoor use only)
Material:	Rubber
Colour:	Black



Rubber Sealing Cover — NEUTRIK

SCDF for XLR D-size female

IP Rate:	IP20(indoor use only)
Material:	Neoprene
Colour:	Black



Rubber Sealing Cover — NEUTRIK

SCDM for XLR D-size male & NL2 / 4

IP Rate:	IP20 Rear
Material:	Neoprene
Colour:	Black



CEE 16 A/240 V - 3P Plug male

PCE

91319 Blue
91320 Black
913201 Black, Turbo Twist

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Plastic



CEE 16 A/240 V - 3P Plug female

PCE

91329 Blue
91330 Black
913301 Black, Turbo Twist

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Plastic



CEE 16 A/240 V - 3-pin Socket male

PCE

91339 Blue
91340 Black

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Plastic



CEE 16 A/240 V - 3P Socket female

PCE

913401 Blue
91350 Black

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Plastic



CEE 16 A/240 V 3P Wallmount - male

PCE

91360 Blue

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Plastic



CEE 16 A/240 V 3P Wallmount - female

PCE

91361 Blue

Rated Curr. (A):	16 A
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44
Housing:	Plastic



Europlug to UK Power Supply

DAP

90452 240 V, 3 A, 50HZ

Rated Curr. (A):	2.5 A
IP Rate:	IP20(indoor use only)
Housing:	Plastic



CEE Form 32 A/3-pin Socket female

ABL

90327 Blue

Rated Curr. (A):	32 A
Min. Wire Size:	2.5 mm²
Max. Wire Size:	6 mm²
IP Rate:	IP44
Housing:	Plastic



CEE 16 A/400 V - 4P Plug male

PCE

91362 Red
91363 Black
91364 Black, Turbo Twist

Rated Curr. (A):	16 A
Pins:	4
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44



CEE 16 A/400 V 4-pin Plug female

PCE

91365 Red
91366 Black
91367 Black, Turbo Twist

Rated Curr. (A):	16 A
Pins:	4
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44



CEE 16 A/400 V 4-pin Socket male

PCE

91368 Red
91369 Black

Rated Curr. (A):	16 A
Pins:	4
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44



CEE 16 A/400 V - 4P Plug female

PCE

91370 Red
91371 Black

Rated Curr. (A):	16 A
Pins:	4
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44



CEE 16 A/400 V 5-pin Plug male

PCE

913211 Red
91321 Black
913212 Black, Turbo Twist

Rated Curr. (A):	16 A
Pins:	5
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44



CEE 16 A/400 V 5-pin Plug female

PCE

913311 Red
91331 Black
913312 Black, Turbo Twist

Rated Curr. (A):	16 A
Pins:	5
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44



CEE 16 A/400 V 5-pin Socket male

PCE

913411 Red
91341 Black

Rated Curr. (A):	16 A
Pins:	5
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44



CEE 16 A/400 V 5-pin Socket female

PCE

913511 Red
91351 Black

Rated Curr. (A):	16 A
Pins:	5
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44



CEE 16 A/400 V 5P Wallmount - male

PCE

91380 Red

Rated Curr. (A):	16 A
Pins:	5
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44



CEE 16 A/400 V 5P Wallmount - female

PCE

91381 Red

Rated Curr. (A):	16 A
Pins:	5
Min. Wire Size:	1 mm²
Max. Wire Size:	2.5 mm²
IP Rate:	IP44



CEE 32 A/400 V 5-pin Plug male

PCE

913221 Red
91322 Black
913222 Black, Turbo Twist

Rated Curr. (A):	32 A
Pins:	5
Min. Wire Size:	2.5 mm²
Max. Wire Size:	6 mm²
IP Rate:	IP44



CEE 32 A/400 V 5-pin Plug female

PCE

913321 Red
91332 Black
913322 Black, Turbo Twist

Rated Curr. (A):	32 A
Pins:	5
Min. Wire Size:	2.5 mm²
Max. Wire Size:	6 mm²
IP Rate:	IP44



CEE 32 A/400 V 5-pin Socket male

PCE

913421 Red
91342 Black

Rated Curr. (A):	32 A
Pins:	5
Min. Wire Size:	2.5 mm²
Max. Wire Size:	6 mm²
IP Rate:	IP44



CEE 32 A/400 V 5-pin Socket female

PCE

913521 Red
91352 Black

Rated Curr. (A):	32 A
Pins:	5
Min. Wire Size:	2.5 mm²
Max. Wire Size:	6 mm²
IP Rate:	IP44



CEE 32 A/400 V 5P Wallmount - male

PCE

91355 Red

Rated Curr. (A):	32 A
Pins:	5
Min. Wire Size:	2.5 mm²
Max. Wire Size:	6 mm²
IP Rate:	IP44



CEE 32 A/400 V 5P Wallmount - female

PCE

91356 Red

Rated Curr. (A):	32 A
Pins:	5
Min. Wire Size:	2.5 mm²
Max. Wire Size:	6 mm²
IP Rate:	IP44



CEE 63 A/400 V 5-pin Plug male

PCE

913231 Red, IP44
913232 Red, IP67
91323 Black, IP67

Rated Curr. (A):	63 A
Pins:	5
Min. Wire Size:	6 mm²
Max. Wire Size:	16 mm²
IP Rate:	IP44



CEE 63 A/400 V 5-pin Plug female

PCE

913331 Red, IP44
913332 Red, IP67
91333 Black, IP67

Rated Curr. (A):	63 A
Pins:	5
Min. Wire Size:	6 mm²
Max. Wire Size:	16 mm²
IP Rate:	IP44



CEE 63 A/400 V 5-pin Socket male

PCE

913333 Red
913334 Black

Rated Curr. (A):	63 A
Pins:	5
Min. Wire Size:	6 mm²
Max. Wire Size:	16 mm²
IP Rate:	IP67



CEE 63 A/400 V 5-pin Socket female

PCE

913531 Red
91353 Black

Rated Curr. (A):	63 A
Pins:	5
Min. Wire Size:	6 mm²
Max. Wire Size:	16 mm²
IP Rate:	IP67



CEE 63 A/400 V 5P Wallmount - male

PCE

913532 Red

Rated Curr. (A):	63 A
Pins:	5
Min. Wire Size:	6 mm²
Max. Wire Size:	16 mm²
IP Rate:	IP67



CEE 63 A/400 V 5P Wallmount - female

PCE

913533 Red

Rated Curr. (A):	63 A
Pins:	5
Min. Wire Size:	6 mm²
Max. Wire Size:	16 mm²
IP Rate:	IP67



CEE 125 A/400 V 5-pin Plug male

PCE

913241 Red
91324 Black

Rated Curr. (A):	125 A
Pins:	5
Min. Wire Size:	16 mm²
Max. Wire Size:	50 mm²
IP Rate:	IP67



CEE 125 A/400 V 5-pin Plug female

PCE

913341 Red
91334 Black

Rated Curr. (A):	125 A
Pins:	5
Min. Wire Size:	16 mm²
Max. Wire Size:	50 mm²
IP Rate:	IP67



CEE 125 A/400 V 5-pin Socket male

PCE

913542 Red
913543 Black

Rated Curr. (A):	125 A
Pins:	5
Max. Wire Size:	50 mm²
IP Rate:	IP67



CEE 125 A/400 V 5-pin Socket female

PCE

913541 Red
91354 Black

Rated Curr. (A):	125 A
Pins:	5
Min. Wire Size:	16 mm²
Max. Wire Size:	50 mm²
IP Rate:	IP67



CEE 125 A/400 V 5P Wallmount - male

PCE

91357 Red

Rated Curr. (A):	125 A
Pins:	5
Min. Wire Size:	16 mm²
Max. Wire Size:	50 mm²
IP Rate:	IP67



CEE 125 A/400 V 5P Wallmount - female

PCE

91358 Red

Rated Curr. (A):	125 A
Pins:	5
Min. Wire Size:	16 mm²
Max. Wire Size:	50 mm²
IP Rate:	IP67





Schuko-Schuko Extension cable 3 x 1.5 mm² — DAP

90560 5 m
90561 10 m
90562 15 m
90563 20 m



Ext. Cable Schuko/Schuko Titanex with PCE 3 x 1.5 mm² — TITANEX

90555 5 m
90556 10 m
90557 15 m
90558 20 m
90559 25 m



Schuko to Schuko, 10 A/230 V Cable 3 x 2.5 mm² — DAP

90570 5 m
90571 10 m
90572 15 m
90573 20 m



Extension Cable Schuko/Schuko Titanex with PCE 3x 2.5 mm² — DAP

90501 5 m
90502 10
905021 15 m
905022 20 m
90503 25 m



Powercable Power Pro connector to Schuko 3 x 1.5 mm² — DAP

90600 1.5 m
90601 3 m
90602 6 m
90603 10 m
90604 20 m



Powercable Blue/White Power Pro Connector 3 x 1.5 mm² — DAP

90810 0.5 m
90811 0.75 m
90812 1.5 m
90813 3 m
90814 6 m
90815 10 m



Power Cable 1.5 m powerCON/CEE — DAP

90584 1.5 m
90585 3 m
90586 6 m
90587 10 m
90588 25 m



Powercable Neutrik powerCON to Schuko 3x 2.5 mm² — DAP

90527 1.5 m
90528 3 m
90529 6 m
90525 10 m
90526 20 m



Powercable Neutrik powerCON M/F 3x 1.5 mm² — DAP

90536 1.5 m
90537 3 m
90546 6 m
90547 10 m



Neutrik powerCON Input Extensioncable 3 x 1.5 mm² — DAP

90538 3 m
90539 6 m
90540 10 m



Powercable Power Pro True to Schuko 3 x 1.5 mm²
DAP

92000 1.5 m
92001 3 m
92002 6 m
92003 10 m
92004 15 m



Powercable Neutrik powerCON True1 to Schuko 3 x 1.5 mm²
NEUTRIK

90471 1.5 m
90472 3 m



Powercable Neutrik powerCON TRUE1 male/female 3 x 1.5 mm²
NEUTRIK

90475 0.5 m
90476 1.5 m
90477 3 m
90478 5 m



Powercable True 1/CEE 3-pin 16 A 3 x 2.5 mm²
DAP

90575 3 m, IP44
90576 6 m, IP44
90577 10 m, IP44
90578 25 m, IP44



UK to IEC Cable
ANTARI

90447 2 m
90441 3 m



Schuko Male to IEC C13 3 x 1.5 mm²
DAP

92020 1 m
92021 3 m
92022 5 m
92023 10 m



Schuko to 2 IEC splitter
DAP

90442 3 m



Schuko to 3 IEC Splitter
DAP

90443 3 m



Schuko to IEC Splitter 3-way MKII
DAP

90457 5 meter



Schuko to Neutrik powerCON splitter 3-way
DAP

90456 5 meter



Schuko to powerCON True1 TOP split 3-way
DAP

90454 3 m



Power Cable Schuko to Neutrik powerCON True1 3 x 1.5 mm²
PCE

90473 1.5 m



IEC C13 Female to IEC C14 Male 3 x 1.5 mm²

DAP

90468 0.5 m
90469 0.75 m
90465 1.5 m
90446 3 m
90466 6 m



IEC C13 Female to IEC C14 Male 3 x 1.0 mm²

DAP

92030 1 m
92031 3 m
92032 5 m
92033 10 m



UK BS13 to IEC C13 plug 3 x 1.5 mm²

DAP

92040 1 m
92041 3 m



Australia Plug to IEC C13 3 x 1.5 mm²

DAP

92050 1 m
92051 3 m





Power Pro Input Connector to Schuko 3 x 1.5 mm² DAP

90519 1.5 m



Power Pro Connector to Schuko 3 x 1.5 mm² DAP

90520 1.5 m



Power Pro Out to Power Pro True In 3 x 1.5 mm² DAP

91240 0.25 m



Power Pro In to Power Pro True Out 3 x 1.5 mm² DAP

91241 0.25 m



Power Splitter - Power Pro True1 In - Power Pro Out DAP

91242

Rated Curr. (A): 16 A
Wire Conn.: 1.5 mm²



Power Splitter - Power Pro True1 Out - Power Pro In DAP

91243

Rated Curr. (A): 16 A
Wire Conn.: 1.5 mm²
IP Rate: IP44



powerCON Out to powerCON TRUE1 Female Adapter 3 x 1.5 mm² DAP

90564 0.25 m



powerCON In to powerCON TRUE1 Male Adapter 3 x 1.5 mm² DAP

90565 0.25 m



powerCON In to powerCON TRUE1 Female Adapter 3 x 1.5 mm² DAP

90566 0.25 m



powerCON Out to powerCON TRUE1 Male Adapter 3 x 1.5 mm² DAP

90567 0.25 m



Motor cable CEE 4P 16 A Red DAP

70300 20 m



Motor cable CEE 4P 16 A Yellow LODESTAR

70299 20 m



Extension Cable, 3 x 16 A/380 V 5 x 2.5 mm²

90510 5 m
90511 10 m
90512 25 m
90513 50 m



Extension Cable, 3 x 32 A/380 V 5 x 4 mm²

90521 10 m
90522 25 m
90523 50 m



Extension Cable, 32 A/380 V, 5 x 6 mm²

90514 5 m
90515 10 m
90516 25 m



Extension Cable, 3 x 63 A/380 V 5 x 10 mm²

90541 10 m
90542 25 m





240V Socketboxes

Power Distribution

2 + 2-way IP20 Multisocket 3 x 1.5 mm²

90463 1.5 m



DAP

3-way Socket 3 x 1.5 mm² DAP

90462 1.5 m



Multisocket Schuko 4-way 3 x 1.5 mm²

90460 1.5 m



DAP

Multisocket Schuko 5-way 3 x 1.5 mm²

90461 1.5 m



DAP

Powerport 3 SHOWGEAR

50275 Pro Power In, 3x Pro Power Out



Powerport 5 SHOWGEAR

50276 Pro Power In, 5x Pro Power Out



PowerBOX 3 W-DMX SHOWGEAR

90660 Pro Power In, 2x Pro Power Out



PowerBOX 4 SHOWGEAR

90661 Pro Power In, 2x Pro Power Out



PowerBOX 4 SHOWGEAR

90666 Pro Power TRUE1 In, 2x Pro Power TRUE1 Out



PowerBOX 4PG SHOWGEAR

90662 Empty



PowerBOX 4C- 3 x 2.5 mm² SHOWGEAR

90663 1.5 m
90664 3.0 m
90665 6.0 m



T-connect 2 Way 16/3, Plug 16/3 PCE

91220 CEE IP44
91221 CEE IP67



T-connect 2-way 16/3, Cablegland PCE

91222 CEE IP44
91223 CEE IP67



PowerBOX clamp SHOWGEAR

90659 set of 2 pcs



BO-6-PW SHOWGEAR

50290 CEE 16A to 6 Schuko's



BO-6-PWC SHOWGEAR

50299 CEE 16 A to 6 x CEE 16 A



BO-6-PG SHOWGEAR

50289 6 Schuko's with cable nut, 16 A max.



BO-6-S1 SHOWGEAR

50287 6 Schuko's and 1 x 16-pin connector



BO-8-S1 SHOWGEAR

50281 8 Schuko's and 1 x 16-pin connector



BO-8-S2 SHOWGEAR

50282 8 Schuko's and 2 x 16-pin connector



Breakout-box SHOWGEAR

70297 16-pin Connector to 4 x CEE 4P 16 A Red



DMX Booster Bar 4 SHOWTEC

50781 4 Channel DMX Booster 3P & 5P XLR



Powersplitters
Power Distribution

19" 1U Socketstrip 7 SHOWGEAR

91233 With breaker



19" 1U Socketstrip 7 SHOWGEAR

91234 With powerCON input



19" 1U Socketstrip SHOWGEAR

91235 6 zones



19" 1U Main Power Strip 8 SHOWGEAR

91230 8 Sockets



19" 1U Main Power Strip 16 SHOWGEAR

91231 Front and Back Control



19" 1U CEE16A To 6 x Sockets SHOWGEAR

91232 3 Phase Splitter



Powersplit 1 CEE 16 A SHOWGEAR

91130 5 x Schuko



Powersplit 6 CEE 16 A PCE

91212 3 x Schuko



Powersplit 3 CEE 16 A SHOWGEAR

91132 4 x Schuko, 2 x CEE 16 A 5P



Powersplit 4 CEE 16 A PCE

91210 3 x 3P CEE



Powersplit 5 CEE 16 A PCE

91211 3 x Schuko



MPD-616 Power Splitter CEE 32 A PCE

91200 6x Schuko



MPD-416CEE Power Splitter CEE 32 A

91201 4x Schuko, 1x CEE 16 A 5P



PCE

MPD-832CEE Power Splitter CEE 32 A

91202 8x Schuko, 2x CEE 16 A 5P



PCE

Powersplit 16 CEE 16 A SHOWGEAR

91133 6x Schuko, 1x CEE 16 A 5P



Powersplit 32 CEE 32 A SHOWGEAR

91134 6x Schuko, 1x CEE 16 A 5P



Power Split 16 True CEE 16 A SHOWGEAR

91135 6x Power Pro True1



Power Split 32 True CEE 32 A SHOWGEAR

91136 6x Power Pro True1, 1x CEE 16 A 5P



PS-3202 MKII CEE 32 A SHOWGEAR

50634 6x Schuko, 2x CEE 16A 5P



PSA-16A3C

50660 **3 x MCB, CEE out**

SHOWGEAR

Specifications:

Rated Curr. (A):	16 A
Pwr. Conn. In.:	CEE5P 16A
Pwr. Conn. Out.:	CEE3P 16A
MCD Rated Curr.:	16 A
MCB Class:	Class C
Length (mm):	483 mm
Height (mm):	90 mm
Width (mm):	225 mm
Weight:	7 kg
R.U.:	2 U
IP Rate:	IP20(indoor use only)
Housing:	Metal

FEATURES:
- Digital voltage & amperage-monitoring per phase.
- 16 A C-type automatic fuses per phase.
- CEE output at Front

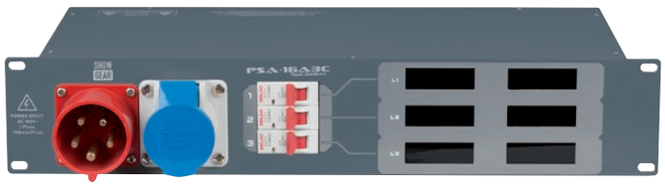



PSA-16A3S

50661 **3 x MCB, Schuko out**

SHOWGEAR

Specifications:

Rated Curr. (A):	16 A
Pwr. Conn. In.:	CEE5P 16A
Pwr. Conn. Out.:	Schuko Socket
MCD Rated Curr.:	16 A
MCB Class:	Class C
Length (mm):	483 mm
Height (mm):	90 mm
Width (mm):	225 mm
Weight:	7 kg
R.U.:	2 U
IP Rate:	IP20(indoor use only)
Housing:	Metal

FEATURES:
- Digital voltage & amperage-monitoring per phase.
- 16 A C-type automatic fuses per phase.
- Schuko output at Front

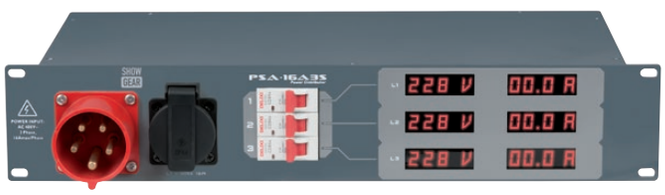



PSA-32A6C

50662 **6 x MCB, CEE out**

SHOWGEAR

Specifications:

Rated Curr. (A):	32 A
Pwr. Conn. In.:	CEE5P 32A
Pwr. Conn. Out.:	CEE3P 16A
MCD Rated Curr.:	16 A
MCB Class:	Class C
RCCB Class:	A
RCCB Sens.:	30mA
Length (mm):	483 mm
Height (mm):	135 mm
Width (mm):	245 mm
Weight:	9.5 kg
IP Rate:	IP20(indoor use only)
Housing:	Metal

FEATURES:
- Digital voltage & amperage-monitoring per phase.
- 16 A C-type automatic fuses per output.
- 19" Rackmount





PSA-32A6S

50663 **6 x MCB, Schuko out**

SHOWGEAR

Specifications:

Rated Curr. (A):	32 A
Pwr. Conn. In.:	CEE5P 32A
Pwr. Conn. Out.:	Schuko Socket
MCD Rated Curr.:	16 A
MCB Class:	Class C
RCCB Class:	A
RCCB Sens.:	30mA
Length (mm):	483 mm
Height (mm):	135 mm
Width (mm):	245 mm
Weight:	7.7 kg
R.U.:	3 U
IP Rate:	IP20(indoor use only)
Housing:	Metal

FEATURES:
- Digital voltage & amperage-monitoring per phase.
- 16 A C-type automatic fuses per output.
- 19" Rackmount





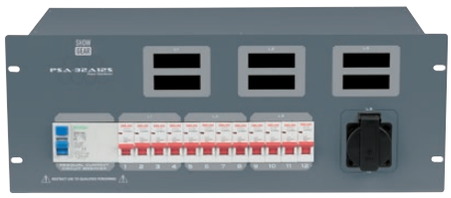

PSA-32A12S

50664 **12 x MCB, Schuko out**

SHOWGEAR

Specifications:

Rated Curr. (A):	32 A	RCCB Sens.:	30mA
Pwr. Conn. In.:	CEE5P 32A	Length (mm):	483 mm
Pwr. Conn. Out.:	Schuko Socket	Height (mm):	176 mm
MCD Rated Curr.:	16 A	Width (mm):	198 mm
MCB Class:	Class C	Weight:	9.8 kg
RCCB Class:	A	R.U.:	4 U
		IP Rate:	IP20(indoor use only)
		Housing:	Metal



FEATURES:

- Digital voltage & amperage-monitoring per phase.
- 16 A C-type automatic fuses per phase.
- Schuko output at Front



PSA-32A12M

50665 **12 x MCB, Schuko + Multipin out**

SHOWGEAR

Specifications:

Rated Curr. (A):	32 A	RCCB Sens.:	30mA
Pwr. Conn. In.:	CEE5P 32A	Length (mm):	483 mm
Pwr. Conn. Out.:	HAN16 Out	Height (mm):	178 mm
MCD Rated Curr.:	16 A	Width (mm):	235 mm
MCB Class:	Class C	Weight:	10.8 kg
RCCB Class:	A	R.U.:	4 U
		IP Rate:	IP20(indoor use only)
		Housing:	Metal



FEATURES:

- Digital voltage & amperage-monitoring per phase.
- 16 A C-type automatic fuses per phase.
- Schuko output at Front

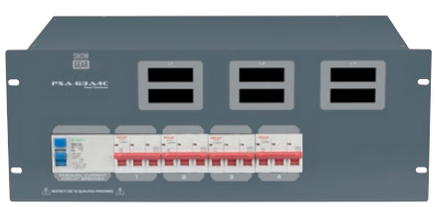

PSA-63A4C

50666 **4 x MCB, CEE out**

SHOWGEAR

Specifications:

Rated Curr. (A):	63 A	RCCB Sens.:	30mA
Pwr. Conn. In.:	CEE5P 63A	Length (mm):	482 mm
Pwr. Conn. Out.:	CEE5P 32A	Height (mm):	180 mm
MCD Rated Curr.:	32 A	Width (mm):	320 mm
MCB Class:	Class C	Weight:	11.4 kg
RCCB Class:	A	R.U.:	4 U
		IP Rate:	IP20(indoor use only)
		Housing:	Metal



FEATURES:

- Digital voltage & amperage-monitoring per phase.
- 32 A C-type automatic fuses per output.
- 19" Rackmount



PSA-125A4C

50667 **4 x MCB, CEE out**

SHOWGEAR

Specifications:

Rated Curr. (A):	125 A	Length (mm):	482 mm
Pwr. Conn. In.:	CEE5P 125A	Height (mm):	267 mm
Pwr. Conn. Out.:	CEE5P 63A	Width (mm):	400 mm
MCD Rated Curr.:	63 A	Weight:	19.4 kg
MCB Class:	Class C	R.U.:	6 U
		IP Rate:	IP20(indoor use only)
		Housing:	Metal



FEATURES:

- Digital voltage & amperage-monitoring per phase.
- 63 A C-type automatic fuses per output.
- 19" Rackmount

Power Multicable 6-pin male-female, 6 x 1.5 mm²

DAP

FP0110 10 m



Power Multicable 10 Pole male-female, 10 x 1.5 mm²

DAP

FP0210 10 m
FP0215 15 m



Power Multicable 16 Pole male-female, 16 x 1.5 mm²

DAP

FP035 5 m
FP0310 10 m
FP0315 15 m
FP0320 20 m
FP0325 25 m



240 V Power Multicable, Black

DAP

D9491 Price per meter, 7x 1.5 mm² (P715)
D9492 Price per meter, 14x 1.5 mm² (P1415)
D9493 Price per meter, 18x 1.5 mm² (P1815)
D9496 Price per meter, 14x 2.5 mm² (P1425)
D9497 Price per meter, 18x 2.5 mm² (P1825)



LED Control Cable RGB, Grey

DAP

D9487 Spool 100 m, 4 x 0.75 mm²
D9488 Spool 100 m, 4 x 1.5 mm²
D9489 Spool 100 m, 4 x 2.5 mm²



Titanex Neoprene Cable, Black

TITANEX

90201 Spool 100 m, 3 x 1.5 mm²
90202 Spool 100 m, 3 x 2.5 mm²



Titanex Neoprene Cable, Black

TITANEX

90204 Price per meter, 4 x 1.5 mm²
90203 Price per meter, 5 x 2.5 mm²
90233 Price per meter, 5 x 4 mm²
90234 Price per meter, 5 x 6 mm²



Lineax Neoprene Cable, Black

90236 Spool 100 m, 3 x 1.5 mm²
90237 Spool 100 m, 3 x 2.5 mm²



Lineax Neoprene Cable, Black

90242 Price per meter, 4 x 1.5 mm²
90239 Price per meter, 5 x 2.5 mm²
90240 Price per meter, 5 x 4 mm²
90241 Price per meter, 5 x 6 mm²
90235 Price per meter, 5 x 10 mm²

16-pin Multicable For 110 V Motor Controller

DAP

70298 20 m, 16 x 1.5 mm²



Socapex 19-pin male Cable Connector PG29 IP67

90784

Rated Curr. (A):	25 A
Cable Entry:	Pg29
Pins:	19
Max. Wire Size:	2.5 mm²
Contact Type:	Gold plated



Socapex 19-pin female Cable Connector PG29 IP67

90785

Rated Curr. (A):	25 A
Cable Entry:	Pg29
Pins:	19
Max. Wire Size:	2.5 mm²
Contact Type:	Gold plated



Socapex 19-pin male Cable Connector PG29 IP55

90780

Rated Curr. (A):	25 A
Cable Entry:	Pg29
Pins:	19
Contact Type:	Gold plated



Socapex 19-pin female Cable Connector PG29 IP55

90781

Rated Curr. (A):	25 A
Cable Entry:	Pg29
Pins:	19
Contact Type:	Gold plated



Socapex 19-pin male Chassis Connector

90783

Rated Curr. (A):	25 A
Pins:	19
Contact Type:	Gold plated



Socapex 19-pin female Chassis Connector

90782

Rated Curr. (A):	25 A
Pins:	19
Contact Type:	Gold plated





Stage and rigging equipment: necessities and finishing touches

Proper stage and rigging equipment provides vital essentials and safety for stages, events, fairs, theatres, video productions, you name it. But it is not only functional, it also catches the eye of the public and brings convenience to your setup. So, before deciding on what you need, make sure you consider all aspects and requirements.

Whether you are building stages, offer support on fairs or productions, or advise in location setup, you will need to know what is necessary to have the event play out safely and smoothly and which gear and hardware is needed.

That is why we offer a complete range of stage essentials and rigging equipment. From truss and rigging to textiles and stage accessories, our products will help you to create a safe and practical stage, prepare a tidy venue, and smooth out every aspect of your event.



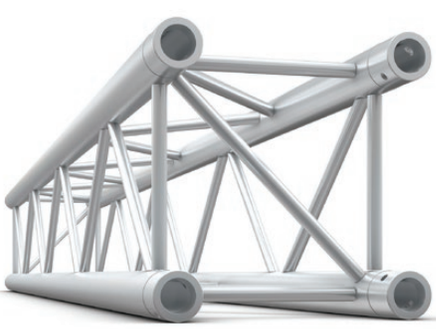

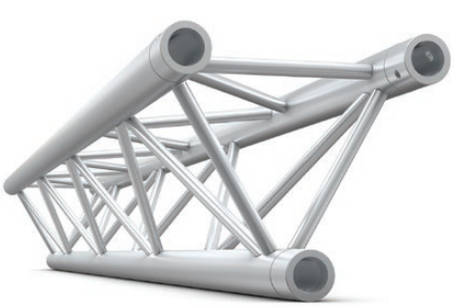



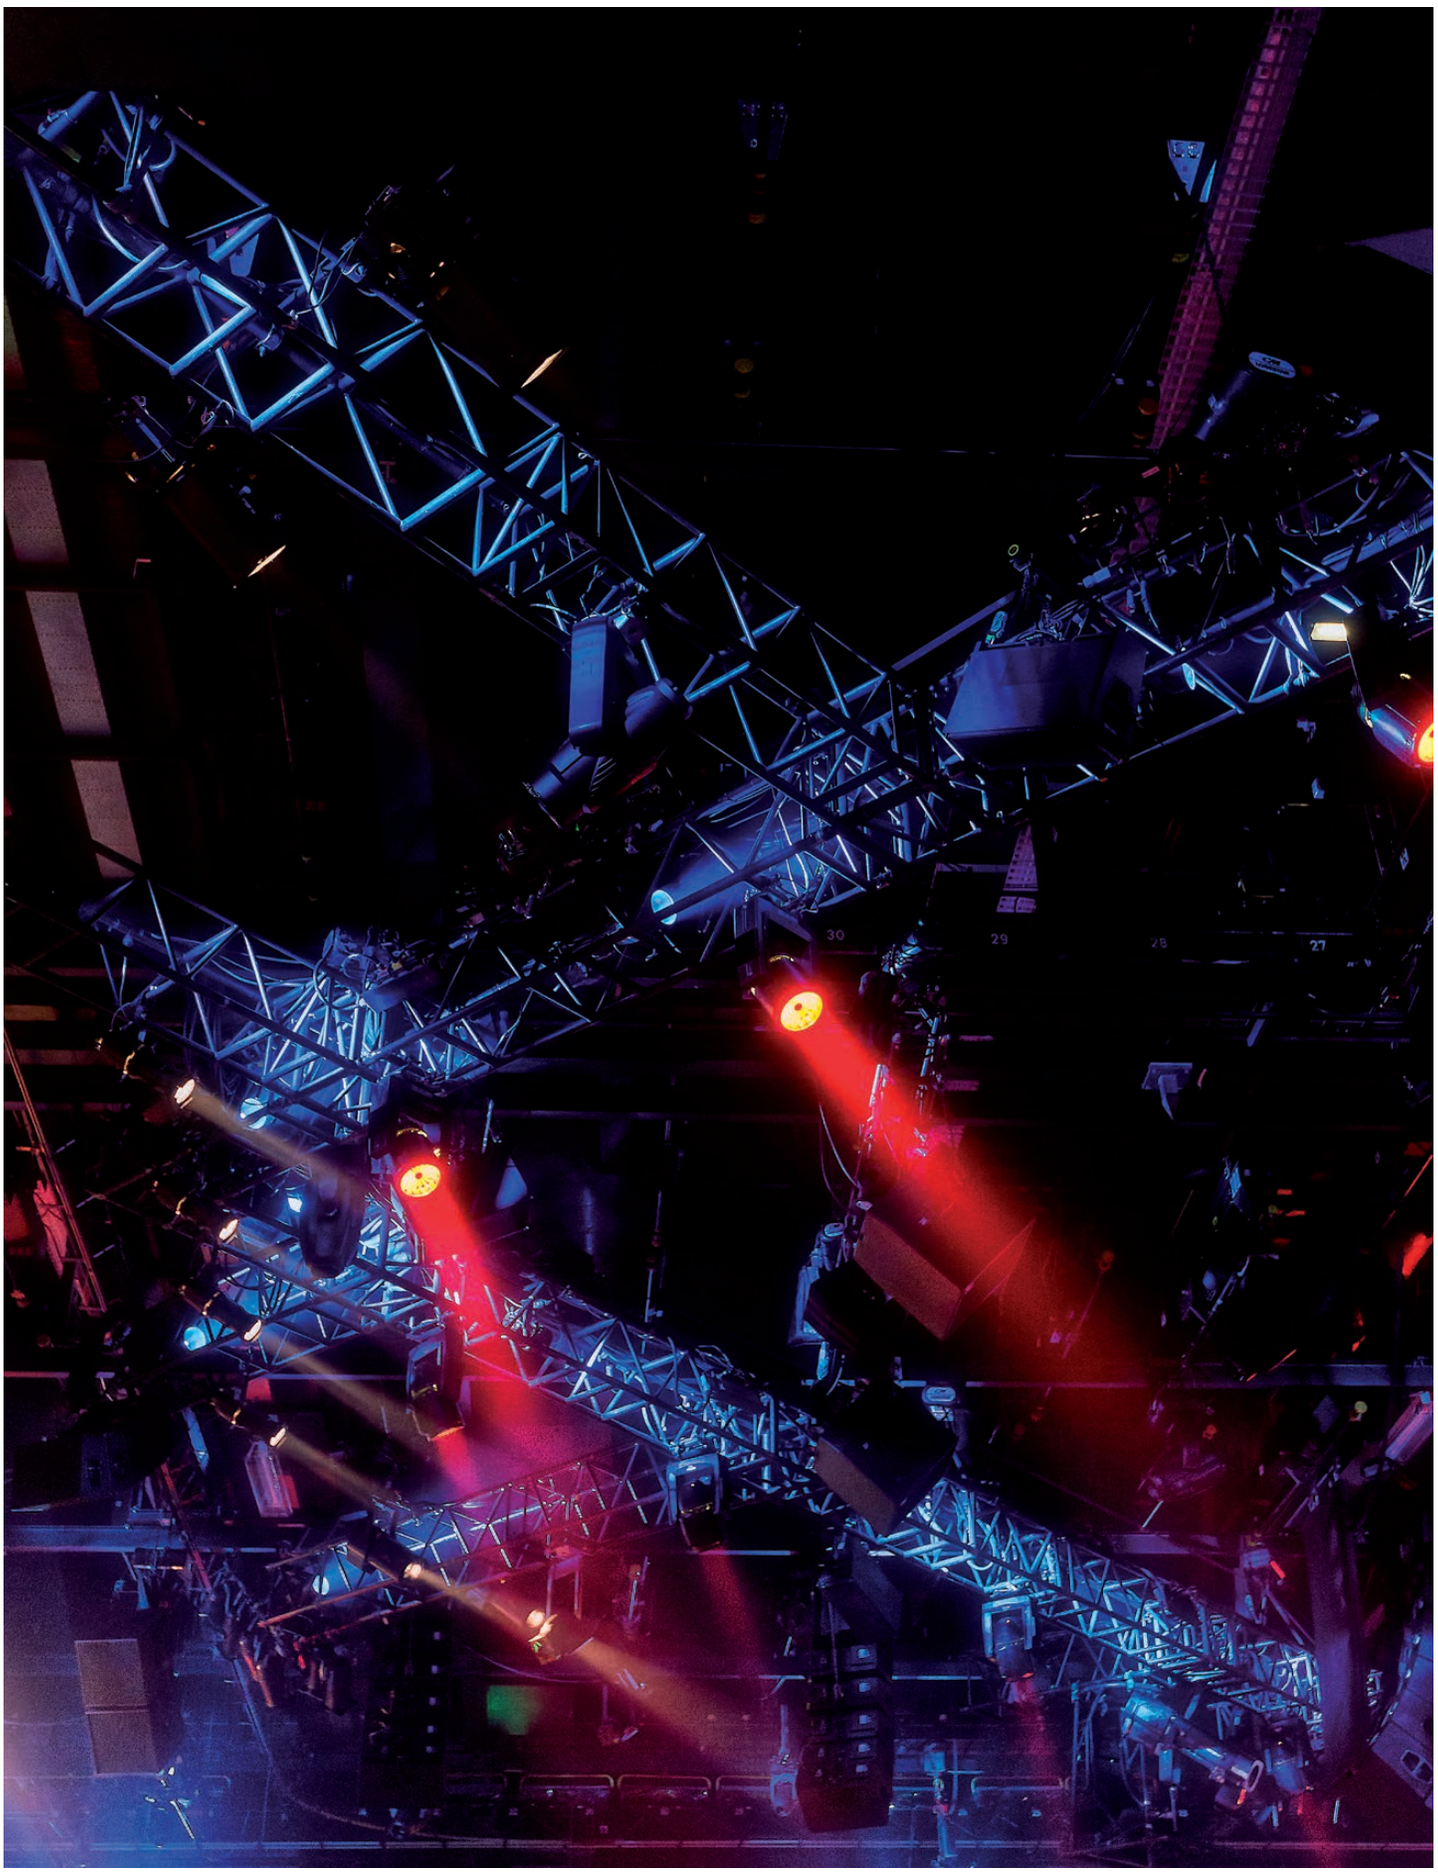
30
29
28
27



Mammoth Stage

70610 **1 x 1 m, Without legs**

SHOWGEAR

Specifications:

Length (mm):	1000 mm
Height (mm):	55 mm
Width (mm):	1000 mm
Max. Load/m²:	500 kg/m²
Weight:	12.1 kg
Deck:	12 mm Plywood
Frame:	Aluminium
Material:	Aluminium / Plywood



Mammoth Stage

70620 **2 x 1 m, Without legs**

SHOWGEAR

Specifications:

Length (mm):	2000 mm
Height (mm):	55 mm
Width (mm):	1000 mm
Max. Load/m²:	500 kg/m²
Weight:	22 kg
Deck:	12 mm Plywood
Frame:	Aluminium
Material:	Aluminium / Plywood



Mammoth Stairs

70639 **20 cm, 1 step**

SHOWGEAR

Specifications:

Height (mm):	200 mm
Width (mm):	990 mm
Depth (mm):	350 mm
Weight:	10.8 kg
Deck:	12 mm Plywood
Frame:	Metal
Material:	Aluminium / Steel / Wood



Mammoth Stairs

70633 **40 cm, 2 steps**

SHOWGEAR

Specifications:

Height (mm):	400 mm
Width (mm):	990 mm
Depth (mm):	675 mm
Weight:	19.7 kg
Deck:	12 mm Plywood
Frame:	Metal
Material:	Aluminium / Steel / Wood



Mammoth Stairs

70634 **60 cm, 1 step**

SHOWGEAR

Specifications:

Height (mm):	600 mm
Width (mm):	990 mm
Depth (mm):	350 mm
Weight:	12.2 kg
Deck:	12 mm Plywood
Frame:	Metal
Material:	Aluminium / Steel / Wood



Mammoth Stairs

70635 **80 cm, 1 step**

SHOWGEAR

Specifications:

Height (mm):	800 mm
Width (mm):	990 mm
Depth (mm):	350 mm
Weight:	14.8 kg
Deck:	12 mm Plywood
Frame:	Metal
Material:	Aluminium / Steel / Wood



Mammoth Dex
70650 **1 x 1 m, Without legs**
SHOWGEAR

Specifications:

Length (mm):	1000 mm
Height (mm):	90 mm
Width (mm):	1000 mm
Max. Load/m²:	750 kg/m²
Weight:	19.6 kg
Deck:	12 mm Plywood
Frame:	Aluminium
Material:	Aluminium / Plywood

Mammoth Dex
70651 **2 x 1 m, Without legs**
SHOWGEAR

Specifications:

Length (mm):	2000 mm
Height (mm):	90 mm
Width (mm):	1000 mm
Max. Load/m²:	750 kg/m²
Weight:	32.5 kg
Deck:	12 mm Plywood
Frame:	Aluminium
Material:	Aluminium / Plywood



Mammoth Dex
70652 **1 x 0.5 m, Without legs**
SHOWGEAR

Specifications:

Length (mm):	1000 mm
Height (mm):	90 mm
Width (mm):	500 mm
Max. Load/m²:	750 kg/m²
Weight:	14.1 kg
Deck:	12 mm Plywood
Frame:	Aluminium
Material:	Aluminium / Plywood



Mammoth Dex
70655 **1.5 x 0.5 m, Without legs**
SHOWGEAR

Specifications:

Length (mm):	1500 mm
Height (mm):	90 mm
Width (mm):	500 mm
Weight:	16,5 kg
Max. Load / m²:	750 kg/m²
Material:	Aluminium / Wood
Deck:	12mm Plywood
Frame:	Aluminium
Colour:	Black / Grey



Mammoth Dex
70653 **2 x 0.5 m, Without legs**
SHOWGEAR

Specifications:

Length (mm):	2000 mm
Height (mm):	90 mm
Width (mm):	500 mm
Max. Load/m²:	750 kg/m²
Weight:	18.8 kg
Deck:	12 mm Plywood
Frame:	Aluminium
Material:	Aluminium / Plywood



Mammoth Dex
70654 **1 m Quadrant, Without legs**
SHOWGEAR

Specifications:

Length (mm):	1000 mm
Height (mm):	90 mm
Width (mm):	1000 mm
Max. Load/m²:	750 kg/m²
Weight:	14.9 kg
Deck:	12 mm Plywood
Frame:	Aluminium
Material:	Aluminium / Wood



Mammoth Stairs Dex

70640 **Adjustable 60–100 cm, 4 steps**

SHOWGEAR

Specifications:

Length (mm):	1375.1 mm
Height (mm):	600 mm
Min. Height (mm):	600 mm
Max. Height (mm):	1150 mm
Width (mm):	750 mm
Weight:	29.94 kg
Deck:	12 mm Plywood
Frame:	Metal
Material:	Aluminium / Steel / Wood



ProStage Stairs

70589 **Adjustable 60-100 cm, 4 steps**

SHOWGEAR

Specifications:

Length (mm):	1500 mm
Height (mm):	600 mm
Min. Height (mm):	600 mm
Max. Height (mm):	1000 mm
Width (mm):	1000 mm
Weight:	45 kg
Deck:	22 mm Plywood
Material:	Steel

Mammoth-D Guard Rail XS Corner Clamp

70649 **Xtra-Safe**



SHOWGEAR

Mammoth Stage Self-leveling Insert

70637



SHOWGEAR

Mammoth Guard Rail Clamp SHOWGEAR

70632



Mammoth Stage Assembly Insert

70638 **M10**



SHOWGEAR

Mammoth Two Leg Clamp SHOWGEAR

70658



Mammoth Four Leg Clamp SHOWGEAR

70659



Mammoth Dex Bottom Clamp SHOWGEAR

70636



Mammoth-D Guard Rail Clamp

70644



SHOWGEAR

Mammoth-S Legs 1 x 1 m SHOWGEAR

70611 20 cm
70612 40 cm
70613 60 cm



Mammoth-D Leg SHOWGEAR

70660 20 cm
70661 40 cm
70662 60 cm
70663 80 cm
70664 100 cm
70677 140 cm



Mammoth-D Telescopic Leg SHOWGEAR

70665 40-60 cm
70666 60-100 cm
70678 100–180 cm



Mammoth Stage Clamp SHOWGEAR

70630



Mammoth-D Guard Rail SHOWGEAR

70642B 1 m, Black
70643B 2 m, Black
70642 1 m, Aluminium
70643 2 m, Aluminium



Mammoth Guard Rail 1 m SHOWGEAR

70631 **Without clamps**



Mammoth Stairs Guard Rail Dex

70641 **for adjustable Mammoth Stairs**



SHOWGEAR



Mammoth Dex Leg Bracing
SHOWGEAR

70675 For 1 m side of Mammoth Dex
70676 For 2 m side of Mammoth Dex



Mammoth-D Guard Rail Coupler

70645



SHOWGEAR

Mammoth-D Guard Rail XS Straight Clamp

70648 Xtra-Safe



SHOWGEAR

Mammoth-D Guard Rail XS
SHOWGEAR

70646 Xtra-Safe - 1 m Aluminium
70647 Xtra-Safe - 2 m Aluminium



Mammoth Stop Bar
SHOWGEAR

70670 1 m, For Mammoth Stage and Dex System
70671 2 m, For Mammoth Stage and Dex System



Mammoth Dex Ramp
SHOWGEAR

70687 60–80 cm
70688 120–140 cm



Mammoth-D Leg on Swiveling Wheel
SHOWGEAR

70667 25 cm
70668 40 cm



Mammoth Transport Trolley
SHOWGEAR

70680 for 10 x Mammoth Stages/Decks



Mammoth Transport Trolley
SHOWGEAR

70681 for 6 x Mammoth Stages/Decks



Mammoth Transport Trolley
SHOWGEAR

70682 for Hand rails



Mammoth Transport Flexy Trolley
SHOWGEAR

70683 for 6 x Mammoth Stages/Decks





Cable Cover 1

71121 **With 1 Channel, Black rubber**

SHOWGEAR

Specifications:

Work Length:	1010 mm
Height (mm):	36 mm
Width (mm):	215 mm



Cable Cover 3

71130 **With 1 Channel, Yellow ABS**

SHOWGEAR

Specifications:

Work Length:	995 mm
Height (mm):	20 mm
Width (mm):	131 mm



Cable Cover 4

71131 **With 1 Channel, Yellow ABS**

SHOWGEAR

Specifications:

Work Length:	962 mm
Height (mm):	37 mm
Width (mm):	272 mm



Cable Bridge 2 100 cm

71140 **With 2 Channels, Value Line**

SHOWGEAR

Specifications:

Work Length:	993 mm
Height (mm):	45 mm
Width (mm):	250 mm



Cable Bridge 2 100 cm

71102 **With 2 Channels**

SHOWGEAR

Specifications:

Work Length:	997 mm
Height (mm):	45 mm
Width (mm):	250 mm



Cable Bridge 2 Corner 30°

71110 **With 2 Channels, for Cable Bridge 2**

SHOWGEAR

Specifications:

Work Length:	250 mm
Height (mm):	45 mm
Width (mm):	290 mm



Cable Bridge 3 100 cm

71141 **With 3 Channels, Value Line**

SHOWGEAR

Specifications:

Work Length:	880 mm
Height (mm):	73 mm
Width (mm):	505 mm



Cable Bridge 5 85 cm

71104 **With 5 Channels**

SHOWGEAR

Specifications:

Work Length:	800 mm
Height (mm):	50 mm
Width (mm):	445 mm

2 m Adjustable Crowd Barrier

SHOWGEAR

90000 Silver

90001 Black

Height (mm):	890 mm
Ø Baseplate:	320 mm
Ø:	63 mm
Colour:	Silver and black



2 m Adjustable Crowd Barrier PRO

SHOWGEAR

90002 Silver

90003 Black

Ø Baseplate:	345 mm
Ø:	70 mm
Weight:	10.5 kg
Colour:	Silver and black



Round Top Cord Pole

SHOWGEAR

90012 Black

90011 Silver

90010 Gold

Ø Baseplate:	320 mm
Ø:	51 mm
Colour:	Gold, silver and black



Velvet Rope Gold Hook

SHOWGEAR

90022 Blue

90021 Black

90020 Red

Length (mm):	1500 mm
Ø:	32 mm
Colour:	Blue, black and red



Velvet Rope Silver Hook

SHOWGEAR

90025 Blue

90024 Black

90023 Red

Length (mm):	1500 mm
Ø:	32 mm
Colour:	Blue, black and red





Nichiban Gaffa Tape NICHIBAN

90615 White, 38 mm / 50 m
90614 Black, 38 mm / 50 m
90613 Grey, 38 mm / 50 m



Nichiban Gaffa Tape NICHIBAN

90644 Black, 25 mm / 50 m



Nichiban Gaffa Tape NICHIBAN

90616 White, 19 mm / 50 m



Gaffa Tape Theatre SHOWGEAR

90606 Grey, 50 mm / 50 m
90607 Black, 50 mm / 50 m
90608 White, 50 mm / 50 m



Nichiban Gaffa Tape NICHIBAN

90612 White, 50 mm / 50 m
90611 Black, 50 mm / 50 m
90610 Grey, 50 mm / 50 m



Nichiban Gaffa Tape NICHIBAN

90627 White, 50 mm / 25 m
90626 Grey, 50 mm / 25 m
90625 Black, 50 mm / 25 m



Gaffa Tape Stage SHOWGEAR

90609B Black, 50 mm / 50 m
90609 Grey, 50 mm / 50 m



Nichiban Gaffa Tape NICHIBAN

90621 Black, 150 mm / 50 m, Extra wide heavy duty



Ballet Floor Tape SHOWGEAR

90617 Black, 50 mm / 33 m



PVC Tape Advance AT4 SHOWGEAR

90670 Black, 19 mm / 20 m
90671 Grey, 19 mm / 20 m
90672 White, 19 mm / 20 m



Marker / Indicator Tape — SHOWGEAR

90629U Blue “5 m”, 25 mm / 33 m
90629R Red “10 m”, 25 mm / 33 m
90629G Green “25 m”, 25 mm / 33 m
90629W White “15 m”, 25 mm / 33 m
90629Y Yellow “20 m”, 25 mm / 33 m



Nichiban Gaffa Tape — NICHIBAN

90633 Blue, 50 mm / 50 m
90632 Green, 50 mm / 50 m
90631 Yellow, 50 mm / 50 m
90630 Red, 50 mm / 50 m



Nichiban Gaffa Tape — NICHIBAN

90637 Blue, 38 mm / 50 m
90636 Green, 38 mm / 50 m
90635 Yellow, 38 mm / 50 m
90634 Red, 38 mm / 50 m



PVC Tape — SHOWGEAR

90628 Black, 19 mm / 66 m
90628W White, 19 mm / 66 m
90628R Red, 19 mm / 66 m
906280 Orange, 19 mm / 66 m
90628U Blue, 19 mm / 66 m
90628Y Yellow, 19 mm / 66 m



Gaffa Tape Neon — SHOWGEAR

90649 Green, 19 mm / 25 m
90680 Orange, 19 mm / 25 m
90681 Yellow, 19 mm / 25 m
90682 Pink, 19 mm / 25 m



Gaffa Tape Neon — SHOWGEAR

90638 Green, 50 mm / 25 m
90639 Orange, 50 mm / 25 m
90640 Yellow, 50 mm / 25 m
90641 Pink, 50 mm / 25 m



Floor-Marking Tape — SHOWGEAR

90624 Red - White, 50 mm / 33 m
90623 Black - Yellow, 50 mm / 33 m



Floor-Marking Tape — SHOWGEAR

90622 Black - Yellow, 150 mm / 33 m





Rain Dome 60

71320 **Moving Head Rain Dome**

SHOWGEAR

Specifications:

Height (mm):	184 mm
Width (mm):	685 mm
Ø:	600 mm
Weight:	14.2 kg
Max. Load:	40 kg

FEATURES:

- Ø 60 cm Rain Cover for standard moving heads
- Two sleeves heights (62/85 cm) available but not included
- Built-in pressure switch
- Bypass switch
- Pro Power, Pro Power True and Schuko output connectors
- All three output connectors can be used at the same time
- Ability to mount truss spigots to make a totem



Sleeve for Rain Dome 60

Cylindrical sleeve - Ø 60 cm, 62 cm high

SHOWGEAR

Specifications:

Height (mm):	670 mm
Ø:	600 mm
Weight:	0.5 kg

FEATURES:

- Suitable for Rain Dome 60
- For <62 cm high moving heads with a <Ø 60 cm width
- Protects against rainfall & moisture



Sleeve for Rain Dome 60

71322 **Dome sleeve - Ø 60 cm, 85 cm high**

SHOWGEAR

Specifications:

Height (mm):	890 mm
Ø:	600 mm
Weight:	0.5 kg

FEATURES:

- Suitable for Rain Dome 60
- For <85 cm high moving heads with a <Ø 60 cm width
- Protects against rainfall & moisture

Rain Dome 40

71325 Moving Head Rain Dome

SHOWGEAR

Specifications:

Height (mm):	184 mm
Width (mm):	480 mm
Ø:	400 mm
Weight:	9.5 kg
Max. Load:	40 kg



FEATURES:

- Ø 40 cm Rain Cover for standard moving heads
- Built-in pressure switch
- Bypass switch
- Pro Power, Pro Power True and Schuko input connectors
- All three input connectors can be used at the same time
- Ability to mount truss spigots to make a totem
- Sleeve not included

Sleeve for Rain Dome 40

71326 Cylindrical sleeve - Ø 40 cm, 52 cm high

SHOWGEAR

Specifications:

Height (mm):	560 mm
Ø:	400 mm
Weight:	0.5 kg



FEATURES:

- Suitable for Rain Dome 40
- For <52 cm high moving heads with a diametre up to 40 cm
- Protects against rainfall & moisture





Rain Cover 45 cm

71315 **Sleeve not included.**

SHOWGEAR

Specifications:

Height (mm):	100 mm
Ø:	450 mm
Weight:	4 kg
Max. Load:	50 kg

Separate Sleeve for Rain Cover Ø 45 cm

71316 **40 cm**



SHOWGEAR



Rain Cover 60 cm

71310 **Sleeve not included**

SHOWGEAR

Specifications:

Height (mm):	100 mm
Ø:	600 mm
Weight:	5.8 kg
Max. Load:	50 kg

Separate Sleeve for Rain Cover Ø 60 cm SHOWGEAR

71311 **Sleeve length 35 cm**

71312 **Sleeve length 50 cm**

71313 **Sleeve length 65 cm - Cone shape**



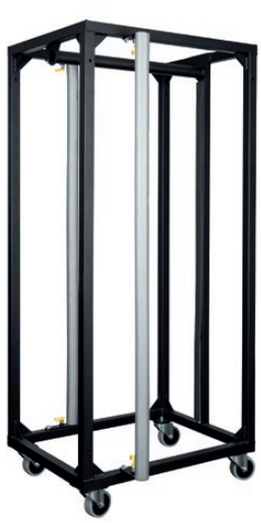

Rain Cover Transport Trolley

71309 **for 7x Rain Cover 60 cm**

SHOWGEAR

Specifications:

Length (mm):	600 mm
Height (mm):	800 mm
Width (mm):	1795 mm
Weight:	44 kg

Stage Tool INFINITY

73001



Laser Distance Meter SHOWGEAR

91007 **Max. distance: 40 m**



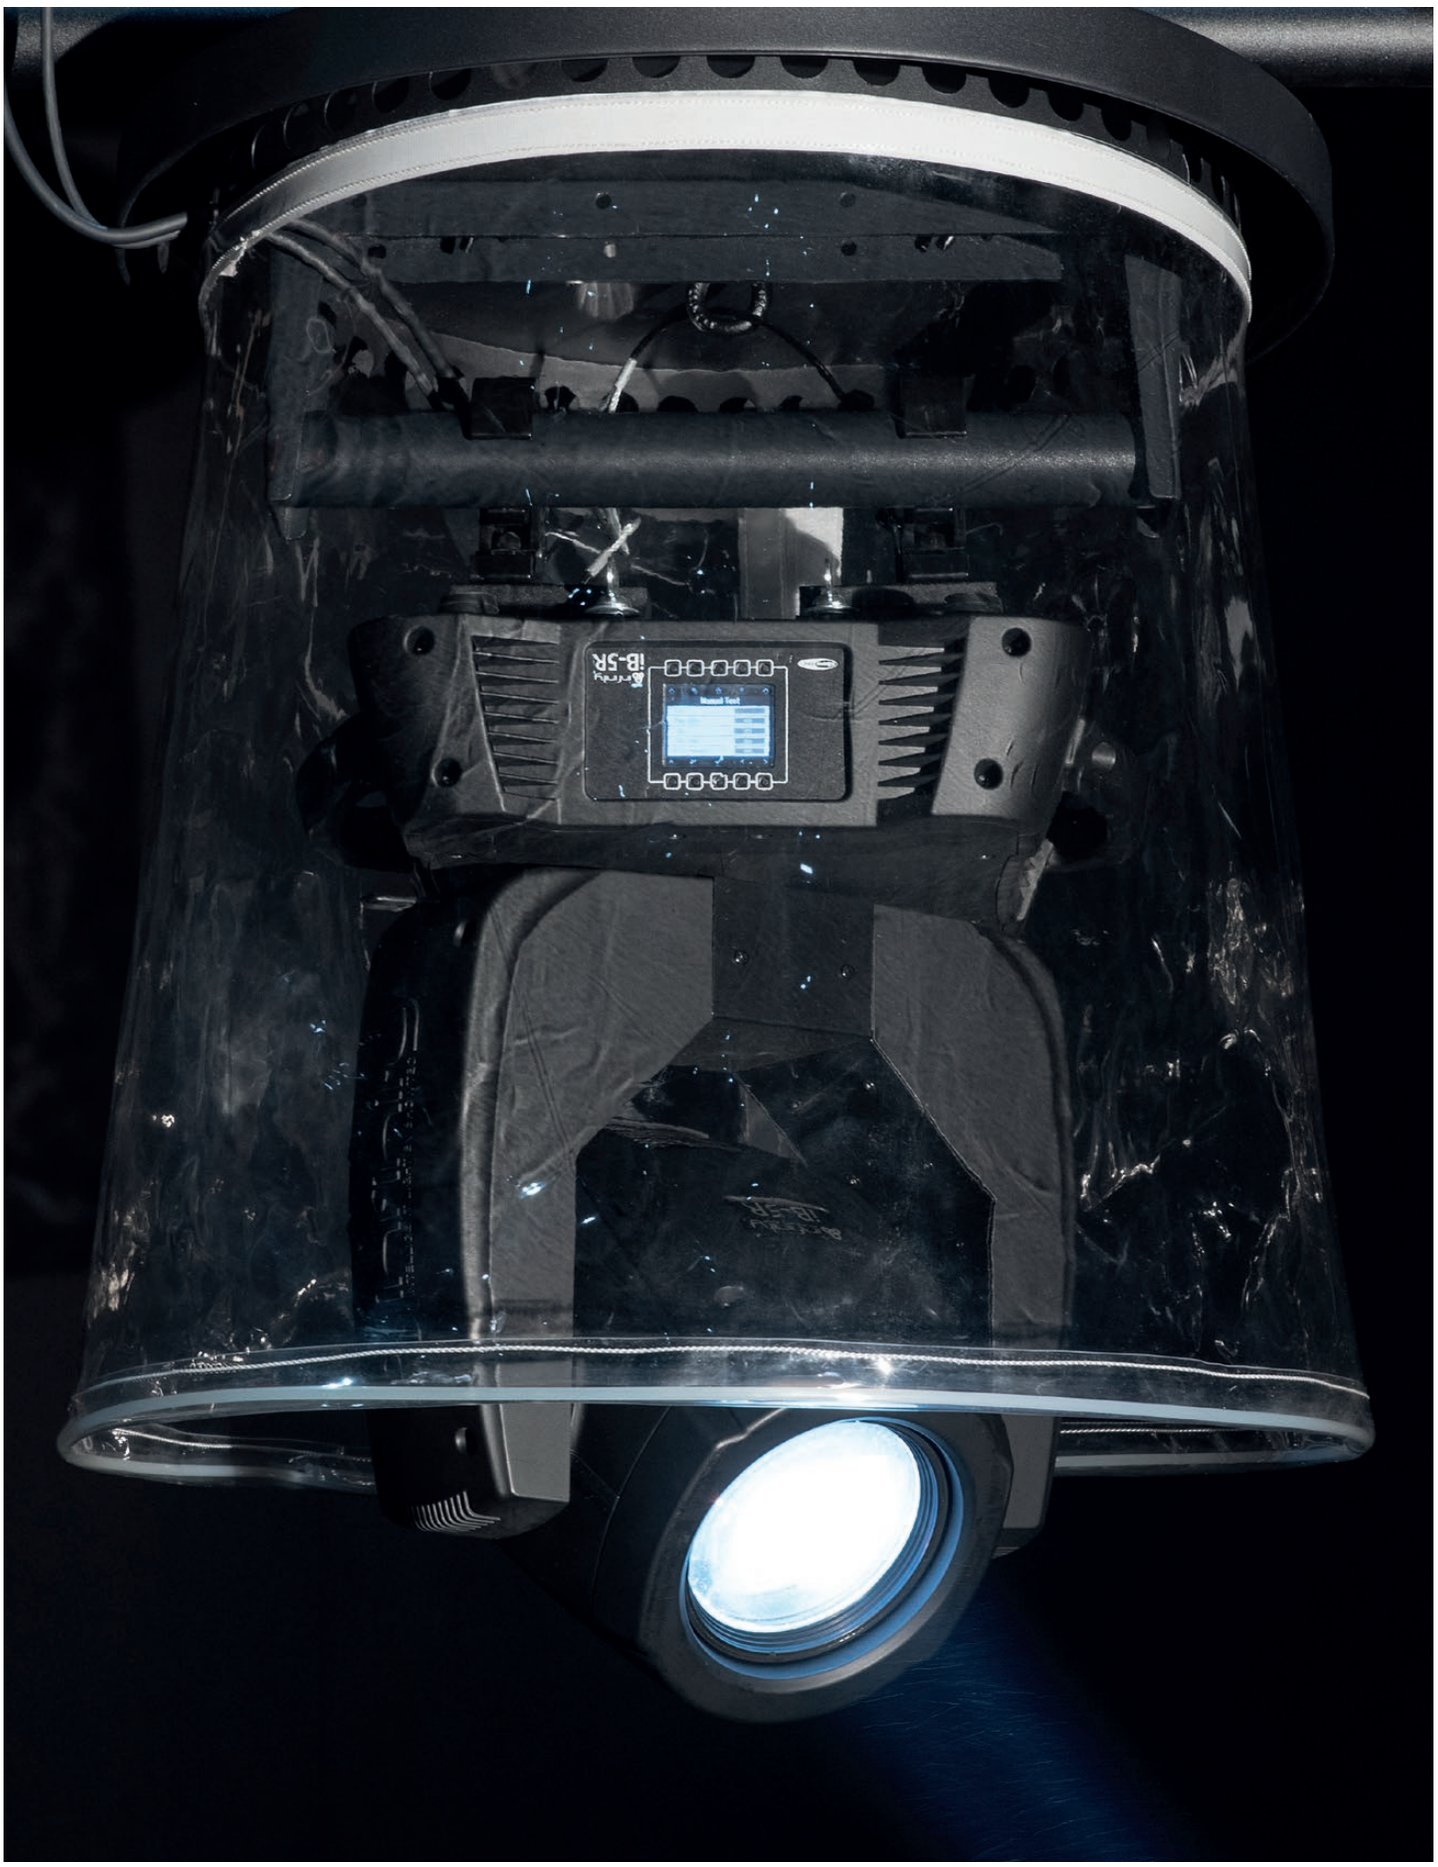

Black Single Tubes



Single Tube 50 mm	MILOS
FP50025B	Tube F 250 - incl. female receivers - 25 cm - F
GP50025B	Tube U 250 - incl. female receivers - 25 cm - G
PP50025B	Tube B 250 - incl. female receivers - 25 cm - P

Single Tube 50 mm	MILOS
FP50050B	Tube F 500 - incl. female receivers - 50 cm - F
GP50050B	Tube U 500 - incl. female receivers - 50 cm - G
PP50050B	Tube B 500 - incl. female receivers - 50 cm - P

Single Tube 50 mm	MILOS
FP50100B	Tube F 1000 - incl. female receivers - 100 cm - F
GP50100B	Tube U 1000 - incl. female receivers - 100 cm - G
PP50100B	Tube B 1000 - incl. female receivers - 100 cm - P

Single Tube 50 mm	MILOS
FP50200B	Tube F 2000 - incl. female receivers - 200 cm - F
GP50200B	Tube U 2000 - incl. female receivers - 200 cm - G
PP50200B	Tube B 2000 - incl. female receivers - 200 cm - P

Single Tube 50 mm	MILOS
FP50300B	Tube F 3000 - incl. female receivers - 300 cm - F
GP50300B	Tube U 3000 - incl. female receivers - 300 cm - G
PP50300B	Tube B 3000 - incl. female receivers - 300 cm - P

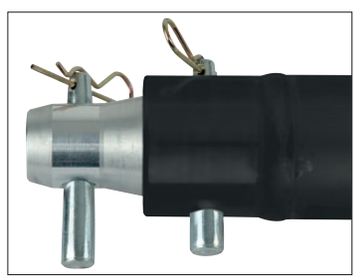

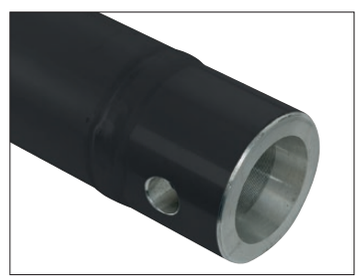

Silver Single Tubes



Single Tube 50 mm	MILOS
FP50025	Tube F 250 - incl. female receivers - 25 cm - F
GP50025	Tube U 250 - incl. female receivers - 25 cm - G
PP50025	Tube B 250 - incl. female receivers - 25 cm - P

Single Tube 50 mm	MILOS
FP50050	Tube F 500 - incl. female receivers - 50 cm - F
GP50050	Tube U 500 - incl. female receivers - 50 cm - G
PP50050	Tube B 500 - incl. female receivers - 50 cm - P

Single Tube 50 mm	MILOS
FP50100	Tube F 1000 - incl. female receivers - 100 cm - F
GP50100	Tube U 1000 - incl. female receivers - 100 cm - G
PP50100	Tube B 1000 - incl. female receivers - 100 cm - P

Single Tube 50 mm	MILOS
FP50200	Tube F 2000 - incl. female receivers - 200 cm - F
GP50200	Tube U 2000 -incl. female receivers - 200 cm - G
PP50200	Tube B 2000 - incl. female receivers - 200 cm - P

Single Tube 50 mm	MILOS
FP50300	Tube F 3000 - incl. female receivers - 300 cm - F
GP50300	Tube U 3000 - incl. female receivers - 300 cm - G
PP50300	Tube B 3000 - incl. female receivers - 300 cm - P

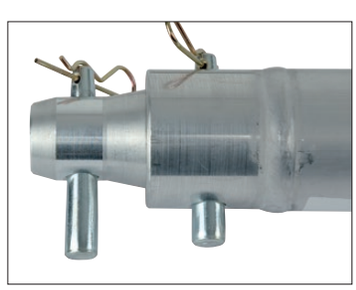

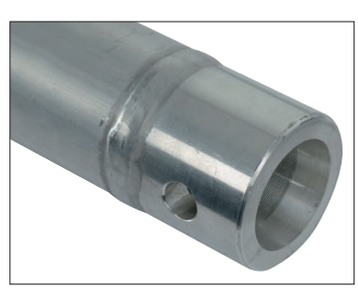

Metal Deco-20 Triangle - Corner
SHOWGEAR

MDT20003 90° Corner



Metal Deco-20 Triangle - Corner down right, apex up
SHOWGEAR

MDT20010 90° Corner



Metal Deco-20 Triangle - T-Cross, 3-way horizontal
SHOWGEAR

MDT20017 90° Corner



Metal Deco-20 Triangle - Straight
SHOWGEAR

MDT20050 500 mm
MDT20100 1000 mm
MDT20150 1500 mm



Deco-22 Triangle Truss - Corner
MILOS

DT22001 ACM19 - 45° corner
DT22002 ACM20 - 60° corner
DT22003 ACM21 - 90° corner



Deco-22 Triangle truss - apex up
MILOS

DT22006 ACM24 - 90° corner



Deco-22 Triangle truss - apex down
MILOS

DT22007 ACM25 - 90° corner



Deco-22 Triangle truss - down left, apex up
MILOS

DT22011 ALM32 - 90° corner



Deco-22 Triangle truss - down right, apex down
MILOS

DT22012 ALM33 - 90° corner



Deco-22 Triangle truss - down left, apex down
MILOS

DT22013 ALM34 - 90° corner



Deco-22 Triangle truss - 4-way horizontal
MILOS

DT22016 ACM41 - 90° corner



Deco-22 Triangle truss - 3-way horizontal
MILOS

DT22017 ATM36 - 90° corner



Deco-22 Triangle truss - T-Cross vertical 3-way, apex down MILOS

DT22018 ATM35 - 90° corner



Deco-22 Triangle truss - T-Cross + up/down 6-way MILOS

DT22021 ATM51 - 90° corner



Deco-22 Triangle truss - Cross up/down 6-way MILOS

DT22022 ACM61 - 90° corner



Deco-22 Triangle truss - T-Cross up/down 3-way MILOS

DT22023 ATM37 - 90° corner



Deco-22 Triangle truss - Cross + down 5-way, apex down MILOS

DT22024 ACM53 - 90° corner



Deco-22 Triangle truss - Cross + down 5-way, apex up MILOS

DT22025 ACM52 - 90° corner



Deco-22 Triangle Truss Straight

Straight MILOS

DT22050 STM500 - 500 mm
DT22100 STM1000 - 1000 mm
DT22150 STM1500 - 1500 mm
DT22200 STM2000 - 2000 mm
DT22250 STM2500 - 2500 mm
DT22300 STM3000 - 3000 mm
DT22400 STM4000 - 4000 mm

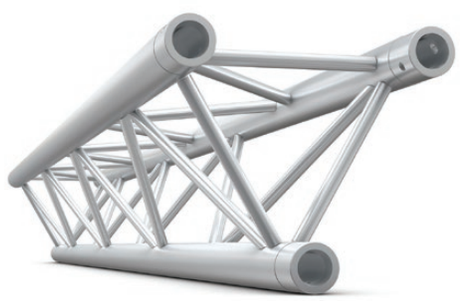

Deco-22 Quatro Truss - Corner	MILOS
DQ22003	QCM21 - 90° corner
DQ22005	QCM23 - 135° corner



Deco-22 Quatro Truss - Corner	MILOS
DQ22012	QLM30 - 90° corner - 3-way



Deco-22 Square Truss Straight

Straight	MILOS
DQ22050	QTM500 - 500 mm
DQ22100	QTM1000 - 1000 mm
DQ22150	QTM1500 - 1500 mm
DQ22200	QTM2000 - 2000 mm
DQ22250	QTM2500 - 2500 mm
DQ22300	QTM3000 - 3000 mm
DQ22400	QTM4000 - 4000 mm

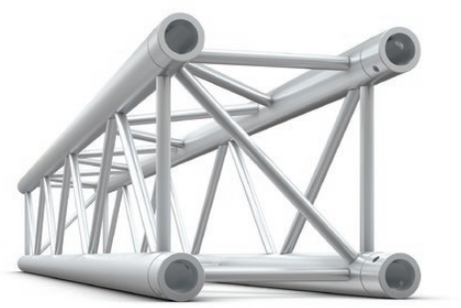



Pro-30 Step Truss - Corner 90° Horizontal MILOS

FS30003H HF21 - F
PS30003H HB21 - P



Pro-30 Step Truss - T-Cross 90° Horizontal MILOS

FS30017H HF35 - F
PS30017H HB35 - P



Pro-30 Step Truss - Corner 90° Vertical MILOS

FS30003V VF21 - F
PS30003V VB21 - P



Pro-30 Step Truss - T-Cross 90° Vertical MILOS

FS30017V VF36 - F
PS30017V VB36 - P



Pro-30 Step Truss Straight

Straight 1000 mm MILOS

FS30050 BTF500 - F
GS30050 BTU500 - G
PS30050 BTB500 - P

Straight 1000 mm MILOS

FS30100 BTF1000 - F
GS30100 BTU1000 - G
PS30100 BTB1000 - P

Straight 1500 mm MILOS

FS30150 BTF1500 - F
GS30150 BTU1500 - G
PS30150 BTB1500 - P

Straight 2000 mm MILOS

FS30200 BTF2000 - F
GS30200 BTU2000 - G
PS30200 BTB2000 - P

Straight 2500 mm MILOS

FS30250 BTF2500 - F
PS30250 BTB2500 - P

Straight 3000 mm MILOS

FS30300 BTF3000 - F
PS30300 BTB3000 - P

Straight 4000 mm MILOS

FS30400 BTF4000 - F
PS30400 BTB4000 - P



Pro-30 Triangle G Truss - Corner 45°

MILOS

GT30001 ACU19 - G



Pro-30 Triangle P Truss - Corner 60°

MILOS

PT30002 ACB20 - P



Pro-30 Triangle Truss - Corner 90°

MILOS

FT30003 ACF21 - F
GT30003 ACU21 - G
PT30003 ACB21 - P



Pro-30 Triangle Truss - Corner 135°

MILOS

FT30005 ACF23 - F
PT30005 ACB23 - P



Pro-30 Triangle Truss - Corner 90° apex up

MILOS

FT30006 ACF24 - F
GT30006 ACU24 - G
PT30006 ACB24 - P



Pro-30 Triangle Truss - Corner 90° apex down

MILOS

FT30007 ACF25 - F
GT30007 ACU25 - G
PT30007 ACB25 - P



Pro-30 Triangle Truss - Corner 90° down right, apex up

MILOS

FT30010 ALF31 - F
GT30010 ALU31 - G
PT30010 ALB31 - P



Pro-30 Triangle Truss - Corner 90° down left, apex up

MILOS

FT30011 ALF32 - F
GT30011 ALU32 - G
PT30011 ALB32 - P



Pro-30 Triangle Truss - Corner 90° down right, apex down

MILOS

FT30012 ALF33 - F
GT30012 ALU33 - G
PT30012 ALB33 - P



Pro-30 Triangle Truss - Corner 90° down left, apex down

MILOS

FT30013 ALF34 - F
GT30013 ALU34 - G
PT30013 ALB34 - P



Pro-30 Triangle F Truss - Corner 90° up/down, right - 71 cm

MILOS

FT30014 ACF44 - F
GT30014 ACU44 - G
PT30014 ACB44- P



Pro-30 Triangle Truss - Corner 90° up/down, left - 71 cm

MILOS

FT30015 ACF45 - F
GT30015 ACU45 - G
PT30015 ACB45 - P



Pro-30 Triangle Truss - Corner 90° 4-way horizontal - 71cm

MILOS

FT30016 ACF41 - F
GT30016 ACU41 - G
PT30016 ACB41 - P



Pro-30 Triangle Truss - 3-way 90° horizontal -71 cm

MILOS

FT30017 ATF36 - F
GT30017 ATU36 - G
PT30017 ATB36 - P



Pro-30 Triangle Truss - T-Cross 90° vertical 3-way, apex down - 71 cm

MILOS

FT30018 ATF35 - F
GT30018 ATU35 - G
PT30018 ATB35 - P



Pro-30 Triangle Truss - T-Cross 90° vertical 3-way, apex up - 71 cm

MILOS

FT30019 ATF35B - F
GT30019 ATU35B - G
PT30019 ATB35B - P



Pro-30 Triangle Truss - T-Cross 90° + down 4-way - 71 cm

MILOS

FT30020 ATF42 - F
GT30020 ATU42 - G
PT30020 ATB42 - P



Pro-30 Triangle Truss - T-Cross 90° + up/down 5-way -71cm

MILOS

FT30021 ATF51 - F
GT30021 ATU51 - G
PT30021 ATB51 - P



Pro-30 Triangle Truss - Cross 90° up/down 6-way - 71cm

MILOS

FT30022 ATF61 - F
PT30022 ACB61 - P



Pro-30 Triangle Truss - T-Cross 90° up/down 3-way - 71cm

MILOS

FT30023 ATF37 - F
GT30023 ATU37 - G
PT30023 ATB37 - P



Pro-30 Triangle Truss - Cross 90° + down 5-way, apex down - 71 cm

MILOS

FT30024 ACF53 - F
GT30024 ACU53 - G
PT30024 ACB53 - P



Pro-30 Triangle Truss - Cross 90° + down 5-way, apex up - 71 cm

MILOS

FT30025 ACF52 - F
GT30025 ACU52 - G
PT30025 ACB52 - P



Straight Pro-30 Triangle Truss

Straight 290 mm	MILOS
FT30029	STF290 - F
GT30029	STU290 - G
PT30029	STB290 - P

Straight 500 mm	MILOS
FT30050	STF500 - F
GT30050	STU500 - G
PT30050	STB500 - P

Straight 710 mm	MILOS
FT30071	STF710 - F
GT30071	STU710 - G
PT30071	STB710 - P

Straight 1000 mm	MILOS
FT30100	STF1000 - F
GT30100	STU1000 - G
PT30100	STB1000 - P

Straight 1500 mm	MILOS
FT30150	STF1500 - F
GT30150	STU1500 - G
PT30150	STB1500 - P

Straight 2000 mm	MILOS
FT30200	STF2000 - F
GT30200	STU2000 - G
PT30200	STB2000 - P

Straight 2500 mm	MILOS
FT30250	STF2500 - F
GT30250	STU2500 - G
PT30250	STB2500 - P

Straight 3000 mm	MILOS
FT30300	STF3000 - F
GT30300	STU3000 - G
PT30300	STB3000 - P

Straight 4000 mm	MILOS
FT30400	STF4000 - F
GT30400	STU4000 - G
PT30400	STB4000 - P

Straight 5000 mm	MILOS
FT30500	STF5000 - F
GT30500	STU5000 - G
PT30500	STB5000 - P

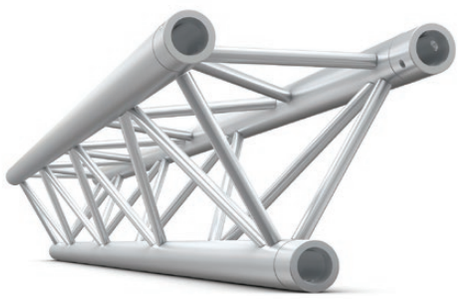



Pro-30 Square Truss - Corner 3-way 90°

MILOS

FQ30012HDB QLVF30 - heavy duty - F
FQ30012B QLF30 - F
GQ30012B QLU30 - G
PQ30012B QLB30 - P



Pro-30 Square Truss - Corner 90° 3-way

MILOS

FQ30012HD QLVF30 - heavy duty - F
FQ30012 QLF30 - F
GQ30012HD QLVU30 - heavy duty - G
GQ30012HDB QLVU30 - heavy duty - G
GQ30012 QLU30 - G
PQ30012 QLB30 - G



Pro-30 Square Truss - Corner 90°

MILOS

GQ30003HDB QCVU21 - heavy duty - G
FQ30003HDB QCVF21 - heavy duty - F
FQ30003B QCF21 - F
GQ30003B QCU21 - G



Pro-30 Square Truss - Corner 90°

MILOS

GQ30003HD QCVU21 - heavy duty - G
FQ30003HD QCVF21 - heavy duty - F
FQ30003 QCF21 - F
GQ30003 QCU21 - G
PQ30003 QCB21 - P



Pro-30 Square Truss - Corner 120°

MILOS

FQ30004HDB QCVF22 - heavy duty - F
GQ30004HDB QCVU22 - heavy duty - G
FQ30004HD QCVF22 - heavy duty - F



Pro-30 Square Truss - Corner 120°

MILOS

FQ30004 QCF22 - F
FQ30004HD QCVF22 - heavy duty - F
GQ30004HD QCVU22 - heavy duty - G
GQ30004 QCU22 - G



Pro-30 Square Truss - Corner 135°

MILOS

FQ30005HDB QCVF23 - heavy duty - F
GQ30005HDB QCVU23 - heavy duty - G



Pro-30 Square Truss - Corner 135°

MILOS

FQ30005HD QCVF23 - heavy duty - F
FQ30005 QCF23 - F
GQ30005HD QCVU23 - heavy duty - G
GQ30005 QCU23 - G



Pro-30 Square Truss - Circle Corner 90° 3-way

MILOS

FQ30012C QLF30-KRS - F
GQ30012C QLU30-KRS - G
PQ30012C QLB30-KRS - P



Pro-30 Square F-Truss - Circle Corner 90°

MILOS

FQ30003C QCF21-KRS - F
GQ30003C QCU21-KRS - G
PQ30003C QCB21-KRS - P



Pro-30 Square Truss - Corner 45°

MILOS

FQ30001HDB QCVF19 - heavy duty - F
GQ30001HDB QCVU19 - heavy duty - G



Pro-30 Square Truss - Corner 45°

MILOS

FQ30001HD QCVF19 - heavy duty - F
GQ30001HD QCVU19 - heavy duty - G



Pro-30 Square Truss - Corner 60°

MILOS

FQ30002HDB QCVF20 - heavy duty - F
GQ30002HDB QCVU20 - heavy duty - G



Pro-30 Square Truss - Corner 60°

MILOS

FQ30002HD QCVF20 - heavy duty - F
FQ30002 QCF20 - F
GQ30002HD QCVU20 - heavy duty - G
GQ30002 QCU20 - G



Pro-30 Square Truss - Cross 90° + Down 5-way

MILOS

GQ30024HDB QCV51 - heavy duty - G
FQ30024HDB QCV51 - heavy duty - F
FQ30024B QCF51 - F



Pro-30 Square Truss - Cross 90° + Down 5-way

MILOS

FQ30024HD QCVF51 - heavy duty - F
GQ30024HD QCVU51 - heavy duty - G
FQ30024 QCF51 - F
GQ30024 QCU51 - G
PQ30024 QCB51 - P



Pro-30 Square Truss - Cross 90° 4-way

MILOS

FQ30016HDB QCV41 - heavy duty - F
FQ30016B QCF41 - F
GQ30016HDB QCV41 - heavy duty - G
GQ30016B QCU41 - G
PQ30016B QCB41 - P



Pro-30 Square Truss - Corner 90° Cross 4-way

MILOS

FQ30016HD QCVF41 - heavy duty - F
FQ30016 QCF41 - F
GQ30016HD QCVU41 - heavy duty - G
GQ30016 QCU41 - G
PQ30016 QCB41 - P



Pro-30 Square Truss - T-Cross 90° 3-way

MILOS

FQ30017HDB QTVF35 - heavy duty - F
FQ30017B QTF35 - F
GQ30017HDB QTVU35 - heavy duty - G
GQ30017B QTU35 - G
PQ30017B QTB 35 - P



Pro-30 Square Truss - T-Cross 90° 3-way

MILOS

FQ30017HD QTVF35 - heavy duty - F
FQ30017 QTF35 - F
GQ30017HD QTVU35 - heavy duty - G
GQ30017 QTU35 - G
PQ30017 QTB35 - P



Pro-30 Square Truss - T-cross 90° + Down 4-way

MILOS

FQ30020HDB QLV40 - heavy duty - F
FQ30020B QLF40 - F
GQ30020HDB QLV40 - heavy duty - G



Pro-30 Square Truss - T-cross 90° + Down 4-way

MILOS

FQ30020HD QLVF40 - heavy duty - F
FQ30020 QLF40 - F
GQ30020HD QLVU40 - heavy duty - G
GQ30020 QLU40 - G
PQ30020 QLB40 - P



Straight Pro-30 Square Truss Black

Straight 500 mm	MILOS
FQ30050HDB	QTVF500 - heavy duty - F
FQ30050B	QTF500 - F
GQ30050HDB	QTVU500 - heavy duty - G
GQ30050B	QTU500 - G
PQ30050B	QTB500 - P

Straight 710 mm	MILOS
FQ30071B	QTF710 - F
GQ30071B	QTU710 - G

Straight 1000 mm	MILOS
FQ30100HDB	QTVF1000 - heavy duty - F
FQ30100B	QTF1000 - F
GQ30100HDB	QTVU1000 - heavy duty - G
GQ30100B	QTU1000 - G
PQ30100B	QTB1000 - P

Straight 1500 mm	MILOS
FQ30150B	QTF1500 - F
FQ30150HDB	QTVF1500 - heavy duty - F
GQ30150B	QTU1500 - G
GQ30150HDB	QTVU1500 - heavy duty - G

Straight 2000 mm	MILOS
FQ30200HDB	QTVF2000 - heavy duty - F
FQ30200B	QTF2000 - F
GQ30200HDB	QTVU2000 - heavy duty - G
GQ30200B	QTU2000 - G
PQ30200B	QTB2000 - P

Straight 2500 mm	MILOS
FQ30250B	QTF2500 - F
FQ30250HDB	QTVF2500 - heavy duty - F
GQ30250B	QTU2500 - G
GQ30250HDB	QTVU2500 - heavy duty - G
PQ30250B	QTB2500 - P

Straight 3000 mm	MILOS
FQ30300HDB	QTVF3000 - heavy duty - F
FQ30300B	QTF3000 - F
GQ30300HDB	QTVU3000 - heavy duty - G
GQ30300B	QTU3000 - G
PQ30300B	QTB3000 - P

Straight 4000 mm	MILOS
FQ30400B	QTF4000 - F
FQ30400HDB	QTVF4000 - heavy duty - F
GQ30400B	QTU4000 - G
GQ30400HDB	QTVU4000 - heavy duty - G
PQ30400B	QTB4000 - P

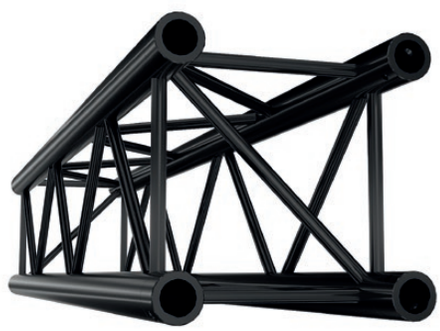

Straight Pro-30 Square Truss Silver

Straight 290 mm	MILOS
FQ30029	QTF290 - F
GQ30029	QTU290 - G
PQ30029	QTB290 - P

Straight 500 mm	MILOS
FQ30050HD	QTVF500 - heavy duty - F
FQ30050	QTF500 - F
GQ30050HD	QTVU500 - heavy duty - G
GQ30050	QTU500 - G
PQ30050	QTB500 - P

Straight 710 mm	MILOS
FQ30071	QTF710 - 710 mm - silver - F
GQ30071	QTU710 - G
PQ30071	QTB710 - P

Straight 1000 mm	MILOS
FQ30100HD	QTVF1000 - heavy duty - F
FQ30100	QTF1000 - F
GQ30100HD	QTVU1000 - heavy duty - G
GQ30100	QTU1000 - G
PQ30100	QTB1000 - P

Straight 1500 mm	MILOS
FQ30150HD	QTVF1500 - heavy duty - F
FQ30150	QTF1500 - F
GQ30150HD	QTVU1500 - heavy duty - G
GQ30150	QTU1500 - G
PQ30150	QTB1500 - P

Straight 2000 mm	MILOS
FQ30200HD	QTVF2000 - heavy duty - F
FQ30200	QTF2000 - F
GQ30200HD	QTVU2000 - heavy duty - G
GQ30200	QTU2000 - G
PQ30200	QTB2000 - P

Straight 2500 mm	MILOS
FQ30250HD	QTVF2500 - heavy duty - F
FQ30250	QTF2500 - F
GQ30250HD	QTVU2500 - heavy duty - G
GQ30250	QTU2500 - G
PQ30250	QTB2500 - P

Straight 3000 mm	MILOS
FQ30300HD	QTVF3000 - heavy duty - F
FQ30300	QTF3000 - F
GQ30300HD	QTVU3000 - heavy duty - G
GQ30300	QTU3000 - G
PQ30300	QTB3000 - P

Straight 4000 mm	MILOS
FQ30400HD	QTVF4000 - heavy duty - F
FQ30400	QTF4000 - F
GQ30400HD	QTVU4000 - heavy duty - G
GQ30400	QTU4000 - G
PQ30400	QTB4000 - P

Straight 5000 mm	MILOS
FQ30500	QTF5000 - F
GQ30500	QTU5000 - G
PQ30500	QTB5000 - P

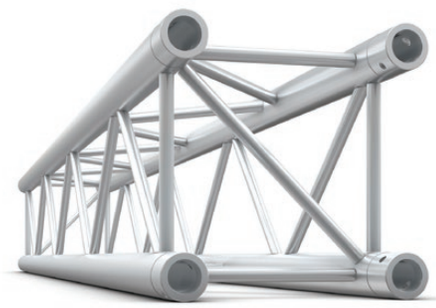

Square Truss Circle 2 m MILOS

FQ30C2 CrQTFd2000 - diametre 2 m - F
GQ30C2 CrQTUd2000 - diametre 2 m - G
PQ30C2 CrQTBd2000 - diametre 2 m - P

FQ30 Square Truss Circle 4 m MILOS

FQ30C4 CrQTFd4000 - diametre 4 m - F
GQ30C4 QTUd4000 - diametre 4 m - G
PQ30C4 CrQTBd4000 - diametre 4 m - P

GQ30 Square Truss Circle 8 m MILOS

GQ30C8 QTUd8000 - diametre 8 m - G
PQ30C8 CrQTBd8000 - diametre 8 m - P

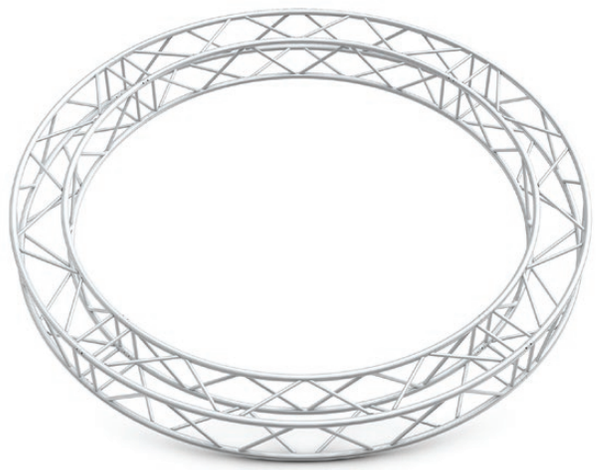

FT30 Triangle Truss Circle 2 m MILOS

FT30C2 CrSTFd2000 - diametre 2 m - F
GT30C2 CrSTUd2000 - diametre 2 m - G
PT30C2 STBd2000 - diametre 2 m - P

FT30 Triangle Truss Circle 4 m MILOS

FT30C4 CrSTFd4000 - diametre 4 m - F
GT30C4 CrSTUd4000 - diametre 4 m - G
PT30C4 STBd4000 - diametre 4 m - P

FT30 Triangle Truss Circle 6 m MILOS

FT30C6 CrSTFd6000 - diametre 6 m - F

FT30 Triangle Truss Circle 8 m MILOS

FT30C8 CrSTFd8000 - diametre 8 m - F

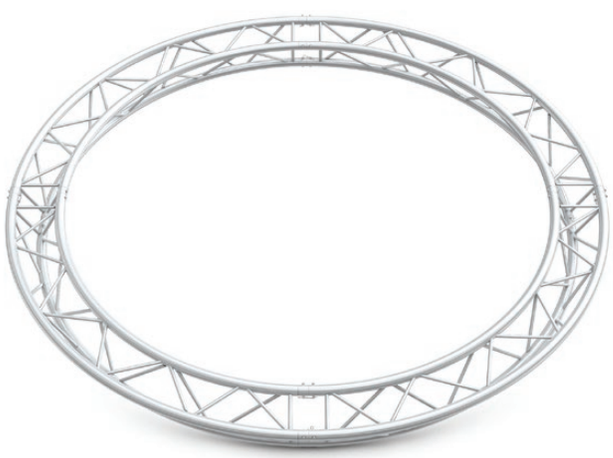

Pro-35 Rectangular
Truss

Pro-35 Rectangular F Truss - Multicube MILOS

FQ35MC RC-M290/390-HD



Pro-35 Rectangular F Truss - M290x390 - Straight - Heavy Duty MILOS

FQ35050 RTLF500 - 0.5 m
FQ35100 RTLF1000 - 1.0 m
FQ35150 RTLF1500 - 1.5 m
FQ35200 RTLF2000 - 2.0 m
FQ35250 RTLF2500 - 2.5 m
FQ35300 RTLF3000 - 3.0 m
FQ35400 RTLF4000 - 4.0 m



Pro-40 Square Truss - Corner 45° - Heavy Duty

MILOS

FQ40001HD QCLF19 - F
GQ40001HD QCLU19 - G



Pro-40 Square Truss - Corner 60° - Heavy Duty

MILOS

FQ40002HD QCLF20 - F
GQ40002HD QCLU20 - G



Pro-40 Square Truss - Corner 90° - Heavy Duty

MILOS

FQ40003HD QCLF21 - F
GQ40003HD QCLU21 - G



Pro-40 Square Truss - Corner 3-way 90° - Heavy Duty

MILOS

FQ40012HD QLLF30 - F
GQ40012HD QLLU30 - G



Pro-40 Square Truss - Cross 90° 4-way - Heavy Duty

MILOS

FQ40016HD QCLF41 - F
GQ40016HD QCLFU41 - G



Pro-40 Square Truss - Corner 120° - Heavy Duty

MILOS

FQ40004HD QCLF22 - F
GQ40004HD QCLU22 - G



Pro-40 Square Truss - Corner 135° - Heavy Duty

MILOS

FQ40005HD QCLF23 - F
GQ40005HD QCLU23 - G



Pro-40 Square Truss - T-Cross 90° 3-way - Heavy Duty

MILOS

FQ40017HD QTLF35 - F
GQ40017HD QTLU35 - G



Pro-40 Square Truss - T-cross 90° + Down 4-way - Heavy Duty

MILOS

FQ40020HD QLLF40 - F
GQ40020HD QLLU40 - G



Pro-40 Square Truss - Cross 90° + Down 5-way - Heavy Duty

MILOS

FQ40024HD QCLF51 - F
GQ40024HD QCLU51 - G



Straight Pro-40 Heavy Duty Truss



Straight 500 mm	MILOS
FQ40050HD	QTLF500 - F
GQ40050HD	QTLU500 - G

Straight 1000 mm	MILOS
FQ40100HD	QTLF1000 - F
GQ40100HD	QTLU1000 - G

Straight 1500 mm	MILOS
FQ40150HD	QTLF1500 - F
GQ40150HD	QTLU1500 - G

Straight 2000 mm	MILOS
FQ40200HD	QTLF2000 - F
GQ40200HD	QTLU2000 - G

Straight 2500 mm	MILOS
FQ40250HD	QTLF2500 - F
GQ40250HD	QTLU2500 - G

Straight 3000 mm	MILOS
FQ40300HD	QTLF3000 - F
GQ40300HD	QTLU3000 - G

Straight 4000 mm	MILOS
FQ40400HD	QTLF4000 - F
GQ40400HD	QTLU4000 - G

FLQ30 LED Screens Truss	SHOWGEAR
FLQ30050	500 mm - black
FLQ30300	3000 mm - black
FLQ30100	1000 mm - black
FLQ30200	2000 mm - black





MT-1 Tower 7.5 m

MT1-F for F Series truss
MT1-G for G Series truss

MILOS

Specifications:

Height (m):	7.5 m
Width (m):	2.876 m
Depth (m):	2.876 m
Size:	290 mm x 290 mm
Ø Main Tube:	48 x 3 mm
Weight:	201 kg
Truss Sys.:	F



Compact Fly Tower

70890

MILOS

Specifications:

Width (m):	2.5 m
Depth (m):	2 m
Size:	290 mm x 290 mm
Ø Main Tube:	48 x 3 mm
Weight:	150 kg
Truss Sys.:	P

MR1 Roof System incl. B1 canopy

MR164 **6 x 4 m**

MILOS

Specifications:

Height (m):	5.96 m
Width (m):	6.06 m
Depth (m):	5.43 m
Inner Width:	6000 mm
Inner Depth:	4400 mm
Size:	290 mm x 290 mm
Ø Main Tube:	48 x 3 mm
Weight:	1034 kg
Truss Sys.:	FGP



MR1 Roof System incl. B1 canopy

MR186 **8 x 6 m**

MILOS

Specifications:

Height (m):	5.96 m
Width (m):	9.06 m
Depth (m):	7.48 m
Inner Width:	8000 mm
Inner Depth:	6400 mm
Size:	290 mm x 290 mm
Ø Main Tube:	48 x 3 mm
Weight:	1344 kg
Truss Sys.:	FGP

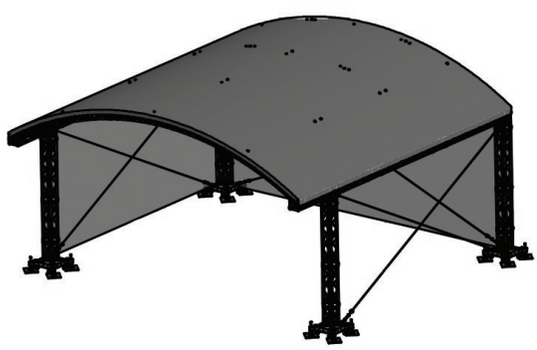



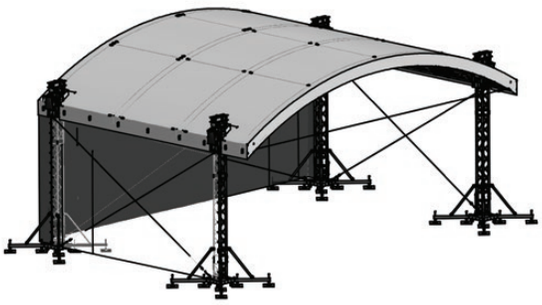

MR1T Roof System incl. B1 canopy

MR1T106 **10 x 6 m**

MILOS

Specifications:

Height (m):	5.91 m
Width (m):	12.83 m
Depth (m):	8.48 m
Inner Width:	1050 mm
Inner Depth:	6150 mm
Size:	290 mm x 290 mm
Ø Main Tube:	48 x 3 mm
Weight:	1834 kg
Truss Sys.:	FGP



MR2 Roof System incl. B1 canopy

MR2106 **10 x 6 m**

MILOS

Specifications:

Height (m):	9.43 m
Width (m):	12.74 m
Depth (m):	10.97 m
Inner Width:	1042 mm
Inner Depth:	6.65 mm
Size:	290 mm x 290 mm
Ø Main Tube:	48 x 3 mm
Weight:	1785 kg
Truss Sys.:	FGP



MR2 Roof System incl. B1 canopy

MR2108 **10 x 8 m**

MILOS

Specifications:

Height (m):	9.43 m
Width (m):	12.74 m
Depth (m):	10.97 m
Inner Width:	10420 mm
Inner Depth:	8.65 mm
Size:	290 mm x 290 mm
Ø Main Tube:	48 x 3 mm
Weight:	1950 kg
Truss Sys.:	FGP

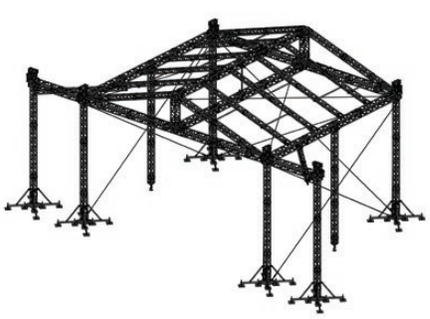

MR2 Roof System incl. PA Wings B1 canopy

MR21210PA **12 x 10 m**

MILOS

Specifications:

Height (m):	9.43 m
Width (m):	12.74 m
Depth (m):	10.97 m
Size:	290 mm x 290 mm
Ø Main Tube:	48 x 3 mm
Weight:	2100 kg
WLL (kg):	3480 kg
Truss Sys.:	FGP



Half Connector male PQ + pin MILOS

CON63PIN PIN-CON63



Metal Deco-20 Triangle - Base Plate SHOWGEAR

MDT20BP For MDT



Truss Transport Clip Pro-30 truss MILOS

73056 TRA-CLI-2XD50 - Black



Truss Carrier for Pro-30 SHOWGEAR

73057 Rubber



Truss Castor for Pro-30 SHOWGEAR

73052 3 Swiveling Castors



Single Tube Cube MILOS

STC50 Cube UNI - without half Connectors



Single Tube Hinge MILOS

STH50 Hinge UNI - without half Connectors



Book Corner Pro-30 Truss MILOS

BC30 QBB1 - Receivers or half Connectors not included



Stabiliser Base with Wheels SHOWGEAR

70030 Steel



Safety Spring MILOS

22SPRING SRP M - Deco-22 Truss



Deco-22 Truss - Pin MILOS

PIN22 PM - Conical



Deco-22 Truss - Pin MILOS

PIN22M6 PM M6 - Conical - with M6 Thread



Decotruss Conical Spigot MILOS

DA22CS CCM



Deco-22 Triangle truss - Triangle MILOS

DT22BP MWPT - female



Deco-22 Triangle truss - Triangle MILOS

DT22BP2 MWPTC - male



Deco-22 Quatro Truss - Square MILOS

DQ22BP MWPQ - female



Deco-22 Quatro Truss - Square MILOS

DQ22BP2 MWPQC - male



Safety Spring MILOS

30SPRING SRP B - Pro-30 P/F/G Truss



G<>F Truss Adapter MILOS

PACSGF CCF/U



G<>P Truss Adapter MILOS

PACSGP CCB/U



P<>F Truss Adapter MILOS

PACSPF CCB/F



Pro-30 P/F/G Truss - Pin MILOS

PIN30 PB - Conical



Pro-30 P/F/G Truss - Pin SHOWGEAR

PIN30M8 Conical, with M8 Thread



Drop Arm Set
SHOWGEAR

70020	50-85 cm, black
70021	100-135 cm black
70022	150-185 cm black



Truss Top Ring 1000 mm
MILOS

70497	F-system - F
70498	U-system - G
70499	P system - P



Truss Carrier Pro-30
SHOWGEAR

73051	Black
73050	White



Truss Protection Ring for 48 - 52 mm tube
SHOWGEAR

73055	Black
73054	Grey



Aluminium Arm Coupler 500 mm
MILOS

75201	CELL213L2 - black
75200	CELL213L2 - silver



Half Connector Male M10
MILOS

BPFACS10	CON88F - F
BPGACS10	CON88U - G
BPPACS10	CON88B - P



Half Connector Male M12
MILOS

CON63F	CON63F - F
CON63U	CON63U - G
CON63	CON63B - P



Deco-22 Truss - Spacer
MILOS

DASP10	CC MD 10 - 10 mm
DASP20	CC MD 20 - 20 mm



Half Conical Spigot M12
MILOS

FACS12	CCF M12 - F
GACS12	CCU M12 - G
PACS12	CCB M12 - P



Pro-30 Square F Truss - Female Multicube Receiver
MILOS

FQ30MCFC	CON25F - F
PQ30MCFC	CON25B -P
GQ30MCFC	CON25U - G



Pro-30 Step - male base plate
MILOS

FS30BP2	FWPDC - F
PS30BP2	BWPDC - P
GS30BP2	UWPDC - G



H-Downrigger
SHOWGEAR

70473	F Truss - Aluminium
70474	G Truss - Aluminium
70473B	F Truss - Black
70474B	G Truss - Black



Multi Cube Eco
MILOS

MC30GFB	QC-M290 - Black (GQ/FQ)
MC30PB	QC-M290B - Black (PQ)
MC30GF	QC-M290U - Alu (GQ/FQ)
MC30P	QC-M290B - Alu (PQ)



Pro-30 Square Truss - Square Base Plate Female
MILOS

FQ30BP	FWPQ - F
GQ30BP	UWPQ - G
PQ30BP	BWPQ - P



Pro-30 Square Truss - Square Base Plate Male
MILOS

FQ30BP2	FWPQC - F
GQ30BP2	UWPQC - G
PQ30BP2	BWPQC - P



Pro-30 F Truss - Spacer
MILOS

FASP10	CCFD10 - 10 mm
FASP20	CCFD20 - 20 mm
FASP30	CCFD30 - 30 mm
FASP40	CCFD40 - 40 mm
FASP50	CCFD50 - 50 mm



Pro-30 G Truss - Spacer
MILOS

GASP10	CCUD10 - 10 mm
GASP20	CCUD20 - 20 mm
GASP30	CCUD30 - 30 mm
GASP40	CCUD40 - 40 mm
GASP50	CCUD50 - 50 mm



Pro-30 P Truss - Spacer
MILOS

PASP10	CCBD10 - 10 mm
PASP20	CCBD20 - 20 mm
PASP30	CCBD30 - 30 mm
PASP40	CCBD40 - 40 mm
PASP50	CCBD50 - 50 mm



Pro-30 Step F Truss - Step base plate Female
MILOS

FS30BP	FWPD - F
GS30BP	UWPD - G
PS30BP	BWPD - P



Pro-30 Triangle F Truss - Triangle base plate Female
MILOS

FT30BP	FWPT - F
GT30BP	UWPT -G
PT30BP	BWPT - P



Pro-30 Triangle F Truss - Triangle base plate Male
MILOS

FT30BP2	FWPTC - F
GT30BP2	UWPTC - G
PT30BP2	BWPTC - P



Pro-30 Square - Multicube Connector M12
MILOS

FQ30MCMC	CON56F - F
GQ30MCMC	CON56U - G
PQ30MCMC	CON56B - P



Single Downrigger
SHOWGEAR

70477B	Black (FT/FQ)
70478B	Black (GT/GQ)
70477	Alu (FT/FQ)
70478	Alu (GT/GQ)



Pro-30 F Truss - Conical spigot
MILOS

FACSM	CCF - F
GACSM	CCU - G
PACSM	CCB - P



T-Downrigger

SHOWGEAR

- **70475B** Black (FT/FQ)
- **70476B** Black (GT/GQ)
- **70475** Alu (FT/FQ)
- **70476** Alu (GT/GQ)



Truss Insert Ring

SHOWGEAR

- **70502** 80 cm - FQ System
- **70503** 80 cm - GQ System
- **70504** 115 cm - FQ System
- **70505** 115 cm - GQ System
- **70506** 145 cm - FQ System
- **70507** 145 cm - GQ System



Universal Baseplate

WENTEX

- **BP600** 600 x 600 mm
- **BP800** 800 x 800 mm



Truss Tower

SHOWGEAR

- **70000** 1.0 m
- **70001** 1.5 m
- **70002** 2.0 m



Truss Tower Spare Cloth

SHOWGEAR

- **700004** 1 m, black
- **700014** 1.5 m, black
- **700024** 2 m, black
- **700003** 1 m, white
- **700013** 1.5 m, white
- **700023** 2 m, white



Mobile DJ Truss Stand

70148

SHOWGEAR

Specifications:

Width (mm):	3680 mm
Height (mm):	2600 mm
Length (m):	1 m
Ø Main Tube:	50 mm
Weight:	36 kg

FEATURES:

- Heavy duty stand
- Quick and easy to build
- Compact and lightweight
- Compatible with GS system

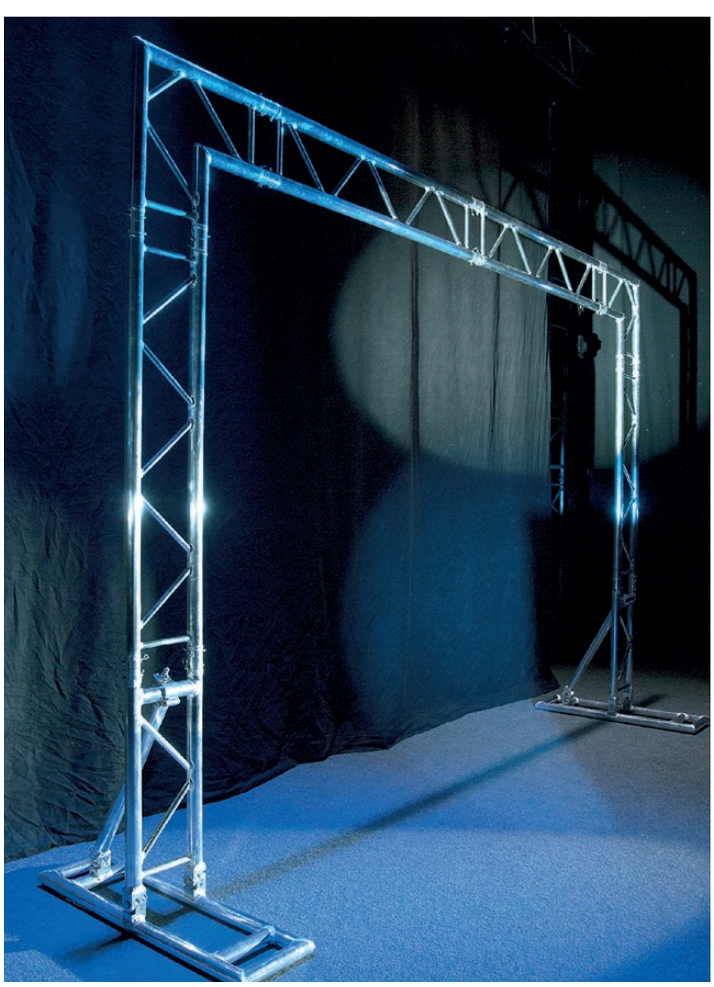



Chain Hoist 250 kg manual

70249 **Lifting height 7 m**
70224 **Lifting height 8 m**
70225 **Lifting height 10 m**
70226 **Lifting height 12 m**
ELLER

Specifications:

Chain:	Grade 80
Lift Height:	7 m
WLL (T):	0.25 T
Length (mm):	95 mm
Height (mm):	259 mm
Width (mm):	100 mm
Weight:	4 kg



Chain Hoist 500 kg VBG-8 economy manual

70463 **Lifting height 8 m**
70464 **Lifting height 10 m**
70465 **Lifting height 12 m**
ELLER

Specifications:

Chain:	Grade 80
Lift Height:	7 m
WLL (T):	0.25 T
Length (mm):	95 mm
Height (mm):	259 mm
Width (mm):	100 mm
Weight:	4 kg



Chain Hoist 1000 kg VBG-8 economy

70466 **Lifting height 8 m**
70467 **Lifting height 10 m**
70468 **Lifting height 12 m**
ELLER

Specifications:

Chain:	Grade 80
Lift Height:	7 m
WLL (T):	0.25 T
Length (mm):	95 mm
Height (mm):	259 mm
Width (mm):	100 mm
Weight:	4 kg



Manual Chain Hoist 1000 kg

70255 **Lifting height 3 m**
70256 **Lifting height 6 m**
70229 **Lifting height 8 m**
70257 **Lifting height 10 m**
70230 **Lifting height 12 m**

ELLER

Specifications:

Chain:	Grade 80
Lift Height:	7 m
WLL (T):	0.25 T
Length (mm):	95 mm
Height (mm):	259 mm
Width (mm):	100 mm
Weight:	4 kg



Manual Chain Hoist 500 kg

70250 **Lifting height 3 m**
70251 **Lifting height 6 m**
70227 **Lifting height 8 m**
70252 **Complete Lifting height 10 m**
70228 **Lifting height 12 m**

ELLER

Specifications:

Chain:	Grade 80
Lift Height:	7 m
WLL (T):	0.25 T
Length (mm):	95 mm
Height (mm):	259 mm
Width (mm):	100 mm
Weight:	4 kg



PLE-30-40 - Direct Control Chain Hoist Controller - Box version

70236 **4-Channel**
70237 **8-Channel**

Specifications:

Pwr. Supp.:	400 VAC 3 Phase
Rated Curr. (A):	10 A
Pwr. Conn. In.:	CEE5P 32 A
Pwr. Conn. Out.:	CEE4P 16A / HAN16 Out
MCD Rated Curr.:	10 A
MCB Class:	Class D
RCCB Class:	C
Length (mm):	550 mm
Height (mm):	220 mm
Width (mm):	465 mm
Weight:	11.75 kg



PLE-30-040 - Direct Control Chain Hoist Controller

70282 **4-Channel**
70283 **8-Channel**

ELLER

Specifications:

Pwr. Supp.:	400 VAC 3 Phase
Pwr. Conn. In.:	CEE5P 32 A
Pwr. Conn. Out.:	CEE4P 16A / HAN16 Out
MCD Rated Curr.:	10 A
MCB Class:	Class D
Length (mm):	483 mm
Height (mm):	200 mm
Width (mm):	178 mm
Weight:	10 kg
R.U.:	4 U



CM Lodestar New Line 500 kg

70710 **20 m chain, Direct Control (DC)**

LODESTAR

Specifications:

Pwr. Supp.:	400 VAC 3 Phase
Pwr. Conn. In.:	CEE4P 16 A
Speed:	4 m/min
SF:	5:1
Lift Height:	20 m
WLL (T):	0.5 T
Length (mm):	530 mm
Height (mm):	168 mm
Width (mm):	220 mm
Weight:	30 kg



CM Lodestar New Line 1000 kg

70711 **20 m chain, Direct Control (DC)**

LODESTAR

Specifications:

Pwr. Supp.:	400 VAC 3 Phase
Pwr. Conn. In.:	CEE4P 16 A
Speed:	4 m/min
Lift Height:	20 m
WLL (T):	1 T
Length (mm):	582 mm
Height (mm):	208 mm
Width (mm):	320 mm
Weight:	50 kg



GIS Electric Chainhoist 250 kg

70790 **20 m, D8+**

GIS

Specifications:

Pwr. Supp.:	400 VAC 3 Phase
Pwr. Conn. In.:	CEE4P 16 A
Speed:	4 m/min
SF:	8:1
Lift Height:	20 m
WLL (T):	0.25 T
Weight:	19 kg



GIS Electic Chain Hoist 500 kg

70791 **20 m, D8+**

GIS

Specifications:

Pwr. Supp.:	400 VAC 3 Phase
Pwr. Conn. In.:	CEE4P 16 A
Speed:	4 m/min
SF:	8:1
Lift Height:	20 m
WLL (T):	0.5 T
Weight:	35 kg





Chain Bag for Chain Hoist 0.25T

70279 **150 mm x 200 mm**

ELLER

Specifications:

Length (mm):	150 mm
Height (mm):	220 mm
Width (mm):	150 mm
Weight:	0.745 kg



Chain Bag for Chain Hoist 0.5T

70278 **175 mm x 225 mm**

ELLER

Specifications:

WLL (T):	0.5 T
Length (mm):	175 mm
Height (mm):	225 mm
Width (mm):	175 mm
Weight:	0.745 kg



Chain Bag for Chain Hoist 1T

70277 **190 mm x 370 mm**

ELLER

Specifications:

WLL (T):	1 T
Length (mm):	200 mm
Height (mm):	370 mm
Width (mm):	200 mm
Weight:	0.745 kg



Chain Bag for Chain Hoist

70245 **260 mm x 700 mm**

SHOWGEAR

Specifications:

Length (mm):	260 mm
Height (mm):	700 mm
Width (mm):	260 mm
Weight:	0.9 kg



Chain Bag for Chain Hoist small

70242 **250 mm x 460 mm**

SHOWGEAR

Specifications:

Length (mm):	460 mm
Height (mm):	150 mm
Width (mm):	250 mm
Weight:	1.46 kg



Chain Bag for Chain Hoist medium

70243 **260 mm x 560 mm**

SHOWGEAR

Specifications:

Length (mm):	560 mm
Height (mm):	150 mm
Width (mm):	260 mm
Weight:	1.46 kg



Quick Lock Bracket for Spectral M800 / Revo SHOWTEC

43639 Clamp



10 - 55 mm Multigrip Clamp SHOWTEC

75132 SWL: 25 kg, black, TÜV



Spigot for Multigrip Clamp SHOWTEC

75133 M10 x 25 mm



Spigot for Multigrip Clamp SHOWTEC

75134 3 / 8" - 16 mm



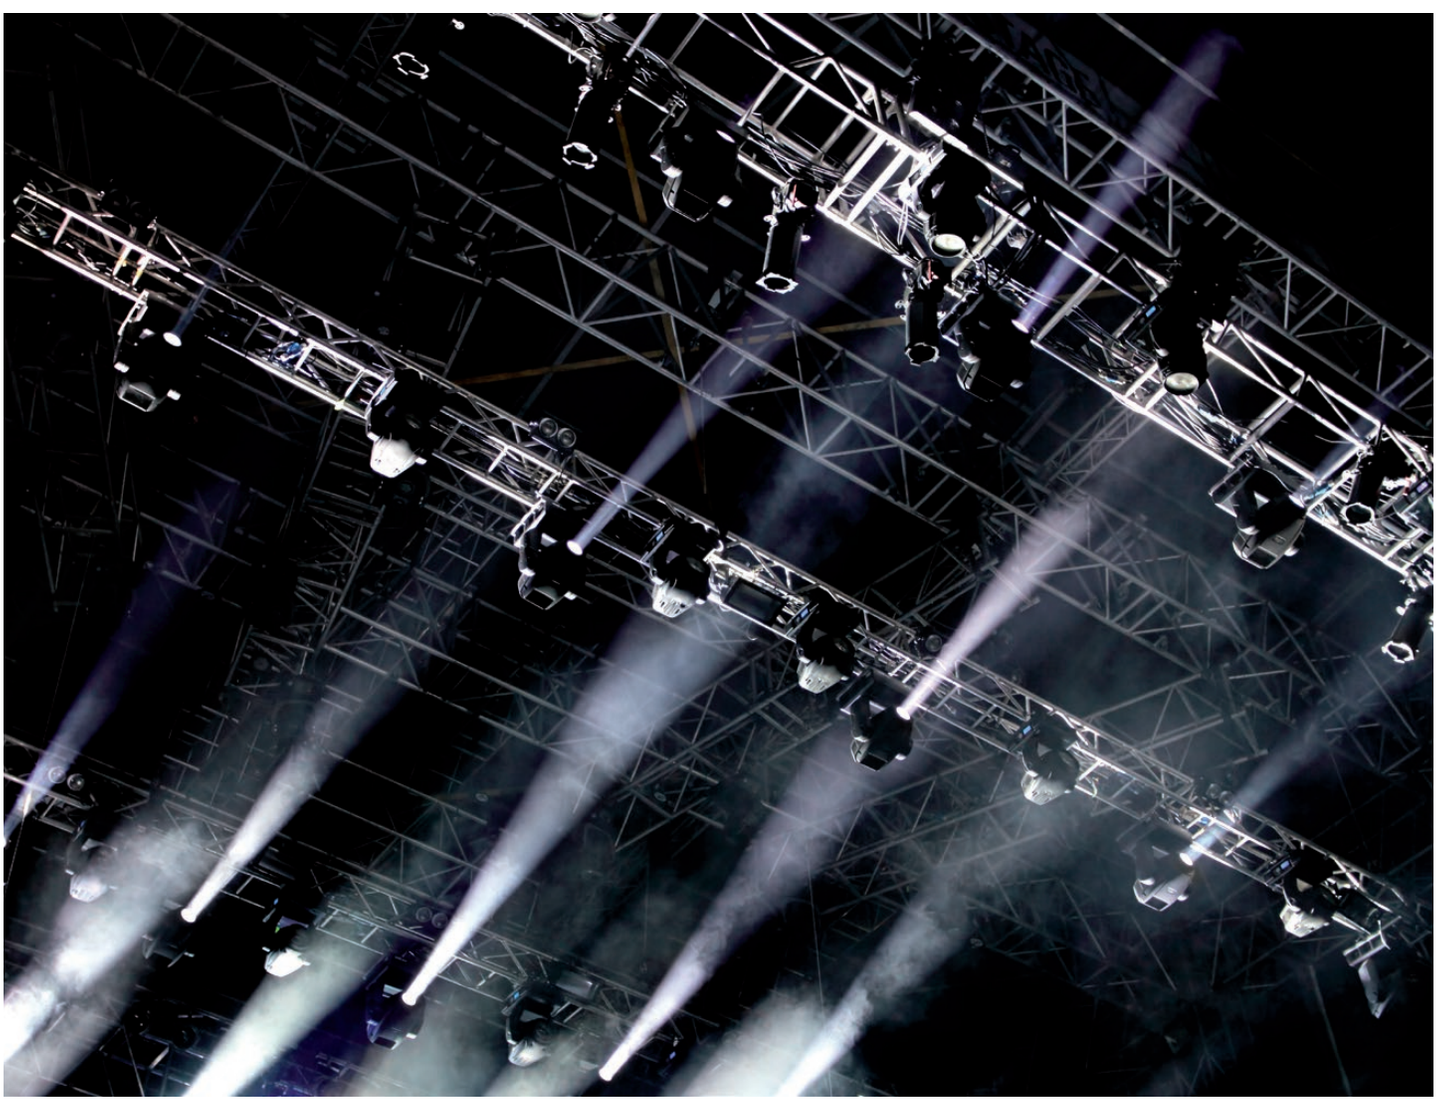

Separate Slide Part
SHOWGEAR

70382 10 mm mounting



Qwiqr Quick Release Adaptor
SHOWGEAR

75140 SWL: 50 kg, 10 mm mounting



32 mm Pipe Clamp
SHOWGEAR

70121 SWL: 20 kg, Steel, black



Stand Mount for 50 mm Tube
SHOWGEAR

70495 Inc. 28 mm TV Spigot, Adjustable 200 - 400 mm, black

Specifications:

SWL:	200Kg
Distance offset:	197 ~ 402 mm
Width:	76mm
Tube:	48 ~ 51mm
Spigot:	28mm



Bracket for Sunstrip LED, Pixelbar 16 Q6 & Edison Series
SHOWGEAR

75150 SWL: 150 kg, Aluminium, 106 mm



50 mm Heavy Duty Pipe Clamp
SHOWGEAR

70109S SWL: 30 kg, Steel, silver
70109B SWL: 30 kg, Steel, black



50 mm Heavy Duty Pipe Clamp
SHOWGEAR

75008S SWL: 30 kg, Steel, silver
75008B SWL: 30 kg, Steel, black



Tent Clamp
SHOWGEAR

70370 SWL: 150 kg, Zinc, silver
70370B SWL: 150 kg, Zinc, black



Mini Tent Clamp
SHOWGEAR

70390 SWL: 15 - 25 kg, Metal, silver
70390B SWL: 15 - 25 kg, Metal, Black



Slide Complete
SHOWGEAR

70381 SWL: 100 kg, 10 mm mounting



50 mm Universal PVC Pipe Clamp
SHOWGEAR

70114 SWL: 30 kg, PVC, black



50 mm Pipe Clamp Long with Protection
SHOWGEAR

70099 SWL: 20 kg, Steel, black



50 mm SlimLine Half Coupler

SHOWGEAR

75001S SWL: 100 kg, Aluminium, silver
75001B SWL: 100 kg, Aluminium, black



50 mm Half Coupler

SHOWGEAR

75003 SWL: 300 kg, Aluminium, silver
75003B SWL: 300 kg, Aluminium, black



32 mm Compact Half Coupler

SHOWGEAR

75000S SWL: 50 kg, Aluminium, silver
75000B SWL: 50 kg, Aluminium, black



50 mm Quick Coupler

SHOWGEAR

75006 SWL: 100 kg, Aluminium, silver
75006B SWL: 100 kg, Aluminium, black



50 mm Compact Half Coupler

SHOWGEAR

75002B SWL: 150 kg, Aluminium, black
75002 SWL: 150 kg, Aluminium, silver



50 mm Q-Trigger Coupler

SHOWGEAR

75007S SWL: 100 kg, Aluminium, silver
75007B SWL: 100 kg, Aluminium, black



50 mm Swivel Coupler

SHOWGEAR

75005 SWL: 500 kg, Aluminium, silver
75005B SWL: 500 kg, Aluminium, black



50 mm Compact Swivel Coupler

SHOWGEAR

75004 SWL: 300 kg, Aluminium, silver
75004B SWL: 300 kg, Aluminium, black



50 mm Universal Moving Head Clamp

SHOWGEAR

70368 SWL: 75 kg, mounting 72 mm - 194 mm



50 mm Quick Coupler
SHOWTEC

75110 SWL: 150 kg, Aluminium, silver
75111 SWL: 150 kg, Aluminium, black



32 mm Half Coupler
SHOWTEC

75050 SWL: 100 kg, Aluminium, silver
75051 SWL: 100 kg, Aluminium, black



50 mm Half Coupler
SHOWTEC

75060 SWL: 500 kg, Aluminium, silver
75061 SWL: 500 kg, Aluminium, black



50 mm Fast Coupler
SHOWTEC

75100 SWL: 150 kg, Aluminium, silver
75101 SWL: 150 kg, Aluminium, black



50 mm Half Coupler + Eye
SHOWTEC

75070 SWL: 340 kg, Aluminium, silver
75071 SWL: 340 kg, Aluminium, black



50 mm Half Coupler + Eye
SHOWTEC

75072 SWL: 230 kg, Aluminium, silver
75073 SWL: 230 kg, Aluminium, black



50 mm Compact Coupler
SHOWTEC

75080 SWL: 75 kg, Aluminium, silver
75081 SWL: 75 kg, Aluminium, black



50 mm Half Coupler
SHOWTEC

75062 SWL: 300 kg, Aluminium, silver
75063 SWL: 300 kg, Aluminium, black



50 mm Swivel Coupler
SHOWTEC

75092 SWL: 300 kg, Aluminium, silver
75093 SWL: 300 kg, Aluminium, black



50 mm Swivel Coupler
SHOWTEC

75090 SWL: 500 kg, Aluminium, silver
75091 SWL: 500 kg, Aluminium, black



50 mm Half Coupler DOUGHTY

70301 SWL: 500 kg, Metal, silver



50 mm Half Coupler DOUGHTY

70308 SWL: 750 kg, Metal, silver



50 mm Half Coupler DOUGHTY

70302 SWL: 750 kg, Metal, silver



50 mm Slimline Coupler DOUGHTY

70377 SWL: 750 kg, Aluminium, black



32 mm Swivel Coupler DOUGHTY

70313 SWL: 100 kg, Aluminium, silver



32 mm Half Coupler DOUGHTY

70311 SWL: 100 kg, Aluminium, silver



50 mm Swivel Coupler DOUGHTY

70306 SWL: 750 kg, Aluminium, silver



50 mm Swivel Coupler DOUGHTY

70305 SWL: 500 kg, Aluminium, silver



32 mm Half Coupler with Lifting Eye DOUGHTY

70312 SWL: 100 kg, Aluminium, silver



50 mm Half Coupler with Lifting Eye DOUGHTY

70307 SWL: 340 kg, Aluminium, silver



50 mm Half Coupler with Lifting Eye DOUGHTY

70303 SWL: 340 kg, Aluminium, silver



50 mm Trigger Clamp DOUGHTY

70322 SWL: 200 kg, Aluminium, silver



50 mm TV Quick Clamp
DOUGHTY

70314 SWL: 250 kg, Aluminium, 29 mm Receiver



50 mm Half Coupler with TV Spigot
DOUGHTY

70304 SWL: 200 kg, Aluminium, 28 mm TV Spigot



51 mm Claw Clamp
DOUGHTY

70323 SWL: 100 kg, Aluminium, for 47 mm plug



Stand Mount for 50 mm Tube
DOUGHTY

70324 Inc. 28 mm TV Spigot, Adjustable 200 - 400 mm, black
70324S Adjustable 200 - 400 mm, silver



Stand Adapter for 29 mm Spigot
DOUGHTY

70325 SWL: 50 kg, Metal, for 32mm stand tube



Stand Mount for 50 mm Step Truss
DOUGHTY

70326 SWL: 200 kg, Steel, 28 mm Spigot , 200 - 400 mm support



LWH-1 LED Wall Hanger for Pro-30 / 40 truss
SHOWGEAR

75210 SWL: 500 kg, Metal, black



50 mm Quicktrigger Slimline basic
DOUGHTY

70315 SWL: 100 kg, Aluminium, black
70315S SWL: 100 kg, Aluminium, silver



50 mm Universal Truss Hook Clamp
DOUGHTY

70328 SWL: 40 kg, Metal, silver



32 mm Mini Pipe Clamp long
DOUGHTY

70321 SWL: 15 kg, Metal, silver



28mm TV Spigot
DOUGHTY

70398 SWL: 100 kg, Metal, M10



Space Saver
DOUGHTY

70394 SWL: 100 kg, Aluminium, M10



50 mm Twenty Clamp
DOUGHTY

70332 SWL: 20 kg, Aluminium, black



Safety Cable 3 mm, BGV-C1 SHOWGEAR

71700 WLL: 5 kg, 60 cm, black
71710 WLL: 8 kg, 100 cm, black



Safety Cable 4 mm, BGV-C1 SHOWGEAR

71701 WLL: 10 kg, 60 cm, black
71711 WLL: 10 kg, 100 cm, black



Safety Cable 5 mm, BGV-C1 SHOWGEAR

71702 WLL: 15 kg, 60 cm, black
71712 WLL: 15 kg, 100 cm, black



Safety Cable 6 mm, BGV-C1 SHOWGEAR

71703 WLL: 20 kg, 60 cm, black
71713 WLL: 20 kg, 100 cm, black



Safety Cable SHOWGEAR

70140 WLL: 40 kg, 50 cm, Ø 4 mm, silver
70141 WLL: 40 kg, 75 cm, Ø 6 mm, silver



Safety Cable with Safety Ring SHOWGEAR

70147 WLL: 80 kg, 50 cm, Ø 4 mm, silver
70152 WLL: 80 kg, 75 cm, Ø 6 mm, silver



Safety Cable 3 mm, BGV-C1 SHOWGEAR

70170 WLL: 5 kg, 60cm, silver
70159 WLL: 20 kg, 60cm, silver



Safety Cable 5 mm, BGV-C1 SHOWGEAR

70169 WLL: 20 kg, 100cm, silver
70167 WLL: 36 kg, 100cm, silver
70168 WLL: 295 kg, 100cm, silver



Safety Cable 3 mm, BGV-C1

SHOWGEAR

70450 WLL: 20 kg, 60cm, silver
70451 WLL: 20 kg, 60cm, black
70452 WLL: 20 kg, 100cm, silver
70453 WLL: 20 kg, 100cm, silver



Safety Cable 4 mm, BGV-C1

SHOWGEAR

70454 WLL: 40 kg, 60cm, silver
70456 WLL: 40 kg, 60cm, black
70457 WLL: 40 kg, 60cm, black



Safety Cable 5 mm, BGV-C1

SHOWGEAR

70459 WLL: 60 kg, 60cm, silver
70460 WLL: 60 kg, 60cm, black
70461 WLL: 60 kg, 100cm, silver
70462 WLL: 60 kg, 100cm, black



Safety Cable 3 mm, BGV-C1

SHOWGEAR

70164 WLL: 5 kg, 60cm, silver



Black wire rope 6 mm, BGV-C1

SHOWGEAR

71750 WLL: 135 kg, with cable glider and 6m cable



Safety Cable 3 mm, Light Duty

SHOWGEAR

70110 WLL: 50 kg, 50 cm, black - Not Certified



Safety Cable 4 mm, Heavy Duty

SHOWGEAR

70111 WLL: 75 kg, 75 cm, black - Not Certified



Sling 1 Ton WLL. Black

ELLER

70400 Working length 1 m
70401 Working length 1.5 m
70402 Working length 2 m
70403 Working length 3 m



Sling 2000 kg WLL - black

ELLER

70409 Working length 1 m
70410 Working length 1.5 m
70411 Working length 3 m



Steel Sling 1 Ton WLL. Black

ELLER

70412 Working length 0.5 m
70413 Working length 1 m
70414 Working length 1.5 m



Steel Sling 2 Ton WLL. Black

ELLER

70416 Working length 1 m
70417 Working length 1.5 m
70424 Working length 2 m



Steel 1 Ton WLL. - 10 mm 6 x 36 WS Core

ELLER

70440 Working length 1 m
70441 Working length 2 m
70442 Working length 3 m



Steel 1 Ton WLL. + PVC - 10 mm 6 x 36 WS Core

ELLER

70440P Working length 1 m
70441P Working length 2 m
70442P Working length 3 m



Steel 2 Ton WLL. - 14 mm 6 x 36 WS Core

ELLER

70443 Working length 1 m
70444 Working length 2 m



Steel 2 Ton WLL. + PVC - 14 mm 6 x 36 WS Core

ELLER

70443P Working length 1 m
70444P Working length 2 m
70445P Working length 3 m



Ellersafe - Full Body Entertainment Harness Set

ELLER

70604 Ellersafe



Petzl - Full Body Entertainment Harness Set

70605 Petzl



Beam Clamp

ELLER

70261 1 Ton, 75 mm - 230 mm
70262 2 Ton, 75 mm - 230 mm
70214 3 Ton, 80 mm - 322 mm



Beam Clamp with Shackle

ELLER

70274 2 Ton, 80 mm - 190 mm



Beam Clamp with Shackle

ELLER

70275 3 Ton, 127 mm - 350 mm
70276 3000 kg Width 127-350 mm with shackle



Ceiling Support with Shackle

MILOS

73060 1 Ton, 290 - 400 mm, Aluminium
73060B 1 Ton, 290 - 400 mm, Black



Cable Glider 50SV II M12

REUTLINGER

70433 WLL : 60 kg with Ø 4 mm, 90 kg with Ø 5 mm



Cable Glider 50SV II ZW Doughty Halfc. Slimline T58081

REUTLINGER

70435 WLL : 60 kg with Ø 4 mm, 90 kg with Ø 5 mm



Cable Glider 80SV II M20 Flying Eye 72 mm

REUTLINGER

70437 WLL : 60 kg with Ø 4 mm, 90 kg with Ø 5 mm



The Moustache Single Tube Clamp

SHOWGEAR

75120 Black
75121 Silver



50 mm Fix Clamp
SHOWGEAR

75122 Silver
75123 Black



Stage Weight 12.5 kg
SHOWGEAR

70392 5 m



Strap 25 mm
ELLER

71000 3 m
71001 5 m



Strap 25 mm
ELLER

71010 5 m, 500 kg



Strap 35 mm
ELLER

71011 3 m, 3000 kg
71012 5 m, 3000 kg



Strap 50 mm
ELLER

71013 9 m, 5000 kg



Double Strap 25mm
ELLER

71014 3 m, 500 kg
71015 5 m, 500 kg



Double Strap 35mm
ELLER

70418 5 m, 3000 kg
71016 8 m, 3000 kg



Double Strap 50 mm
ELLER

71017 5 m, 5000 kg
70419 8 m, 5000 kg
70420 9 m, 5000 kg



Chain Shackle, Shoulder Bolt
ELLER

70470 WLL: 2 Ton, black
70471 WLL: 3.25 Ton, black
70472 WLL: 4.75 Ton, black
70427 WLL: 6.5 Ton, silver



Chain Shackle, Nut - Bolt
ELLER

70428 WLL: 1 Ton, silver
70426 WLL: 6.5 Ton, silver



Backdrop Black
SHOWGEAR

89010 3 m (W) - 3.5 m (H)
89011 6 m (W) - 3.5 m (H)
89020 3 m (W) - 4.5 m (H)
89021 6 m (W) - 4.5 m (H)
89023 3 m (W) - 6 m (H)
890261 6 m (W) - 6 m (H)
89030 3 m (W) - 9 m (H)
89031 6 m (W) - 9 m (H)



Glamour Backdrop Black
SHOWGEAR

89121 3 m (W) - 6 m (H)
89122 3 m (W) - 3 m (H)
89123 3 m (W) - 4 m (H)



Square Cloth white
SHOWGEAR

89060 1.4 m (W) - 1.4 m (H)
89062 3.4 m (W) - 3.4 m (H)
89063 4.4 m (W) - 4.4 m (H)
89064 5.4 m (W) - 5.4 m (H)



Deko Flanel
WENTEX

89211 1.3 m (W) - 60 m (L), white
89212 1.3 m (W) - 60 m (L), black



Deko Molton
WENTEX

89200 3 m (W) - 60 m (L), white
89201 3 m (W) - 60 m (L), light grey
89208 3 m (W) - 60 m (L), black
89202 3 m (W) - 60 m (L), dark grey
89203 3 m (W) - 60 m (L), deep blue
89204 3 m (W) - 60 m (L), navy blue
89206 3 m (W) - 60 m (L), red

Deko Backdrop Black
SHOWGEAR

89131 3 m (W) - 6 m (H)
89132 3 m (W) - 3 m (H)
89133 3 m (W) - 4 m (H)



Skirt for Stage Elements Black, unpleated
SHOWGEAR

89087 6 m (W) - 0.2 m (H)
89088 6 m (W) - 0.4 m (H)
89051 6 m (W) - 0.6 m (H)
89089 6 m (W) - 0.8 m (H)
89050 6 m (W) - 1 m (H)



Deko Molton Black, Bolt
WENTEX

89260 60 m (L) - 0.2 m (H)
89261 60 m (L) - 0.4 m (H)
89262 60 m (L) - 0.6 m (H)
89263 60 m (L) - 0.8 m (H)
89264 60 m (L) - 1 m (H)



Stretch Shape Triangle White
WENTEX

89145 1.25 m (W) - 1.25 m (H)
89146 1.25 m (W) - 1.85 m (H)
89147 1.25 m (W) - 2.5 m (H)
89150 2.5 m (W) - 2.5 m (H)
89148 2.5 m (W) - 3.75 m (H)
89149 2.5 m (W) - 5 m (H)

Stretch Shape Square White
WENTEX

89152 1.25 m (W) - 1.25 m (H)
89153 1.25 m (W) - 1.85 m (H)
89154 1.25 m (W) - 2.5 m (H)



Stretch Shape Square Large White
WENTEX

89151 2.5 m (W) - 2.5 m (H)
89155 2.5 m (W) - 3.75 m (H)
89156 2.5 m (W) - 5 m (H)



Stretch Shape Diamond White
WENTEX

89170 1.25 m (W) - 1.25 m (H)
89171 1.25 m (W) - 1.85 m (H)
89172 1.25 m (W) - 2.5 m (H)

Stretch Shape Diamond Large White
WENTEX

89173 2.5 m (W) - 2.5 m (H)
89174 2.5 m (W) - 3.75 m (H)
89175 2.5 m (W) - 5 m (H)

Truss Stretch Cover, white
SHOWGEAR

89220 100 cm
89221 200 cm
89222 300 cm



Truss Stretch Cover, black
SHOWGEAR

89230 100 cm
89231 200 cm
89232 300 cm



Truss Stretch Cover
SHOWGEAR

89223 30 m roll, White
89233 30 m roll, Black



Tube Connector - 50 mm
WENTEX

89651



Base Plate 45 x 8 cm

89670



WENTEX

U-Torque Bracket for Support Profile

89666



WENTEX

Star Dream

40427 6x3 m - 144 white LEDs - incl. Controller
40428 6x4 m - 192 white LEDs - incl. Controller
40429 6x3 m - 128 RGB LEDs - incl. Controller
40430 6x4 m - 128 RGB LEDs - incl. Controller

SHOWTEC

Specifications:

		Pwr. Conn. In.:	Pro Power Blue
		DMX Conn. in:	XLR 3P
Light Src. Type:	LED	DMX Conn. out:	XLR 3P
LED Colour Type:	White	Height (m):	3 m
DMX Ch.:	5 / 12	Width (m):	6 m
Pwr. Supp.:	100-240 VAC 50-60 Hz	Weight Fabric:	300 g/m²
Pwr. Cons.:	100 W	Fire Ret.:	BS EN 1101:1996+A1:2006

FEATURES:
- Certified Original Backdrop curtain with Velcro and eyelets
- 144 white LEDs in 8 groups
- Built-in controller

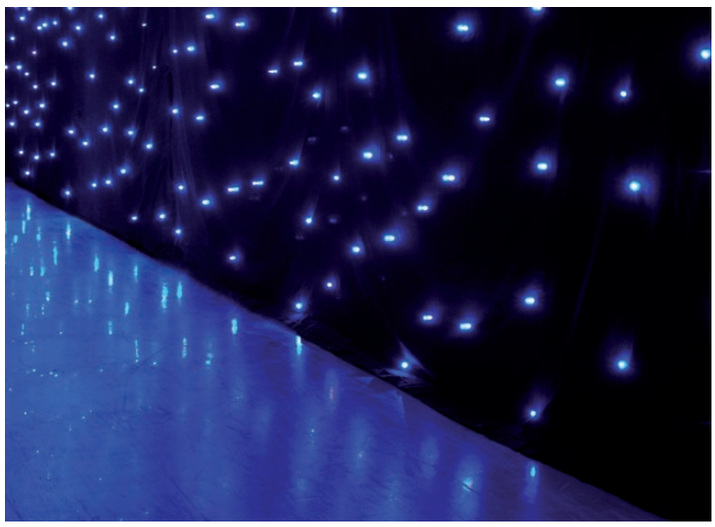

Base Plate - Powder coated

WENTEX

89300 350 mm (L) x 300 mm (W) - 4 kg, black
89301 450 mm (L) x 450 mm (W) - 8 kg, black
89302 600 mm (L) x 600 mm (W) - 14 kg, black
89303 350 mm (L) x 300 mm (W) - 4 kg, white
89304 450 mm (L) x 450 mm (W) - 8 kg, white
89305 600 mm (L) x 600 mm (W) - 14 kg, white



Base Plate Pin, Orange

WENTEX

89310 100 mm (H)
89311 200 mm (H)
89312 400 mm (H)



Base Plate Cover, White

WENTEX

89317 450 mm (L) x 450 mm (W)
89318 600 mm (L) x 600 mm (W)

Fixed Upright - Powder coated

WENTEX

89320 120 cm (H), black



Telescopic Upright 2-way

WENTEX

89326 120 cm (H) - 180 cm (H), White
89327 120 cm (H) - 180 cm (H), Black



Telescopic Upright - 2-way

WENTEX

89329 180 cm (H) - 300 cm (H), White
89330 180 cm (H) - 300 cm (H), Black
89331 180 cm (H) - 420 cm (H), Black
89334 180 cm (H) - 420 cm (H), White



Telescopic Upright - 3-way

WENTEX

89331 180 cm (H) - 420 cm (H), Black
89334 180 cm (H) - 420 cm (H), White



Telescopic Drape Support

WENTEX

89340 90 cm (L) - 120 cm (L), Black
89339 90 cm (L) - 120 cm (L), White



Telescopic Drape Support WENTEX

89341 120 cm (L) - 180 cm (L), Black
89346 120 cm (L) - 180 cm (L), White



Telescopic Drape Support WENTEX

89342 180 cm (L) - 300 cm (L), Black
89347 180 cm (L) - 300 cm (L), White



4-way Connector Replacement Ø35 mm WENTEX

89543 Black
89549 White



4-way Connector Replacement Ø40.6 mm WENTEX

89542 Black
89548 White



4-way Connector Replacement Ø45.7 mm WENTEX

89551 Black
89550 White



4-way Connector Replacement Ø50.8 mm WENTEX

89540 Black
89547 White



Innovative Systems (round) Drape Support Adapter Kit WENTEX

89383 Inner Ø31 mm - outer Ø36 mm, Black



Rotary Knob for Drape Support WENTEX

89350 M10 x 12 mm, White
89351 M10 x 12 mm, Black



Rotary Knob for Upright WENTEX

89352 M10 x 20 mm, White
89353 M10 x 20 mm, Black



4-way connector for Upright WENTEX

89360 With 50 mm clamp



T-Bar 60 cm WENTEX

89391 Black



Single Spigot for Pipe & Drape WENTEX

89384 M10 x 20 mm



4-Point Connector
WENTEX

89390 Black



Angled Bracket for 4-way Connector
WENTEX

89512 Black



Flex Adapter for 4-way Connector
WENTEX

89533 Black (powder coated)



Angled Bracket with 4-way Connector
WENTEX

89514 With 50 mm clamp



Ropeholder for Upright
WENTEX

89515 Black



Rope for Bollard
WENTEX

89516B Black
89516R Red
89516U Blue



Wardrobe Strip
WENTEX

89518 25 cm, 8 hooks



Base Plate Trolley
MILOS

70590 For 8x 600 x 600 mm Base Plate



P&D Curtain Wagner Hook
WENTEX

89321 Black



P&D Curtain - Medium Gloss Satin, 165 gram/m² — WENTEX

89400 White, Unpleated, 280 cm (W) x 120 cm (H)
89401 Black, Unpleated, 280 cm (W) x 120 cm (H)



P&D Curtain - Medium Gloss Satin, 165 gram/m² — WENTEX

89415 Black, pleated, 300 cm (W) x 120 cm (H)
89419 Black, pleated, 300 cm (W) x 250 cm (H)
89411 Black, pleated, 300 cm (W) x 300 cm (H)
89413 Black, pleated, 300 cm (W) x 400 cm (H)
89422 Black, pleated, 300 cm (W) x 500 cm (H)



Voile CS Curtain, 55 gram/m² — SHOWGEAR

89460 Black, unpleated, 300 cm (W) x
89461 White, unpleated, 300 cm (W) x
89462 Black, unpleated, 300 cm (W) x
89463 White, unpleated, 300 cm (W) x 400 cm (H)



P&D Curtain - Dimout, 260 gram/m² — WENTEX

89448 White, pleated, 300 cm (W) x 400 cm (H)
89449 Black, pleated, 300 cm (W) x 400 cm (H)
89450 Yellow, pleated, 300 cm (W) x 400 cm (H)
89451 Red, pleated, 300 cm (W) x 400 cm (H)
89452 Blue, pleated, 300 cm (W) x 400 cm (H)
89453 Brown, pleated, 300 cm (W) x 400 cm (H)
89454 Light grey, pleated, 300 cm (W) x 400 cm (H)
89455 Dark grey, pleated, 300 cm (W) x 400 cm (H)



Bag - Soft Nylon, Black — WENTEX

89392 150 cm (L) x 16 cm (W) x 35 cm (H), Max Load: 25 kg
89394 210 cm (L) x 16 cm (W) x 35 cm (H), Max Load: 25 kg
89393 185 cm (L) x 16 cm (W) x 35 cm (H), Max Load: 25 kg
89395 250 cm (L) x 16 cm (W) x 35 cm (H), Max Load: 25 kg



String Curtain Grey, 220 gram/m² — WENTEX

89161 Unpleated, 300 cm (W) x 300 cm (H)
89164 Unpleated, 300 cm (W) x 400 cm (H)
89167 Unpleated, 300 cm (W) x 600 cm (H)



P&D Curtain - Medium Gloss Satin, 165 gram/m² — WENTEX

89414 White, pleated, 300 cm (W) x 120 cm (H)
89418 White, pleated, 300 cm (W) x 250 cm (H)
89410 White, pleated, 300 cm (W) x 300 cm (H)
89412 White, pleated, 300 cm (W) x 400 cm (H)



P&D Curtain - Molton CS, 300 gram/m² — WENTEX

89431 Black, pleated, 300 cm (W) x 120 cm (H)
89432 Black, pleated, 300 cm (W) x 250 cm (H)
89433 Black, pleated, 300 cm (W) x 300 cm (H)
89434 Black, pleated, 300 cm (W) x 400 cm (H)



P&D Curtain - Dimout, 260 gram/m² — WENTEX

89440 White, pleated, 300 cm (W) x 300 cm (H)
89441 Black, pleated, 300 cm (W) x 300 cm (H)
89442 Yellow, pleated, 300 cm (W) x 300 cm (H)
89443 Red, pleated, 300 cm (W) x 300 cm (H)
89444 Blue, pleated, 300 cm (W) x 300 cm (H)
89445 Brown, pleated, 300 cm (W) x 300 cm (H)
89446 Light grey, pleated, 300 cm (W) x 300 cm (H)
89447 Dark grey, pleated, 300 cm (W) x 300 cm (H)



P&D Chromakey Green Screen Curtain — WENTEX

89480 Unpleated, 300 cm (H) x 290 cm (W)
89481 Unpleated, 300 cm (H) x 590 cm (W)
89482 Unpleated, 400 cm (H) x 290 cm (W)
89483 Unpleated, 400 cm (H) x 590 cm (W)



String Curtain Black, 220 gram/m² — WENTEX

89162 Unpleated, 300 cm (W) x 300 cm (H)
89165 Unpleated, 300 cm (W) x 400 cm (H)
89168 Unpleated, 300 cm (W) x 600 cm (H)



String Curtain White, 220 gram/m² — WENTEX

89163 Unpleated, 300 cm (W) x 400 cm (H)
89166 Unpleated, 300 cm (W) x 600 cm (H)
89160 Unpleated, 300 cm (W) x 300 cm (H)



SF Connection Clip WENTEX

89682 For single sided frame



Connection Strip for Set Frame WENTEX

89668



Eurotrack - Rail, Black WENTEX

89500 200 cm (L), Anodised
89501 500 cm (L), Anodised



Eurotrack - Corner 90° - Black WENTEX

89505 R=1000 mm - stop 200 mm
89506 R=500 mm - stop 200 mm



Eurotrack - Ceiling Mount, Black WENTEX

89510 Powder coated



Eurotrack - Universal mounting bracket, Black WENTEX

89511 Powder coated



Eurotrack - Connection Strip, Black WENTEX

89513 Powder coated



Rope Guide, Black WENTEX

89519 3 Wheels, Powder coated



Rope Guide, Black WENTEX

89524 4 Wheels, Powder coated



Eurotrack - Wall Arm, Black WENTEX

89532 100 mm



Eurotrack - Sliding Nut WENTEX

89529 M10



Eurotrack - Runner - 2 wheel WENTEX

89520 White
89521 Black



Eurotrack - Heavy Duty (HD) Runner, Black WENTEX

89525 4 x 4 Wheels



Eurotrack - Return Pulley, Black WENTEX

89526 Time Wheel, 85 mm



Eurotrack - Rope Connector straight WENTEX

89536 for Heavy Duty Runner, black



Eurotrack - Double Wheel Pulley WENTEX

89527 Time Wheel, 85 mm, black



Eurotrack - Floor Pulley WENTEX

89530 Black



Eurotrack Ballast Pulley - 90 mm WENTEX

89531 Pulley Wheel 35 x 12 mm



Eurotrack - Overlap Arm WENTEX

89522 Black



Eurotrack - End stop WENTEX

89523 Black



Eurotrack - Ballast Bag - 5 kg WENTEX

89528 Black



Eurotrack - Cord 8 mm, 100 m WENTEX

89534 Black, on Spool
89535 White, on Spool



Rapido - Curtain Clamp 50 mm
WENTEX

89097 Black
89096 White



Key Ring for Rapido Curtain Clamp
WENTEX

89099 Bag of 100 pcs



Grippon Tube Curtain Clamp
SHOWGEAR

89105 For 32 - 51 mm tubes



Grippon Step Kabuki Cord, 6 m
SHOWGEAR

89107 Incl. 24 hooks



Banner Clamp for 48 - 51 mm tube
SHOWGEAR

75130 Black
75131 Silver



Holdon Midi Clip
HOLDON

89092 Black
89093 White



Holdon Mini Clip
HOLDON

89094 Black
89098 White



Shock Cord 25 cm
SHOWGEAR

89090 Black
89091 White



Velcro Loop, Spool, 2 cm wide, sew-on
SHOWGEAR

89100 Black, 100 m



Velcro Hook, Spool, 2 cm wide, self-adhesive
SHOWGEAR

89101 Black, 25 m



Durable Bags and Cases to protect your gear

Although we build our event equipment from high-quality materials, transport conditions are often quite ruthless and there is a big chance of breaking expensive hardware if it is not protected well. And if you damage just one item, you could be in trouble as it could degrade your show significantly. Bags and cases help prevent such events and will preserve the value and longevity of your equipment.

We make sure that not only the contents of our bags and cases are safe, but also those who operate them. We strive to make transportation lightweight, easy, fast, and safe for the benefit of rental companies and their crew. Our Universal Cases and Bags, like our Daily Cases, are not only used in the entertainment industry, but also for the safe shipping and transportation of other expensive or fragile goods.

We have constructed our Bags and Flight Cases from strong materials to withstand the rigours of frequent touring. In this section you will also find flight case hardware and foam for repairing damaged hardware or constructing new flight cases. Finalising hardware and accessories for your 19” rack, like rack lighting and 19” fan units, are also grouped in this section.





Case for Chimp 100

INFINITY

D7250 **Premium Line**





Specifications:

12.96 kg



Case for Banana Wing

INFINITY

D7262 **Premium Line**





Specifications:

11,6 kg



Case for Chimp 100 + Touchscreen

INFINITY

D7264 **Premium Line**







Specifications:

22 kg



Case for Chimp 300

INFINITY

D7251 **Premium Line**





Specifications:

22 kg



Case for Chimp Tour Pack

INFINITY

D7263 **Premium Line**





Specifications:

24 kg



Case for 2x iS-100

INFINITY

D7234 **Premium Line**





Specifications:

31,9 kg



Case for 2x iS-200/iB-5R

INFINITY

D7030 **Premium Line**





Specifications:

44 kg



Case for 2x iS-250

INFINITY

D7258 **Premium Line**





Specifications:

38 kg



Case for 2x Furion S201

INFINITY

D7265 **Premium Line**





Specifications:

37 kg



Case for 2x Furion S401

INFINITY

D7266 **Premium Line**





Specifications:

41 kg



Case for 2x Furion S601

INFINITY

D7267 **Premium Line**





Specifications:

72 kg



Case for 6x iW-720

INFINITY

D7237 **Premium Line**







Specifications:



Case for Infinity iB-2R/1915

INFINITY

D7253 Premium Line





Specifications:

45 kg



Case for 2x iW-1915

INFINITY

D7028 Flight Case







Specifications:

36 kg



Case for 4x iW-741

INFINITY

D7272 Premium Line







Specifications:

38 kg



Case for 2x iW-1941

INFINITY

D7273 Premium Line







Specifications:

35 kg



Case for 2x iB-2R

INFINITY

D7031 Flight Case







Specifications:

35 kg



Case for 2x Furion B401

INFINITY

D7268 Premium Line







Specifications:

36 kg



Case for 2x IFX-640

INFINITY

41553 Premium Line







Specifications:

39 kg



Case for 2x iM-2515

INFINITY

D7243 Premium Line







Specifications:

39,5 kg



Case for LED Bar

SHOWTEC

D7595 Flight case





Specifications:

15 kg



Case for 8x Sunstrip LED

SHOWTEC

30755 Premium Line







Specifications:

24 kg



Case for 4x Pulse Pixel Bar 16

SHOWTEC

D7042 Value Line





Specifications:

9,3 kg



Case for 8x Pulse Pixel Bar 16

SHOWTEC

D7053 Flight case





Specifications:

35 kg



Case for 8x Candela Pix 50

SHOWTEC

D7057 Flight case







Specifications:

42 kg



Case for 8x Candela Pix 100

SHOWTEC

D7058 Flight case





Specifications:

45 kg



Case for 4x Club par

SHOWTEC

D7032 Value Line







Specifications:

6 kg



Charger Case for 6 x EventSpot 1600 Q4

SHOWTEC

D7300 Flight case







Specifications:

63 kg



Case for 6x EventLITE 6/3, 7/4 and 4/10

SHOWTEC

D7022 Flight Case







Specifications:



Case for 8 x Octostrip

SHOWTEC

D7486B for Octostrips set, controller + cables







Specifications:

22 kg



Case for LAMPY 20

SHOWTEC

D7332 Flight Case





Specifications:

6 kg



Case for LAMPY 40

SHOWTEC

D7333 Flight Case





Specifications:

8 kg



Case for 2x Phantom 25 / 50 / 65

SHOWTEC

D7495B Flight Case





Specifications:



Case for 4 x Kanjo 10 / 60

SHOWTEC

D7034 Flight Case





Specifications:

13 kg



Case for 2 x Phantom 25/50/65

SHOWTEC

D7010 Value Line





Specifications:

7,4 kg



Case for 4x Shark Scan or Barrel

SHOWTEC

D7528 Flight Case





Specifications:

35 kg



Case for 2x Shark Spot / Wash / Zoom / Combi

SHOWTEC

D7048 Value Line Flight Case







Specifications:

5 kg



Case for 4 x Kanjo 10 / 60

SHOWTEC

D7033 Value Line Flight Case







Specifications:

7,2 kg



Case for 4x Phantom 65

SHOWTEC

D7051 Flight Case







Specifications:

31 kg



Case for 4x Shark Beam FX

SHOWTEC

D7050 Flight Case







Specifications:

34 kg



Case for 4x Shark Spot / Wash / Zoom / Combi

SHOWTEC

D7049 Flight Case







Specifications:

26 kg



Case for 2x Phantom 75 / 95

SHOWTEC

D7476 Flight Case







Specifications:

30,8 kg



Case for 4x Phantom 100 / 180

SHOWTEC

D7062 Flight Case







Specifications:

65,3 kg



Case for 4x Phantom 100 / 130 / 3R

SHOWTEC

D7052 Flight Case







Specifications:

48 kg



Case for 2x Phantom 3R Hybrid

SHOWTEC

D7259 Premium Line





Specifications:

35 kg



Case for 2x Phantom 130 / 3R

SHOWTEC

D7260 Premium Line





Specifications:

33 kg



Case for 2 x Phantom 280 Hybrid/12R Hybrid

SHOWTEC

D7063 Flight case







Specifications:

46 kg



Case for 2x Phantom 250 Spot

SHOWTEC

D7064 Flight Case







Specifications:



Case for 4x Phantom Zoombar 1220

SHOWTEC

40022 **Flight Case**





Specifications:

24 kg



Case for Mistique

SHOWTEC

D7271 **Premium Line**





Specifications:

43 kg



Case for 8 x Sunstrip Active

SHOWTEC

D7510 **Flight case**





Specifications:

53 kg



Case for 8x Active Sunstrip

SHOWTEC

D7240 **Premium Line**





Specifications:

41,8 kg



Case for 6 x Stage Blinder 1

SHOWTEC

D7060 Flight case







Specifications:

22 kg



Case for 12 x Stage Blinder 1

SHOWTEC

D7061 Flight case







Specifications:

35 kg



Case for 4x Stage Blinder 4

SHOWTEC

D7056 Flight case





Specifications:

32 kg



Case for 4x Helix M1000

SHOWTEC

D7229 Premium Line







Specifications:

33 kg



Case for 4x Helix 4000/S5000

SHOWTEC

D7249 **Premium Line**







Specifications:

34 kg



Case for 4x Helix S5000 incl. accessories

SHOWTEC

D7269 **Premium Line**







Specifications:

55 kg



Case for 4 x LED eco Par56

SHOWTEC

D7594 **Flight case**





Specifications:

8,3 kg



Case for 8x Compact Par 7

SHOWTEC

D7475 **Flight Case**





Specifications:

28 kg



Case for 8 x Spectral Spot

SHOWTEC

D7498B Flight case





Specifications:

30 kg



Case for ColorCue 1

SHOWTEC

D7405 Flight Case





Specifications:

3,2 kg



Case for ColorCue 2

SHOWTEC

D7406 Flight Case





Specifications:

4,2 kg



Case for ColorCue 3

SHOWTEC

D7407 Flight Case





Specifications:

5,4 kg



Case for ColorCue 4

SHOWTEC

D7408 Flight Case







Specifications:

6,2 kg



Case for Scanmaster Series

SHOWTEC

D7403 Flight case







Specifications:

4,6 kg



Case for Showmaster24 & SC-24

SHOWTEC

D7401 Flight case







Specifications:

5,2 kg



Case for Showmaster48

SHOWTEC

D7402 Flight case







Specifications:

6,6 kg



Case for 4x Compact Light Sets

SHOWTEC

D7026 Flight case







Specifications:

38 kg



Case for Followspot 120 W

SHOWTEC

D7059 Flight case





Specifications:

26 kg



Case for 12x Sunstrip Active

SHOWTEC

D7039 Flight case







Specifications:

45 kg



Case for 4 x LED Bar

SHOWGEAR

D7012 **Value Line**





Specifications:

6,6 kg



Case for 2x Scanner

SHOWGEAR

D7526 **Flight case**





Specifications:

11 kg



Case for 8 x Par64

SHOWGEAR

D7511 **Flight case**





Specifications:

40 kg



Case for 4 x Flat Par

SHOWGEAR

D7011 **Value Line**





Specifications:

4,8 kg



Case for 4 x LED Par 56 — SHOWGEAR

D7013 Value Line







Specifications:

4,4 Kg



Case for 30 cm Mirror Ball — SHOWGEAR

D7440B



Specifications:

5 kg



Case for 40 cm Mirror Ball — SHOWGEAR

D7441B



Specifications:

8,14 kg



Case for 50 cm Mirror Ball — SHOWGEAR

D7442B



Specifications:

16,2 kg



Case for 100 cm Mirror Ball — SHOWGEAR

D7443B



Specifications:

76 kg



Case for Showbar + 4 x Par56 — SHOWGEAR

D7351B Flight case



Specifications:

16,5 kg



Case for 6 x Mammoth Stage 1 x 1 m — SHOWGEAR

D7225 Premium Line



Specifications:

45 kg



Case for ER1193 Wireless Mic

DAP

D7430B Flight case





Specifications:



Case for ER216 Wireless Mic

DAP

D7431B Flight Case





Specifications:



Case for 2 x K-112/K-115

DAP

D7580 Flight Case




Specifications:



Case for 2 x M10 monitor

DAP

D7318 Flight Case





Specifications:



Case for 2 x M12 monitor

DAP

D7319 Flight Case







Specifications:

21,2 kg



Case for 2 x M15 monitor

DAP

D7320 Flight Case







Specifications:

25,4 kg



Case for 2x Odin SF-12A

DAP

D7226 Premium Line





Specifications:

32 kg



Case for 2x Odin SF-15A

DAP

D7227 Premium Line





Specifications:

35 kg



Case for 4x Odin T-8A

DAP

D7224 Premium Line







Specifications:

44 kg



Case for 60 CDs

SHOWGEAR

D7325B Flight Case





Specifications:

3,98 kg



Case for 170 CDs

SHOWGEAR

D7327B Flight Case





Specifications:

6,4 kg



Case for 19" CD-player 3U

SHOWGEAR

D7317B Flight Case







Specifications:

8,1 kg



19” Mixer Case 8U

SHOWGEAR

D7573 Flight Case







Specifications:

7,64 kg



19” Mixer Case 9U with shelf

SHOWGEAR

D7576 Flight Case





Specifications:

11,5 kg



Case for 7 Microphones

SHOWGEAR

D7304B Black



Specifications:

1,88 kg



Case for 7 Microphones

SHOWGEAR

D7304R Red



Specifications:

1,88 kg



Case for 7 Microphones

SHOWGEAR

D7304S Silver



Specifications:

1,88 kg



Case for 7 Microphones

SHOWGEAR

D7304U Blue



Specifications:

1,88 kg



Pro Case for 6 Mics

SHOWGEAR

D7393B



Specifications:
3,84 kg



Pro Case for 12 Mics

SHOWGEAR

D7394B



Specifications:
5 kg



Pro Case for 25 mics

SHOWGEAR

D7358B



Specifications:
8,5 kg



Wireless Microphone Case 1

SHOWGEAR

D7519B







Specifications:

17,1 kg



Wireless Microphone Case 2

SHOWGEAR

D7520B







Specifications:

26 kg



19" Live Mixer Case Value Line

SHOWGEAR

D7021 Flight Case





Specifications:

9 kg



19" Live Mixer Case

SHOWGEAR

D7017 Flight Case





Specifications:

11 kg



Case for Pioneer DJM-V10

DAP

D7565 Flight Case





Specifications:

26 kg



Case Core Mixer + 2 x CDMP-750

DAP

D7018 Flight Case







Specifications:

16 kg



Universal Case 2-Ch DJ Control

SHOWGEAR

D7467







Specifications:

10,6 kg



Turntable Case

SHOWGEAR

D7328B





Specifications:

7,64 kg



Case for Pioneer/Technics mixer

SHOWGEAR

D7379B





Specifications:



10” Mixer Case

SHOWGEAR

D7575

Specifications:









12” Mixer Case

SHOWGEAR

D7574

Specifications:









Mobile DJ Case ‘Compact’

SHOWGEAR

D7381B

Specifications:









Case for Denon SC-5000

SHOWGEAR

D7045 Flight case







Specifications:

7,5 kg



Case for CDJ & DJM

SHOWGEAR

D7047 Fits Pioneer models & Denon x 1800







Specifications:

7,8 kg



Case for Pioneer DJM-mixer

SHOWGEAR

D7567 Flight Case







Specifications:

7,5 kg



Case for Pioneer CDJ-player

SHOWGEAR

D7569 Flight Case







Specifications:

7,75 kg



DJ Case for Pioneer

SHOWGEAR

D7566 Small Set







Specifications:

14 kg
Height closed: 225



DJ Case for Pioneer

SHOWGEAR

D7568 Large Set







Specifications:

19,8 kg



Case for Pioneer DDJ-RZ/DDJ-SZ

SHOWGEAR

D7046 Flight case







Specifications:

20 kg



Case Core Mixer + 2x CDMP-750

DAP

D7018 Flight Case







Specifications:

16 kg



Case for 8 x DMT Premiere Series

DMT

D7290 **Premium Line**





Specifications:

80 kg



Case for 8x DMT Premiere Series

DMT

D7293 **Premium Line**





Specifications:

80 kg



Case for 6x E-series LED Screen 100 x 50 cm

DMT

D7292 **Premium Line**





Specifications:

39.7 kg



Case for 8x FX Shot & 4 x Baseplate

SHOWTEC

D7025 Flight case







Specifications:

22,5 kg



Case for Beer Bottles

SHOWGEAR

D7350 Up to 6 beer bottles







Specifications:

4,4 kg



Tool Case 2

SHOWGEAR

D7040 Value Line







Specifications:

2,6 kg



Tool Case 3

SHOWGEAR

D7041 Value Line







Specifications:

6,1 kg



Stack case Value Line — SHOWGEAR

D7001 **H1**

Specifications:

2,04 kg





Stack case Value Line — SHOWGEAR

D7002 **H2**

Specifications:

2,35 kg





Stack case Value Line — SHOWGEAR

D7003 **H3**

Specifications:

2,84 kg





Stack case Value Line — SHOWGEAR

D7004 **H4**

Specifications:

3,22 kg





Wheelboard for Stack Case VL — SHOWGEAR

D7005

Specifications:

4,4 Kg





Cover for Stack Case VL — SHOWGEAR

D7006

Specifications:

0.79 kg





Stack Case 1 — SHOWGEAR

D7420B **Flight Case**







Specifications:

10,86 kg



Stack Case 2

SHOWGEAR

D7421B Flight Case







Specifications:

11,72 kg



Stack Case 3

SHOWGEAR

D7422B Flight Case







Specifications:

13,58 kg



Stack Case 4

SHOWGEAR

D7423B Flight case







Specifications:

16,76 kg



Stack Case 5

SHOWGEAR

D7424B Flight Case







Specifications:

24,2 kg



Stack Case 6

SHOWGEAR

D7425B **Flight Case**







Specifications:

24 kg



Rigging Case with Insert

SHOWGEAR

D7470B







Specifications:

21,4 kg



Wheel Set for Stack Cases

SHOWGEAR

D7429B

Specifications:

4,5 kg





Conical Adapter Case

SHOWGEAR

D7363B Including 2 Adapter Inlays



Specifications:

10,06 kg



Conical Adapter Case II

SHOWGEAR

D7524 Including 1 Adapter Inlay



Specifications:

11 kg



Conical Adapter Case III

SHOWGEAR

D7525



Specifications:

8,14 kg



Extra Insert for 96-pin CA1

SHOWGEAR

D7364B



Specifications:

1,84 kg



Cable Bridge Case

SHOWGEAR

D7512







Specifications:

40 kg



Compact Transport Trolley

SHOWGEAR

D7428B







Specifications:

Max weight:
50 kg



Drawer Case 12U + Work Surface

SHOWGEAR

D7383B Flight Case







Specifications:

54 kg



Drawer Case 16U

SHOWGEAR

D7384B Flight Case







Specifications:

60 kg



Multiflex Case 80

SHOWGEAR

D7450 Premium Line







Specifications:

31 kg



Multiflex Case 120

SHOWGEAR

D7451 Premium Line







Specifications:

42 kg



Top insert for Multiflex Case 80/120

SHOWGEAR

D7452 37 cm, Premium Line

Specifications:





Top insert for Multiflex Case 80/120

SHOWGEAR

D7453 57 cm, Premium Line

Specifications:





Low divider for Multiflex Case 80/120

D7454 Premium Line



SHOWGEAR

High divider for Multiflex Case 80/120

D7455 Premium Line



SHOWGEAR

Emergency Case

SHOWGEAR

D7518







Specifications:

30,2 kg



Roadie Case

SHOWGEAR

D7329B

Specifications:

6 kg









Universal Foam Case 1

SHOWGEAR

D7491B







Specifications:



Universal Foam Case 2

SHOWGEAR

D7492B







Specifications:



Universal Foam Case 3

SHOWGEAR

D7500B





Specifications:



ABS Tool Case

SHOWGEAR

D7142



Specifications:



ABS Universal Foam Case

SHOWGEAR

D7143



Specifications:



Case for Lodestar MKII Chainhoist

LODESTAR

D7474B





Specifications:

35 kg



Pipe & Drape Case for FOH Kit

WENTEX

D7554 For up to 19 m (62 ft) wide





Specifications:

75 kg



Pipe & Drape Case 45 cm base

WENTEX

D7555 For 8 complete sets





Specifications:

91,6 kg



Pipe & Drape Case 60 cm base

WENTEX

D7556 For 8 complete sets





Specifications:

113,2 kg



Daily Case 2

SHOWGEAR

D7160



Specifications:

Height (mm):	95 mm
Width (mm):	235 mm
Depth (mm):	187 mm
Inner Height:	84 mm
Inner Width:	215 mm
Inner Depth:	144 mm
Weight:	0.8 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	No

Daily Case 4

SHOWGEAR

D7161



Specifications:

Height (mm):	97 mm
Width (mm):	280 mm
Depth (mm):	230 mm
Inner Height:	83 mm
Inner Width:	255 mm
Inner Depth:	185 mm
Weight:	1 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	No

Daily Case 7

SHOWGEAR

D7162



Specifications:

Height (mm):	155 mm
Width (mm):	280 mm
Depth (mm):	230 mm
Inner Height:	140 mm
Inner Width:	255 mm
Inner Depth:	185 mm
Weight:	1.15 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	No

Daily Case 9

SHOWGEAR

D7163



Specifications:

Height (mm):	120 mm
Width (mm):	390 mm
Depth (mm):	285 mm
Inner Height:	105 mm
Inner Width:	365 mm
Inner Depth:	247 mm
Weight:	1.8 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	No

Daily Case 10

SHOWGEAR

D7164





Specifications:

Height (mm):	170 mm
Width (mm):	345 mm
Depth (mm):	275 mm
Inner Height:	150 mm
Inner Width:	311 mm
Inner Depth:	210 mm
Weight:	1.9 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	No

Daily Case 15

SHOWGEAR

D7165





Specifications:

Height (mm):	168 mm
Width (mm):	425 mm
Depth (mm):	325 mm
Inner Height:	150 mm
Inner Width:	390 mm
Inner Depth:	265 mm
Weight:	2.7 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	No

Daily Case 16

SHOWGEAR

D7166





Specifications:

Height (mm):	140 mm
Width (mm):	465 mm
Depth (mm):	365 mm
Inner Height:	123 mm
Inner Width:	435 mm
Inner Depth:	305 mm
Weight:	3.2 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	No

Daily Case 22

SHOWGEAR

D7167





Specifications:

Height (mm):	185 mm
Width (mm):	465 mm
Depth (mm):	365 mm
Inner Height:	168 mm
Inner Width:	430 mm
Inner Depth:	294 mm
Weight:	3.4 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	No

Daily Case 30

SHOWGEAR

D7170 **incl. trolley**







Specifications:

Height (mm):	230 mm
Width (mm):	570 mm
Depth (mm):	420 mm
Inner Height:	177 mm
Inner Width:	485 mm
Inner Depth:	360 mm
Weight:	5.8 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	Yes

Daily Case 37

SHOWGEAR

D7171 **incl. trolley**







Specifications:

Height (mm):	230 mm
Width (mm):	560 mm
Depth (mm):	450 mm
Inner Height:	178 mm
Inner Width:	528 mm
Inner Depth:	386 mm
Weight:	6.7 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	Yes

Daily Case 47

SHOWGEAR

D7172 **incl. trolley**







Specifications:

Height (mm):	230 mm
Width (mm):	665 mm
Depth (mm):	500 mm
Inner Height:	190 mm
Inner Width:	590 mm
Inner Depth:	420 mm
Weight:	9.8 kg
IP Rate:	IP65
Material:	Polypropeen
Retr. Handle:	Yes

Compact Effect Case

SHOWGEAR

D7532B 4U







Specifications:

7,8 kg



Compact Effect Case

SHOWGEAR

D7533B 8U



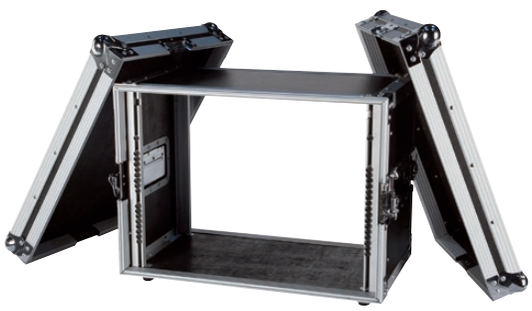

Specifications:

13 kg



Double Door Case

SHOWGEAR

D7371B 2U







Specifications:

6,92 kg



Double Door Case

SHOWGEAR

D7372B 4U







Specifications:

9,72 kg



Double Door Case

SHOWGEAR

D7373B 6U





Specifications:

10,7 kg



Double Door Case

SHOWGEAR

D7374B 8U





Specifications:

15 kg



Double Door Case

SHOWGEAR

D7375B 10U





Specifications:

18 kg



Double Door Case

SHOWGEAR

D7376B 12U





Specifications:

19,8 kg



Double Door Case

SHOWGEAR

D7377B 16U







Specifications:

21,32 kg



Wheelbase for Rackcases

SHOWGEAR

D7370B For 19" flight cases





Double Door Case SHOWGEAR

D7101 2U, ABS

Specifications:

5,2 kg





Double Door Case SHOWGEAR

D7102 4U, ABS

Specifications:

6,4 kg





Double Door Case SHOWGEAR

D7103 6U, ABS

Specifications:

6,6 kg





Double Door Case SHOWGEAR

D7104 8U, ABS

Specifications:

7,1 kg





Double Door Case SHOWGEAR

D7105 10U, ABS

Specifications:

7,2 kg





Double Door Case SHOWGEAR

D7106 12U, ABS

Specifications:

8,2 kg





Combi Case

SHOWGEAR

D7378B 4U + 10U top





Specifications:



Combi Case

SHOWGEAR

D7369B 6U + 10U top





Specifications:

16,5 kg



Combi Case

SHOWGEAR

D7368B 8U + 10U top





Specifications:

29,32 kg



Combi Case

SHOWGEAR

D7367B 10U + 10U top





Specifications:

29,5 kg



Combi Case

SHOWGEAR

D7366B 12U + 10U top





Specifications:

32,6 kg



Combi Case

SHOWGEAR

D7365B 16U + 10U top



Specifications:

31,5 kg



Combi Case

SHOWGEAR

D7386B 16+14U





Specifications:

35 kg



Metal Equipment Rack — SHOWGEAR

D7600 12U



Specifications:

R.U.:	12 U
Height (mm):	594 mm
Width (mm):	566 mm
Depth (mm):	462 mm
Inst. Depth Ex. Conn.:	430 mm
Weight:	18 kg
Material:	Metal
Castors:	4

Metal Equipment Rack — SHOWGEAR

D7601 16U



Specifications:

R.U.:	16 U
Height (mm):	825 mm
Width (mm):	560 mm
Depth (mm):	460 mm
Inst. Depth Ex. Conn.:	430 mm
Weight:	22 kg
Material:	Metal
Castors:	4

Metal Equipment Rack — SHOWGEAR

D7602 20U



Specifications:

R.U.:	20 U
Height (mm):	1000 mm
Width (mm):	560 mm
Depth (mm):	460 mm
Weight:	26 kg
Material:	Metal
Castors:	4

Metal Equipment Rack — SHOWGEAR

D7603 24U



Specifications:

R.U.:	24 U
Height (mm):	1180 mm
Width (mm):	560 mm
Depth (mm):	460 mm
Weight:	29 kg
Material:	Metal
Castors:	4

Metal Equipment Rack — SHOWGEAR

D7604 28U



Specifications:

R.U.:	28 U
Height (mm):	1365 mm
Width (mm):	560 mm
Depth (mm):	460 mm
Weight:	31.5 kg
Material:	Metal
Castors:	4

Metal Equipment Rack — SHOWGEAR

D7605 32U



Specifications:

R.U.:	32 U
Height (mm):	1545 mm
Width (mm):	560 mm
Depth (mm):	460 mm
Weight:	34.5 kg
Material:	Metal
Castors:	4

Metal Equipment Rack — SHOWGEAR

D7606 36U



Specifications:

R.U.:	36 U
Height (mm):	1750 mm
Width (mm):	560 mm
Depth (mm):	460 mm
Weight:	37 kg
Material:	Metal
Castors:	4

Metal Equipment Rack — SHOWGEAR

D7607 40U



Specifications:

R.U.:	40 U
Height (mm):	1900 mm
Width (mm):	560 mm
Depth (mm):	460 mm
Weight:	39.5 kg
Material:	Metal
Castors:	4



RCA-WMF-6

SHOWGEAR

D7652 6U Network Cabinet with glass door

Specifications:			
R.U.:	6 U	Depth (mm):	610 mm
Height (mm):	368 mm	Weight:	20.5 kg
Width (mm):	605 mm	Material:	Glass / Metal

RCA-WMF-9

SHOWGEAR

D7653 9U Network Cabinet with glass door

Specifications:			
R.U.:	9 U	Depth (mm):	610 mm
Height (mm):	503 mm	Weight:	25 kg
Width (mm):	605 mm	Material:	Glass / Metal

RCA-WMF-15

SHOWGEAR

D7654 15U Network Cabinet with glass door

Specifications:			
R.U.:	15 U	Depth (mm):	600 mm
Height (mm):	769 mm	Weight:	32 kg
Width (mm):	600 mm	Material:	Glass / Metal



RCA-WMH-6

SHOWGEAR

D7655 6U Network Cabinet with glass door

Specifications:			
R.U.:	6 U	Depth (mm):	600 mm
Height (mm):	470 mm	Inst. Depth Ex. Conn.:	400 mm
Width (mm):	600 mm	Weight:	26 kg
		Material:	Steel

RCA-WMH-9

SHOWGEAR

D7656 9U Network Cabinet with glass door

Specifications:			
R.U.:	9 U	Depth (mm):	600 mm
Height (mm):	603 mm	Inst. Depth Ex. Conn.:	400 mm
Width (mm):	600 mm	Weight:	34.5 kg
		Material:	Steel

RCA-WMH-15

SHOWGEAR

D7657 15U Network Cabinet with glass door

Specifications:			
R.U.:	15 U	Depth (mm):	600 mm
Height (mm):	769 mm	Inst. Depth Ex. Conn.:	400 mm
Width (mm):	600 mm	Weight:	36.5 kg
		Material:	Steel





Pro Metal Equipment Rack

SHOWGEAR

D7620 12U Network Cabinet with glass door

Specifications:			
R.U.:	12 U	Inst. Depth Ex. Conn.:	527 mm
Height (mm):	767 mm	Weight:	30 kg
Width (mm):	585 mm	Material:	Metal
Depth (mm):	585 mm	Castors:	4

D7621 16U Network Cabinet with glass door

Specifications:			
R.U.:	16 U	Inst. Depth Ex. Conn.:	527 mm
Height (mm):	955 mm	Weight:	33.5 kg
Width (mm):	585 mm	Material:	Metal
Depth (mm):	585 mm	Castors:	4

D7622 20U Network Cabinet with glass door

Specifications:			
R.U.:	20 U	Inst. Depth Ex. Conn.:	527 mm
Height (mm):	1130 mm	Weight:	40 kg
Width (mm):	585 mm	Material:	Metal
Depth (mm):	585 mm	Castors:	4

D7623 24U Network Cabinet with glass door

Specifications:			
R.U.:	24 U	Inst. Depth Ex. Conn.:	527 mm
Height (mm):	1310 mm	Weight:	47.5 kg
Width (mm):	585 mm	Material:	Metal
Depth (mm):	585 mm	Castors:	4

D7624 28U Network Cabinet with glass door

Specifications:			
R.U.:	28 U	Inst. Depth Ex. Conn.:	527 mm
Height (mm):	1490 mm	Weight:	53 kg
Width (mm):	585 mm	Material:	Metal
Depth (mm):	585 mm	Castors:	4

D7625 32U Network Cabinet with glass door

Specifications:			
R.U.:	32 U	Inst. Depth Ex. Conn.:	527 mm
Height (mm):	1675 mm	Weight:	61 kg
Width (mm):	585 mm	Material:	Metal
Depth (mm):	585 mm	Castors:	4

D7626 36U Network Cabinet with glass door

Specifications:			
R.U.:	36 U	Inst. Depth Ex. Conn.:	527 mm
Height (mm):	1850 mm	Weight:	70 kg
Width (mm):	585 mm	Material:	Metal
Depth (mm):	585 mm	Castors:	4

D7627 40U Network Cabinet with glass door

Specifications:			
R.U.:	40 U	Inst. Depth Ex. Conn.:	527 mm
Height (mm):	2020 mm	Weight:	85 kg
Width (mm):	585 mm	Material:	Metal
Depth (mm):	585 mm	Castors:	4

RCA-FSG-18

SHOWGEAR

D7674 **18 U Network Cabinet with glass door**

Specifications:			
R.U.:	18 U	Depth (mm):	800 mm
Height (mm):	988 mm	Weight:	61 kg
Width (mm):	600 mm	Material:	Glass / Metal

RCA-FSG-22

SHOWGEAR

D7675 **22 U Network Cabinet with glass door**

Specifications:			
R.U.:	22 U	Depth (mm):	800 mm
Height (mm):	1166 mm	Weight:	70 kg
Width (mm):	600 mm	Material:	Glass / Metal

RCA-FSG-32

SHOWGEAR

D7676 **32 U Network Cabinet with glass door**

Specifications:			
R.U.:	32 U	Depth (mm):	800 mm
Height (mm):	1610 mm	Weight:	90 kg
Width (mm):	600 mm	Material:	Glass / Metal

RCA-FSG-42

SHOWGEAR

D7677 **42 U Network Cabinet with glass door**

Specifications:			
R.U.:	42 U	Depth (mm):	800 mm
Height (mm):	2055 mm	Weight:	112 kg
Width (mm):	600 mm	Material:	Glass / Metal



RCA-FSM-18

SHOWGEAR

D7670 **18 U Network Cabinet with mesh door**

Specifications:			
R.U.:	18 U	Weight:	61 kg
Height (mm):	988 mm	Material:	Metal
Width (mm):	600 mm	Castors:	4
Depth (mm):	800 mm		

RCA-FSM-22

SHOWGEAR

D7671 **22 U Network Cabinet with mesh door**

Specifications:			
R.U.:	22 U	Weight:	70 kg
Height (mm):	1166 mm	Material:	Metal
Width (mm):	600 mm	Castors:	4
Depth (mm):	800 mm		

RCA-FSM-32

SHOWGEAR

D7672 **32 U Network Cabinet with mesh door**

Specifications:			
R.U.:	32 U	Weight:	90 kg
Height (mm):	1610 mm	Material:	Metal
Width (mm):	600 mm	Castors:	4
Depth (mm):	800 mm		

RCA-FSM-42

SHOWGEAR

D7673 **42 U Network Cabinet with mesh door**

Specifications:			
R.U.:	42 U	Weight:	112 kg
Height (mm):	2055 mm	Material:	Metal
Width (mm):	600 mm	Castors:	4
Depth (mm):	800 mm		



19-inch 1U Fixed Rack Mount Shelf

D7692 **For Showgear FSM/FSG/WMF/ WMH series**



SHOWGEAR

1U Cable Management with cap

D7694 **19" - 12 slots**



SHOWGEAR

Sliding Profile for Flight case

D6900 Length 2 m



SHOWGEAR

Butterfly Lock Large, Polished

D5120 106 x 102 mm



SHOWGEAR

Butterfly Lock small, Polished

D5121 80 x 72 mm



SHOWGEAR

Flight Case Lock Small, Polished

D5122 67 x 67 mm



SHOWGEAR

Fliphandle, Polished — SHOWGEAR

D5128 124 x 82 mm



Fliphandle, Polished — SHOWGEAR

D5129 160 x 107 mm



Swivel Blue Wheel — SHOWGEAR

D8001 100 mm, without Brake



Swivel Blue Wheel — SHOWGEAR

D8002 100 mm, with Brake



Flight Case Label — SHOWGEAR

D5133 177 x 127 mm - with adhesive back



Flight Case Label — SHOWGEAR

D5134 290 x 190 mm - with adhesive back



Flight Case Magnetic Label — DMT

D5130 With 3M tape and marker



Flight Case Magnetic Label — DAP

D5131 With 3M tape and marker



Flight Case Magnetic Label — SHOWTEC

D5132 With 3M tape and marker



Egg Foam 30 mm — SHOWGEAR

D6901 Set of 2 sheets of 1.5 m x 2 m



Soft Foam 20 mm — SHOWGEAR

D6902 Sheet of 1.5 m x 2 m



Pearl Foam 20 mm — SHOWGEAR

D6903 Sheet of 1 m x 1.3 m



Hard Foam 10 mm

D6904 Sheet of 1.15 m x 1.5 m
SHOWGEAR



Cubed Foam 50 mm

D6905 Sheet of 1.2 m x 0.6 m
SHOWGEAR



Cubed Foam 100 mm

D6906 Sheet of 1.2 m x 0.6 m
SHOWGEAR



Backpack for Sidekick

55009

INFINITY

Specifications:

Length (mm):	525 mm
Height (mm):	310 mm
Width (mm):	100 mm
Inner Length:	510 mm
Inner Height:	295 mm
Inner Width:	80 mm
Acc. Pocket:	Yes
Laptop Pocket:	Yes



Stand Bag for Microphone Stands

D7923 For 6 Stands

INFINITY

Specifications:

Length (mm):	1100 mm
Height (mm):	150 mm
Width (mm):	230 mm
Retr. Handle:	No





Gear Bag 1

SHOWGEAR

D6641 Suitable for Strobes, Moonflowers

Specifications:

Length (mm):	240 mm
Height (mm):	360 mm
Width (mm):	240 mm
Retr. Handle:	No
Acc. Pocket:	Yes



Gear Bag 2

SHOWGEAR

D6642 Suitable for Foggers, Scanners

Specifications:

Length (mm):	470 mm
Height (mm):	260 mm
Width (mm):	300 mm
Retr. Handle:	No
Acc. Pocket:	Yes



Gear Bag 3

SHOWGEAR

D6643 Suitable for Small Mushroom

Specifications:

Length (mm):	300 mm
Height (mm):	350 mm
Width (mm):	250 mm
Retr. Handle:	No
Acc. Pocket:	Yes



Gear Bag 4

SHOWGEAR

D6644 Suitable for Club Scan

Specifications:

Length (mm):	300 mm
Height (mm):	200 mm
Width (mm):	300 mm
Retr. Handle:	No
Acc. Pocket:	Yes



Gear Bag 5

SHOWGEAR

D6645 Suitable for Small Scanners

Specifications:

Length (mm):	470 mm
Height (mm):	130 mm
Width (mm):	320 mm
Retr. Handle:	No
Acc. Pocket:	Yes



Gear Bag 6

SHOWGEAR

D6646 Suitable for Medium Size Scanners

Specifications:

Length (mm):	470 mm
Height (mm):	385 mm
Width (mm):	360 mm
Retr. Handle:	No
Acc. Pocket:	Yes



Gear Bag 8

SHOWGEAR

D6648 Suitable for Starzone / EGO series

Specifications:

Length (mm):	460 mm
Height (mm):	200 mm
Width (mm):	400 mm
Retr. Handle:	No
Acc. Pocket:	Yes



Gear Bag 9

SHOWGEAR

D6649 Suitable for Small Lighteffects

Specifications:

Length (mm):	340 mm
Height (mm):	440 mm
Width (mm):	320 mm
Acc. Pocket:	Yes



PB-MP1

SHOWGEAR

D6600 For 16-pin Multi Top Entry

Specifications:

Length (mm):	150 mm
Height (mm):	100 mm
Width (mm):	60 mm



PB-MP2

SHOWGEAR

D6601 For 16-pin Multi Side Entry

Specifications:

Length (mm):	160 mm
Height (mm):	100 mm
Width (mm):	60 mm



PB-MP3

SHOWGEAR

D6602 For 16-pin Multi Side Entry

Specifications:

Length (mm):	160 mm
Height (mm):	100 mm
Width (mm):	80 mm



PB-S1

SHOWGEAR

D6605 For Socapexconnectors, afterwards mountable

Specifications:

Length (mm):	130 mm
Height (mm):	160 mm
Width (mm):	130 mm

Tool Bags

Bags



Radio Pouch

D6624 **Perfect to carry your communication systems**

SHOWGEAR

Specifications:

Length (mm):	80 mm
Height (mm):	150 mm
Width (mm):	36 mm



P&D Carrying Bag orange

89398S **Size S - 84 x 22 cm**

WENTEX

Specifications:

Length (mm):	840 mm
Width (mm):	220 mm



P&D Carrying Bag orange

89398M **Size M - 84 x 42 cm**

WENTEX

Specifications:

Length (mm):	820 mm
Width (mm):	420 mm



P&D Carrying Bag orange

89398L **Size L - 84 x 50 cm**

WENTEX

Specifications:

Length (mm):	820 mm
Width (mm):	470 mm

19 Inch Gear

19 Inch Accessories



4-way, 1U Fan Unit Temperature controlled

SHOWGEAR

D7696 **For 19" rack or cabinet**

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Conn. In.:	IEC C13 female
R.U.:	1 U
Length (mm):	170 mm
Height (mm):	45 mm
Width (mm):	484 mm



ACU-100 Black

DAP

D1932B **Audio Connection Unit**

Specifications:

Pwr. Supp.:	240 VAC 50-60 Hz
Pwr. Conn. In.:	powerCON Blue
R.U.:	1 U
Height (mm):	44.45 mm
Width (mm):	482.6 mm



2-way 1U Fan Unit Temperature controlled

SHOWGEAR

D7695 **For 19" rack or cabinet**

Specifications:

Pwr. Supp.:	220V-240 VAC 50 Hz
Pwr. Conn. In.:	IEC C13 female
R.U.:	1 U
Length (mm):	170 mm
Height (mm):	45 mm
Width (mm):	484 mm

19-inch 1U Fixed Sliding Rack Mount Shelf

SHOWGEAR

D7693 **For Showgear FSM/FSG/WMF/WMH series**



19 inch Ventilation Panel Black

SHOWGEAR

D7806 **1U**



19 inch Ventilation Panel Black

SHOWGEAR

D7807 **2U**



19 Inch Ventilation Panel Black

SHOWGEAR

D7808 0,5U



19 Inch Blind Panel Black

SHOWGEAR

D7800 0,5U
D7801 1U
D7802 2U
D7803 3U
D7804 4U





19 Inch Connector Panel

SHOWGEAR

D7811 1U, for 8 XLR Connectors (D-Size)
D7812 2U, for 16 XLR Connectors (D-Size)

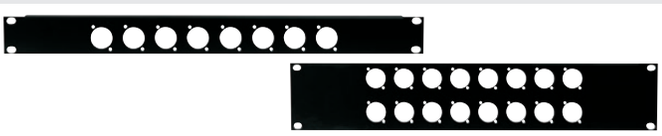

19 Inch Multi Connector Panel

SHOWGEAR

D7816 2U, for 2 x 16-pin multiconnectors



19 Inch Cover Box

SHOWGEAR

D7817 3U, for 6 x PG16 & 6 x PG21

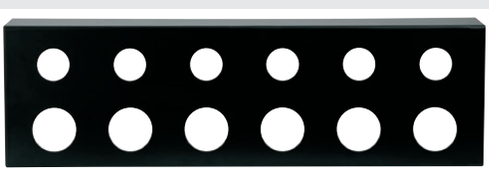

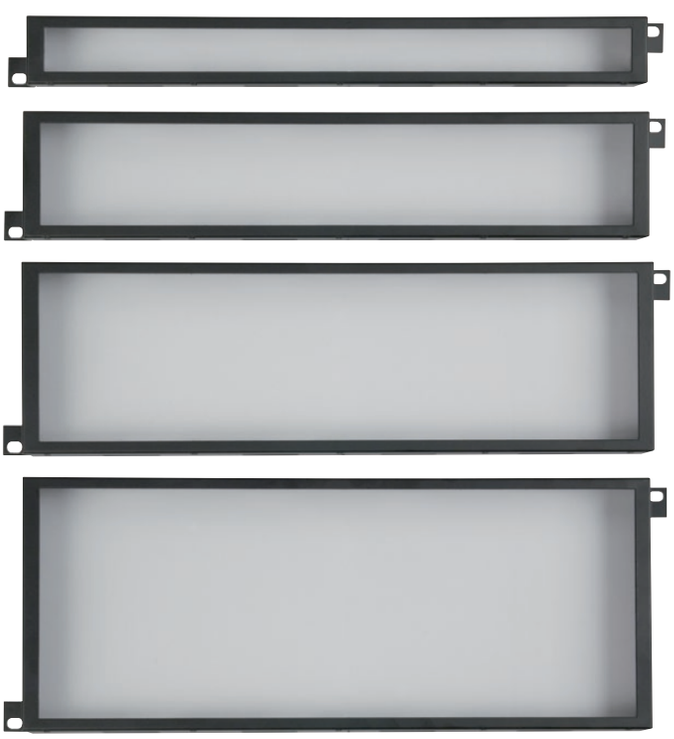

19 Inch Protection Panel

SHOWGEAR

D7870 1U
D7871 2U
D7872 3U
D7873 4U



19 Inch Protection Panel with Locker SHOWGEAR

D7866 1U
D7867 2U
D7868 3U
D7869 4U

D-Size Panel SHOWGEAR

D7716 1 Segment



D-Size Panel SHOWGEAR

D7717 2 Segments



Schuko Panel SHOWGEAR

D7724 2 Segments



Blank Panel SHOWGEAR

D7706 1 Segment



Blank Panel SHOWGEAR

D7707 2 Segments



MP-1 Master Panel SHOWGEAR

D7701 2U, excl. Rear Cover



Master Panel Rear Cover SHOWGEAR

D7702 2U



19 inch Drawer SHOWGEAR

D7831 1U



Shelf for Pro Metal Equipment Rack SHOWGEAR

D7617 1U



19 inch Drawer SHOWGEAR

D7832 2U



19 inch Drawer SHOWGEAR

D7833 3U



Cabinet Drawner Mat

SHOWGEAR

D7835 37 x 40 cm



Shelf for Pro Metal Equipment Rack

SHOWGEAR

D7618 2U



19 Inch Keyboard Drawer

SHOWGEAR

D7830 2U, Panel for Computer Keyboard



19 Inch Switch Box

SHOWGEAR

D7889 3U



Mounting Set

SHOWGEAR

D8010 10 x Screwbolt, Nut and Protectionring
D8011 100 x Screwbolt, Nut and Protectionring



M6 Plastic Protection Ring

SHOWGEAR

D7885



Blindcap for D Hole

SHOWGEAR

D7881





19 Inch Mounting Panel For non-19" Equipment

SHOWGEAR

D7821 1U
D7822 2U
D7823 3U



19 Inch Drawer with keylock

SHOWGEAR

D7840 1U
D7841 2U
D7842 3U
D7843 4U
D7844 6U

M6 Screw 20 mm

SHOWGEAR

D7883 Black
D7884 Nickel







MusicStand Light 4

60787 White LED

SHOWGEAR

Specifications:

Light Src. Type: LED
LED Colour Type: W
Pwr. Supp.: 4.5 VDC





Music Stand Light

60812 Switchable White

SHOWGEAR

Specifications:

Light Src. Type: LED
LED Colour Type: CW / WW
Batt. Type: AA
Pwr. Supp.: 5 VDC
Pwr. Conn. In.: Low Voltage DC plug
R.U.: 1 U





MusicStand Light 10

60788 White LED

SHOWGEAR

Specifications:

Light Src. Type: LED
LED Colour Type: W
Pwr. Supp.: 4.5 VDC





GooseLight XLR, CW

60778 45 cm, 3-pin straight, dimmable

SHOWGEAR

Specifications:

Light Src. Type: LED
LED Colour Type: CW
Pwr. Supp.: 12 VDC
Pwr. Conn. In.: XLR 3P Straight



GooseLight XLR, RGBW — SHOWGEAR

60777 45 cm, 3-pin straight, dimmable

60776 45 cm, 4-pin straight, dimmable



GooseLight XLR, CW — SHOWGEAR

60790 40 cm, 3-pin Straight

60791 40 cm, 3-pin Right-angled



GooseLight XLR, CW — SHOWGEAR

60792 40 cm, 4-pin Straight

60793 40 cm, 4-pin Right-angled



GooseLight BNC, CW — SHOWGEAR

60794 30 cm, BNC Straight



GooseLight USB, CW — SHOWGEAR

60795 30 cm, USB Straight



GooseLight Deskmount, CW — SHOWGEAR

60789 30 cm, Straight



Mini Light USB RGB — SHOWGEAR

60809 30 cm, magnetic mounting base with built-in rechargeable battery



19 Inch Rackmount Light SHOWGEAR

60796 1U, 2 x White GooseLED



19 Inch Rackmount Light SHOWGEAR

60811 1U, Dimmable, Warm and cold white tube light



19" 2-way Rack Light SHOWGEAR

60810 1U, 2 x RGB GooseLED, Individual dimmable





